


# Mac下使用VSCode打开课程代码

## 主讲：雷老师


# 课程代码

- 在浏览器中打开[https://github.com/suneri/junior\\_spider](https://github.com/suneri/junior_spider)
- 点击 Download ZIP 下载课程代码

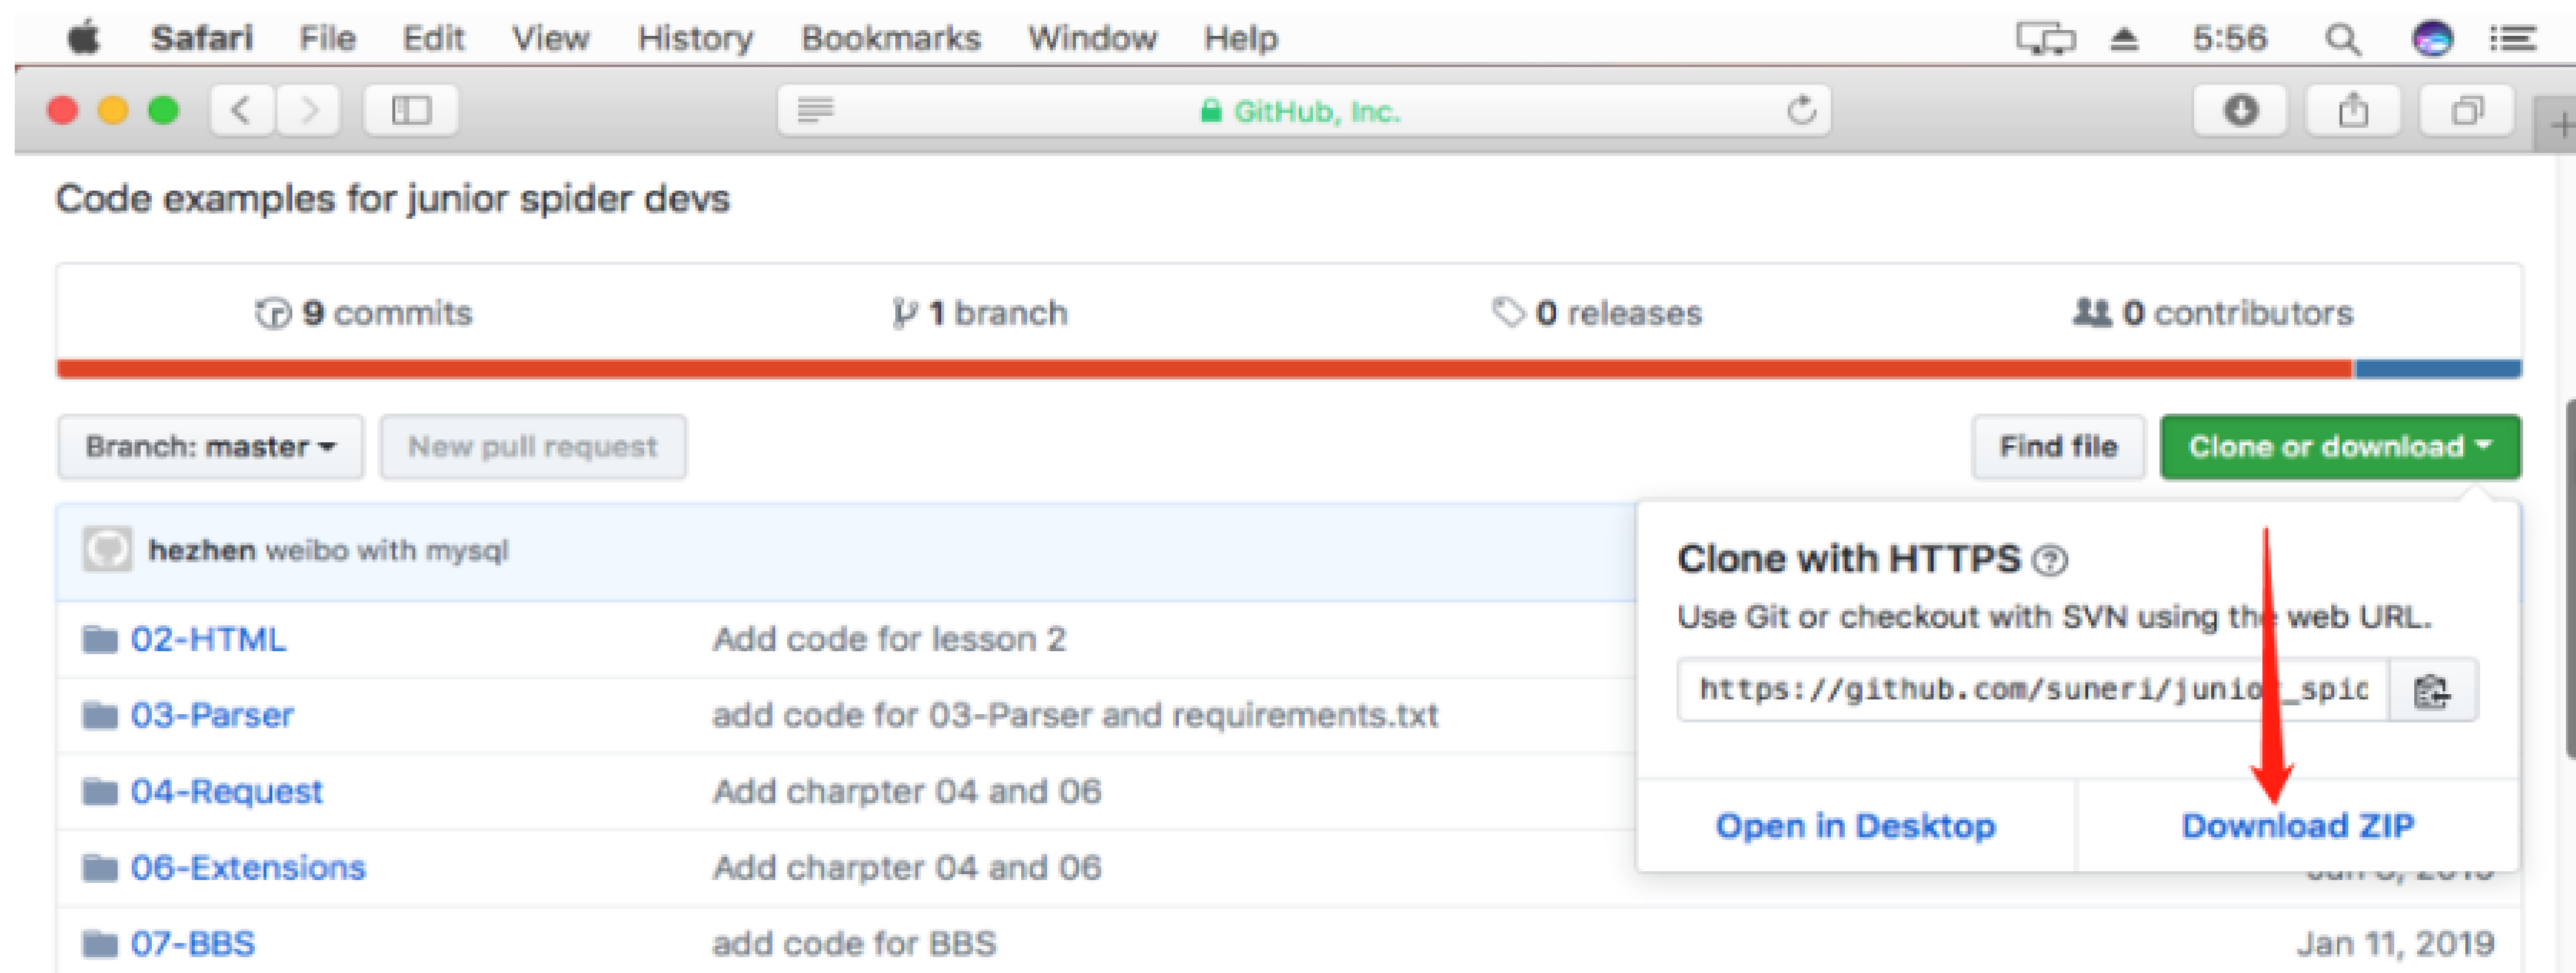


# 课程代码


- 下载junior\_spider-master后目录显示：

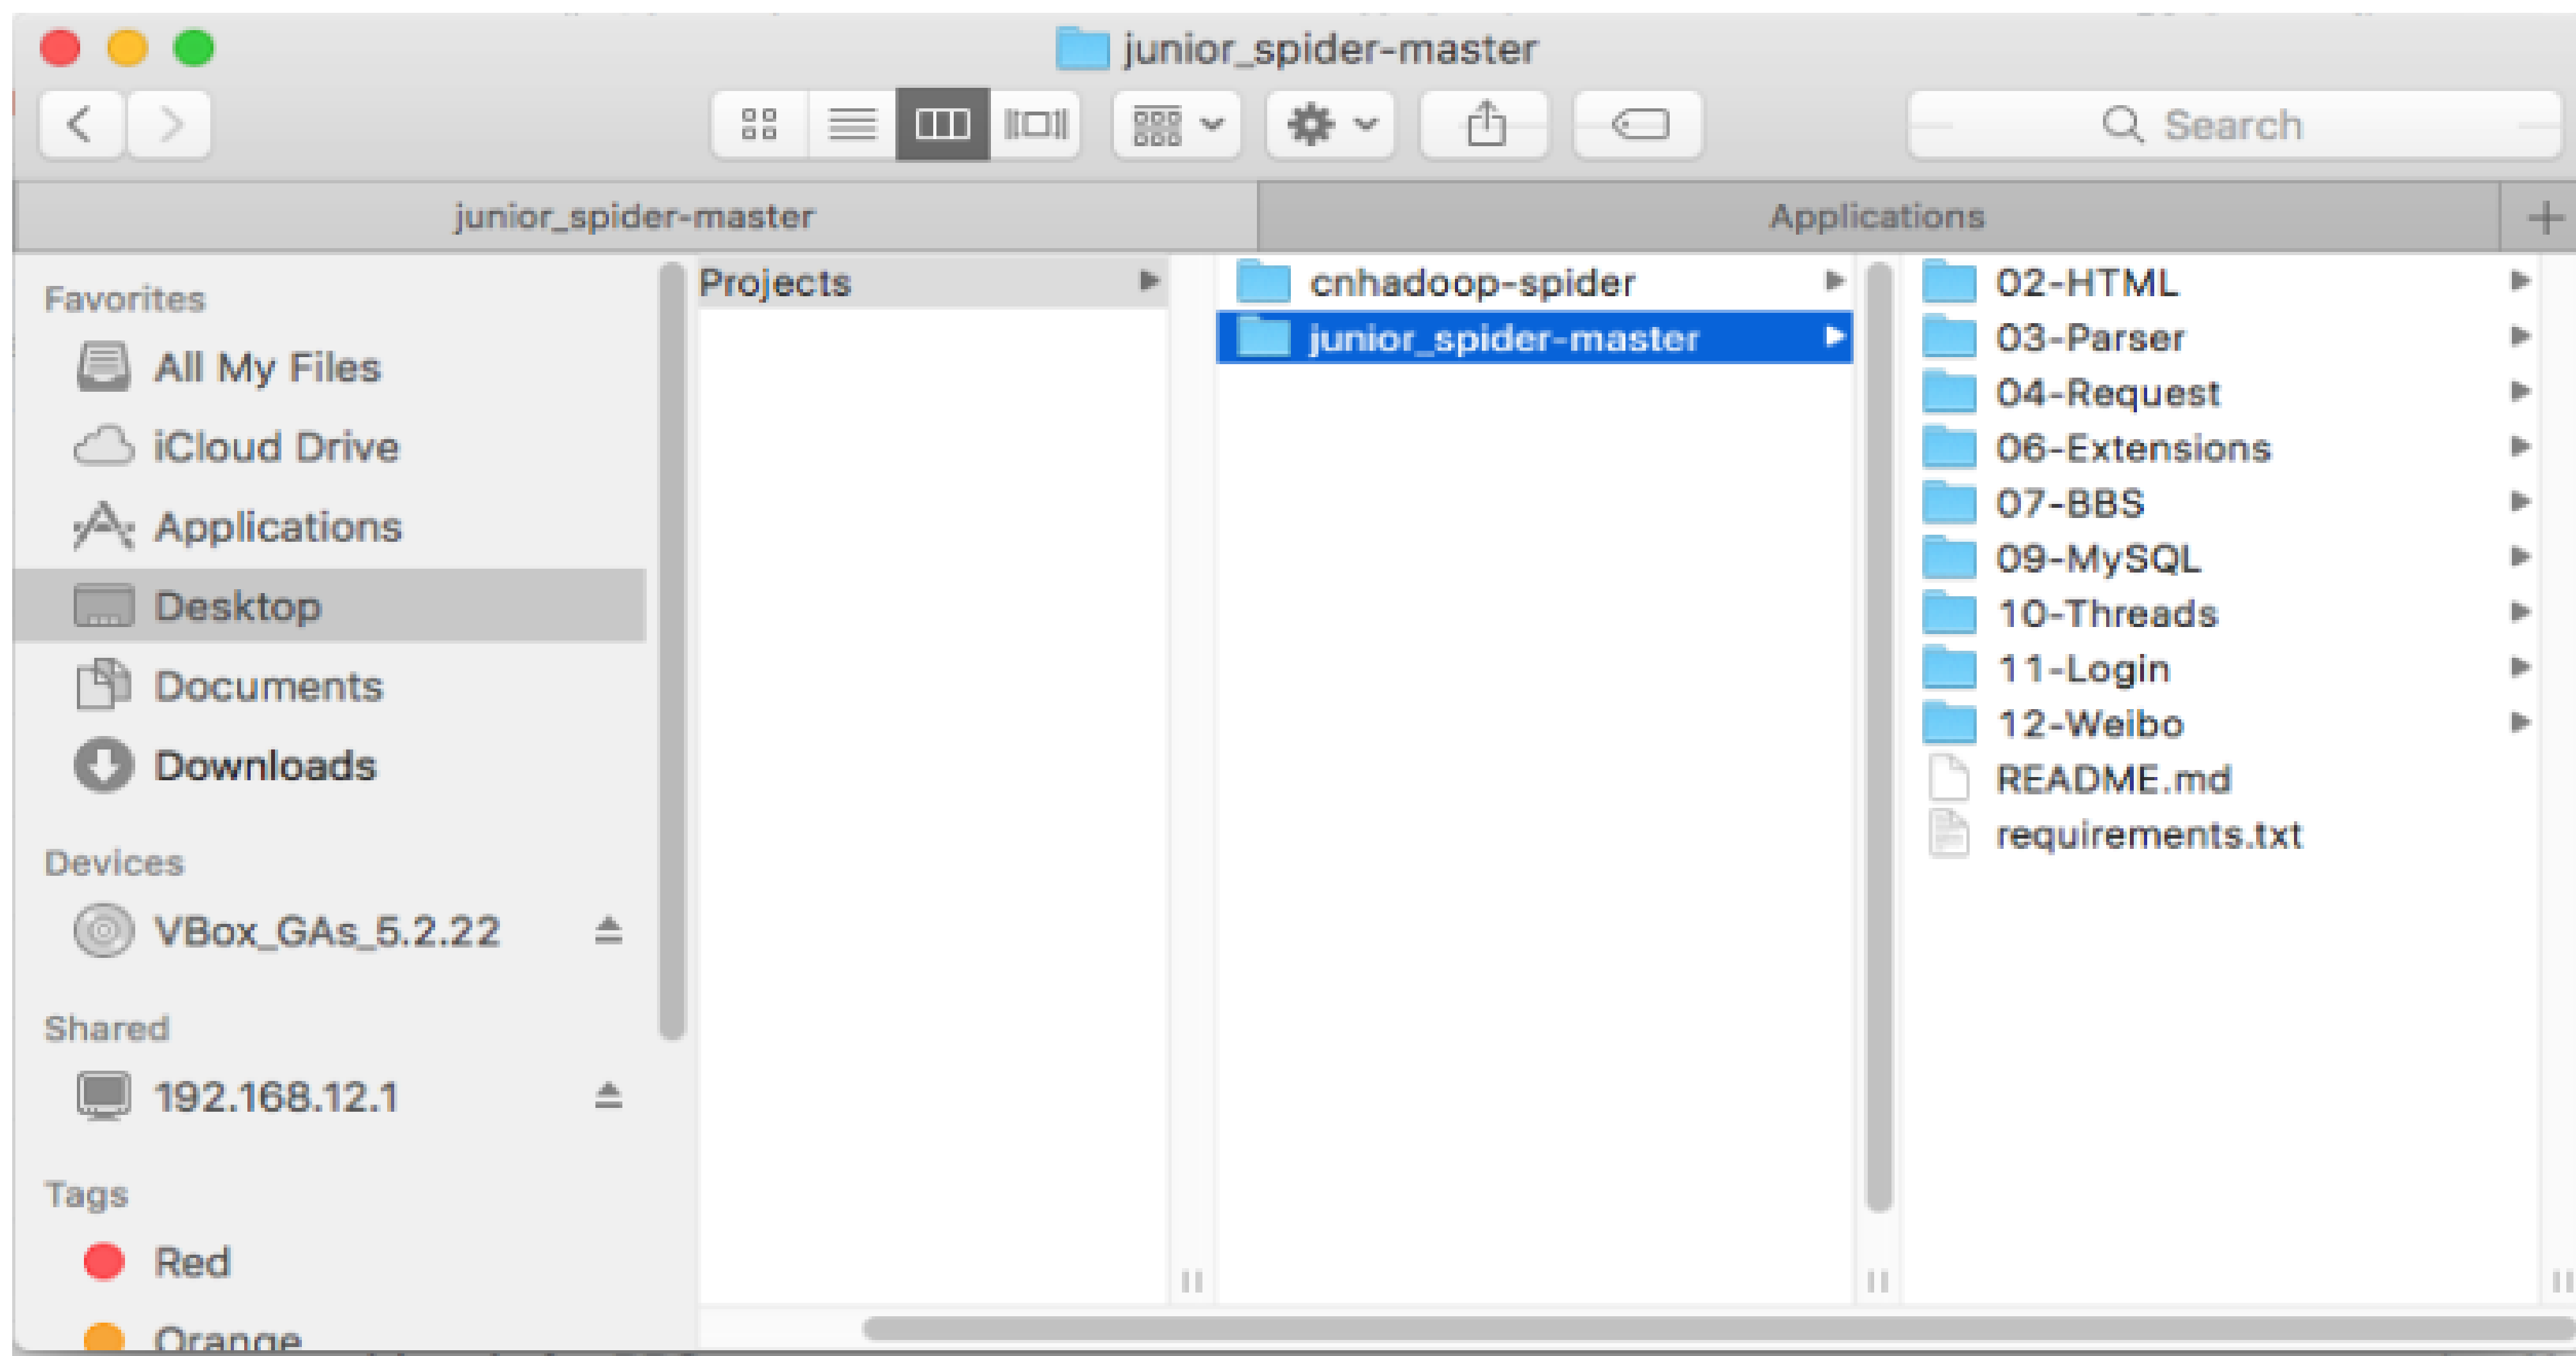


# 打开VSCode

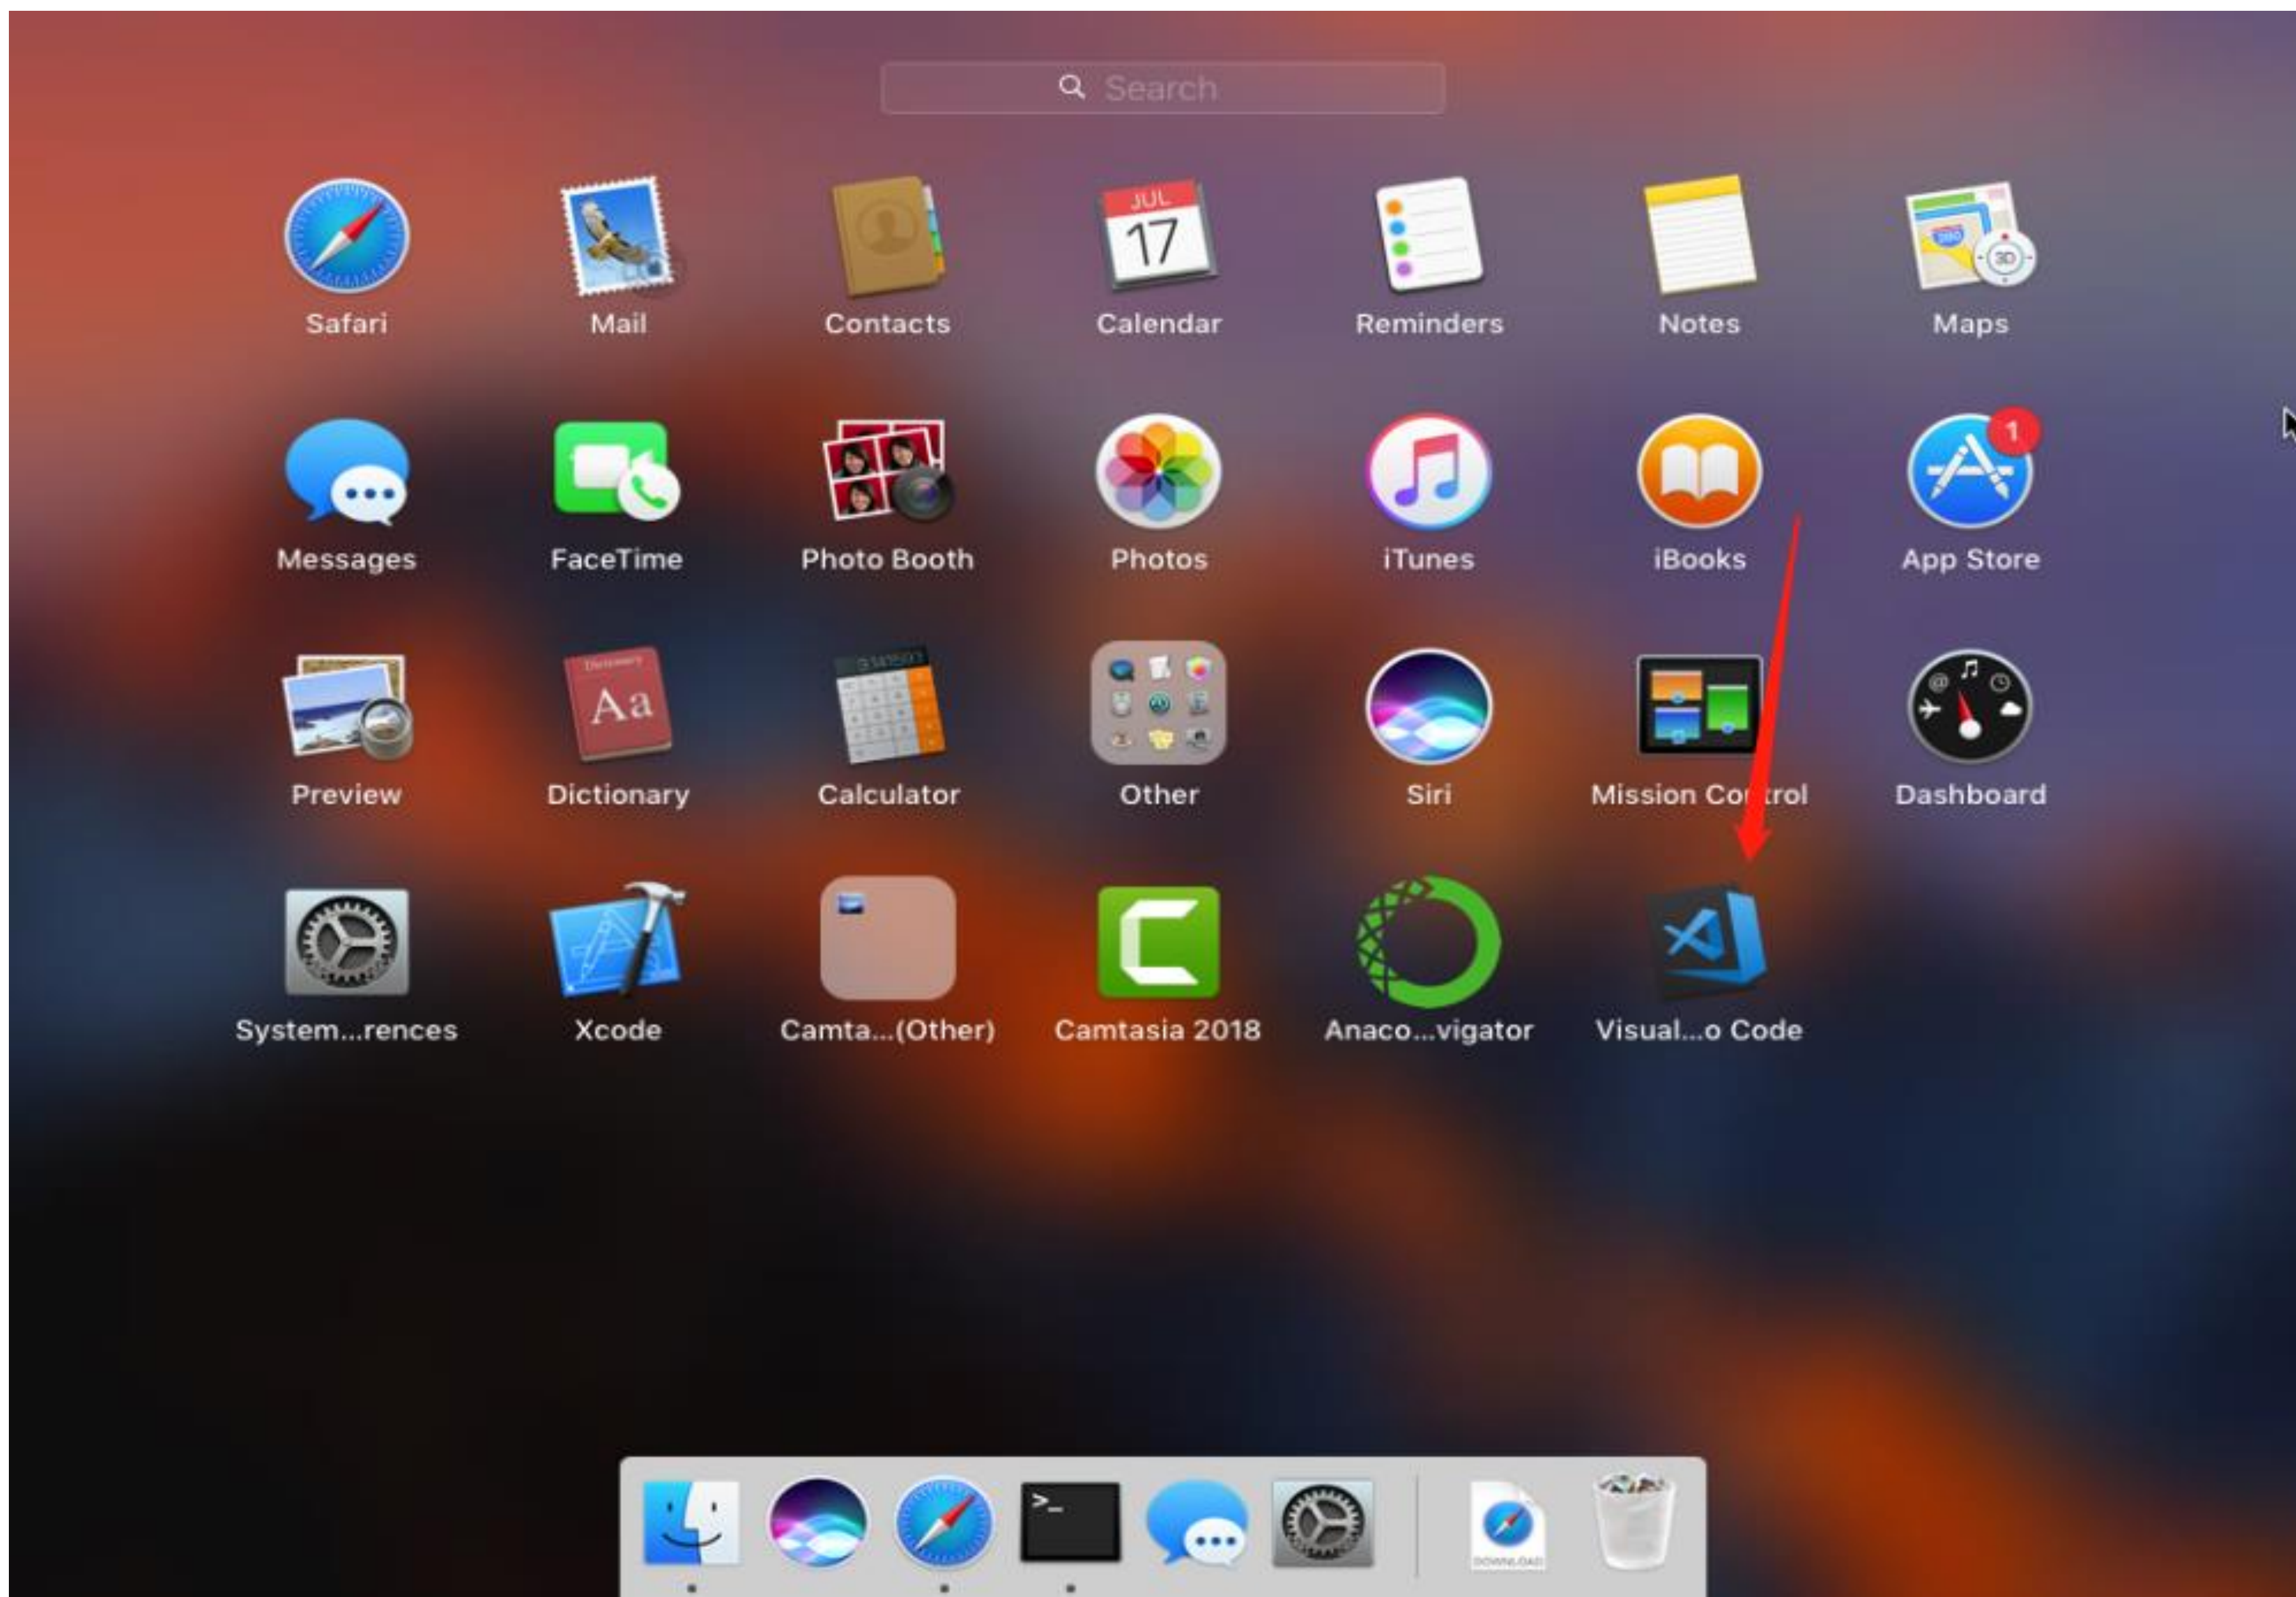

# 点击左上角File菜单项Open

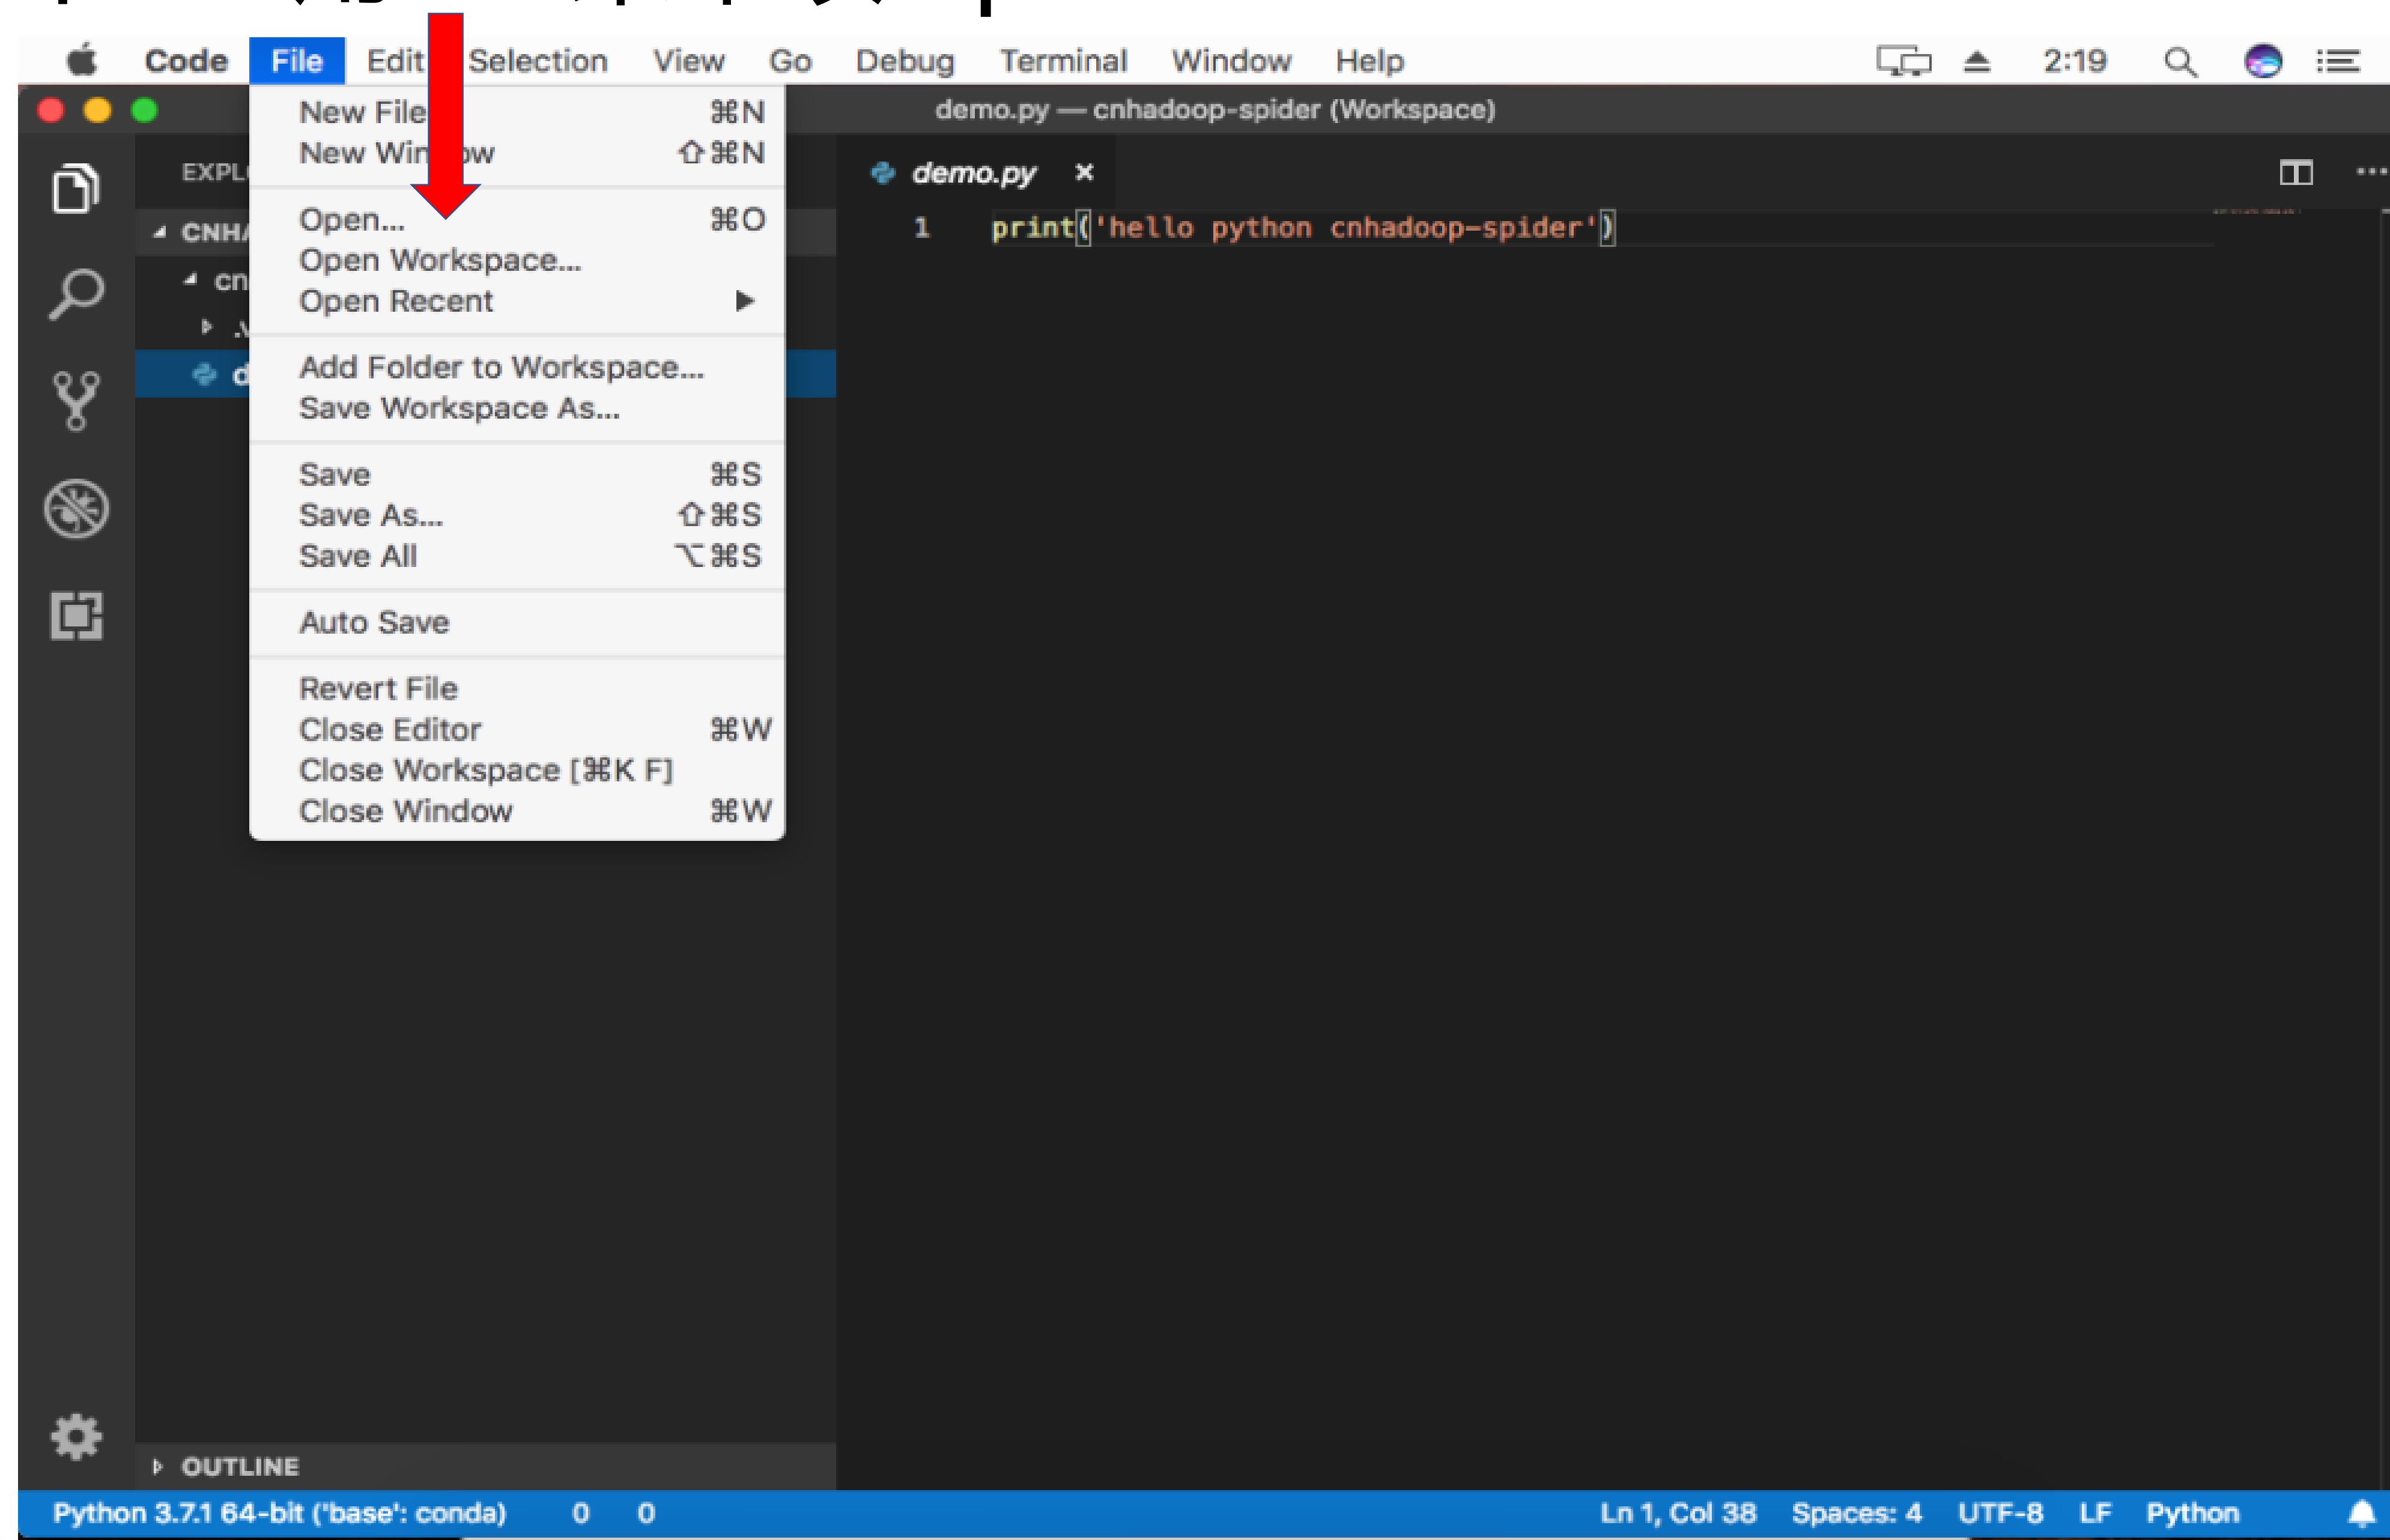


# 选中下载的课程代码目录，再点击Open

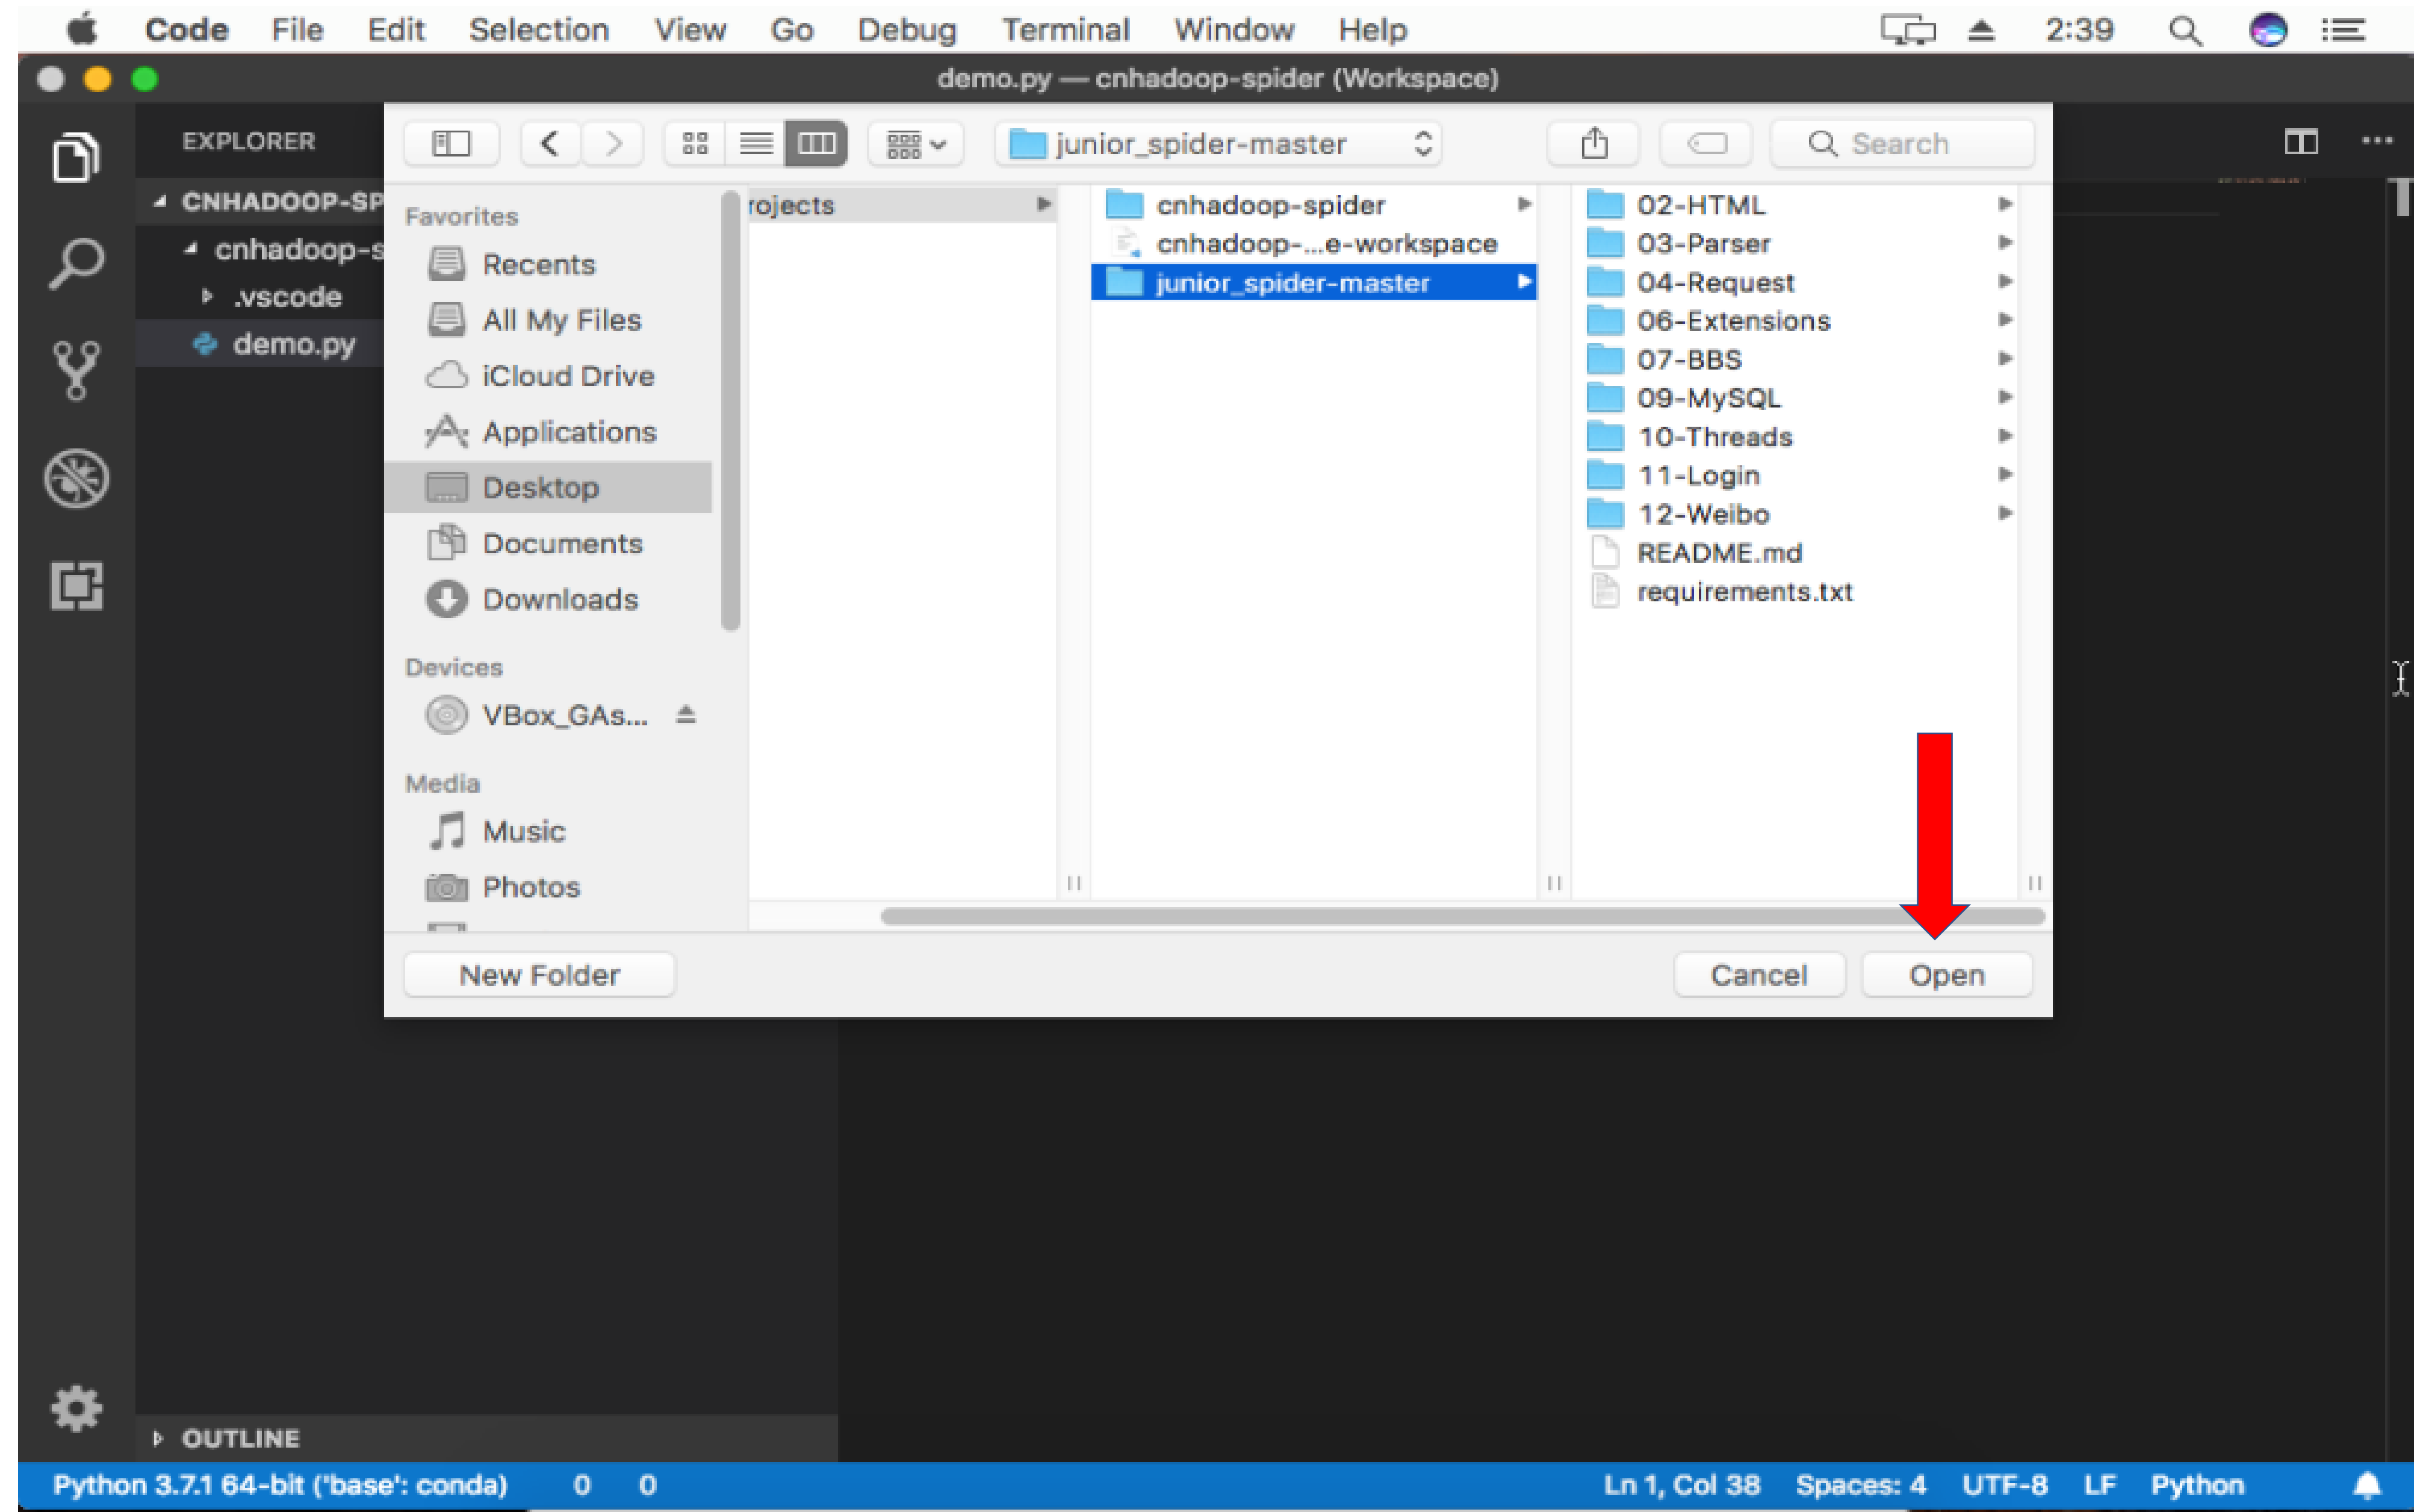




# 运行一个课程代码样例

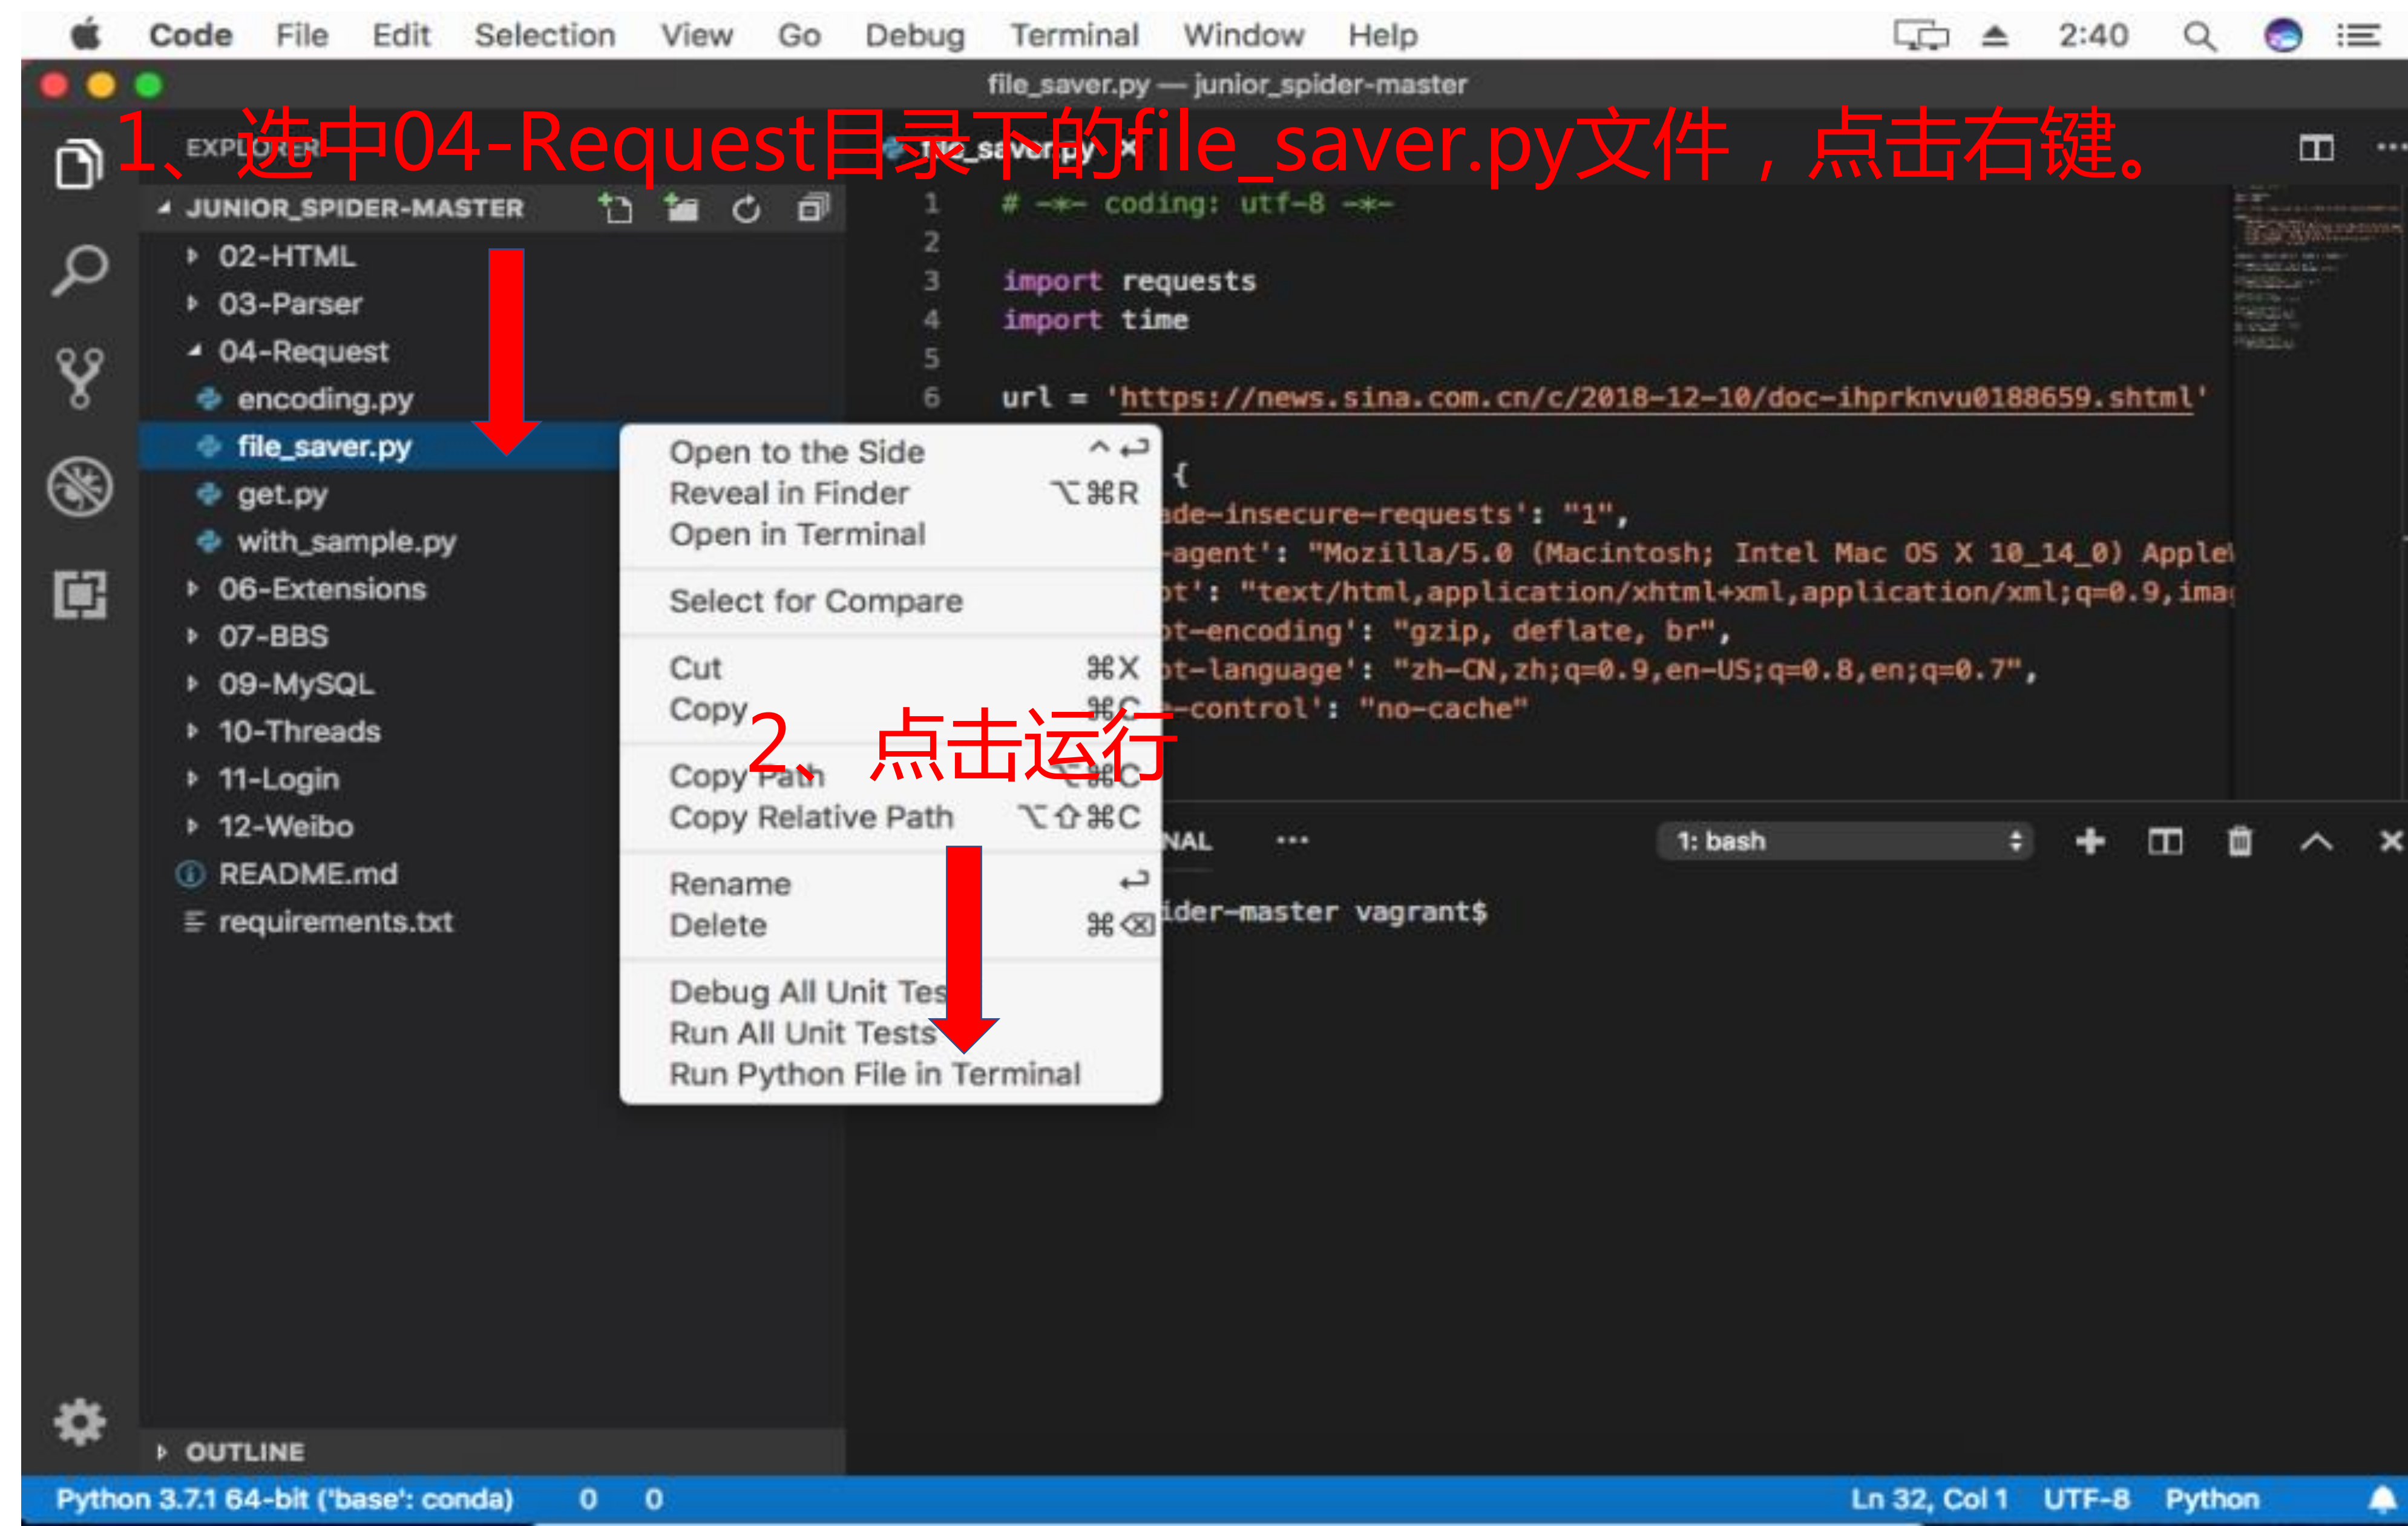



# 执行后会生成文件

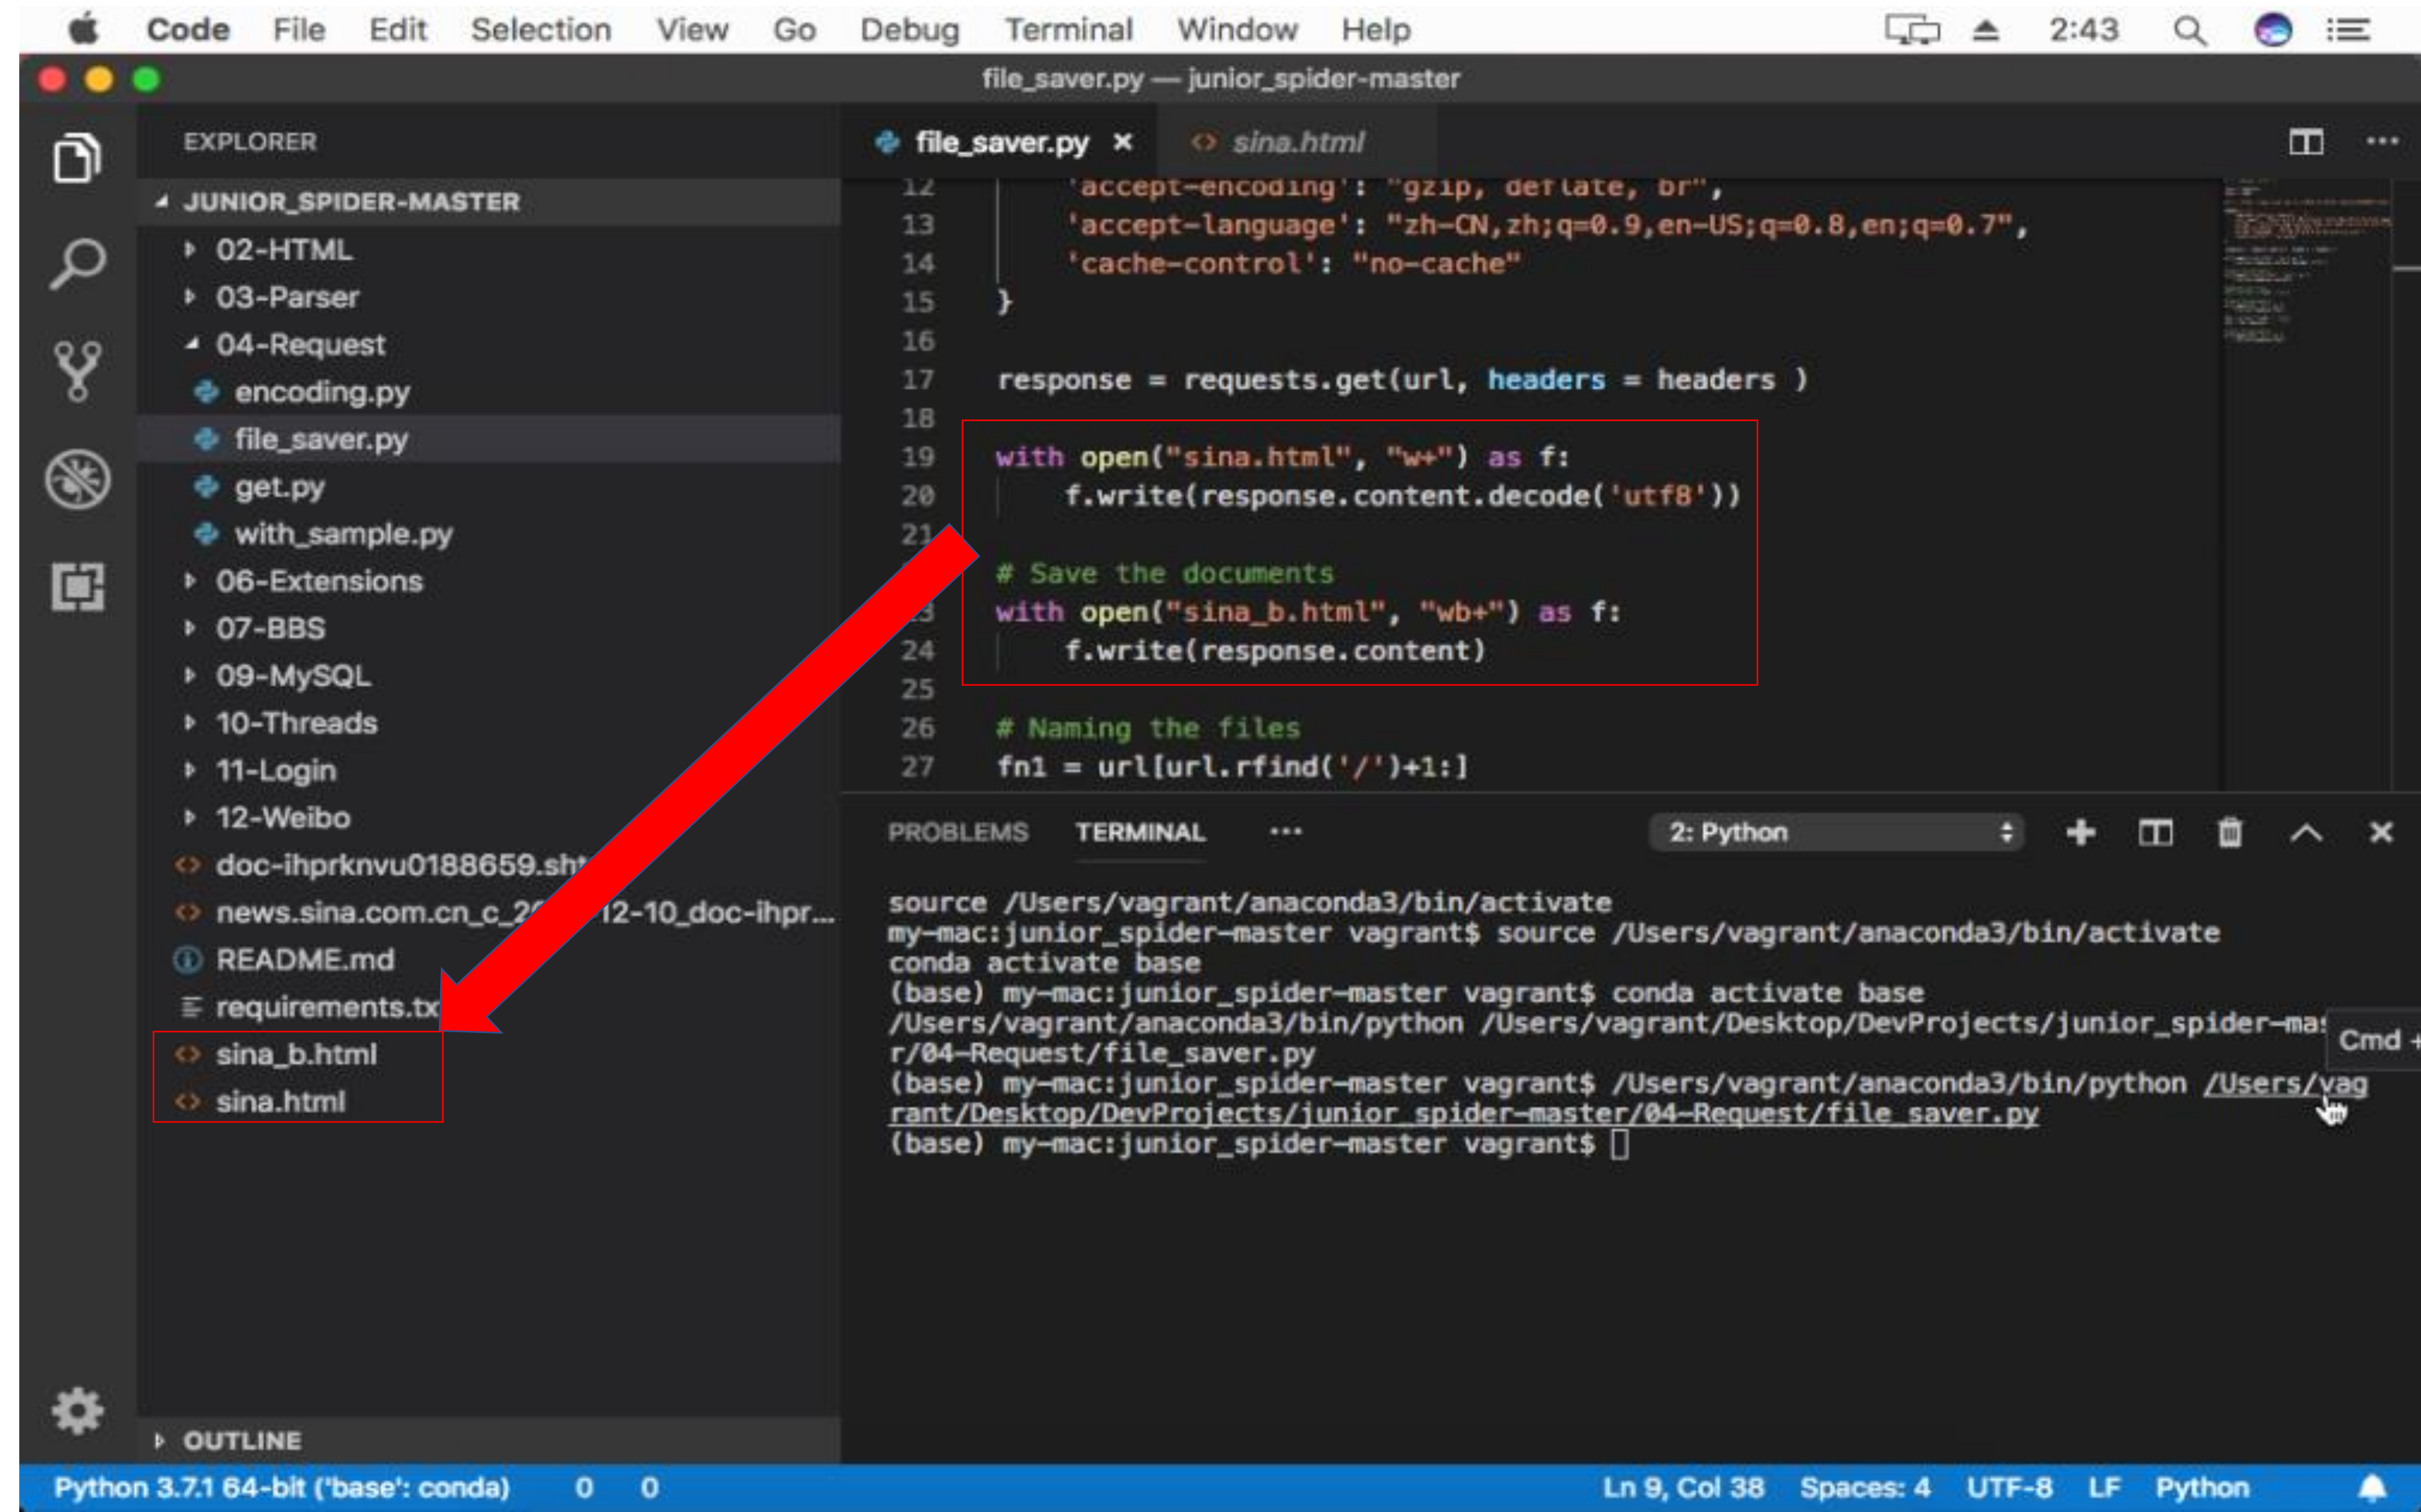

The screenshot shows the Visual Studio Code interface. The Explorer panel on the left displays the project structure for 'JUNIOR\_SPIDER-MASTER', with files like '02-HTML', '03-Parser', '04-Request', 'encoding.py', 'file\_saver.py', 'get.py', 'with\_sample.py', '06-Extensions', '07-BBS', '09-MySQL', '10-Threads', '11-Login', '12-Weibo', 'doc-ihprknvu0188659.sh', 'news.sina.com.cn\_c\_2...', '12-10\_doc-ihpr...', 'README.md', 'requirements.tx', 'sina\_b.html', and 'sina.html'. The file 'sina\_b.html' is highlighted with a red box. A large red arrow points from the code in the main editor to this box. The main editor shows the 'file\_saver.py' script, which includes headers for 'accept-encoding', 'accept-language', and 'cache-control', and uses 'requests.get' to fetch data. It then writes the content to 'sina.html' and 'sina\_b.html'. The Terminal panel at the bottom shows the command to run the script: `python /Users/vagrant/Desktop/DevProjects/junior_spider-master/04-Request/file_saver.py`. The status bar at the bottom indicates 'Python 3.7.1 64-bit ('base': conda)' and 'Ln 9, Col 38'.

```
file_saver.py — junior_spider-master
```

```
12     'accept-encoding': "gzip, deflate, br",
13     'accept-language': "zh-CN,zh;q=0.9,en-US;q=0.8,en;q=0.7",
14     'cache-control': "no-cache"
15 }
16
17 response = requests.get(url, headers = headers )
18
19 with open("sina.html", "w+") as f:
20     f.write(response.content.decode('utf8'))
21
22 # Save the documents
23 with open("sina_b.html", "wb+") as f:
24     f.write(response.content)
25
26 # Naming the files
27 fn1 = url[url.rfind('/')+1:]
```

```
source /Users/vagrant/anaconda3/bin/activate
my-mac:junior_spider-master vagrant$ source /Users/vagrant/anaconda3/bin/activate
conda activate base
(base) my-mac:junior_spider-master vagrant$ conda activate base
/Users/vagrant/anaconda3/bin/python /Users/vagrant/Desktop/DevProjects/junior_spider-master/04-Request/file_saver.py
(base) my-mac:junior_spider-master vagrant$ /Users/vagrant/anaconda3/bin/python /Users/vagrant/Desktop/DevProjects/junior_spider-master/04-Request/file_saver.py
(base) my-mac:junior_spider-master vagrant$
```

Python 3.7.1 64-bit ('base': conda) 0 0 Ln 9, Col 38 Spaces: 4 UTF-8 LF Python



# 课程代码仅供参考

- 课程代码仅供参考，请根据讲解视频多多练习。
- 最好跟着老师敲一遍代码。

只为遇见明天更优秀的你！