



C Output Problem

Prepared By:

Kishor Roy

Assistant Programmer

Sonali Bank Limited

EX: BSC in CSE,CUET

Question No.1

```
#include<stdio.h>
int main()
{
    int x;
    for(x=-1; x<=10; x++)
    {
        if(x < 5)
            continue;
        else
            break;
        printf("abc");
    }
    return 0;
}
```

- A. Infinite times
- B. 11 times
- C. 0 times**
- D. 10 times

Question No.2

```
#include<stdio.h>
int main()
{
    int i=0;
    for(; i<=5; i++);
    printf("%d", i);
    return 0;
}
```

- A. 0, 1, 2, 3, 4, 5
- B. 5
- C. 1, 2, 3, 4
- D. 6**

Question No.3

```
#include<stdio.h>
int main()
{
    int a = 500, b = 100, c;
    if(!a >= 400)
        b = 300;
    c = 200;
    printf("b = %d c = %d\n", b, c);
    return 0;
}
```

- A. b = 300 c = 200
- B. b = 100 c = garbage
- C. b = 300 c = garbage
- D. b = 100 c = 200**

Question No.4

```
#include<stdio.h>
int main()
{
    unsigned int i = 65535; /* Assume 2 byte integer*/
    while(i++ != 0)
        printf("%d", ++i);
    printf("\n");
    return 0;
}
```

- A. Infinite loop**
- B. 0 1 2 ... 65535
- C. 0 1 2 ... 32767 - 32766 - 32765 - 1 0
- D. No output

Question No.5

```
#include<stdio.h>
int main()
{
    int x = 3;
    float y = 3.0;
    if(x == y)
        printf("x and y are equal");
    else
        printf("x and y are not equal");
    return 0;
}
```

- [A]. x and y are equal**
- [B]. x and y are not equal
- [C]. Unpredictable
- [D]. No output

Question No.6

```
#include<stdio.h>
int main()
{
    char ch;
    if(ch = printf(""))
        printf("It matters\n");
    else
        printf("It doesn't matters\n");
    return 0;
}
```

- A. It matters**
- B. It doesn't matters**
- C. matters
- D. No output

Question No.7

```
#include<stdio.h>
int main()
{
    int a[5] = {5, 1, 15, 20, 25};
    int i, j, m;
    i = ++a[1];
    j = a[1]++;
    m = a[i++];
    printf("%d, %d, %d", i, j, m);
    return 0;
}
```

- A. 2, 1, 15
- B. 1, 2, 5
- C. 3, 2, 15**
- D. 2, 3, 20

Question No.8

What is the output of this program ?

```
#include<stdio.h>
void main()
{
    int a=b=c=10;
    a=b=c=50;
    printf("\n %d %d %d",a,b,c);
}
```

- A] 50 50 50
- B] Compile Time Error**
- C] 10 10 10
- D] Three Garbage Values

Question No.9

What is the following function call mean?

```
strcpy(s1, s2);
```

A]copies s1 string into s2

B]copies s2 string into s1

C]copies both s1 and s2

D] None of these

Question No.10

What will be the output of the following program?

```
void main()  
{  
    int x []= {10,20,30,40,50};  
    printf (" \n %d %d %d %d %d ", x[4],3[x],x[2],1[x],x[0]);  
}
```

a]error

b]10 20 30 40 50

c]50 40 30 20 10

d]none of these

Question No.11

What will be the out put ?

```
void main ()  
{  
    int i;  
    i=0x10+ 010+10;  
    printf (" \nx=%x", i);  
}
```

A] x= 34

B] i= 34

C] x = 22

D]Error

Question No.12

What will be the output ?

```
#define square(x) x*x  
void main () {  
    printf (" \n square = %d", square(10+2));  
}
```

A] Square = 144

B] Square =32

C] Square =122

D]Square =12

Question No.13

What will be the value of x after executing the program?

```
void main () {  
    int x;  
    x = printf("I See, Sea in C");  
    printf("\n x= %d" , x);  
}
```

- ☒ A] x= 15
- ☐ B] x=2
- ☐ C] Garbage value
- ☐ D] Error

Question No.14

```
void main ()  
{  
    int a= 0;  
    for (; a ;)  
        a++;  
    printf("%d",a);  
}
```

What will be the value of the variable a, on the execution of the above program?

- ☐ A] 1
- ☒ B] 0
- ☐ C] -1
- ☐ D] None of these

Question No. 15

What will be the output of the following program code?

```
void main ()  
{  
    char a[] = "Hello World";  
    char *p;  
    p=a;  
    printf("\n%d%d%d%d", sizeof(a), sizeof(p), strlen(a), strlen(p));  
}
```

- ☐ A] 11 11 10 10
- ☐ B] 10 10 10 10
- ☐ C] 12 12 11 11
- ☒ D] 12 2 11 11

Question No.16

What will be the output of the following program code?

```
void main ()  
{  
printf ("\n abc\b\b\binfo world");  
}
```

CSE GUR

A] Info world

B] ABC Info world

C] strxfrm

D] strcut

Question No.17

What will be the output ?

```
void main ()  
{  
printf("%d",'B' < 'A');  
}
```

A] Error

B] 1

C] 0

D] None of these

Question No. 18

What will be the output ?

```
void main ()  
{  
printf("\n %d %d", 10&20, 10/ 20);  
}
```

A] 0 0

B] 10 10

C] 0 30

D] 20 20

Question No.19

What will be the output ?

```
void main ()  
{  
int i= 48;  
printf("\n %c %d" ,i,i);  
}
```

A] Error

B] 48 48

C] 1 48

D] 0 48

Question No.20

What will be the output of the following program ?

```
void main ()  
{  
int x=10,y=20;  
printf ("\n %d",x,y);  
}
```

A] 10

B] 20

C] 10 20

D] syntax error

Question No.21

What will be the size of following union declaration?

```
union test  
{  
int x;  
char y;  
float z;  
};
```

A] 7 bytes

B] 4 bytes

C] 1 byte

D] 4 bytes

Question No.22

What is the output of the following code?

```
void main()  
{  
int c=2, d=5,e=10,a;  
a=c>1?d>1||e>1?100:200:300;  
printf("a=%d",a);  
}
```

A] a=300

B] a=100

C] a=200

D] None of these

Question No.23

How many times the below loop will be executed?

```
#include<stdio.h>
void main () {
    int x,y;
    for (x=5;x>=1;x--)
    {
        for(y=1;y<=x;y++)
            printf("%d\n",y);
    }
}
```

A)15

B)10

C)11

D)13

Question No.24

What will be the output of the below code

```
# include <stdio.h>
int main()
{
    float f = 0.1;
    if (f ==0.1)
        printf("YES\n");
    else
        printf("NO\n");
    return 0;
}
```

A) NO

B) ERROR

C) NO OUTPUT

~~D) YES~~

Question No.25

26) How many times Hello will print?

```
#include <stdio.h>
void main ()
{
    int i;
    for (i=0;i<5;i--);
    {
        printf("Hello");
    }
}
```

A. compilation error

B. 1

C. 4

D. runtime error

Question No. 26

Which of the following is correct

i) (a=b)? (c==d):(e==f)

ii) (a==b)?(c=d):(e=f)

iii) (a=b)?(c=d):(e=f)

iv) (a==b)?(c==d):(e==f)

A) i is correct

B) i and ii is correct

C) ii and iv is correct

D) all the above.

Question No.27

What will be the output.

```
#include<stdio.h>
int main()
{
    static int i;
    int j;
    for(j=0;j<10;j++)
    {
        i+=2;
        i-=j;
    }
    printf("%d",i);
}
```

CSE

A) - 27

B) - 25

C) Cannot Be Determined

D) - 21

Question N0.28

What is the output of this C code?

```
#include <stdio.h>
void main()
{
    static int i;
    printf("i is %d", i);
}
```

A) 0

B) 1

C) garbage value

D) run time error

Question N0.29

What is the output of this C code?

```
#include <stdio.h>
static int i;
void main()
{
    int i;
    printf("i is %d", i);
}
```

A) 0

B) garbage value

C) 1

~~D) runtime error~~

Question N0.30

```
int i = 20;
printf ("%x", i);
what is the output?
```

A) x14

B) 14

C) 20

D) none of the above

Question N0.31

```
int a = 0, b = 2;
if (a = 0)
    b = 0;
else
    b *= 10;
```

what is the value of b?

A) 0

B) 2

C) 20

D) none of the above

Question N0.32

What is the value of x in this C code?

```
void main()
{
int x = 4 * 5 / 2 + 9;
}
```

- A. 6.75
- B. 1.85
- C. 19
- D. 17

Question N0.33

What is the output of this C code?

```
void main()
{
int x = 4.3 % 2;
printf("Value of x is %d", x);
}
```

- A. Value of x is 1.3
- B. Value of x is 2
- C. Value of x is 0.3
- D. Compile time error

Question N0.34

Find the output:

```
#include<stdio.h>
int main()
{
int x=10;
int y;
{
y=x++;
}
printf("%d",x);
}
```

- A.10
- B.20
- C.21
- D.11

Question N0.35

Break statement is used for

- A. Quit a program
- B. Quit the current iteration
- C. Both of above
- D. None of above

Question N0.36

What is the output of following program code :

```
float x = 10.7;
int i;
i = (int) x;
printf("%d",i);
```

- A. null
- B. error
- C. 10
- D. garbage value

Question N0.37

Find the output

```
void main()
{
char c='a';
switch(c) {
case 97:
printf("97");
break;
case 'a':
printf("98");
break;
case 99:
printf("99");
break;
default:
printf("default");
}
}
```

- A.97
- B.98
- C.error**
- D.'a'

Question N0.38

Which one is not a reserve keyword in C Language?

- A.auto
- B.main**
- C.case
- D.register

Question N0.39

Find the output:

```
#include<stdio.h>
int main()
{
int x=10;
do{
x++;
}while(x++>12);
printf("%d",x);
}
```

- A.10
- B.11
- C.12**
- D.13

Question N0.40

- Comment on the output of following C program?

```
#include <stdio.h>
main()
{
int a = 1;
printf("size of a is %d, ", sizeof(++a));
printf("value of a is %d", a);
}
```

- A. size of a is 2, value of a is 1**
- B. size of a is 2, value of a is 2
- C. size of a is 4, value of a is 2
- D. None of the above

Question N0.41

Which of the following condition checks will print 10 twice?

```
void main(){
int a=10;
if(_____)
printf("\n%d",a);
else
printf("\n%d %d",a,a);
}
```

- A. `a==10`
- B. `a <= 10`
- C. `printf("\n%d",a)`
- D. None of the above

Question N0.42

Find the output:

```
int main()
{
    int c,a=25;
    c= printf("%d",a);
    printf("\n%d",c);
    return 0;
}
```

- A. 25 1
- B. 25 2
- C. 2
- D. 1

Question N0.43

What will be the output of the following arithmetic expression ?

$5+3*2\%10-8*6$

A) -37

B) -42

C) -32

D) -28

CSE GURUS

Question N0.44

Difference between structure and union is

- A. We can define functions within structures but not within a union
- B. We can define functions within union but not within a structure
- C. The way memory is allocated
- D. There is no difference

CSE GURUS @ N

Question N0.45

Structures can be used

- A. to hold different datatypes
- B. have pointers to structures
- C. to assign to one another
- D. all of above**

Question N0.46

What will be the output of the following program ?

```
void main()
{ int a = 2;
  switch(a)
  { case 1:
    printf("goodbye"); break;
    case 2:
    continue;
    case 3:
    printf("bye");
  }
}
```

- A) error**
- B) goodbye
- C) bye
- D) byegoodbye

Question N0.47

Which among the following is never possible in C when members in a structure are same as that in a union?

```
//Let P be a structure
//Let Q be a union
```

- A. sizeof(P) is greater than sizeof(Q)
- B. sizeof(P) is equal to sizeof(Q)
- C. sizeof(P) is less than to sizeof(Q)**
- D. None of the above

CSE GURUS @ M3

Question N0.48

What will be the size of the following structure?

```
#include <stdio.h>
struct temp
{
  int a[10];
  char p;
};
```

- A. 21**
- B. 11
- C. 44
- D. 5

Question N0.49

What will be the output of the following statement ?

```
printf( 3 + "goodbye");
```

- A) goodbye
- B) odbye
- C) bye
- D) dbye**

Question N0.50

What is prototype of a function in C

- A. It is the return type of a function
- B. It is the return data of the function
- C. It is declaration of a function**
- D. It is a datatype

Question N0.51

```
void display(int);
void main()
{
    display(60);
    display(80);
    display(40);
    display(70);
    display(20);
}
void display(int a)
{
    static int p;
    p++;
    printf("\np value:%d\t a value:%d",p,a);
}
```

Handwritten notes for Question N0.51:

p
1
2
3
4
5

$a=60$ $p=1$
80
60
80
40
70
20

Output:

p value:1	a value:60
p value:2	a value:80
p value:3	a value:40
p value:4	a value:70
p value:5	a value:20

CSE GURUS @

Question N0.52

```
void display(int);
void main()
{
    display(60);
    display(80);
    display(40);
    display(70);
    display(20);
}
void display(int a)
{
    static int p=2;
    p++;
    printf("\np value:%d\t a value:%d",p,a);
}
```

Handwritten notes for Question N0.52:

p
2
3

3 60
4 80
5 40
6 70
7 20

Output:

p value:3	a value:60
p value:4	a value:80
p value:5	a value:40
p value:6	a value:70
p value:7	a value:20

CSE GURUS @ M3

Question N0.53

```
void display(int);
void main()
{
    display(60);
    display(80);
    display(40);
    display(70);
    display(20);
}
void display(int a)
{
    static int p;
    p++;
    p=6;
    printf("\np value:%d\t a value:%d",p,a);
}
```

Handwritten notes for Question N0.53:

6 60
6 80
6 40
6 70
6 20

$p=0$
 $\times$
 $\times$
 $\times$
 $\times$
 $\times$
6

Output:

p value:6	a value:60
p value:6	a value:80
p value:6	a value:40
p value:6	a value:70
p value:6	a value:20

CSE GURUS @ M3

Question N0.54

```
void display(int);
void main()
{
    display(60);
    display(80);
    display(40);
    display(70);
    display(20);
}
void display(int a)
{
    int p=2;
    p++;
    printf("\np value:%d\t a value:%d",p,a);
}
```

Output:

```
p value:3    a value:60
p value:3    a value:80
p value:3    a value:40
p value:3    a value:70
p value:3    a value:20
```

CSE GURUS @ M3

CSE

Question N0.55

• The statement
 printf("%d", 10 ? 0 : 5 : 1 : 12);
 will print?

A. 10

B. 0

C. 12

D. 1

```
#define N 5
void main()
{
    int a[N],*p,i;
    float b[N],*q;
    for(i=0;i<N;i++)
    {
        a[i]=1;    b[i]=0.3;
    }
    p=&a[3];
    q=&b[3];
    *p=5;
    *(p-1)=7;
    *(p+1)=9;
    *q=.2;
    *(q-1)=.4;
    *(q+1)=.6;
    for(i=0;i<N;i++)
        printf("\n%d\t%f",a[i],b[i]);
}
```

Question N0.56

Handwritten diagram showing array indices and values for Question N0.56:

```

    0 1 2 3 4
a[] 1 1 2 2 2
    2 5 9

    0 1 2 3 4
b[] 0.3 0.3 0.3 0.3 0.3
    0.4 0.2 0.6
    
```

Output:

```
1 0.3
1 0.3
7 0.4
5 0.2
9 0.6
```

CSE GURUS @ M3


CSE GURU

```

void main()
{
    int a[]={6,2,8,4,9},*p,n;
    p=a+2;
    n=*p;
    printf("\nOutput1:%d",n);
    n=*++p;
    printf("\nOutput2:%d",n);
    n=(-p);
    printf("\nOutput3:%d",n);
    n=*p--;
    printf("\nOutput4:%d",n);
    n=(*p)++;
    printf("\nOutput5:%d",n);
    n=++(*p);
    printf("\nOutput6:%d",n);
    n=-*p;
    printf("\nOutput7:%d",n);
    n=*(++p);
    printf("\nOutput8:%d",n);
}

```

Question N0.57

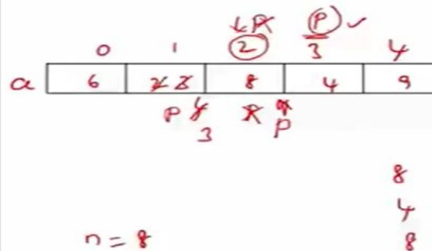

Output:

Output1:8
 Output2:4
 Output3:8
 Output4:8
 Output5:2
 Output6:4
 Output7:3
 Output8:8

CSE GURUS

Question N0.58

Find output .

```

void main()
{
    int a=25;
    clrscr();
    printf("%o %x",a,a);
    getch();
}

```

- A) 25 25
- (B) 025 0X25
- (C) 12 42
- (D) 31 19

Question N0.59

What will be the value of 'a' after the following code is executed

```

#define square(x) x*x
a = square(2+3)

```

- A) 25
- B) 13
- C) 11
- D) 10

CSE GU

Question N0.60

What will be the output of following statements ?

```

char x[] = "hello hi";
printf("%d%d",sizeof(*x),sizeof(x));

```

- A) 88
- B) 18
- C) 29
- D) 19

Question N0.61

```
#include <stdio.h>
```

```
int main()
{
    int a=10,b=2,c;
    a=!(c=c==c)&&++b;
    c+=(a+b--);
    printf("%d %d %d",b,c,a);
    return 0;
}
```

A) 2 3 0

B) 2 13 0

C) 1 3 0

D) 2 3 4

Question N0.62

What will be the output of the following statements ?

```
int a=5,b=6,c=9,d;
d=a>b?(a>c?1:2):(c>b?6:8);
printf("%d",d);
```

A) 1

B) 2

C) 6

D) ERROR

Question N0.63

What will be the output of the following statements ?

```
int i = 3;
printf("%d%d",i,i++);
```

A) 34

B) 43

C) 44

D) 33

Question N0.64

What will be the output of the following statements ?

```
int i = 3;
printf("%d%d%d",i++,i,++i);
```

A) 345

B) 444

C) 445

D) 344

Question N0.65

What will be the output of the following statements ?

```
int i = 3;
printf("%d%d%d",--i,i,i--,i++);
```

CSE G

A) 2343

B) 2232

C) 2221

D) 2233

Question N0.66

```
void func()
{
    int x = 0;
    static int y = 0;
    x++; y++;
    printf( "%d — %d\n", x, y );
}
```

```
int main()
{
    func();
    func();
    return 0;
}
```

What will the above code print when it is executed?

A)

1—1

1—1

B)

1—1

2—1

C)

1—1

2—2

D)

1—1

1—2

Question N0.67

```
int y[4] = {6, 7, 8, 9};
int *ptr = y + 2;
printf("%d\n", ptr[ 1 ]);
```

What is printed when the sample code above is executed?

CSE GU

A) 6

B) 7

C) 8

D) 9

Question N0.68

What will be output if you will compile and execute the following c code

```
void main()
{
    if(printf("cquestionbank"))
        printf("I know c");
    else
        printf("I know c++");
}
```

(A) I KNOW C

(B) I KNOW C++

(C) CQUESTIONBANKI KNOW C

(D) CQUESTIONBANKI KNOW C++

Question N0.69

What will be output if you will compile and execute the following c code?

```
#define call(x) #x  
void main()  
{  
printf("%s",call(c/c++));  
}
```

CSE C

- (A) c
- (B) c++
- (C) #c/c++
- (D) c/c++**

Question N0.70

What will be output if you will compile and execute the following c code?

```
#define message "union is\ power of c"  
void main()  
{  
clrscr();  
printf("%s",message);  
getch();  
}
```

- (A) union is \ power of c
- (B) union is power of c**
- (C) union is Power of c
- (D) compiler error

Question N0.71

What will be output if you will compile and execute the following c code?

```
void main()  
{ int a,b;  
a=1,3,15;  
b=(2,4,6);  
clrscr();  
printf("%d ",a+b);  
getch();  
}
```

CSE GURUS @

- (A) 3
- (B) 21
- (C) 17
- (D) 7**

Question N0.72

What will be output if you will compile and execute the following c code?

```
void main()  
{  
int i=0;  
if(i==0)  
{  
i=((5,(i=3)),i=1);  
printf("%d",i); }  
else  
printf("equal");  
}
```

CSE GURU

- (A) 5
- (B) 3
- (C) 1**
- (D) EQUAL

Question N0.73

What will be output if you will compile and execute the following c code?

```
void main()
{ static main;
  int x;
  x=call(main);
  printf("%d ",x);
  getch();
}
int call(int address)
{ address++;
  return address;
}
```

- (A) 0
- (B) 1**
- (C) GARBAGE VALUE
- (D) COMPILER ERROR

Question N0.74

What will be output if you will compile and execute the following c code?

```
#include "string.h"
void main()
{
  printf("%d %d",sizeof("string"),strlen("string"));
  getch();
}
```

CSE GURUS @ I

- (A) 6 6
- (B) 7 7
- (C) 6 7
- (D) 7 6**

Question N0.75

Where are local variables stored?

- A.In a Queue
- B.In Heap memory
- C.In Stack memory**
- D.In hard disk

Question N0.76

What will be output if you will compile and execute the following c code?

```
struct marks
{ int p:3;
  int c:3;
  int m:2;
};
void main()
{
  struct marks s={2,-6,5};
  printf("%d %d %d",s.p,s.c,s.m);
}
```

- (A) 2 -6 5
- (B) 2 -6 1
- (C) 2 2 1**
- (D) COMPILER ERROR

Question N0.77

The similarity among structure, union and enumeration is

- A.Size of all of them do not vary from program to program
- B.All of them let us define new data types**
- C.All of them let us define new pointers
- D.All of them let us define new values

Question N0.78

Which of the below has the highest precision?

A. unsigned long int

B. double

C. float

D. long int

Question N0.79

What will be output if you will compile and execute the following c code?

```
int extern x;  
void main()  
{  
    printf("%d",x);  
    x=2;  
    getch();  
}
```

int x=23;

(A) 0

(B) 2

(C) 23

(D) COMPILER ERROR

CSE GURUS @

Question N0.80

Comment on the output of this C code?

```
#include <stdio.h>  
int main()  
{  
    int a[5] = {1, 2, 3, 4, 5};  
    int i;  
    for (i = 0; i < 5; i++)  
        if ((char)a[i] == '5')  
            printf("%d\n", a[i]);  
        else  
            printf("FAIL\n");  
}
```

A. The compiler will flag an error

B. The program will compile and print the output 5

C. The program will compile and print the ASCII value of 5

D. The program will compile and print FAIL for 5 times

Question N0.81

What is the output of this C code?

```
#include <stdio.h>
```

```
int main()  
{
```

```
    enum {ORANGE = 5, MANGO, BANANA = 4, PEACH};  
    printf("PEACH = %d\n", PEACH);  
}
```

A) PEACH = 3

B) PEACH = 4

C) PEACH = 5

D) PEACH = 6

Question N0.82

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int c;
    c=printf("%d",printf("%d",printf("1234")));
    return 0;
}
```

- A) 123434
- B) 123441**
- C) compile time error
- D) 123444

Question N0.83

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int a,b,c;
    c=scanf("%d%d",&a,&b); // assume a=5 b=6
    printf("%d",c);
    return 0;
}
```

- A) 5
- B) 6
- C) compile time error
- D) 2**

Question N0.84

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int a,b,c;
    c=printf("hai%d",scanf("%d%d",&a,&b)); // assume a=5 b=6
    printf("%d",c);
    return 0;
}
```

- A) hai24**
- B) hai22
- C) compile time error
- D) hai34

Question N0.85

Which of the data types has the size that is variable?

- A) int
- B) struct**
- C) float
- D) double

Question N0.86

What is the output of this C code?

```
#include <stdio.h>
void main()
{
    int x = 1, y = 0, z = 5;
    int a = x && y || z++;
    printf("%d", z);
}
```

- A) 6
- B) 5
- C) 0
- D) varies

Question N0.87

What is the output of this C code?

```
#include <stdio.h>
void main()
{
    int x = 1, z = 3;
    int y = x << 3;
    printf(" %d\n", y);
}
```

- A) -2147483648
- B) -1
- C) run time error
- D) 8

Question N0.88

What is the final value of j in the below code?

```
#include <stdio.h>
int main()
{
    int i = 0, j = 0;
    if (i && (j = i + 10))
        //do something
    ;
    printf("%d", j);
}
```

- A) 0
- B) 10
- C) compiler error
- D) 11

Question N0.89

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int i = 1;
    if (i++ && (i == 1))
        printf("Yes\n");
    else
        printf("No\n");
}
```

- A) yes
- B) no
- C) depends on the compiler
- D) depends on the standard

Question N0.90

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int a = 1, b = 1, c;
    c = a++ + b;
    printf("%d, %d", a, b);
}
```

A) a = 1, b = 1

B) a = 2, b = 1

C) a = 1, b = 2

D) a = 2, b = 2

Question N0.91

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int a = 10, b = 10;
    if (a = 5)
        b--;
    printf("%d, %d", a, b--);
}
```

A) a = 10, b = 9

B) a = 10, b = 8

C) a = 5, b = 9

D) a = 5, b = 8

Question N0.92

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int x = 2, y = 0;
    int z = (y++) ? y == 1 && x : 0;
    printf("%d\n", z);
    return 0;
}
```

A) 0

B) 1

C) undefined behaviour

D) compile time error

Question N0.93

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int y = 1, x = 0;
    int l = (y++, x++) ? y : x;
    printf("%d\n", l);
}
```

A) 1

B) 2

C) compile time error

D) undefined behaviour

Question N0.94

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    int j = 10;
    printf("%d\n", j++);
    return 0;
}
```

- A) 10
- B) 11
- C) compile time error
- D) 0

Question N0.95

What will be output if you will compile and execute the following c code?

```
void main(){
    int i=10;
    static int x=i;
    if(x==i)
        printf("Equal");
    else if(x>i)
        printf("Greater than");
    else
        printf("Less than");
}
```

- (A) equal
- (B) greater than
- (C) less than
- (D) compiler error

Question N0.96

What is the output of this C code?

```
#include <stdio.h>
int main()
{
    float x = 'a';
    printf("%f", x);
    return 0;
}
```

- A) a
- B) run time error
- C) a.0000000
- D) 97.000000

Question N0.97

```
int main()
{
    int i = 0;
    for (i=0; i<20; i++)
    {
        switch(i)
        {
            case 0: i += 5;
            case 1: i += 2;
            case 5: i += 5;
            default: i += 4;
            break;
        }
        printf("%d ", i);
    }
    return 0;
}
```

1: 0

- A. 5 10 15 20
- B. 7 12 17 22
- C. 16 21
- D. Compiler Error

Question N0.98

How many times CSE GURUS is printed

```
#include<stdio.h>
```

```
int main()
```

```
{
```

```
int i = -5;
```

```
while (i <= 5)
```

```
{
```

```
if (i >= 0)
```

```
break;
```

```
else
```

```
{
```

```
i++;
```

```
continue;
```

```
}
```

```
printf(" CSE GURUS ");
```

```
}
```

```
return 0;
```

```
}
```

- A. 10 times
- B. 5 times
- C. Infinitie times
- D. 0 times

Question N0.99

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
char p;
```

```
char b[10] = {1, 2, 3, 4, 5, 6, 9, 8};
```

```
p = (b + 1)[5];
```

```
printf("%d", p);
```

```
return 0;
```

```
}
```

A. 5

B. 6

C. 9

D. None of the above

Question N0.100

```
int main()
```

```
{
```

```
char p[] = "csegurus";
```

```
char t;
```

```
int i, j;
```

```
for(i=0,j=strlen(p); i<j; i++)
```

```
{
```

```
t = p[i];
```

```
p[i] = p[j-i];
```

```
p[j-i] = t;
```

```
}
```

```
printf("%s", p);
```

```
return 0;
```

```
}
```

CSE GUR

A. guruscse

B. Nothing is printed on the screen

C. csegurus

D. gggggggg

Question No.101

What are i,j values after the execution of this program?

```
void main()
{
char s[100];
int i;
gets(s); //Assume input string is given as hello\n
i=printf("%s",s);
j=printf("hello\n");
}
```

A. 6 6

B. 7 6

C. 7 7

D. 5 6

Question No.102

A program reads in 500 integers in the range [0...100] representing the scores of 500 students. it then prints the frequency of each score above 50. what would be the best way for the program to store the frequencies?

CSE GURUS @ M3

A. An array of 101 numbers

B. An array of 50 numbers

C. An array of 500 numbers

D. A dynamically allocated array of 550 numbers

CSE
GURUS

Question NO.103

What is the output of this C code?

```
int main ()
{
    int i=5, j=-2, k =0, w, x, y, z;
    w = i || j || k;
    x = i && j && k;
    y = i || j && k;
    z = i && j || k;
    printf("%d, %d, %d, %d\n",w,x,y,z);
    return 0;
}
```

- A. 1, 1, 1, 1
- B. 1, 1, 0, 1
- C. 1, 0, 0, 1
- D. 1, 0, 1, 1**

Question NO.104

What is the output of the C Program?

```
int main()
{
    int k;
    for(printf("FLOWER "); printf("YELLOW "); printf("FRUITS "))
    {
        break;
    }
    return 0;
}
```

- A) Compiler error
- B) FLOWER FRUITS
- C) FLOWER YELLOW**
- D) FLOWER YELLOW FRUITS

Question No.105

```
void main()
{
    int i=3,j=5,k;
    k=0?1:j;
    printf("%d",k);
}
```

- A. 0
- B. 5**
- C. Runtime error
- D. 3

Question No.106

What will be the output of the C program?

```
#include<stdio.h>
int main()
{
    float num = 8.88;
    char status[10] = "out";
    printf("\t\t%d",printf("\nfloat"));
    printf("\t\t%d",printf("\n%f",num));
    printf("\t\t%d",printf("\n%s",status));
    return 0;
}
```

- A. float 6
8.880000 9
'out' 6**

- B. float 6
8.880000 9
'out' 4
- C. float 5
8.880000 9
'out' 4
- D. float 5
8.880000 9
'out' 4

Question No.107

```
void main()
{
    int i= 17;
    char c = 'c';
    int sum;
    sum = i+c;
    printf("Value of sum: %d\n", sum);
}
```

Coment about the above program

- A) This program will compile and run correctly**
- B) A character and an integer are added which is an error
- C) Error
- D)None of these

Question No.108

```
void main(){
    char *p="CSEGURUS";
    int *q;
    p++;
    q = (int *)p;
    q++;
    printf("\n%s\n%s",p,q);
}
```

A. SEGURUS
EGURUS

B. CSEGURUS
CSEGURUS

C. Error

D. SEGURUS
RUS

Question No.109

What will be the output of the C program?

```
#include<stdio.h>
```

```
int main()
{
    int i = 5, *ptr;
    ptr = &i;
    *ptr = 0;
    printf("\n Number is %d",i);
    return 0;
}
```

- A. Number is 5**
- B. Compilation Error
- C. Runtime error
- D. Number is 0**

Question No.110

What will be the output of the C program?

```
#include<stdio.h>
```

```
int main()
{
    static int arr[5],i;
    for(i=0;i<=5;i++)
    printf("%d",arr[i] = 1);
    return 0;
}
```

A. 11111

B. 111111

C. Runtime Error

D. Compilation Error

Question No.111

```
#include <stdio.h>
int main()
{
    int a[5] = {1,3,5,7,8};
    int *ptr= (int*)(&a+1);
    printf("%d", *(a+1)* *(ptr-1));
    return 0;
}
```

A. 21

B. 24

C. 5

D. 7

Question No.112

. What will be the output of the C program?

```
#include<stdio.h>
int main()
{
    printf("%d", 5.00);
    return 0;
}
```

A. Runtime error

B. Compilation error

C. 5

D. 0

Question No.113

What will be the output of the C program?

```
#include<stdio.h>
int main()
{
    int min-value = 2;
    int max-value = 10;
    int avg = max-value + min-value / 2;
    printf("%d",avg);
    return 0;
}
```

A. 6

B. 7

C. Runtime error

D. Compilation error

Question No.114

A 10-bit unsigned integer has the following range:

A. 0 to 1000

B. 0 to 1024

C. 1 to 1025

D. 0 to 1023

Question No. 115

The format identifier '%i' is also used for _____ data type?

a) char

b) double

c) float

d) int

CSE

Question No.116

```
#include<string.h>
void main()
{
char a[10]="[0]";
int i;
for(i=0;i<strlen(a);i++)
{
printf("%c",a[i]);
}
}
```

- A. [0]**
- B. [0]
- C. Runtime error
- D. 0

Question No.118

```
void main()
{
int i=5;
printf("%d %d\n", i, i++);
printf ("%d\n", i);
i=i++;
printf ("%d\n", i);
}
```

- A. 5 6
- 6
- 7
- B. 6 5
- 6
- 7
- C. 5 6
- 6
- 6
- D. 6 5**
- 6
- 6

Question No.119

```
void main()
{
int i=5;
printf("%d %d\n", i, i=++i);
printf ("%d\n", i);
i=i++;
printf ("%d\n", i);
}
```

- A. 6 6**
- 6
- B. 6 5
- 6
- 7
- C. 5 6
- 6
- 6
- D. 6 5
- 6
- 6

Question No.120

```
void main()
{
int i=5;
printf("%d %d\n", i, i=i++);
printf ("%d\n", i);
i=i++;
printf ("%d\n", i);
}
```

- A. 5 6
- 6
- 7
- B. 6 5
- 6
- 7
- C. 5 5**
- 5
- 5
- D. 6 5
- 6
- 6

Question No. 121

```
int main()
{
printf("\0goodbye");
return 0;
}
```

- A. Prints nothing**
- B. goodbye
- C. oodbye
- D. \0goodbye

Question No.122

```
#include <stdio.h>
int main()
{
    int n;
    for(n=7;n!=0;n--)
        printf("n=%d",n--);
    return 0;
}
```

- A. Infinite loop**
- B. Numbers 7 to 0 in descending order
- C. None of the other choices as there is a compilation error
- D. Numbers 7 to 1 in descending order.

Question No.123

```
void main()
{
    int x=-1;
    int y=~10;
    printf("%d\n",y);
    if(x==y)
        printf("yes");
    else
        printf("No");
}
```

- A. -11 No**
- B. 10 No
- C. -1 yes
- D. 1 No

Question No.124

```
void main()
{
    unsigned int x=-1;

    int y=10;
    if(x<y)
        printf("yes");
    else
        printf("No");
}
```

- A. No**
- B. yes
- C. Compile time error
- D. Runtime error

Question No.125

```
void main()
{
    char a='586';
    printf("%d",a);
}
```

- A. 586
- B. 54**
- C. 6
- D. 5

- Taking a positive integer value as **char**:

```
#include <stdio.h>
int main()
{
    char a = 278;
    printf("%d", a);
    return 0;
}
```

Output:

22

Question No. 126

```
void main()
```

```
{
    printf("%d", 7 << 6);
}
```

Handwritten notes for the first part of the question:

$7 \ll 6$

$44 \checkmark$

$7 \rightarrow \boxed{0111}$

$01110 \rightarrow 14 \checkmark$

$011100 \rightarrow 28 \checkmark$

Handwritten notes for the second part of the question:

$7 \times 2^1 = 14$

$7 \times 2^2 = 28$

$7 \times 2^6 = 448$

Handwritten notes for the third part of the question:

$7 \gg 2$

$\boxed{0111}$

$0011 \rightarrow 3 \checkmark$

$0001 \rightarrow 1 \checkmark$

$0000 \rightarrow 0 \checkmark$

$\frac{7}{2^2} = 3 \checkmark$

$\frac{7}{2^1} = 3 \checkmark$

$\frac{7}{2^2} = 1$

$\frac{7}{2^3} = 0 \checkmark$

Question No.127

```
int main()
```

```
{
```

```
int a[5] = {1,3,5,7,9};
```

```
int *ptr = (int*)(&a+1);
```

```
printf("%d", *(a+1));
```

```
printf("%d", *(ptr-2));
```

```
return 0;
```

```
}
```

A. 3 5

B. 3 7

C. 3 Garbage value

D. 3 9

Question NO.129

```
void main()
```

```
{
```

```
int a=10,b;
```

```
if(a==a--)
```

```
printf("true");
```

```
printf("%d",a);
```

```
a=10;
```

```
if(a==--a)
```

```
printf("false");
```

```
printf("%d",a);
```

```
}
```

A. 9 false 9

B. true 9 9

C. 10 false 9

D. true 10 9

Question NO.130

```
void main()
```

```
{
```

```
int ai[]={10,20,30,40,50};
```

```
int *aptr[]={ai,ai+1,ai+2,ai+3,ai+4};
```

```
int **dptr=aptr+2;
```

```
printf("%d %d",dptr-aptr,aptr[4]-ai);
```

```
}
```

A. 8 16

B. 2 4

C. 3 6

D. 16 32

Question NO.131

```
void main()
```

```
{
```

```
int num[]={1,4,8,12,16};
```

```
int *a,*b;
```

```
int i;
```

```
a=num;
```

```
b=num+2;
```

```
i=*a+1;
```

```
printf("%d %d %d",i,*a,*b);
```

```
}
```

A. 4 1 8

B. 2 1 3

C. 2 1 8

D. 4 1 3

Question N0.132

```
int array[]={1,2,3,4,5,6,7,8};
#define SIZE (sizeof(array)/sizeof(int))
main()
{
    printf("%d ",SIZE);
    if(-1<=SIZE)
        printf("1");
    else printf("2");
}
```

- A. 8 1
- B. 32 1
- C. 8 2**
- D. 32 2

Question N0.133

```
void main()
{
    int i = 4;
    switch (i)
    { default: ;
      case 3: i += 5;
        if (i == 8)
        {
            i++;
            if (i == 9) break;
            i *= 2;
        }
        i -= 4; break;
      case 8: i += 5; break;
    }
    printf("i = %d\n", i);
}
```

What will the output of the sample code ?

- A) i = 5**
- B) i = 8
- C) i = 9
- D) i = 10

Question N0.134

```
void main()
{
    int i = 3;
    switch (i)
    { default: ;
      case 3: i += 5;
        if (i == 8)
        {
            i++;
            if (i == 9) break;
            i *= 2;
        }
        i -= 4; break;
      case 8: i += 5; break;
    }
    printf("i = %d\n", i);
}
```

What will the output of the sample code ?

- A) i = 5
- B) i = 8
- C) i = 9**
- D) i = 10

Question N0.135

```
void main()
{
    int i = 8;
    switch (i)
    { default: ;
      case 3: i += 5;
        if (i == 8)
        {
            i++;
            if (i == 9) break;
            i *= 2;
        }
        i -= 4; break;
      case 8: i += 5;
    }
    printf("i = %d\n", i);
}
```

What will the output of the sample code ?

- A) i = 13**
- B) i = 8
- C) i = 9
- D) i = 10

Question N0.136

Which of the following statement are true after execution of the program?

```
void main()
{
    int a [10],*p;
    a [0] =1;
    a [1] =2;
    p=a;
    (*p)++;
}
```

CSE GURUS @ M

(A) a [1] =3

(B) a [0] =2

(C) a [0] = 1

(D) Compilation error

Question N0.137

```
int main()
{
    int a=0, b=1, c=3;
    *((a) ? &b : &a) = a ? b : c;
    printf("%d, %d, %d\n", a, b, c);
    return 0;
}
```

A. 0, 1, 3

B. 1, 2, 3

C. 3, 1, 3

D. 1, 3, 1

Question N0.138

What will be output of the following program

```
int main()
{
    int b[4]={5,1,32,4};
    int k,l,m;
    k=++b[1];
    l=b[1]++;
    m=b[k++];
    printf("%d, %d, %d",k,l,m);
    return 0;
}
```

A) 2, 2, 4

B) 3, 2, 32

C) 3, 2, 4

D) 2, 3, 32

Question N0.139

What will be output of the following program where c=65474 and int=2 bytes.

```
int main()
{
    int c[3][4]={2,3,1,6,4,1,6,2,2,7,1,10};
    printf("%u, %u\n", c+1, &c+1);
    return 0;
}
```

- A) 65482, 65498
- B) 65476, 65476
- C) 65476, 65498
- D) No Output

Question N0.140

What will be output of the following program

```
int main()
{
    int a[5],i=0;
    while(i<5)
    a[i]=++i;
    for(i=0;i<5;i++)
    printf("%d,",a[i]);
}
```

- A) Garbage Value,1,2,3,4
- B) 1,2,3,4,5
- C) Error
- D) Program Crash

Question N0.141

What will be output of the following program

```
int main()
{
    float a[]={12.4, 2.3, 4.5, 6.7};
    printf("%d, %d", sizeof(a), sizeof(a[0]));
    return 0;
}
```

- A) 16 Bytes, 4 Bytes
- B) 4 Bytes, 4 Bytes
- C) 8 Bytes, 4 Bytes
- D) None Of These

Question N0.142

What is the output of the following piece of program?

```
void main()
{
    int value =11;
    while(value-->2);
    printf("count down is:%d",value );
}
```

- A) Count down is: -2
- B) Count down is: -3
- C) Syntax error
- D) Run time error

Question NO.143

What is the output of this C code?

```
#include<stdio.h>
#define MAX 2
enum bird {SPROW =MAX + 1, PARROT=MAX};
int main ()
{
enum bird b =PARROT;
printf("%d", b);
return 0;
}
```

- (A) Compilation error
- (B) 5
- (C) Undefined value
- (D) 2

CSE GURUS @ M:

Question No.144

Which of the following statements should be used to obtain a remainder after dividing 3.14 by 2.1?

1.

CSE GURUS @

- A. `rem = 3.14 % 2.1;`
- B. `rem = modf(3.14, 2.1);`
- C. `rem = fmod(3.14, 2.1);`
- D. Remainder cannot be obtain in floating point division.

Question N0.145

What will be the output?

```
int main()
{
    int main = 5;
    main++;
    printf("%d", main);
    return 0;
}
```

- A) Compile-time Error
- B) Run-time Error
- C) Run Without Any Error And Prints 6
- D) Experience Infinite Looping

Question N0.146

What is the output of this C code?

```
int main()
{
    register int i = 10;
    int *q = &i;
    *q = 11;
    printf("%d %d\n", i, *q);
}
```

CSE GURUS

- A) Depends on whether i is actually stored in machine register
- B) 10 10
- C) 11 11
- D) Compile time error

Question No.147

What will be the output of the C program?

```
#include<stdio.h>
```

```
int main()
```

```
{
```

```
    char ch[20] = "abcdefghijklm";
```

```
    printf("\n%5.2s",ch);
```

```
    return 0;
```

```
}
```

A. abcde.fg

B. ab

C. junk characters

D. abcdef

Question N0.148

```
void main()
```

```
{
```

```
    int i=1,j=2;
```

```
    if(i&&!(i&j))==1)
```

```
        printf("%d",i);
```

```
    else
```

```
        printf("%d",j);
```

```
}
```

(A) 1

(B) 2

(C) error

(D) None of the above

Question N0.149

```
void main()
```

```
{
```

```
    int fact=1,i,n;
```

```
    n=5;
```

```
    for(i=n;i>=0;i--)
```

```
        fact=fact*i;
```

```
    printf("%d",fact);
```

```
}
```

(A) 120

(B) 720

(C) error

(D) 0

Question No.150

What will be the output of the C program?

```
#include<stdio.h>
```

```
int main()
```

```
{
```

```
    int a = 5;
```

```
    printf("%d"+1,a);
```

```
    return 0;
```

```
}
```

A. compilation error

B. Runtime error

C. 5

D. d