

18 Testing security configurations

This chapter covers

- Testing integration with Spring Security configurations for endpoints
- Defining mock users for tests
- Testing integration with Spring Security for method-level security
- Testing reactive Spring implementations

The legend says that writing unit and integration tests started with the following short verse:

99 little bugs in the code,

99 little bugs.

Track one down, patch it around,

There's 113 little bugs in the code.

—Anonymous

With time, software became more complex, and teams became larger. Knowing all the functionalities implemented over time by others became impossible. Developers needed a way to make sure they didn't break existing functionalities while correcting bugs or implementing new features.

While developing applications, we continuously write tests to validate that the functionalities we implement work as desired. The main reason why we write unit and integration tests is to ensure we don't break existing functionalities when changing code to fix a bug or to implement new features. This is also called *regression testing*.

Nowadays, when a developer finishes making a change, they upload the changes to a server used by the team to manage code versioning. This action automatically triggers a continuous integration tool that runs all existing tests. If any of the changes break an existing functionality, the tests fail, and the continuous integration tool notifies the team (figure 18.1). This way, it's less likely to deliver changes affecting existing features.

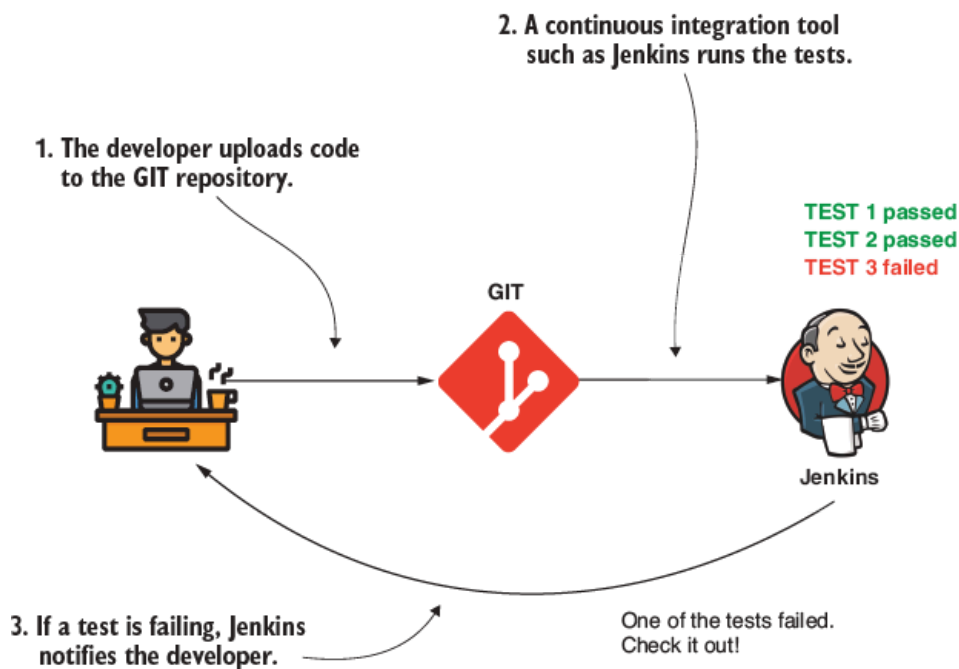


Figure 18.1 Testing is part of the development process. Anytime a developer uploads code, the tests run. If any test fails, a continuous integration tool notifies the developer.

NOTE By using Jenkins in this figure, I'm not saying that this is the only continuous integration tool used or that it's the best one. You have many alternatives to choose from like Bamboo, GitLab CI, CircleCI, and so on.

When testing applications, you need to remember it's not only your application code that you need to test. You need to also make sure you test the integrations with the frameworks and libraries you use (figure 18.2). Sometime in the future, you may upgrade that framework or library to a new version. When changing the dependency version, you want to ensure your app still integrates well with the new version of that dependency. If your app doesn't integrate in the same way, you want to easily find where you need to make changes to correct the integration problems.

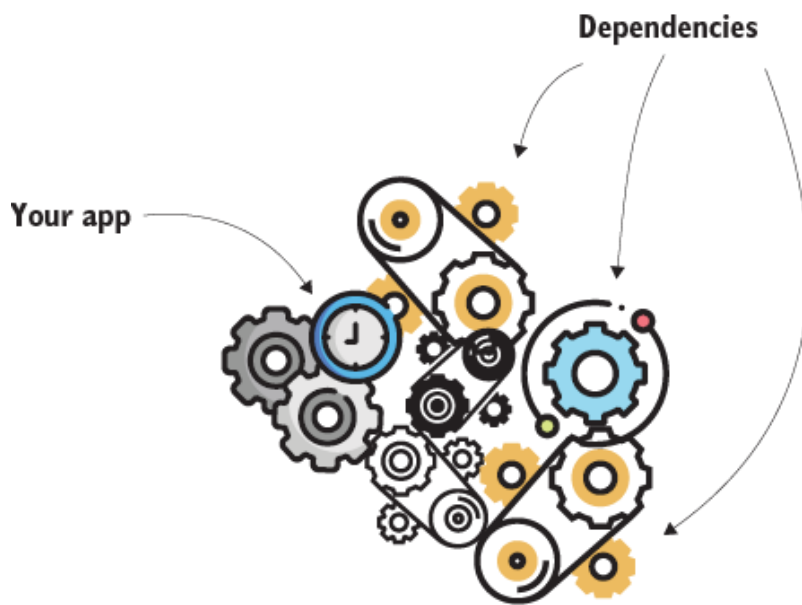


Figure 18.2 The functionality of an application relies on many dependencies. When you upgrade or change a dependency, you might affect existing functionality. Having integration tests with dependencies helps you to discover quickly if a change in a dependency affects the existing functionality of your application.

So that's why you need to know what we'll cover in this chapter—how to test your app's integration with Spring Security. Spring Security, like the Spring Framework ecosystem in general, evolves quickly. You probably upgrade your app to new versions, and you certainly want to know if upgrading to a specific version causes vulnerabilities, errors, or incompatibilities in your application. Remember what we stressed right from the first chapter: *you need to consider security from the first design for the app, and you need to take it seriously*. Implementing tests for any of your security configurations should be a mandatory task and should be defined as part of your definition of *done*. You shouldn't consider a task finished if security tests aren't ready.

In this chapter, we'll discuss several practices for testing an app's integration with Spring Security. We'll go back to some of the examples we worked on in previous chapters, and you'll learn how to write integration tests for implemented functionality. Testing, in general, is a crucial story. But learning this subject in detail brings many benefits.

In this chapter, we'll focus on testing integration between an application and Spring Security. Before starting our examples, I'd like to recommend a few resources that helped me understand this subject deeply. If you need to understand the subject in more detail, or even as a refresher, you can read these books. I am positive you'll find these a great help!

- *JUnit in Action, Third Edition* by Cătălin Tudose et al. (Manning, 2020)
- *Unit Testing Principles, Practices, and Patterns* by Vladimir Khorikov (Manning, 2020)
- *Testing Java Microservices* by Alex Soto Bueno et al. (Manning, 2018)

Our adventure in writing tests for security implementations starts with testing authorization configurations. In section 18.1, you'll learn how to skip authentication and define mock users to test authorization configuration at the endpoint level. Then, in section 18.2, you'll learn how to test authorization configurations with users from a `UserDetailsService`. In section 18.3, we'll discuss how to set up the full security context in case you need to use specific implementations of the `Authentication` object. And finally, in section 18.4, you'll apply the approaches you learned in the previous sections to test authorization configuration on method security.

Once we complete our discussion on testing authorization, section 18.5 will teach you how to test the authentication flow. Then, in sections 18.6 and 18.7, we'll discuss testing other security configurations, such as cross-site request forgery (CSRF) and cross-origin resource sharing (CORS). The chapter ends with section 18.8, discussing integration tests of Spring Security and reactive applications.

18.1 Using mock users for tests

This section discusses using mock users to test authorization configuration. This approach is the most straightforward and frequently used method for testing authorization configurations. When using a mock user, the test completely skips the authentication process (figure 18.3).

Implementing tests to skip authentication and focus on authorization is very common. You don't need to validate the authentication process every time you validate that the system correctly applies an authorization rule. Remember that authentication and authorization depend on one another, but they are completely decoupled through the security context. So if you want to test an authorization configuration in isolation, you can define a mock security context and control it to test all the needed authorization scenarios. Because in most cases an app implements only a limited number of authentication methods (in most cases, actually, one) but has a large variety of authorization rules that apply to use cases or endpoints, you'll prefer to write authorization tests in isolation so you don't have to repeat the authentication tests every time you validate that authorization for a specific element works fine.

The mock user is valid only for the test execution, and for this user, you can configure any characteristics you need to validate a specific scenario. For example, you can give the user specific roles (ADMIN, MANAGER, etc.) or use different authorities to validate that the app behaves as expected in these conditions.

NOTE It's important to know which components from the framework are involved in an integration test. This way, you know which part of the integration you cover with the test. For example, a mock user can only be used to cover authorization. (In section 18.5, you'll learn how to deal with authentication.) I sometimes see developers getting confused by this aspect. They thought they were also covering, for example, a custom implementation of an `AuthenticationProvider` when working with a mock user, which is not the case. Make sure you correctly understand what you're testing.

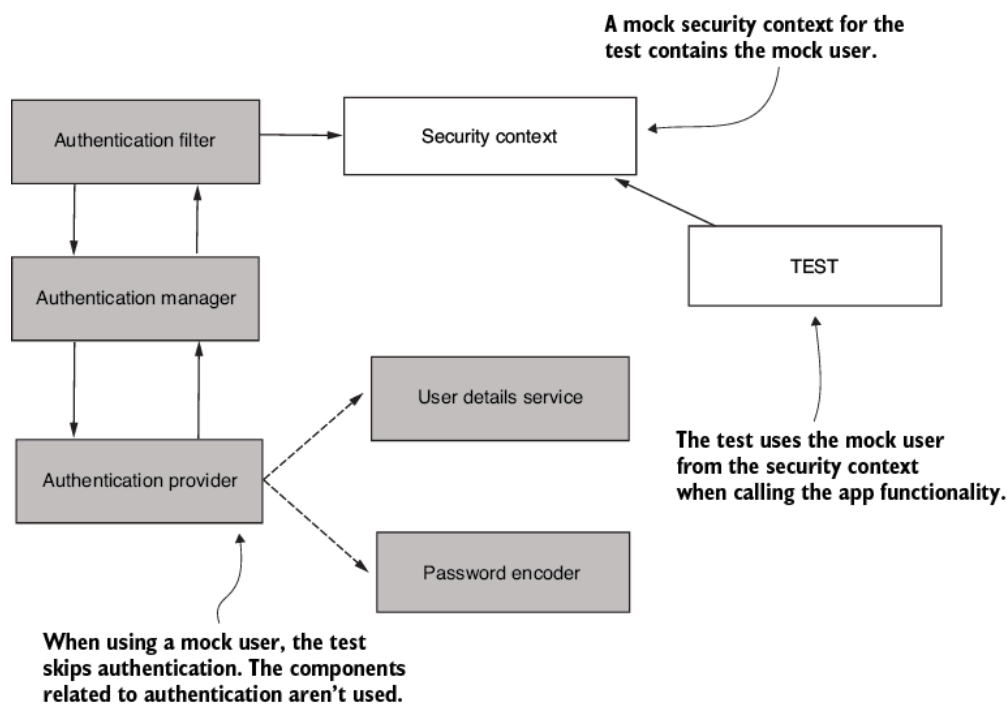


Figure 18.3 We skip the shaded components in the Spring Security authentication flow when executing a test. The test directly uses a mock `SecurityContext`, which contains the mock user you define to call the tested functionality.

To prove how to write such a test, let's go back to the simplest example we worked on in this book, the project `ssia-ch2-ex1`. This project exposes an endpoint for the path `/hello` with only the default Spring Security configuration. What do we expect to happen?

- When calling the endpoint without a user, the HTTP response status should be 401 Unauthorized.
- When calling the endpoint having an authenticated user, the HTTP response status should be 200 OK, and the response body should be `Hello!`.

Let's test these two scenarios! We need a couple of dependencies in the `pom.xml` file to write the tests. The next code snippet shows you the classes we use throughout the examples in this chapter. You should make sure you have these in your `pom.xml` file before starting to write the tests.

Here are the dependencies:

```

<dependency>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-test</artifactId>
  <scope>test</scope>
</dependency>
<dependency>
  <groupId>org.springframework.security</groupId>
  <artifactId>spring-security-test</artifactId>
  <scope>test</scope>
</dependency>

```

NOTE For the examples in this chapter, we use JUnit 5 for writing tests. However, don't be discouraged if you still work with JUnit 4. From the Spring Security integration point of view, the annotations and the rest of the classes you'll learn work the same. Chapter 4 of *JUnit in Action* by Cătălin Tudose et al. (Manning, 2020), which is a dedicated discussion about migrating from JUnit 4 to JUnit 5, contains some interesting tables that show the correspondence between classes and annotations of versions 4 and 5. Here's the link: <http://mng.bz/OPJn>.

In the test folder of the Spring Boot Maven project, we add a class named `MainTests`. We write this class as part of the main package of the application. The name of the main package is `com.laurentiuspilca.ssia`. In the next listing, you can find the definition of the empty class for the tests. We use the `@SpringBootTest` annotation, which represents a convenient way to manage the Spring context for our test suite.

Listing 18.1 A class for writing the tests

```

@SpringBootTest                                ①
public class MainTests {

}

```

① Makes Spring Boot responsible for managing the Spring context for the tests

A convenient way to implement a test for the behavior of an endpoint is by using Spring's `MockMvc`. In a Spring Boot application, you can auto-configure the `MockMvc` utility for testing endpoint calls by adding an annotation over the class, as the next listing illustrates.

Listing 18.2 Adding `MockMvc` for implementing test scenarios

```

@SpringBootTest
@AutoConfigureMockMvc ①
public class MainTests {

    @Autowired
    private MockMvc mvc; ②
}

```

① Enables Spring Boot to autoconfigure MockMvc. As a consequence, an object of type MockMvc is added to the Spring context.

② Injects the MockMvc object that we use to test the endpoint

Now that we have a tool we can use to test endpoint behavior, let's get started with the first scenario. When calling the /hello endpoint without an authenticated user, the HTTP response status should be 401 Unauthorized.

You can visualize the relationship between the components for running this test in figure 18.4. The test calls the endpoint but uses a mock SecurityContext. We decide what we add to this SecurityContext. For this test, we need to check that if we don't add a user that represents the situation in which someone calls the endpoint without authenticating, the app rejects the call with an HTTP response with the status 401 Unauthorized. When we add a user to the SecurityContext, the app accepts the call, and the HTTP response status is 200 OK.

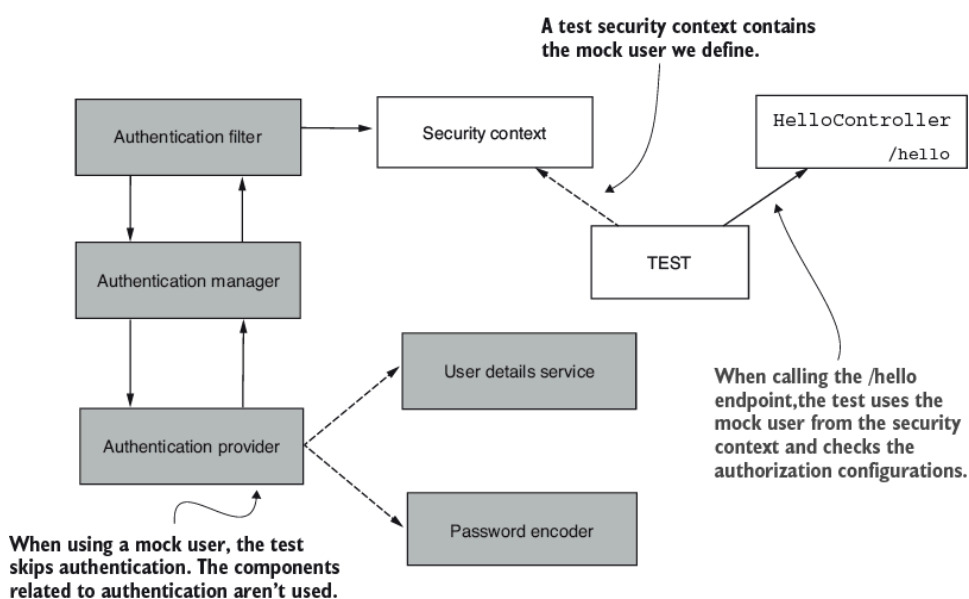


Figure 18.4 When running the test, we skip authentication. The test uses a mock SecurityContext and calls the /hello endpoint exposed by HelloController. We add a mock user in the test SecurityContext to verify that the behavior is correct according to the authorization rules. If we don't define a mock user, we expect the app to not authorize the call, but if we define a user, we expect that the call succeeds.

The following listing presents this scenario's implementation.

Listing 18.3 Testing that you can't call the endpoint without an authenticated user

```
@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;

    @Test
    public void helloUnauthenticated() throws Exception {
        mvc.perform(get("/hello"))
            .andExpect(status().isUnauthorized());
    }
}
```

① When performing a GET request for the /hello path, we expect to get back a response with the status Unauthorized.

Note that we statically import the methods `get()` and `status()`. You can find the method `get()` and similar methods related to the requests we use in the examples of this chapter in this class:

```
org.springframework.test.web.servlet.request.MockMvcRequestBuilders
```

Likewise, you can find the method `status()` and similar methods related to the result of the calls that we use in the next examples of this chapter in this class:

```
org.springframework.test.web.servlet.result.MockMvcResultMatchers
```

You can run the tests now and see the status in your IDE. Usually, in any IDE, to run the tests, you can right-click on the test's class and then select Run. The IDE displays a successful test with green and a failing one with another color (usually red or yellow).

NOTE In the projects provided with the book, above each method implementing a test, I also use the `@DisplayName` annotation. This annotation allows us to have a longer, more detailed description of the test scenario. To occupy less space and allow you to focus on the functionality of the

tests we discuss, I took the `@DisplayName` annotation out of the listings in the book.

To test the second scenario, we need a mock user. To validate the behavior of calling the `/hello` endpoint with an authenticated user, we use the `@WithMockUser` annotation. By adding this annotation above the test method, we instruct Spring to set up a `SecurityContext` that contains a `UserDetails` implementation instance. It's basically skipping authentication. Now calling the endpoint behaves as if the user defined by the `@WithMockUser` annotation successfully authenticated.

With this simple example, we don't care about the details of the mock user like its username, roles, or authorities. Thus, we add the `@WithMockUser` annotation, which provides some defaults for the mock user's attributes. Later in this chapter, you'll learn how to configure the user's attributes for test scenarios in which their values are important. The next listing provides the implementation for the second test scenario.

Listing 18.4 Using `@WithMockUser` to define a mock authenticated user

```
@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;

    // Omitted code

    @Test
    @WithMockUser
    public void helloAuthenticated() throws Exception {
        mvc.perform(get("/hello"))
            .andExpect(content().string("Hello!"))
            .andExpect(status().isOk());
    }
}
```

① Calls the method with a mock authenticated user

② In this case, when performing a GET request for the `/hello` path, we expect the response status to be OK.

Run this test now, and observe its success. However, in some situations, we need to use a specific name or give the user specific roles or authori-

ties to implement the test. Say we want to test the endpoints we defined in `ssia-ch5-ex2`. For this example, the endpoints return a body depending on the authenticated user's name. To write the test, we need to give the user a known username. The next listing shows how to configure the details of the mock user by writing a test for the `/hello` endpoint in the `ssia-ch5-ex2` project.

Listing 18.5 Configuring details for the mock user

```
@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    // Omitted code

    @Test
    @WithMockUser(username = "mary")
    public void helloAuthenticated() throws Exception {
        mvc.perform(get("/hello"))
            .andExpect(content().string("Hello, mary!"))
            .andExpect(status().isOk());
    }
}
```

① Sets up a username for the mock user

In figure 18.5, you find a comparison of how using annotations to define the test security environment differs from using a `RequestPostProcessor`. The framework interprets annotations such as `@WithMockUser` before it executes the test method. This way, the test method creates the test request and executes it in an already configured security environment. When using a `RequestPostProcessor`, the framework first calls the test method and builds the test request. The framework then applies the `RequestPostProcessor`, which alters the request or the environment in which it's executed before sending it. In this case, the framework configures the test dependencies, such as the mock users and the `SecurityContext`, after building the test request.

Like setting up the username, you can set the authorities and roles for testing authorization rules. An alternative approach to creating a mock user is using a `RequestPostProcessor`. We can provide a `RequestPostProcessor` the `with()` method, as listing 18.6 shows. The class `SecurityMockMvcRequestPostProcessors` provided by Spring Security offers us lots of implementations for `RequestPostProcessor`, which helps us cover various test scenarios.

In this chapter, we also discuss the frequently used implementations for `RequestPostProcessor`. The method `user()` of the class `SecurityMockMvcRequestPostProcessors` returns a `RequestPostProcessor` we can use as an alternative to the `@WithMockUser` annotation.

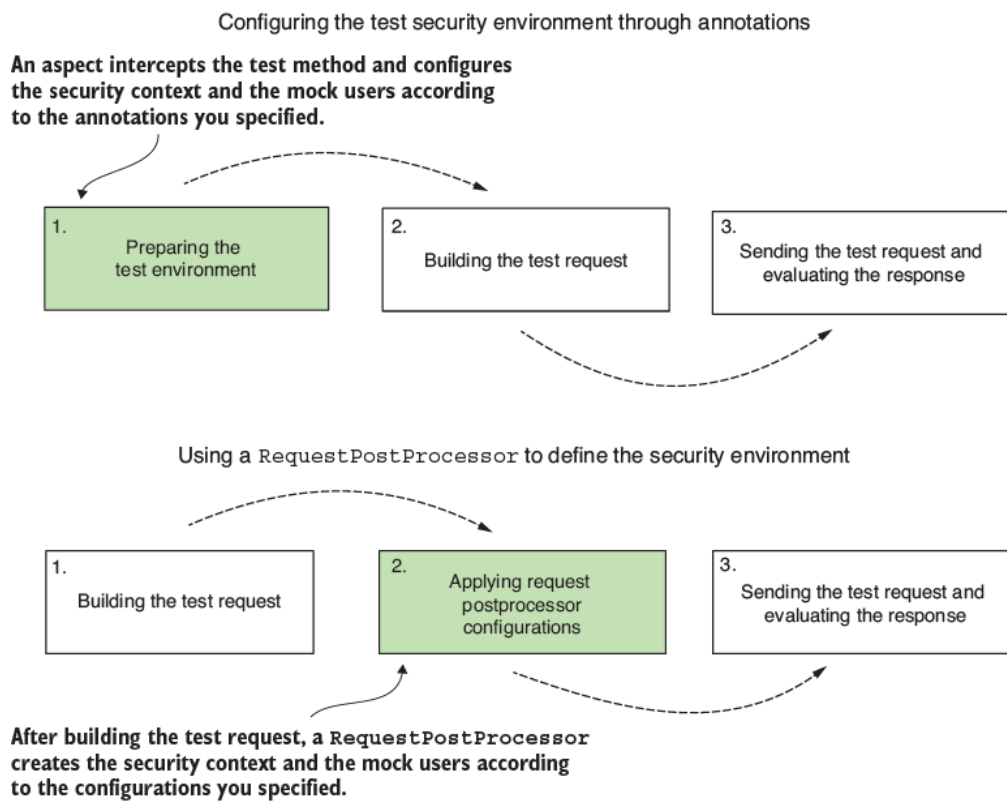


Figure 18.5 The difference between using annotations and the `RequestPostProcessor` to create the test security environment. When using annotations, the framework sets up the test security environment first. When using a `RequestPostProcessor`, the test request is created and then changed to define other constraints such as the test security environment. In the figure, the points where the framework applies the test security environment are shaded.

Listing 18.6 Using a `RequestPostProcessor` to define a mock user

```

@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    // Omitted code

    @Test
    public void helloAuthenticatedWithUser() throws Exception {
        mvc.perform(
            get("/hello")
                .with(user("mary"))
                .andExpect(content().string("Hello!"))
                .andExpect(status().isOk());
    }
}
  
```

①

① Calls the /hello endpoint using a mock user with the username Mary

As you observed in this section, writing tests for authorization configurations is fun and simple! Most of the tests you write for Spring Security integration with functionalities of your application are for authorization configurations. You might be wondering why we didn't test authentication as well. In section 18.5, we'll discuss testing authentication. However, in general, and as discussed earlier in this section, it makes sense to test authorization and authentication separately. Usually, an app has one way to authenticate users but might expose dozens of endpoints for which authorization is configured differently. That's why you test authentication separately with a handful of tests and then implement these individually for each authorization configuration for the endpoints. It's a loss of execution time to repeat authentication for each endpoint tested, as long as the logic doesn't change.

18.2 Testing with users from a UserDetailsService

This section discusses obtaining the user details for tests from a `UserDetailsService`. This approach is an alternative to creating a mock user. The difference is that this time, instead of creating a fake user, we need to get the user from a given `UserDetailsService`. You use this approach if you want to also test integration with the data source from where your app loads the user details (figure 18.6).

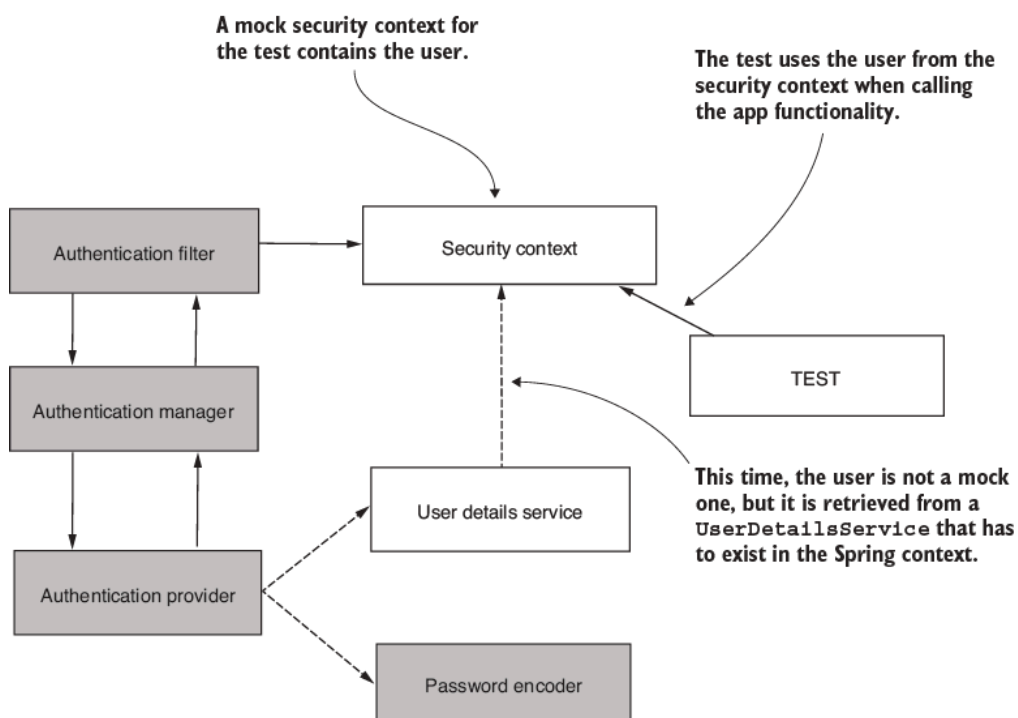


Figure 18.6 Instead of creating a mock user for the test when building the `SecurityContext` used by the test, we take the user details from a `UserDetailsService`. This way, you can test authorization using real users taken from a data source. During the test, the flow of execution skips the shaded components.

To demonstrate this approach, let's open project `ssia-ch2-ex2` and implement the tests for the endpoint exposed at the `/hello` path. We use the `UserDetailsService` bean that the project already adds to the context. Note that with this approach, we need to have a `UserDetailsService` bean in the context. To specify the user we authenticate from this `UserDetailsService`, we annotate the test method with `@WithUserDetails`. With the `@WithUserDetails` annotation, to find the user, you specify the username. The following listing presents the implementation of the test for the `/hello` endpoint using the `@WithUserDetails` annotation to define the authenticated user.

Listing 18.7 Defining the authenticated user with the `@WithUserDetails` annotation

```
@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;

    @Test
    @WithUserDetails("john") ①
    public void helloAuthenticated() throws Exception {
        mvc.perform(get("/hello"))
            .andExpect(status().isOk());
    }
}
```

① Loads the user John using the `UserDetailsService` for running the test scenario

18.3 Using custom Authentication objects for testing

Generally, when using a mock user for a test, you don't care which class the framework uses to create the `Authentication` instances in the `SecurityContext`. But say you have some logic in the controller that depends on the type of the object. Can you somehow instruct the framework to create the `Authentication` object for the test using a specific type? The answer is yes, and this is what we discuss in this section.

The logic behind this approach is simple. We define a factory class responsible for building the `SecurityContext`. This way, we have full

control over how the `SecurityContext` for the test is built, including what's inside (figure 18.7). For example, we can choose to have a custom `Authentication` object.

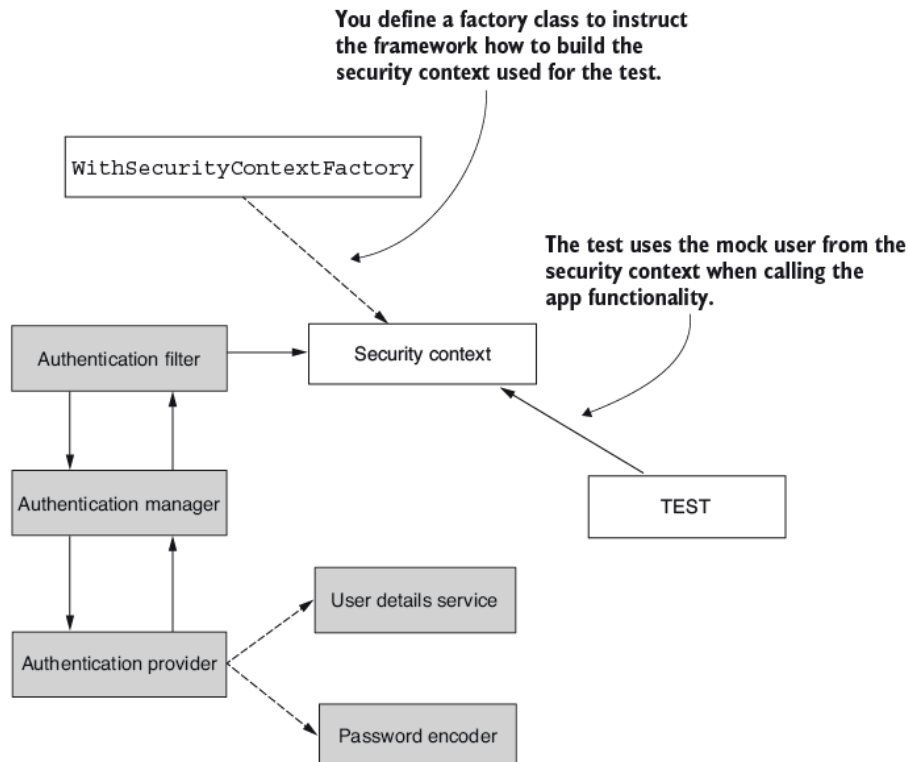


Figure 18.7 To obtain full control of how the `SecurityContext` for the test is defined, we build a factory class that instructs the test on how to build the `SecurityContext`. This way, we gain greater flexibility, and we can choose details like the kind of object to use as an `Authentication` object. In the figure, the components omitted from the flow during the test are shaded.

Let's open project `ssia-ch2-ex4` and write a test in which we configure the mock `SecurityContext` and instruct the framework on how to create the `Authentication` object. An interesting aspect to remember about this example is that we use it to prove the implementation of a custom `AuthenticationProvider`. The custom `AuthenticationProvider` we implement in our case only authenticates a user named John. However, as in the other two previous approaches we discussed in sections 18.1 and 18.2, the current approach skips authentication. For this reason, you see at the end of the example that we can actually give any name to our mock user. We follow three steps to achieve this behavior (figure 18.8):

1. Write an annotation to use over the test similarly to the way we use `@WithMockUser` or `@WithUserDetails`.
2. Write a class that implements the `WithSecurityContextFactory` interface. This class implements the `createSecurityContext()` method that returns the mock `SecurityContext` the framework uses for the test.

3. Link the custom annotation created in step 1 with the factory class created in step 2 via the `@WithSecurityContext` annotation.

Step 1

```
@WithCustomUser

@Retention(RetentionPolicy.RUNTIME)
public @interface WithCustomUser {

    String username();
}
```

We define a custom annotation to use for the test methods for which we need to customize the test security context.

Step 2

```
WithSecurityContextFactory

public class CustomSecurityContextFactory
    implements WithSecurityContextFactory<WithCustomUser> {

    @Override
    public SecurityContext createSecurityContext() {
        ...
    }
}
```

We implement a factory class in which we build the custom test security context. The framework uses this factory class to build the security context when it finds a test method annotated with the custom annotation we created in step 1.

Step 3

```
@WithCustomUser

@Retention(RetentionPolicy.RUNTIME)
@WithSecurityContext
(factory = CustomSecurityContextFactory.class)
public @interface WithCustomUser {

    String username();
}
```

We link the custom annotation created in step 1 to the factory class created in step 2. This way, the framework knows which factory class to use to create the test security context for a test method annotated with our custom annotation.

Figure 18.8 To enable the test to use a custom `SecurityContext`, you need to follow the three steps illustrated in this figure.

STEP 1: DEFINING A CUSTOM ANNOTATION

In listing 18.8, you can find the definition of the custom annotation we define for the test, named `@WithCustomUser`. As properties of the annotation, you can define whatever details you need to create the mock `Authentication` object. I added only the `username` here for my demonstration. Also, don't forget to use the annotation `@Retention(RetentionPolicy.RUNTIME)` to set the retention policy to runtime. Spring needs to read this annotation using Java reflection at runtime. To allow Spring to read the annotation, you need to change its retention policy to `RetentionPolicy.RUNTIME`.

Listing 18.8 Defining the `@WithCustomUser` annotation

```
@Retention(RetentionPolicy.RUNTIME)
public @interface WithCustomUser {

    String username();
}
```

The second step consists of implementing the code that builds the `SecurityContext` the framework uses for the test's execution. Here's where we decide what kind of `Authentication` to use for the test. The following listing demonstrates the implementation of the factory class.

Listing 18.9 The implementation of a factory for the `SecurityContext`

```
public class CustomSecurityContextFactory                                ①
    implements WithSecurityContextFactory<WithCustomUser> {

    @Override                                                            ②
    public SecurityContext createSecurityContext(
        WithCustomUser withCustomUser) {
        SecurityContext context =                                       ③
            SecurityContextHolder.createEmptyContext();

        var a = new UsernamePasswordAuthenticationToken(
            withCustomUser.username(), null, null);                    ④

        context.setAuthentication(a);                                   ⑤

        return context;
    }
}
```

① Implements the `WithSecurityContextFactory` annotation and specifies the custom annotation we use for the tests

② Implements `createSecurityContext()` to define how to create the `SecurityContext` for the test

③ Builds an empty security context

④ Creates an `Authentication` instance

⑤ Adds the mock `Authentication` to the `SecurityContext`

STEP 3: LINKING THE CUSTOM ANNOTATION TO THE FACTORY CLASS

Using the `@WithSecurityContext` annotation, we now link the custom annotation we created in step 1 to the factory class for the `SecurityContext` we implemented in step 2. The following listing presents the change to our `@WithCustomUser` annotation to link it to the `SecurityContext` factory class.

Listing 18.10 Linking the custom annotation to the `SecurityContext` factory class

```
@Retention(RetentionPolicy.RUNTIME)
@WithSecurityContext(factory = CustomSecurityContextFactory.class)
public @interface WithCustomUser {

    String username();
}
```

With this setup complete, we can write a test to use the custom `SecurityContext`. The next listing defines the test.

Listing 18.11 Writing a test that uses the custom `SecurityContext`

```
@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;

    @Test
    @WithCustomUser(username = "mary") ①
    public void helloAuthenticated() throws Exception {
        mvc.perform(get("/hello"))
            .andExpect(status().isOk());
    }
}
```

① Executes the test with a user having the username “mary”

Running the test, you observe a successful result. You might think, “Wait! In this example, we implemented a custom `AuthenticationProvider` that only authenticates a user named `john`. How could the test be successful with the username `mary`?” As in the case of `@WithMockUser` and `@WithUserDetails`, with this method, we skip the authentication logic. Thus, you can use it only to test what’s related to authorization and beyond.

18.4 Testing method security

This section discusses testing method security. All the tests we wrote until now in this chapter refer to endpoints. But what if your application doesn’t have endpoints? In fact, if it’s not a web app, it doesn’t have end-

points at all! However, you might have used Spring Security with global method security, as we discussed in chapters 11 and 12. You still need to test your security configurations in such scenarios.

Fortunately, you do this by using the same approaches we discussed in the previous sections. You can still use `@WithMockUser`, `@WithUserDetails`, or a custom annotation to define your own `SecurityContext`. But instead of using `MockMvc`, you directly inject from the context the bean defining the method you need to test.

Let's open project `ssia-ch11-ex1` and implement the tests for the `getName()` method in the `NameService` class. We protected the `getName()` method using the `@PreAuthorize` annotation. In listing 18.12, you find the implementation of the test class with its three tests, and figure 18.9 illustrates the three scenarios we test:

1. Calling the method without an authenticated user, the method should throw `AuthenticationException`.
2. Calling the method with an authenticated user that has an authority different than the expected one (write), the method should throw `AccessDeniedException`.
3. Calling the method with an authenticated user that has the expected authority returns the expected result.

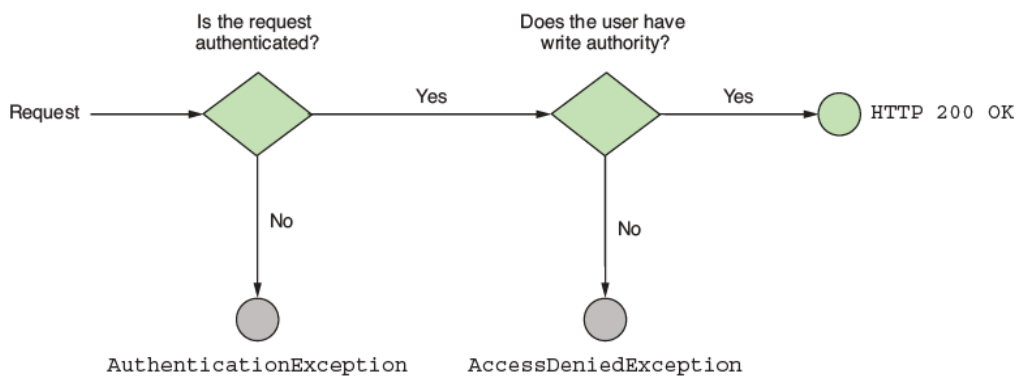


Figure 18.9 The tested scenarios. If the HTTP request is not authenticated, the expected result is an `AuthenticationException`. If the HTTP request is authenticated, but the user doesn't have the expected authority, the expected result is an `AccessDeniedException`. If the authenticated user has the expected authority, the call is successful.

Listing 18.12 Implementation of the three test scenarios for the `getName()` method

```
@SpringBootTest
class MainTests {

    @Autowired
    private NameService nameService;
```

```

@Test
void testNameServiceWithNoUser() {
    assertThrows(AuthenticationException.class,
        () -> nameService.getName());
}

@Test
@WithMockUser(authorities = "read")
void testNameServiceWithUserButWrongAuthority() {
    assertThrows(AccessDeniedException.class,
        () -> nameService.getName());
}

@Test
@WithMockUser(authorities = "write")
void testNameServiceWithUserButCorrectAuthority() {
    var result = nameService.getName();

    assertEquals("Fantastico", result);
}
}

```

We don't configure `MockMvc` anymore because we don't need to call an endpoint. Instead, we directly inject the `NameService` instance to call the tested method. We use the `@WithMockUser` annotation, as discussed in section 18.1. Similarly, you could have used the `@WithUserDetails`, as discussed in section 18.2, or designed a custom way to build the `SecurityContext`, as discussed in section 18.3.

18.5 Testing authentication

In this section, we discuss testing authentication. Previously in this chapter, you learned how to define mock users and test authorization configurations. But what about authentication? Can we also test the authentication logic? You need to do this if, for example, you have custom logic implemented for your authentication, and you want to make sure the entire flow works. When testing authentication, the test implementation requests work like normal client requests, as presented in figure 18.10.

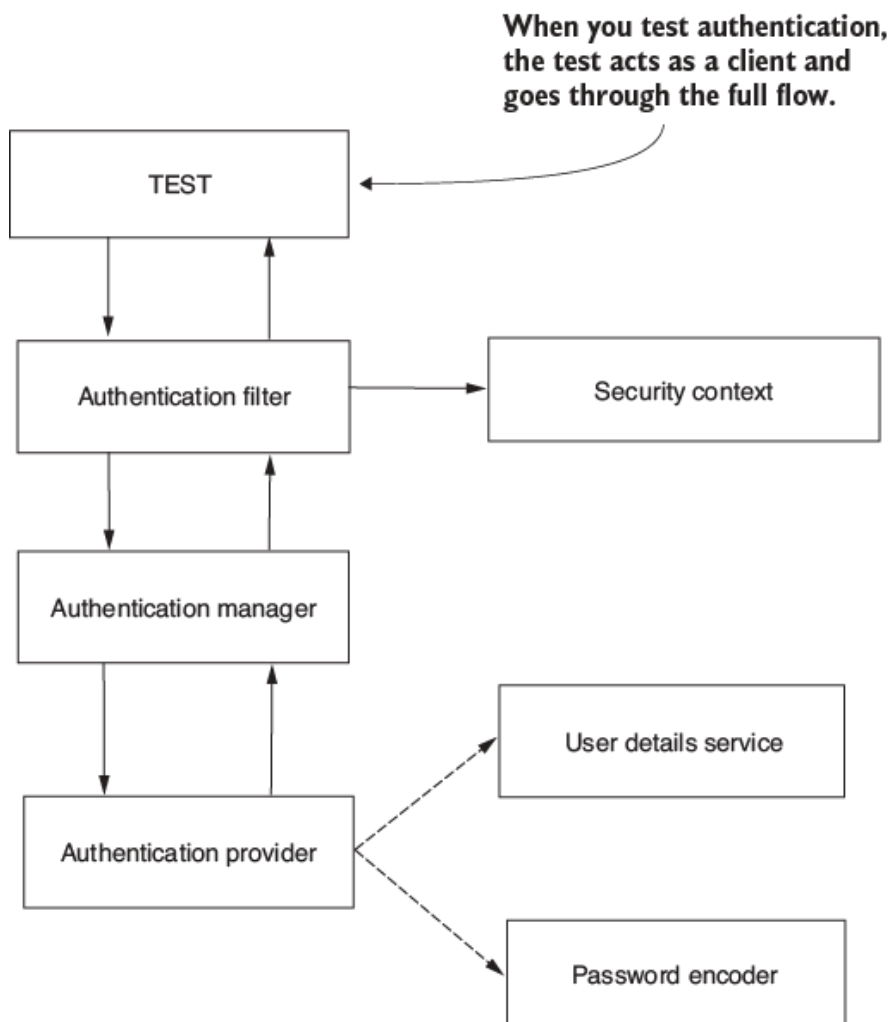


Figure 18.10 When testing authentication, the test acts as a client and goes through the full Spring Security flow discussed throughout the book. This way, you can also test, for example, your custom `AuthenticationProvider` objects.

For example, going back to project `ssia-ch2-ex4`, can we prove that the custom authentication provider we implemented works correctly and secure it with tests? In this project, we implemented a custom `AuthenticationProvider`, and we want to ensure that we secure this custom authentication logic as well with tests. Yes, we can test the authentication logic too.

The logic we implement is straightforward. Only one set of credentials is accepted: the username "john" and the password "12345". We need to prove that when using valid credentials, the call is successful, whereas when using some other credentials, the HTTP response status is 401 Unauthorized. Let's open project `ssia-ch2-ex4` again and implement a couple of tests to validate that authentication behaves correctly.

Listing 18.13 Testing authentication with `httpBasic()`
`RequestPostProcessor`

```

@SpringBootTest
@AutoConfigureMockMvc
public class AuthenticationTests {

```

```

@Autowired
private MockMvc mvc;

@Test
public void helloAuthenticatingWithValidUser() throws Exception {
    mvc.perform(
        get("/hello")
            .with(httpBasic("john", "12345"))           ①
            .andExpect(status().isOk());
    }

@Test
public void helloAuthenticatingWithInvalidUser() throws Exception {
    mvc.perform(
        get("/hello")
            .with(httpBasic("mary", "12345"))           ②
            .andExpect(status().isUnauthorized());
    }
}

```

① Authenticates with the correct credentials

② Authenticates with the wrong credentials

Using the `httpBasic()` request postprocessor, we instruct the test to execute the authentication. This way, we validate the behavior of the endpoint when authenticating using either valid or invalid credentials. You can use the same approach to test the authentication with a form login. Let's open project `ssia-ch6-ex4`, where we used form login for authentication, and write some tests to prove authentication works correctly. We test the app's behavior in the following scenarios:

- When authenticating with an incorrect set of credentials
- When authenticating with a valid set of credentials, but when the user doesn't have a valid authority according to the implementation we wrote in the `AuthenticationSuccessHandler`
- When authenticating with a valid set of credentials and a user that has a valid authority according to the implementation we wrote in the `AuthenticationSuccessHandler`

In listing 18.14, you find the implementation for the first scenario. If we authenticate using invalid credentials, the app doesn't authenticate the user and adds the header `"failed"` to the HTTP response. We customized an app and added the `"failed"` header with an `AuthenticationFailureHandler` when discussing authentication back in chapter 6.

```

@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;

    @Test
    public void loggingInWithWrongUser() throws Exception {
        mvc.perform(formLogin()
            .user("joey").password("12345"))
            .andExpect(header().exists("failed"))
            .andExpect(unauthenticated());
    }
}

```

① Authenticates using form login with an invalid set of credentials

Back in chapter 6, we customized authentication logic using an `AuthenticationSuccessHandler`. In our implementation, if the user has read authority, the app redirects them to the `/home` page. Otherwise, the app redirects the user to the `/error` page. The following listing presents the implementation of these two scenarios.

Listing 18.15 Testing app behavior when authenticating users

```

@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;

    // Omitted code

    @Test
    public void loggingInWithWrongAuthority() throws Exception {
        mvc.perform(formLogin()
            .user("bill").password("12345")
        )
            .andExpect(redirectedUrl("/error"))
            .andExpect(status().isFound())
            .andExpect(authenticated());
    }

    @Test

```

```

        public void loggingInWithCorrectAuthority() throws Exception {
            mvc.perform(formLogin()
                .user("john").password("12345")
            )
                .andExpect(redirectedUrl("/home"))           ②
                .andExpect(status().isFound())
                .andExpect(authenticated());
        }
    }
}

```

① When authenticating with a user that doesn't have read authority, the app redirects the user to path /error.

② When authenticating with a user that has read authority, the app redirects the user to path /home.

If the app is an OAuth 2/OpenID Connect resource server (chapter 15), you'll need a token to test authentication. A resource server might either use non-opaque JWTs or opaque tokens. Spring Security offers support for testing your app for both these approaches. Similarly to the `with(httpBasic())` method used earlier in this section, you can use a `with(jwt())` to configure a mock JWT token for your test or `with(opaqueToken())` to configure a mock opaque token for your test.

The following listing shows an example of a test you can find in project `ssia-ch15-ex1`. This test uses the `with(jwt())` approach to set a mock token for testing the authentication of a resource server.

Listing 18.16 Using a mock JWT to test a resource server's authentication

```

@SpringBootTest
@AutoConfigureMockMvc
class ApplicationTests {

    @Autowired
    private MockMvc mockMvc;

    @Test
    void demoEndpointSuccessfulAuthenticationTest() throws Exception {
        mockMvc.perform(
            get("/demo").with(jwt())           ①
            .andExpect(status().isOk());
        }
    }
}

```

① Configures a mock JWT to test the authentication for a resource server using non-opaque tokens

Using this approach, you might also need to set some custom fields in the token, such as the authorities. You can use configuration methods following the `jwt()` method to specify custom authorities or even completely customize the JWT. The following code snippet shows how to specify custom authorities on the JWT. The code adds an authority named "read" to the mock token used in authentication:

```
jwt().authorities(() -> "read"))
```

A test similar to the one presented in listing 18.16, but for opaque tokens, can be found in project `ssia-ch15-ex3`. The following listing presents this test implementation.

Listing 18.17 Using a mock opaque token to test a resource server's authentication

```
@SpringBootTest
@AutoConfigureMockMvc
class ApplicationTests {

    @Autowired
    private MockMvc mockMvc;

    @Test
    void demoEndpointSuccessfulAuthenticationTest() throws Exception {
        mockMvc.perform(
            get("/demo").with(opaqueToken())           ①
            .andExpect(status().isOk());
        }
    }
}
```

① Using a mock opaque token to test the resource server's authentication

Even with an opaque token, you might need to have specific authorities in the security context that results after authentication. You can control what authorities the authentication instance added into the security context will have. To do that, you can follow the `opaqueToken()` method with the `authorities()` configuration method as presented in the following snippet. The following code snippet configures an authority named "read" in the authentication instance that will be added to the test's security context:

```
opaqueToken().authorities(() -> "read")))
```

18.6 Testing CSRF configurations

In this section, we discuss testing the CSRF protection configuration for your application. When an app presents a CSRF vulnerability, an attacker can fool the user into taking actions they don't want to take once they're logged into the application. As discussed in chapter 9, Spring Security uses CSRF tokens to mitigate these vulnerabilities. This way, for any mutating operation (POST, PUT, DELETE), the request needs to have a valid CSRF token in its headers. Of course, at some point, you need to test more than HTTP GET requests. Depending on how you implement your application, as we discussed in chapter 9, you might need to test CSRF protection. You need to make sure it works as expected and protects the endpoint that implements mutating actions.

Fortunately, Spring Security provides an easy approach to test CSRF protection using a `RequestPostProcessor`. Let's open the project `ssia-ch9-ex1` and test that CSRF protection is enabled for an endpoint `/hello` when called with HTTP POST in the following scenarios:

- If we don't use a CSRF token, the HTTP response status is 403 Forbidden.
- If we send a CSRF token, the HTTP response status is 200 OK.

The following listing shows the implementation of these two scenarios. Observe how we can send a CSRF token in the response simply by using the `csrf()` `RequestPostProcessor`.

Listing 18.18 Implementing the CSRF protection test scenarios

```
@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;

    @Test
    public void testHelloPOST() throws Exception {
        mvc.perform(post("/hello"))
            .andExpect(status().isForbidden());
    }

    @Test
```

```

        public void testHelloPOSTWithCSRF() throws Exception {
            mvc.perform(post("/hello").with(csrf()))
                .andExpect(status().isOk());
        }
    }
}

```

②

① When calling the endpoint without a CSRF token, the HTTP response status is 403 Forbidden.

② When calling the endpoint with a CSRF token, the HTTP response status is 200 OK.

18.7 Testing CORS configurations

This section discusses testing CORS configurations. As you learned in chapter 10, if a browser loads a web app from one origin (say, example.com), the browser won't allow the app to use an HTTP response that comes from a different origin (say, example.org). We use CORS policies to relax these restrictions. This way, we can configure our application to work with multiple origins. Of course, as for any other security configurations, you need to also test the CORS policies. In chapter 10, you learned that CORS is about specific headers on the response whose values define whether the HTTP response is accepted. Two of these headers related to CORS specifications are `Access-Control-Allow-Origin` and `Access-Control-Allow-Methods`. We used these headers in chapter 10 to configure multiple origins for our app.

When writing tests for the CORS policies, all we need to do is make sure that these headers (and maybe other CORS-related headers, depending on the complexity of your configurations) exist and have the correct values. For this validation, we can act precisely as the browser does when making a preflight request. We make a request using the HTTP OPTIONS method, requesting the value for the CORS headers. Let's open project `ssia-ch10-ex1` and write a test to validate the values for the CORS headers. The following listing shows the definition of the test.

Listing 18.19 Test implementation for CORS policies

```

@SpringBootTest
@AutoConfigureMockMvc
public class MainTests {

    @Autowired
    private MockMvc mvc;
}

```

```

@Test
public void testCORSForTestEndpoint() throws Exception {
    mvc.perform(options("/test")
        .header("Access-Control-Request-Method", "POST")
        .header("Origin", "http://www.example.com")
    )

    .andExpect(header().exists("Access-Control-Allow-Origin"))
    .andExpect(header().string("Access-Control-Allow-Origin", "*"))
    .andExpect(header().exists("Access-Control-Allow-Methods"))
    .andExpect(header().string("Access-Control-Allow-Methods", "POST"))
    .andExpect(status().isOk());
}
}

```

① Performs an HTTP OPTIONS request on the endpoint requesting the value for the CORS headers

② Validates the values for the headers according to the configuration we made in the app

18.8 Testing reactive Spring Security implementations

In this section, we discuss testing the integration of Spring Security with functionalities developed within a reactive app. You won't be surprised to find out that Spring Security also provides support for testing security configurations for reactive apps. As in the case of non-reactive applications, security for reactive apps is crucial. So testing their security configurations is also essential. To show you how to implement tests for your security configurations, we go back to the examples we worked on in chapter 17. With Spring Security for reactive applications, you need to know two approaches to writing your tests:

- Using mock users with `@WithMockUser` annotations
- Using a `WebTestClientConfigurer`

Using the `@WithMockUser` annotation is straightforward because it works the same as for non-reactive apps, as we discussed in section 18.1. The definition of the test is different, however, because given that it is a reactive app, we can't use `MockMvc` anymore. However, this change isn't related to Spring Security. We can use something similar when testing reactive apps, a tool named `WebTestClient`. In the next listing, you find the implementation of a simple test making use of a mock user to verify the behavior of a reactive endpoint.

Listing 18.20 Using the `@WithMockUser` when testing reactive implementations

```
@SpringBootTest
@AutoConfigureWebTestClient           ①
class MainTests {

    @Autowired                         ②
    private WebTestClient client;

    @Test
    @WithMockUser                      ③
    void testCallHelloWithValidUser() {
        client.get()                  ④
            .uri("/hello")
            .exchange()
            .expectStatus().isOk();
    }
}
```

① Requests Spring Boot to autoconfigure the `WebTestClient` we use for the tests

② Injects the `WebTestClient` instance configured by Spring Boot from the Spring context

③ Uses the `@WithMockUser` annotation to define a mock user for the test

④ Makes the exchange and validates the result

As you'll observe, using the `@WithMockUser` annotation is pretty much the same as for non-reactive apps. The framework creates a `SecurityContext` with the mock user. The application skips the authentication process and uses the mock user from the test's `SecurityContext` to validate the authorization rules.

The second approach you can use is a `WebTestClientConfigurer`. This approach is similar to using the `RequestPostProcessor` in the case of a non-reactive app. In the case of a reactive app, for the `WebTestClient` we use, we set a `WebTestClientConfigurer`, which helps mutate the test context. For example, we can define the mock user or send a CSRF token to test CSRF protection like we did for non-reactive apps in section 18.6. The following listing shows how to use a `WebTestClientConfigurer`.

Listing 18.21 Using a `WebTestClientConfigurer` to define a mock user

```

@SpringBootTest
@AutoConfigureWebTestClient
class MainTests {

    @Autowired
    private WebTestClient client;

    // Omitted code

    @Test
    void testCallHelloWithValidUserWithMockUser() {
        client.mutateWith(mockUser())
            .get()
            .uri("/hello")
            .exchange()
            .expectStatus().isOk();
    }
}

```

① Before executing the GET request, mutates the call to use a mock user

Assuming you're testing CSRF protection on a POST call, you write something similar to

```

client.mutateWith(csrf())
    .post()
    .uri("/hello")
    .exchange()
    .expectStatus().isOk();

```

Summary

- Writing tests is the best practice. You write tests to make sure your new implementations or fixes don't break existing functionalities.
- You need not only to test your code, but also to test integration with libraries and frameworks you use.
- Spring Security offers excellent support for implementing tests for your security configurations.
- You can test authorization directly by using mock users. You write separate tests for authorization without authentication because generally, you need fewer authentication than authorization tests.
- It saves execution time to test authentication in separate tests, which are fewer in number, and then test the authorization configuration for your endpoints and methods.

- To test security configurations for endpoints in non-reactive apps, Spring Security offers excellent support for writing your tests with `MockMvc`.
- To test security configurations for endpoints in reactive apps, Spring Security offers excellent support for writing your tests with `WebTestClient`.
- It is possible to write tests directly for methods for which you wrote security configurations using method security.