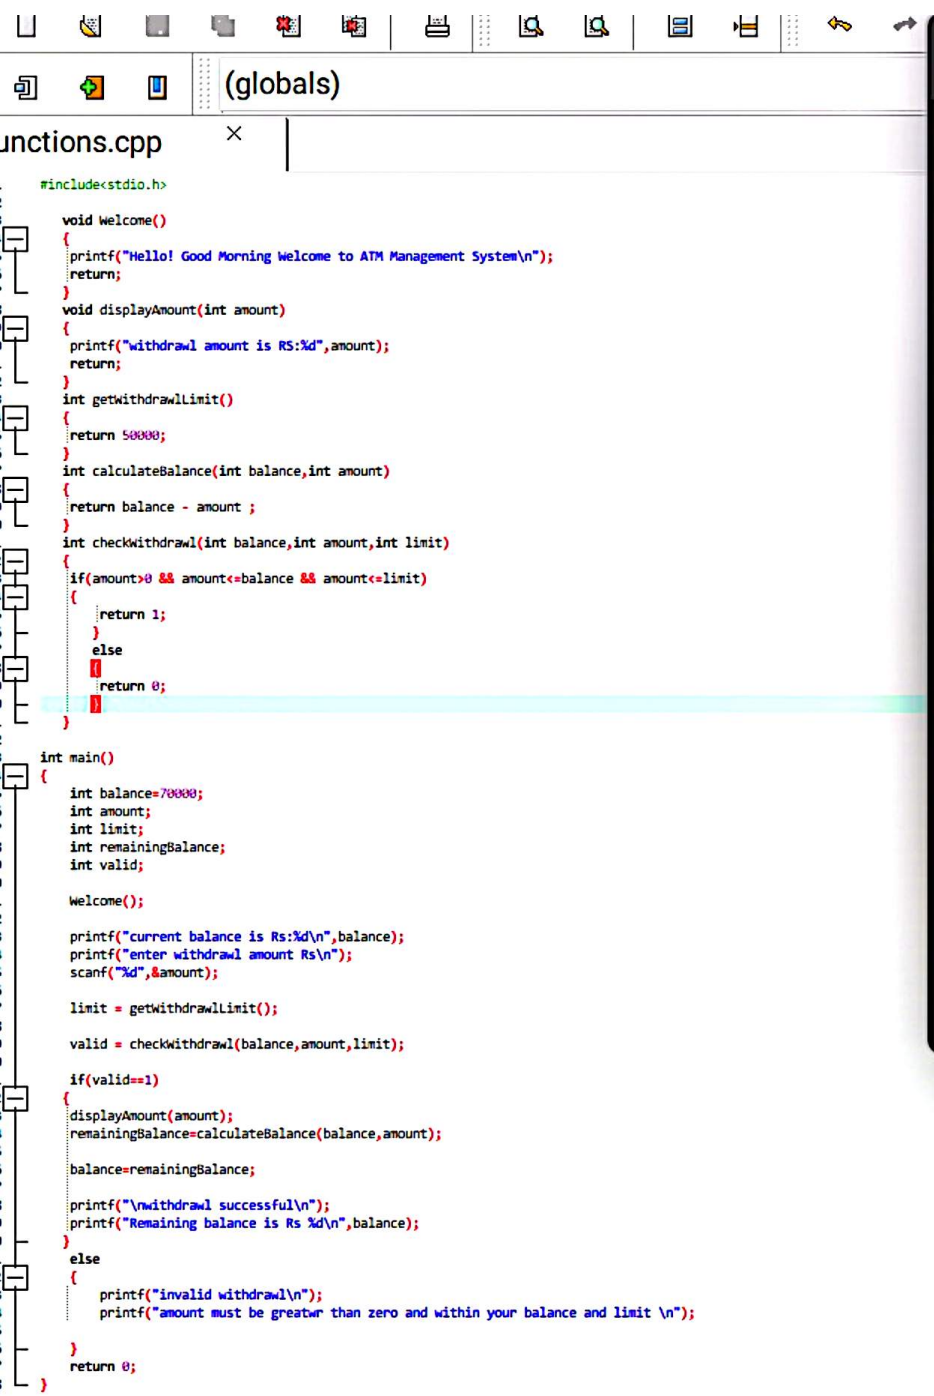


```c
#include<stdio.h>

void Welcome()
{
 printf("Hello! Good Morning Welcome to ATM Management System\n");
 return;
}
void displayAmount(int amount)
{
 printf("withdrawl amount is RS:%d",amount);
 return;
}
int getWithdrawlLimit()
{
 return 50000;
}
int calculateBalance(int balance,int amount)
{
 return balance - amount ;
}
int checkWithdrawl(int balance,int amount,int limit)
{
 if(amount>0 && amount<=balance && amount<=limit)
 {
     return 1;
    }
    else
    {
     return 0;
    }
}

int main()
{
    int balance=70000;
    int amount;
    int limit;
    int remainingBalance;
    int valid;

    Welcome();

    printf("current balance is Rs:%d\n",balance);
    printf("enter withdrawl amount Rs\n");
    scanf("%d",&amount);

    limit = getWithdrawlLimit();

    valid = checkWithdrawl(balance,amount,limit);

    if(valid==1)
    {
     displayAmount(amount);
     remainingBalance=calculateBalance(balance,amount);

     balance=remainingBalance;

     printf("\nwithdrawl successful\n");
     printf("Remaining balance is Rs %d\n",balance);
    }
     else
     {
         printf("invalid withdrawl\n");
         printf("amount must be greatwr than zero and within your balance and limit \n");

     }
     return 0;
}
```

```
C:\Users\HP\Documents\func
Hello! Good Morning Welcome to ATM Management System
current balance is Rs:70000
enter withdrawl amount Rs
10000
withdrawl amount is RS:10000
withdrawl successful
Remaining balance is Rs 60000

--------------------------------
Process exited after 4.064 seconds with return value 0
Press any key to continue . . .
```

Chat

CamScanner

functions.cpp × functions 2.cpp ×

```c
#include <stdio.h>

void welcome()
{
    printf("Hello! Welcome to online Shopping Store!\n");
}

  void showMenu()
{
    printf("\n Product Menu \n");
    printf("1.sticky notes    Rs. 250\n");
    printf("2. lunch box      Rs. 450\n");
    printf("3. calculator     Rs. 2200\n");
    printf("4. pencil         Rs. 80\n");
}

    int getProductPrice(int choice)
{
    if (choice == 1)
        return 250;
    else if (choice == 2)
        return 450;
    else if (choice == 3)
        return 2200;
    else if (choice == 4)
        return 80;
    else
        return 0;
}

int calculateItemPrice(int price, int quantity)
```

CamScanner

```
12      printf("2. lunch box       Rs. 450\n");
13      printf("3. calculator      Rs. 2200\n");
14      printf("4. pencil          Rs. 80\n");
15  }
16
17      int getProductPrice(int choice)
18  {
19      if (choice == 1)
20          return 250;
21      else if (choice == 2)
22          return 450;
23      else if (choice == 3)
24          return 2200;
25      else if (choice == 4)
26          return 80;
27      else
28          return 0;
29  }
30
31  int calculateItemPrice(int price, int quantity)
32  {
33      return price * quantity;
34  }
35
36  int calculateSubtotal(int quantities[])
37  {
38      int subtotal = 0;
39
40      subtotal = subtotal + calculateItemPrice(250, quantities[0]);
41      subtotal = subtotal + calculateItemPrice(450, quantities[1]);
42      subtotal = subtotal + calculateItemPrice(2200, quantities[2]);
43      subtotal = subtotal + calculateItemPrice(80, quantities[3]);
44
45      return subtotal;
46  }
47
48  int calculateDiscount(int subtotal)
```

CamScanner

```
44
45      return subtotal;
46  }
47
48  int calculateDiscount(int subtotal)
49  {
50      if (subtotal >= 5000)
51          return subtotal * 10 / 100; //10% discount on orders above rs 5000
52      else
53          return 0;
54  }
55
56  int calculateFinalBill(int subtotal, int discount)
57  {
58      return subtotal - discount;
59  }
60
61      char askContinue()
62  {
63      char answer;
64
65      printf("\nDo you want to continue shopping? (y/n): ");
66      scanf(" %c", &answer);
67
68      return answer;
69  }
70
71      void displayReceipt(int quantities[], int subtotal,
72                          int discount, int finalBill)
73  {
74      int i;
75      int prices[4] = {250, 450, 2200, 80};
76      char names[4][13] = {
77          "sticky notes", "lunch box", "calculator", "Pencil"
78      };
79
80      printf("\n SHOPPING RECEIPT \n");
81
```

CamScanner

```c
    printf("\n SHOPPING RECEIPT \n");

    for (i = 0; i < 4; i++)
    {
        if (quantities[i] > 0)
        {
            printf("%s x %d = Rs. %d\n",
                   names[i], quantities[i],
                   calculateItemPrice(prices[i], quantities[i]));
        }
    }


    printf("Subtotal: Rs. %d\n", subtotal);
    printf("Discount: Rs. %d\n", discount);
    printf("Final Bill: Rs. %d\n", finalBill);
    printf("Thank you for shopping!\n");
}

int main()
{
    int quantities[4] = {0, 0, 0, 0};
    int choice, quantity;
    int price, subtotal, discount, finalBill;
    char answer = 'y';

    welcome();

    do
    {
        showMenu();

```

CamScanner

functions.cpp × functions 2.cpp ×

```
109     {
110         showMenu();
111
112         printf("Enter product number (1-4): ");
113         scanf("%d", &choice);
114
115         if (choice >= 1 && choice <= 4)
116         {
117             printf("Enter quantity: ");
118             scanf("%d", &quantity);
119
120             if (quantity > 0)
121             {
122                 price = getProductPrice(choice);
123
124                 quantities[choice - 1] =
125                     quantities[choice - 1] + quantity;
126
127                 printf("Item price: Rs. %d\n",
128                        calculateItemPrice(price, quantity));
129             }
130             else
131             {
132                 printf("Quantity must be greater than zero.\n");
133             }
134         }
135         else
136         {
137             printf("Invalid product choice!\n");
138         }
139
140         answer = askContinue();
141
142     } while (answer == 'y');
143
144     subtotal = calculateSubtotal(quantities);
145     discount = calculateDiscount(subtotal);
146     finalBill = calculateFinalBill(subtotal, discount);
147
```

CamScanner

```
127                 printf("Item price: Rs. %d\n",
128                        calculateItemPrice(price, quantity));
129             }
130             else
131             {
132                 printf("Quantity must be greater than zero.\n");
133             }
134         }
135         else
136         {
137             printf("Invalid product choice!\n");
138         }
139
140         answer = askContinue();
141
142     } while (answer == 'y');
143
144     subtotal = calculateSubtotal(quantities);
145     discount = calculateDiscount(subtotal);
146     finalBill = calculateFinalBill(subtotal, discount);
147
148     displayReceipt(quantities, subtotal, discount, finalBill);
149
150     return 0;
151 }
152
```

CamScanner

```
tions 2.cpp

>= 1 && choice <= 4)

("Enter quantity: ");
"%d", &quantity);

antity > 0)

ice = getProductPrice(choice);

antities[choice - 1] =
  quantities[choice - 1] + quantity;

ntf("Item price: Rs. %d\n",
    calculateItemPrice(price, quantity));


ntf("Quantity must be greater than zero.\n");


("Invalid product choice!\n");


skContinue();

 == 'y');

culateSubtotal(quantities);
culateDiscount(subtotal);
iculateFinalBill(subtotal, discount);

(quantities, subtotal, discount, finalBill);
```

```
Hello! Welcome to online Shopping Store!

 Product Menu
1.sticky notes    Rs. 250
2. lunch box      Rs. 450
3. calculator     Rs. 2200
4. pencil         Rs. 80
Enter product number (1-4): 2
Enter quantity: 2
Item price: Rs. 900

Do you want to continue shopping? (y/n): y

 Product Menu
1.sticky notes    Rs. 250
2. lunch box      Rs. 450
3. calculator     Rs. 2200
4. pencil         Rs. 80
Enter product number (1-4): 3
Enter quantity: 3
Item price: Rs. 6600

Do you want to continue shopping? (y/n): n

 SHOPPING RECEIPT
lunch box x 2 = Rs. 900
calculator x 3 = Rs. 6600
Subtotal: Rs. 7500
Discount: Rs. 750
Final Bill: Rs. 6750
Thank you for shopping!

--------------------------------
Process exited after 19.6 seconds with return value 0
Press any key to continue . . .
```

CamScanner