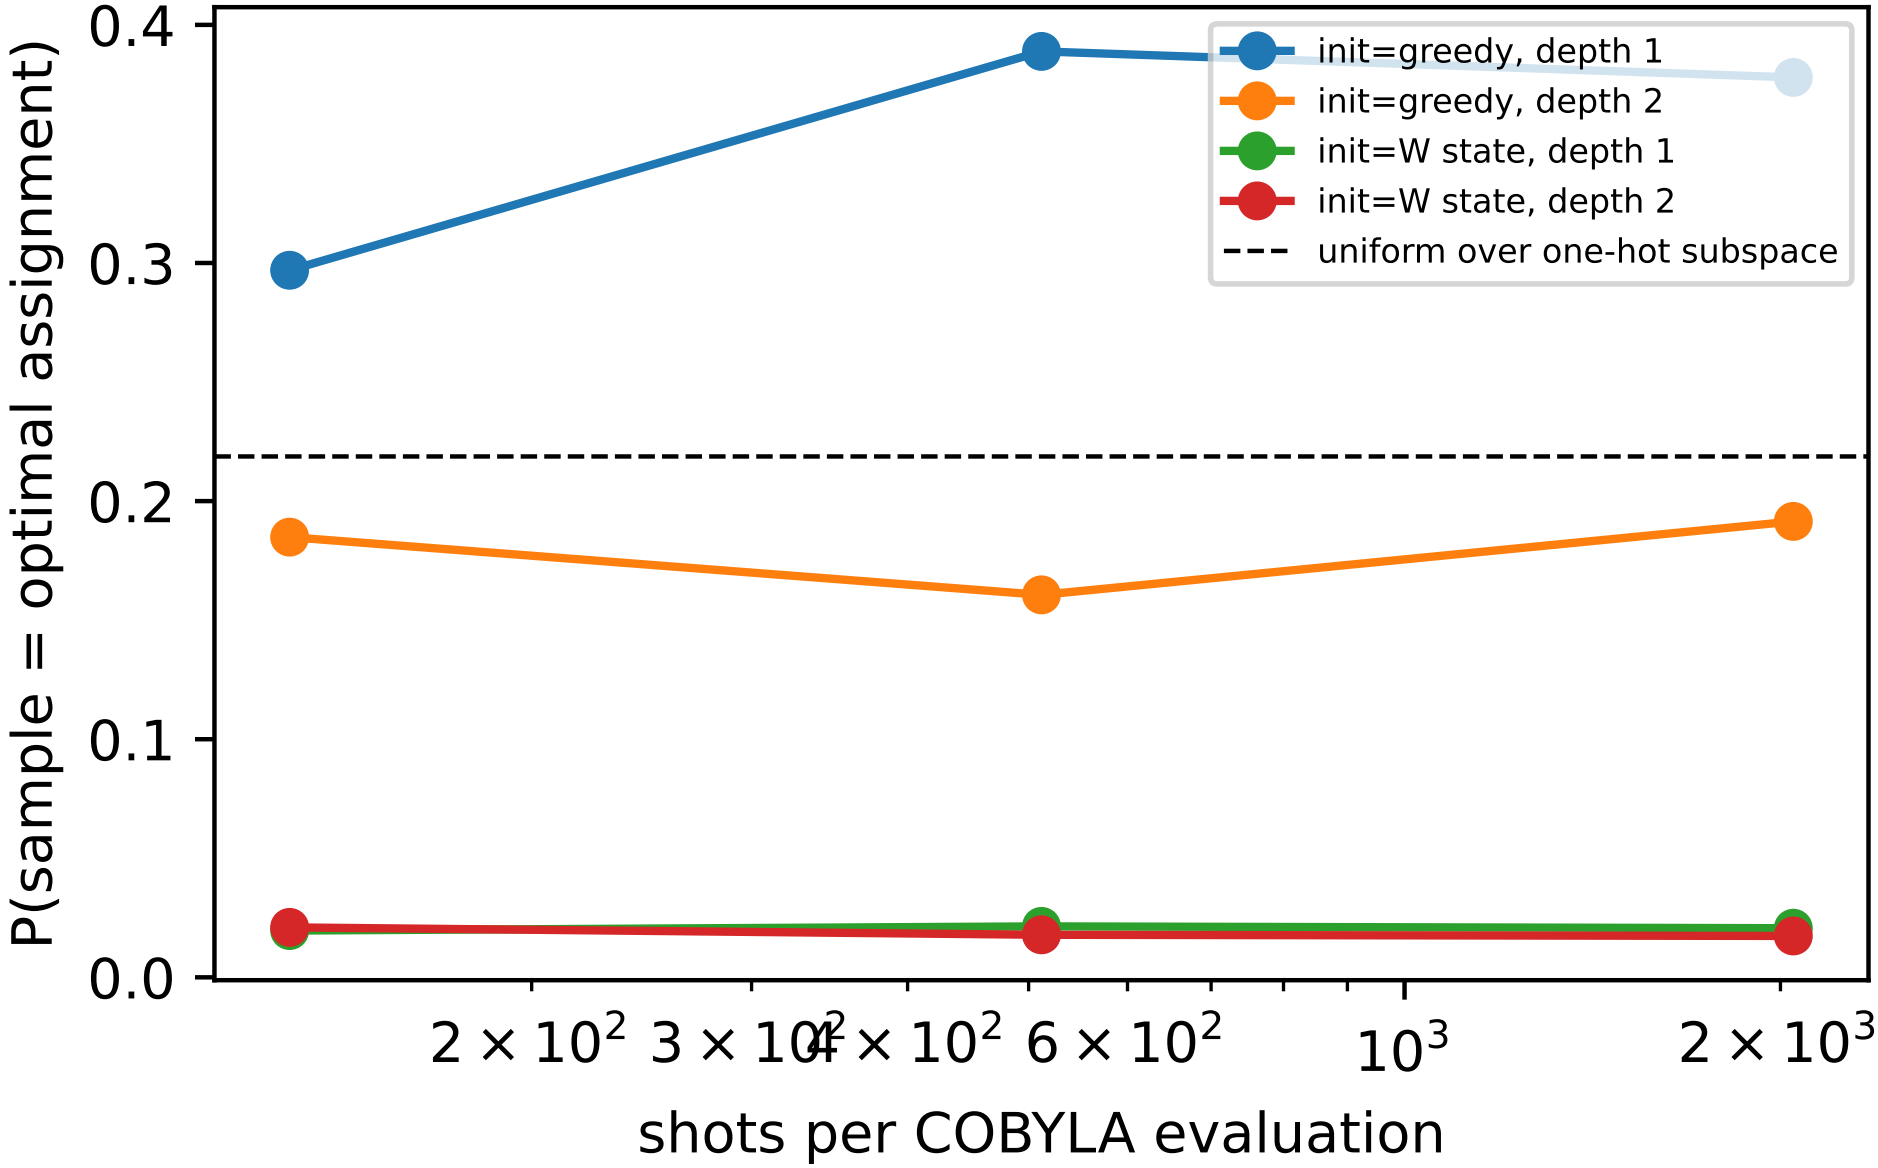
init=greedy, depth 1
init=greedy, depth 2
init=W state, depth 1
init=W state, depth 2
uniform over one-hot subspace
P(sample = optimal assignment)
0.0
0.1
0.2
0.3
0.4
2×10^2
3×10^2
4×10^2
6×10^2
10^3
2×10^3
shots per COBYLA evaluation