



Powering the API world

Enhancing Developer Experience with Kong MCP Server

Jintao Zhang @ Kong Inc.

May 2025



- 张晋涛 @ Kong Inc.
- CNCF Ambassador
- Microsoft MVP
- Kubernetes Ingress-Nginx maintainer
- K8s生态周报 - 维护者



Can an LLM do anything?


We need to expand the capabilities of
LLM

How?

Function Calling

Function Calling

2023.06

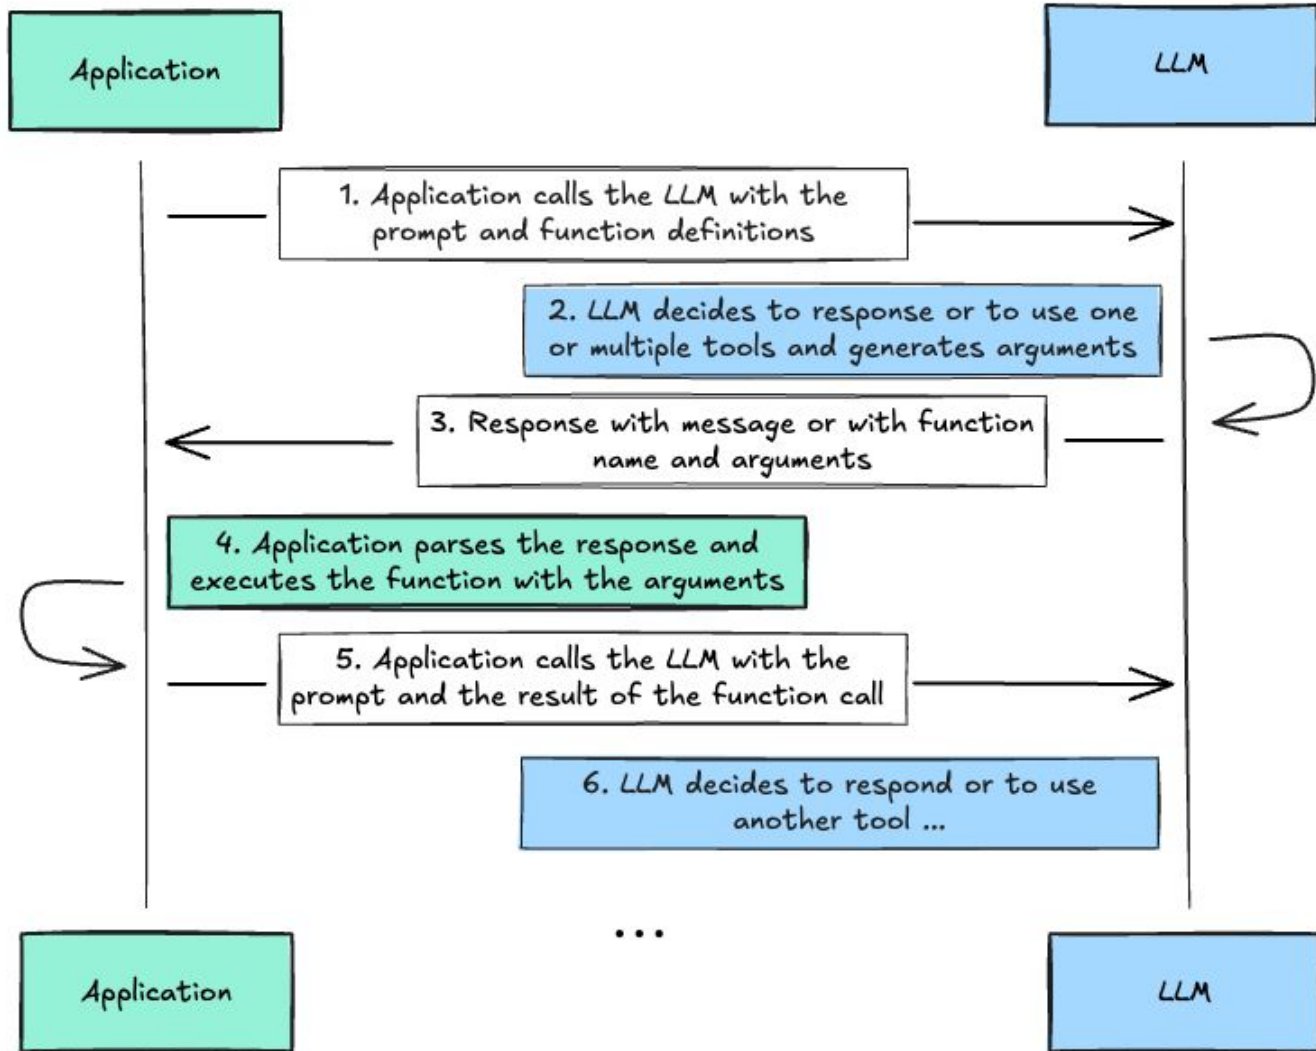


Is Function Calling perfect?

Model Context Protocol (MCP)

Model Context Protocol (MCP) Flow




MCP Components




Standardization Across Different LLMs

Consistent Developer Experience

How to run Kong MCP Server

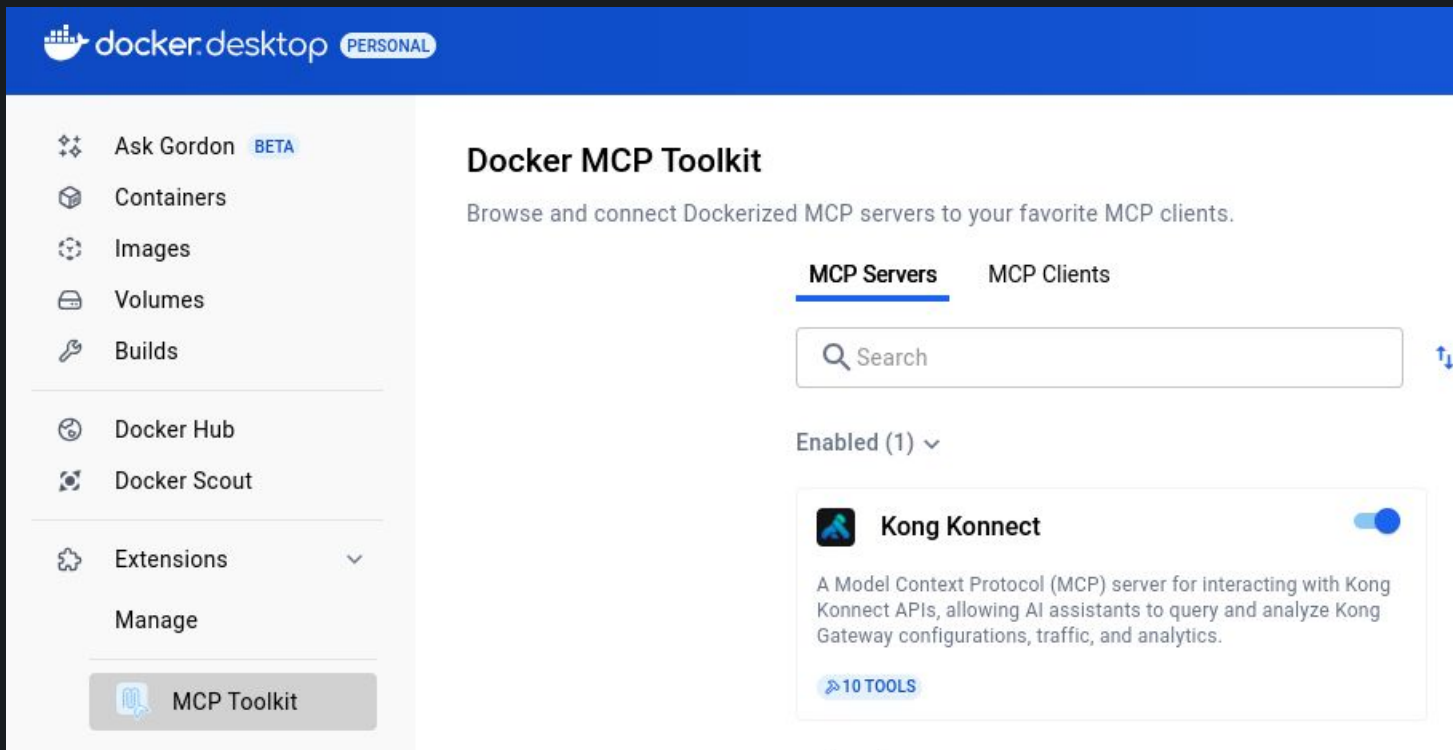

How to run Kong MCP Server

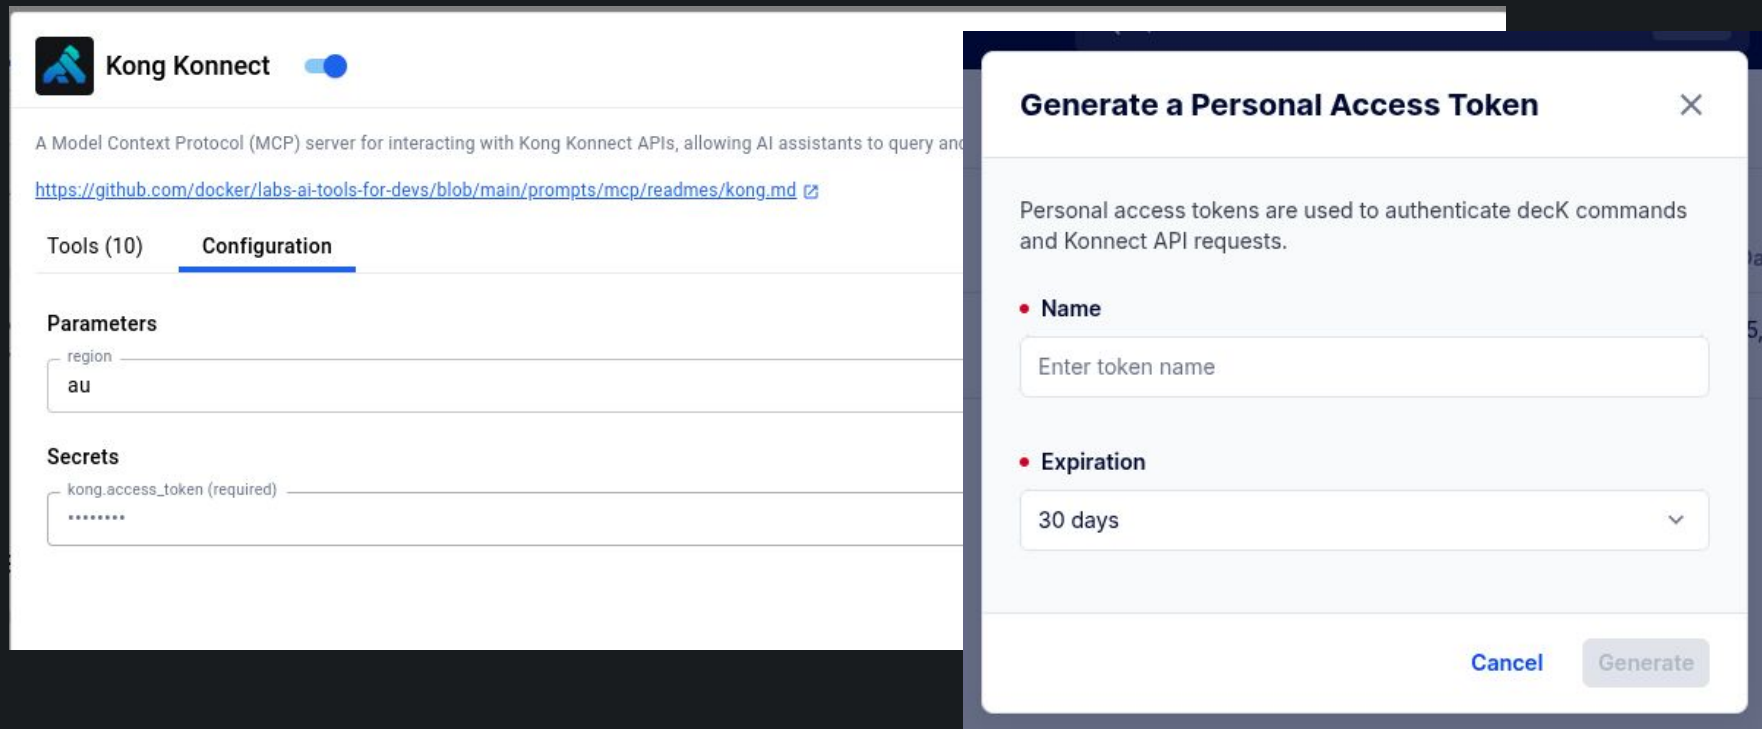

The image shows the Kong Connect configuration interface. On the left, the 'Configuration' tab is active, showing parameters like 'region' set to 'au' and a 'kong.access_token (required)' field. On the right, a modal titled 'Generate a Personal Access Token' is open. The modal explains that tokens are used for authentication and provides fields for 'Name' (with placeholder 'Enter token name') and 'Expiration' (set to '30 days'). 'Cancel' and 'Generate' buttons are at the bottom right of the modal.

Kong Connect 

A Model Context Protocol (MCP) server for interacting with Kong Connect APIs, allowing AI assistants to query and...

<https://github.com/docker/labs-ai-tools-for-devs/blob/main/prompts/mcp/readmes/kong.md>

Tools (10) **Configuration**

Parameters

region
au

Secrets

kong.access_token (required)

Generate a Personal Access Token 

Personal access tokens are used to authenticate deckK commands and Connect API requests.

- Name**
Enter token name
- Expiration**
30 days 

[Cancel](#) [Generate](#)

How to connect with MCP client

Docker MCP Toolkit

Browse and connect Dockerized MCP servers to your favorite MCP clients.

MCP Servers

MCP Clients



Gordon

Manual configuration >

Disconnect



Claude Desktop

Client not installed

Connect



Cursor

Client not installed

Connect



Continue.dev

Client not installed

Connect

Or

Connect other MCP clients to the same server by specifying the following command:

```
docker run -i --rm alpine/socat STDIO TCP:host.docker.internal:8811
```

Copy

Choose the type of MCP server to add

Command (stdio) Run a local command that implements the MCP protocol

Manual Install

HTTP (HTTP or Server-Sent Events) Connect to a remote HTTP server that implements the MCP ...

NPM Package Install from an NPM package name

Model-Assisted

Pip Package Install from a Pip package name

Docker Image Install from a Docker image

Add MCP server in VS Code

```
{
  "extensions.ignoreRecommendations": true,
  "github.copilot.enable": {
    "**": false
  },
  "augment.chat.userGuidelines": "",
  "mcp": {
    "servers": {
      ✓ Running | Stop | Restart | 10 tools
      "my-mcp-server-6e689e81": {
        "type": "stdio",
        "command": "docker",
        "args": [
          "run",
          "-i",
          "--rm",
          "alpine/socat",
          "STDIO",
          "TCP:host.docker.internal:8811"
        ]
      }
    }
  }
}
```

Overview

Gateway Manager

AI Manager

Mesh Manager

API Products

Dev Portal

Analytics

Service Catalog

Organization

Plan and Usage

Labs

MoeLove

AU (Australia)

Quick search...

Ctrl K

AI Manager

Expose a new LLM

General information

General information will help identify and manage added LLM.

Authentication

Manage authentication for the selected LLM provider.

Route

Determine how you want to expose the model for consumption.

LLM provider

OpenAI

All models

Specific model

Authentication from gateway to LLM

Provided by the client/agent

Provided by the AI gateway

To provide authentication, add this header to the request: `Authorization: Bearer <YOUR_API_KEY>`

Basic

Quickly set up a route with HTTP & HTTPS protocol with the essentials: path, method, and host.

Advanced

Define complex route logic with other protocols or additional paths or attributes such as headers.

Choose at least one path, method or host option. To add more than one, use the Advanced options.

Path

e.g. /api/v1

Strip Path

Methods

Select methods

Kong Powering the API world

© Kong Inc. 16

 KONECT

Overview

Gateway Manager

AI Manager

Overview

Load balancing

Prompt management

Guardrails

RAG

PII sanitization

Semantic caching

Go to LLM analytics

Mesh Manager

API Products

Dev Portal

Analytics

Service Catalog

MoeLove

AU (Australia)

Quick search...

Ctrl K

Info

Help

Notifications

JZ

Mistral, Cohere

Created: 5/28/2025

ID: 544bf54c-5de5-43f9-b8df-05c46c54d084

Identified consumers: 1 agent

Models: Mistral/* Cohere/*

Manage LLM

Control plane: moelove

Gateway service: AIManagerModelService_1748370203280

Load balancing: round-robin (2 models)

Streaming: Enabled

LLM authentication: Provided by client and AI gateway

Tiers of access: One for all clients

An LLM model is a Gateway Service in your control plane whose access you can manage like any other services or APIs. Unlike an API though, you can apply AI plugins to an LLM to govern usage, security and more.

LLM Analytics

Requests12

Tokens1040

Error Rate66.67%

LLM Average Latency2338.19ms

100% vs previous 30 days

100% vs previous 30 days

66.67% vs previous 30 days

100% vs previous 30 days

Refreshing...

Last 30 days consumption

Anonymous

mistral7 requests - 2376ms avg latency

UNSPECIFIED3 requests - 8ms avg latency

cohere2 requests - 1403ms avg latency

 Kong

Powering the API world

© Kong Inc.

17

 **tao12345666333**

list all my routes

 **GitHub Copilot**> Ran `list_control_planes` – my-mcp-server-6e689e81 (MCP Server)> Ran `list_routes` – my-mcp-server-6e689e81 (MCP Server)> Ran `list_routes` – my-mcp-server-6e689e81 (MCP Server)

You have the following routes configured:

- Control Plane: moelove
 - Route Name: AIManagerModelRoute_1748370204170
 - Hosts: mum.moelove.info
 - Paths: /mistral
 - Protocols: http, https
 - Strip Path: true
 - Preserve Host: false

There are no routes configured for the "default" control plane. If you need more details on associated services or plugins, let me know!

**tao12345666333**

list plugins for this route

 **GitHub Copilot**

I'll check the plugins configured for the route you have. Let me retrieve that information for you.

> Ran `list_plugins` – my-mcp-server-6e689e81 (MCP Server) ✓

Here are the plugins configured for your route:

Plugin: ai-proxy-advanced

- **Plugin ID:** 544bf54c-5de5-43f9-b8df-05c46c54d084
- **Status:** Enabled
- **Applied to:** Service ID 28b023a9-82cb-424b-ba38-77941beff0e7 (which is the service your route points to)
- **Protocols:** http, https, grpc, grpcb

Configuration Details:

- **LLM Format:** OpenAI
- **Response Streaming:** Allowed
- **Maximum Request Body Size:** 8192 bytes
- **Model Name Header:** Enabled

Load Balancer Configuration:

- **Algorithm:** round-robin
- **Connection Timeout:** 60 seconds
- **Retries:** 5
- **Fallover Criteria:** error, timeout
- **Latency Strategy:** tpot

 Add Context... `settings.json` Current file 

Edit files in your workspace in agent mode




Kong **Kon**nect



Apps & Agents

AI Gateway

AI Providers

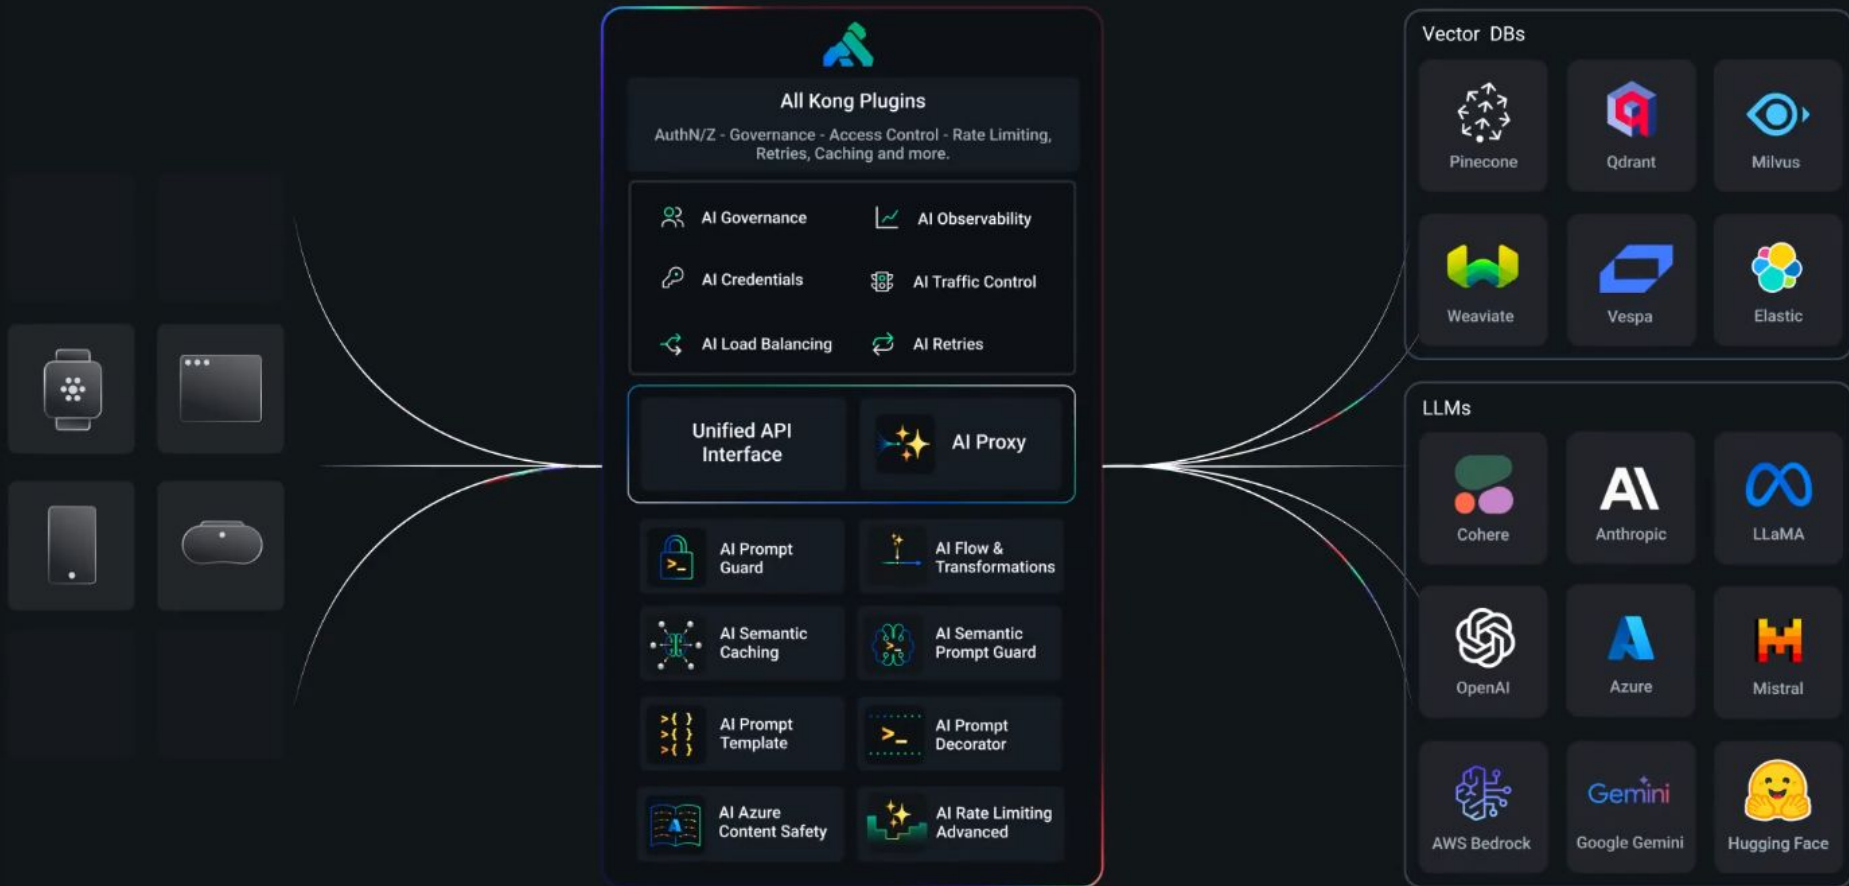



Powering the API world

Thank you!

[Konghq.com](https://konghq.com)

Kong Inc.

jintao.zhang@konghq.com

