



软件源代码缺陷检测

taos-connector-jdbc

检测报告

苏州棱镜七彩信息科技有限公司

2026-04-17 21:40:53



2004

2010

2012

2006

CHART SEGMENT TITLE

CHART SEGMENT TITLE

报告声明

棱镜七彩是苏州棱镜七彩信息科技有限公司的简称，PrismSAST 是棱镜七彩具有自主知识产权的软件源代码安全缺陷检测平台的简称。

本检测报告由棱镜七彩软件源代码安全缺陷检测平台（PrismSAST）采用智能检测引擎进行自动化检测，并对检测结果经过人工复核后产生的检测报告。棱镜七彩保留对检测报告中各款项的解读权利，但并不意味着对检测结果中的缺陷或安全漏洞可能引起的任何直接经济损失或任何间接损失承担责任。

本检测报告的最终解释权归属棱镜七彩。

1 项目信息

项目名称	taos-connector-jdbc
提交时间	2026-04-20 16:57:41
完成时间	2026-04-20 16:58:45
用时	00:01:05
代码总行数	89687
检测文件数	489
缺陷总数	1037
致命缺陷数	0
缺陷密度（缺陷/KLOC）	11.56
检测类别	常规检测
报告创建日期时间	2026-04-17 21:40:53
检测团队	安全部
版本号	1.3.0

参考标准

*CMMI（软件能力成熟度模型集成）中缺陷密度参考值：		
CMM5 级	< 0.32	国际一流软件研发企业
CMM4 级	< 0.92	
CMM3 级	< 2.39	国内一流软件研发企业
CMM2 级	< 5.52	国内其他软件研发企业
CMM1 级	< 11.95	

2 风险等级

缺陷/安全漏洞严重等级	等级描述
致命	会造成程序崩溃或系统性故障的缺陷；或可能被容易利用且造成系统重大风险的安全漏洞
严重	会影响程序部分功能和性能，或者造成未定义行为的缺陷；或可能被利用且造成较为严重的风险的安全漏洞
一般	会造成对程序功能或性能的轻度影响；或存在可能被利用的低危安全漏洞。
强制	强制性标准是要求必须严格执行的标准条款
建议	建议性标准是企业可参考，自愿采用的标准条款
提示	不会直接影响程序的功能和性能，但这不是良好的代码风格，可能会有潜在的影响。
此等级划分是按照相关行业标准、国家标准，并参考《GB/T30279-2020 信息安全技术网络安全漏洞分类分级指南》进行定义	

3 评分评级

1. 用户可以在项目级别自定义下列三个影响因子的权重及情况：

序号	影响因子	描述
A	是否外部可达	可以分为物理隔绝、内部局域网连接、连接外网三个级别
B	影响程度	可以分为对别的组件或是部门影响较大、有一般的影响、不影响其它组件或是部门
C	缺陷/安全漏洞严重等级	致命、严重、一般、强制、建议、提示

2. 评分计算公式：A*A 权重 + B*B 权重 + C*C 权重

A、B、C 取值在【0，9】，三个权重相加等于 1，因此结果取值范围也在【0，9】；

最后根据公式的结果分级：低危【0，4），中危【4，6），高危【7，9）。


3. 缺省情况下：A 权重 20%，B 权重 20%，C 权重 60%

A = 5，B=5，C：致命=9，严重=7，一般=3，提示=1。

4 汇总统计

4.1 图表统计

4.1.1 按缺陷级别统计

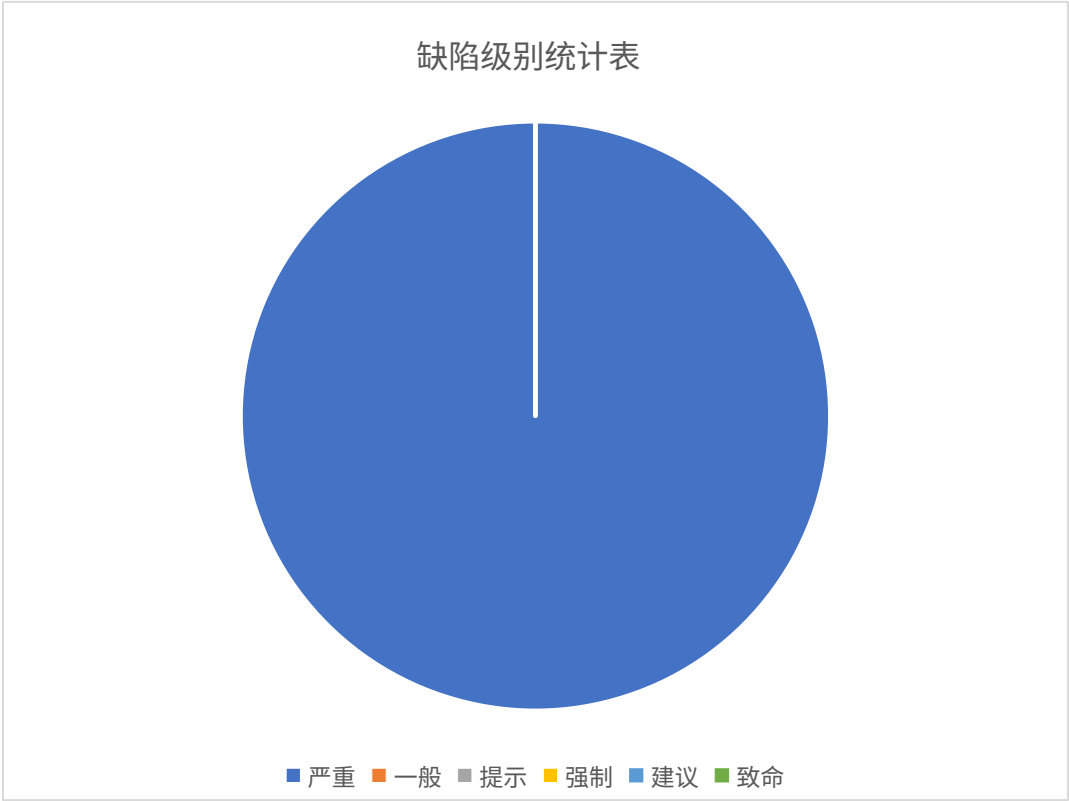

4.1.2 按 CWE 2023 (Top25)统计



4.1.3 按 OWASP 2021 (TOP10)统计



4.2 选择检测集及检测结果统计表

序号	规则集	检测集	选择数量	发现缺陷/安全漏洞数
1	Java	CWE JAVA	55	1037
2	Java	Java 安全编码规范	1	0

4.3 人工复核结果统计表

缺陷级别	真实缺陷	误报缺陷	待确认缺陷	忽略缺陷	总计
致命	0	0	0	0	0
严重	0	0	1037	0	1037
一般	0	0	0	0	0
提示	0	0	0	0	0
强制	0	0	0	0	0
建议	0	0	0	0	0

4.4 代码质量度量统计表

变量描述	数量	简述
总行数	89687	源代码行数统计
总文件数	489	文件数量统计
总类个数	0	编译后中间文件个数
总方法个数	0	所有的方法的个数
总有效代码行数	72282	有效代码行数>=总代码行数-注释行数-空行数 总行数 "c= a+b; //some comments" 如上面一行代码会同时归入有效代码行和注释行
总注释行数	2932	总注释行=文件头注释+方法头注释+方法内注释
文件头注释总行数	0	文件头注释
函数声明注释总函数	0	方法函数注释，域变量注释

方法内注释总行数	0	方法内部的注释
总空行数	0	空行数
注释比率	3.28	注释比率=注释行总数/代码总行数
声明注释比率	0.00	声明注释比率=头注释行数/有效代码
代码注释比例	0.00	代码注释比例=函数内注释行数/有效代码
总基本块数	0	基本块数
出度为 1 的基本块数	0	出度为 1 的基本块数
总操作数	0	加，减，乘，除，取余，与，或，异或等操作
参与操作符运算的变量数	0	参与操作符运算的变量数
程序出口个数	0	程序出口个数
扇入数比率	0.00	扇入数/函数数量
扇出数比率	0.00	扇入数/函数数量
扇入数	0	当前节点的所有被调用数量
扇出数	0	当前节点的所有调用数量
循环数	0	程序中所有的 loop 操作数量
圈复杂度	1.70	$(E-N+2)$ /总方法数量

5 CWE JAVA

5.1 分项汇总表

序号	CWE JAVA	缺陷/安全漏洞名称	数量	缺陷级别
1	CWE397	抛出通用异常	181	严重
2	CWE459	资源未关闭/释放	838	严重
3	CWE400	不受控制的资源消耗	5	严重
4	CWE375	将可变对象返回给不受信任的调用者	13	严重

5.2 缺陷/安全漏洞详解

5.2.1 严重类

5.2.1.1 CWE397 抛出通用异常

缺陷数量： 181 个		
缺陷描述： 抛出过于宽泛的异常会促进复杂的错误处理代码，这些代码更可能包含安全漏洞。 声明抛出 Exception 或 Throwable 的方法会使调用方难以执行正确的错误处理和错误恢复。例如，Java 的异常机制的设置使调用者能够轻松地预测可能出现的错误，并编写代码来处理每个特定的异常情况。声明一个方法抛出泛型形式的异常会使系统失败。		
修复意见： 将方法抛出异常的类型具体详细化。		
1	缺陷发生位置： /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalance2Test.java	行号： 88
	步骤描述： Define and throw a dedicated exception instead of using a generic one.	
	代码片段： 86: @Description("query") 87: @Test(expected = SQLException.class) 88: public void loadBalanceAndSlave() throws Exception { 89: TaosAdapterMock mockB = new TaosAdapterMock(); 90: TaosAdapterMock mockC = new TaosAdapterMock();	
	污染路径： 无	
2	缺陷发生位置： /src/test/java/com/taosdata/jdbc/cloud/CloudTest.java	行号： 18
	步骤描述： Define and throw a dedicated exception instead of using a generic one.	
	代码片段： 16: 17: @Test 18: public void connectCloudService() throws Exception { 19: 20: String url =	

	System.getenv("TDENGINE_CLOUD_URL");	
	污染路径: 无	
3	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ WSConsumerWithDiffType336Test.java	行号: 37
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 35: 36: @Test 37: public void testWSBeanObject() throws Exception { 38: insertOneRow(); 39:	
	污染路径: 无	
4	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ImportTest.java	行号: 24
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 22: 23: @Test 24: public void case001_insertData() throws Exception { 25: try (Statement stmt = connection.createStatement()) { 26: for (int i = 0; i < 50; i++) {	
	污染路径: 无	
5	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utlis/HttpClientPoolUtilTest.java	行号: 537
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 535: 536: @Test 537: public void testInit_SingletonPattern_InitializesOnlyOnce() throws Exception { 538: // Arrange	

	539: String endpoint = "/singleton";	
	污染路径: 无	
6	缺陷发生位置: /src/test/java/com/taosdata/jdbc/VarbinaryTest.java	行号: 28
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 26: 27: @Test 28: public void testInsert() throws Exception { 29: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NATIVE + " tags('\\\\x123456abcdef\\') values(now, '\\\\x" + TEST_STR + "\\')"); 30: ResultSet resultSet = statement.executeQuery("select c1, t1 from " + DB_NAME + "." + TABLE_NATIVE);	
	污染路径: 无	
7	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 242
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 240: 241: @Test 242: public void testAlterStableTagWithRegexp() throws Exception { 243: String stName = "st_tag_regexp"; 244: String topic = "topic_tag_regexp_" + DB_NAME;	
	污染路径: 无	
8	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 293
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 291: 292: @Test 293: public void testCreateVirtualNormalTable() throws	

	Exception { 294: String topic = "topic_vt_normal_" + DB_NAME; 295: statement.executeUpdate("drop topic if exists " + topic);	
	污染路径: 无	
9	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号: 156
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 154: 155: @Test 156: public void testCreateChildTableJson() throws Exception { 157: String topic = topics[2]; 158: // create topic	
	污染路径: 无	
10	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DoubleQuoteInSqlTest.java	行号: 41
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 39: e.printStackTrace(); 40: } catch (JsonProcessingException e) { 41: throw new RuntimeException(e); 42: } 43:	
	污染路径: 无	
11	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionValidationTest.java	行号: 231
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 229: } 230: @Test 231: public void testReConnect() throws Exception { 232: TaosAdapterMock mockB = new TaosAdapterMock();	

	233: mockB.start();	
	污染路径: 无	
12	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSCustomerNullValueTest.java	行号: 86
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 84: } 85: @Test 86: public void testWSBeanMap() throws Exception { 87: insertOneRow(); 88:	
	污染路径: 无	
13	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSCustomerMainTest.java	行号: 59
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 57: } 58: @Test 59: public void testWSMap() throws Exception { 60: AtomicInteger a = new AtomicInteger(1); 61: ScheduledExecutorService scheduledExecutorService = Executors.newSingleThreadScheduledExecutor(r -> {	
	污染路径: 无	
14	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDecimalTest.java	行号: 45
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 43: } 44: @Test 45: public void testInsertNull() throws Exception { 46: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NORMAL + " tags(1) values(now, NULL, NULL)"); 47: try (ResultSet resultSet =	

	statement.executeQuery("select d1, d2 from " + DB_NAME + "." + TABLE_NORMAL)) {	
	污染路径: 无	
15	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/ ConsumerWithDiffType336Test.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: 35: @Test 36: public void testWSBeanObject() throws Exception { 37: insertOneRow(); 38:	
	污染路径: 无	
16	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSMasterSlaveTest.java	行号: 119
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 117: consumer.unsubscribe(); 118: } catch (SQLException e) { 119: throw new RuntimeException(e); 120: } 121: scheduledExecutorService.shutdown();	
	污染路径: 无	
17	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 43
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 41: 42: @Test 43: public void testAlterTable() throws Exception { 44: String topic = topics[0]; 45: // create topic	

	污染路径: 无	
18	缺陷发生位置: /src/main/java/com/taosdata/jdbc/ws/loadbalance/ RebalanceManager.java	行号: 450
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 448: if (count > 50) { 449: log.warn("Timeout waiting for background health check threads to terminate"); 450: throw new RuntimeException("Timeout waiting for background health check threads to terminate"); 451: } 452: }	
	污染路径: 无	
19	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/ ConsumerWithDiffType336Test.java	行号: 85
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 83: 84: @Test 85: public void testWSBeanMap() throws Exception { 86: insertOneRow(); 87:	
	污染路径: 无	
20	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 113
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 111: @Description("test connection count after node down") 112: @Test 113: public void connectionCountAfterNodeDownTest()	

	throws Exception { 114: Properties properties = new Properties(); 115: String url = "jdbc:TAOS-WS://" + HOST + ":" + mockA.getListenPort()	
	污染路径: 无	
21	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WsConnectionValidationTest.java	行号: 321
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 319: } 320: 321: private void clearStaticField(Class<?> clazz, String fieldName) throws Exception { 322: Field field = findFieldInClassHierarchy(clazz, fieldName); 323: if (field == null) {	
	污染路径: 无	
22	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WsConsumerMetaMainTest.java	行号: 426
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 424: 425: @Test 426: public void testAlterTableAddColumnWithCompress() throws Exception { 427: String stName = "st_add_compress"; 428: String topic = "topic_add_compress_" + DB_NAME;	
	污染路径: 无	
23	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cloud/ConsumerTest.java	行号: 35
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 33: 34: @Test	

	代码片段: 32: 33: @Test 34: public void TestWithBean() throws Exception { 35:	
--	--	--

	/src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	551
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 549: 550: @Test 551: public void testAlterVirtualTableSetRefNull() throws Exception { 552: String topic = topics[1]; 553: statement.executeUpdate(	
	污染路径: 无	
33	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utis/HttpClientPoolUtilTest.java	行号: 595
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 593: 594: @Test 595: public void testExecute_SpecialCharactersInData_HandlesCorrectly() throws Exception { 596: // Arrange 597: String endpoint = "/special";	
	污染路径: 无	
34	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 55
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 53: @Description("test rebalance trigger when all conditions are satisfied") 54: @Test 55: public void testRebalanceTriggerOnAllConditionsMet() throws Exception { 56: // 1. Configure JDBC properties (including rebalance thresholds and health check params) 57: Properties properties = getRebalanceProperties();	

	33: String topic = topics[0];	
	污染路径: 无	
38	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/ConsumerCommitTest.java	行号: 52
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 50: 51: @Test 52: public void testAsync() throws Exception { 53: Properties properties = new Properties(); 54: properties.setProperty(TMQConstants.MSG_WITH_TABLE_NAME, "true");	
	污染路径: 无	
39	缺陷发生位置: /src/main/java/com/taosdata/jdbc/ws/BlockResultSet.java	行号: 63
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 61: return new String((byte[]) value, charset); 62: } catch (UnsupportedEncodingException e) { 63: throw new RuntimeException(e.getMessage()); 64: } 65: }	
	污染路径: 无	
40	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTest.java	行号: 120
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 118: @Test("query") 119: @Test(expected = SQLException.class) 120: public void queryBlockWithAllNodeDown() throws Exception { 121: TaosAdapterMock mockB = new TaosAdapterMock();	

	name, fn); 76: throw new RuntimeException(msg, e); 77: } catch (Exception e) { 78: final String pattern = "You can set the `{0}` through environment variables or " +	
	污染路径: 无	
44	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/OffsetSeekTest.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: 35: @Test 36: public void testGetOffset() throws Exception { 37: Properties properties = new Properties(); 38: properties.setProperty(TMQConstants.BOOTSTRAP_SERVERS, HOST + ":" + TestEnvUtil.getJniPort());	
	污染路径: 无	
45	缺陷发生位置: /src/test/java/com/taosdata/jdbc/BlobTest.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: 35: @Test 36: public void testInsertNull() throws Exception { 37: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NATIVE + " tags(\"123456abcdef\") values(now, NULL)"); 38: ResultSet resultSet = statement.executeQuery("select c1, t1 from " + DB_NAME + "." + TABLE_NATIVE);	
	污染路径: 无	
46	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/ConsumerTopicTest.java	行号: 25
	步骤描述:	

	Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 23: 24: @Test 25: public void testGetTopic() throws Exception { 26: Properties properties = new Properties(); 27: properties.setProperty(TMQConstants.MSG_WITH_TABLE_NAME, "true");	
	污染路径: 无	
47	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTest.java	行号: 81
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 79: e.printStackTrace(); 80: } catch (InterruptedException e) { 81: throw new RuntimeException(e); 82: } 83:	
	污染路径: 无	
48	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/ConsumerWithDiffTypeTest.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: 35: @Test 36: public void testWSBeanObject() throws Exception { 37: insertOneRow(); 38:	
	污染路径: 无	
49	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/FetchBlockDataTest.java	行号: 86
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	

	代码片段: 84: // test error response 85: @Test 86: public void testErrorResponse() throws Exception { 87: 88: ByteBuf buffer = PooledByteBufAllocator.DEFAULT.heapBuffer(200);	
	污染路径: 无	
50	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtStbNsTest.java	行号: 79
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 77: 78: } catch (Exception e) { 79: throw new RuntimeException(e); 80: } 81: connection.close();	
	污染路径: 无	
51	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号: 274
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 272: } 273: if (changeNum > 0) { 274: throw new Exception("not all child table created"); 275: } 276:	
	污染路径: 无	
52	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/CommitRespTest.java	行号: 123
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 121: 122: @Test	

	123: public void testJsonPropertyNameConsistency() throws Exception { 124: // Ensure the JSON property name matches the annotation 125: commitResp.setMsgageId(555L);	
	污染路径: 无	
53	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/FetchBlockDataTest.java	行号: 110
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 108: 109: @Test 110: public void testErrorResponseWithRetry() throws Exception { 111: 112: ByteBuf buffer = PooledByteBufAllocator.DEFAULT.heapBuffer(200);	
	污染路径: 无	
54	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionValidationTest.java	行号: 280
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 278: 279: @Test 280: public void testConnectionLoss() throws Exception { 281: TaosAdapterMock mockB = new TaosAdapterMock(); 282: mockB.start();	
	污染路径: 无	
55	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ WSConsumerWithDiffTypeTest.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: }	

	35: @Test 36: public void testWSBeanObject() throws Exception { 37: insertOneRow(); 38:	
	污染路径: 无	
56	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSBlobTest.java	行号: 33
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 31: 32: @Test 33: public void testInsert() throws Exception { 34: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NORMAL + " tags(\"123456abcdef\") values(now, \"\\x\" + TEST_STR + "\\"); 35: try (ResultSet resultSet = statement.executeQuery("select c1, t1 from " + DB_NAME + "." + TABLE_NORMAL)) {	
	污染路径: 无	
57	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/meta/ColumnTest.java	行号: 349
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 347: 348: @Test 349: public void testDeserializeRefWithRefTbNameAlias() throws Exception { 350: String json = 351: "{\"name\":\"c1\",\"type\":4,\"ref\": {\"refDbName\":\"src_db\",\"refTbName\":\"src_table\",\"refCol Name\":\"src_col\"}}";	
	污染路径: 无	
58	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/	行号: 95

	RebalanceManagerTest.java	
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 93: atomicBoolean.set(value); 94: } catch (IllegalAccessException e) { 95: throw new RuntimeException("Failed to reset private AtomicBoolean "" + fieldName + "", e); 96: } 97: }</pre>	
	污染路径: 无	
59	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSVarcharAsStringTest.java	行号: 56
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 54: 55: @Test 56: public void testWSMap() throws Exception { 57: AtomicInteger a = new AtomicInteger(1); 58: ScheduledExecutorService scheduledExecutorService = Executors.newSingleThreadScheduledExecutor(r -> {</pre>	
	污染路径: 无	
60	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 201
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 199: 200: @Test 201: public void testConcurrentConnections() throws Exception { 202: String url = "jdbc:TAOS-WS://" + 203: HOST + ":" + mockA.getListenPort() + "," +</pre>	
	污染路径: 无	
61	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/ws/FetchBlockDataTest.java	145
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 143: // test completed response 144: @Test 145: public void testCompletedResponse() throws Exception { 146: ByteBuf buffer = PooledByteBufAllocator.DEFAULT.heapBuffer(200); 147: buffer.writeLongLE(7); // action id	
	污染路径: 无	
62	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ConsumerCommittedTest.java	行号: 90
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 88: 89: @Test 90: public void testWS() throws Exception { 91: TimeUnit.MILLISECONDS.sleep(1000); 92: Properties properties = new Properties();	
	污染路径: 无	
63	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ WSConsumerWithDiffTypeTest.java	行号: 89
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 87: 88: @Test 89: public void testWSBeanMap() throws Exception { 90: insertOneRow(); 91:	
	污染路径: 无	
64	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/	行号: 141

	CommitOffsetRespTest.java	
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 139: 140: @Test 141: public void testJsonPropertyNameMatching() throws Exception { 142: // Verify that JSON property names match the @JsonProperty annotations 143: ObjectMapper mapper = new ObjectMapper();	
	污染路径: 无	
65	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 104
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 102: >Description("test no rebalance when total connections are below threshold") 103: @Test 104: public void testNoRebalanceOnTotalConnectionBelowThreshold() throws Exception { 105: Properties properties = getRebalanceProperties(); 106: properties.setProperty(TSDBDriver.PROPERTY_KEY_REBALANCE _CON_BASE_COUNT, "30");	
	污染路径: 无	
66	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utils/DataTypeConvertUtil.java	行号: 479
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 477: tmp = new String((byte[]) value, charset); 478: } catch (UnsupportedEncodingException e) { 479: throw new RuntimeException(e.getMessage()); 480: } 481: return DateTimeUtils.parseDate(tmp, zoneId);	

	污染路径: 无	
67	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalance2Test.java	行号: 57
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 55: @Description("query") 56: @Test 57: public void queryBlock() throws Exception { 58: TaosAdapterMock mockB = new TaosAdapterMock(); 59: TaosAdapterMock mockC = new TaosAdapterMock();	
	污染路径: 无	
68	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBPreparedStatement.java	行号: 482
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 480: @Override 481: public void setTagTimestamp(int index, Timestamp value) { 482: throw new RuntimeException("not supported"); 483: } 484:	
	污染路径: 无	
69	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/ CommitOffsetRespTest.java	行号: 64
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 62: 63: @Test 64: public void testJsonPropertyAnnotations() throws Exception { 65: ObjectMapper mapper = new ObjectMapper(); 66:	

	污染路径: 无	
70	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ RebalanceManagerTest.java	行号: 109
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 107: return (T) method.invoke(instance, params); 108: } catch (NoSuchMethodException e) { 109: throw new RuntimeException("Private method '" + methodName + "' not found in " + clazz.getName(), e); 110: } catch (Exception e) { 111: throw new RuntimeException("Failed to invoke private method '" + methodName + "'", e);	
	污染路径: 无	
71	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/CommitRespTest.java	行号: 41
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 39: 40: @Test 41: public void testJsonPropertyAnnotation() throws Exception { 42: commitResp.setMsgId(999L); 43:	
	污染路径: 无	
72	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 466
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 464: 465: @Test 466: public void testAlterTableUpdateColumnCompress() throws Exception { 467: String stName = "st_update_compress";	

	468: String topic = "topic_update_compress_" + DB_NAME;	
	污染路径: 无	
73	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utils/DataTypeConvertUtil.java	行号: 68
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 66: tmp = new String((byte[]) value, charset); 67: } catch (UnsupportedEncodingException e) { 68: throw new RuntimeException(e.getMessage()); 69: } 70: if ("TRUE".compareToIgnoreCase(tmp) == 0) {	
	污染路径: 无	
74	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号: 364
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 362: 363: @Test 364: public void testCreateNormalTable() throws Exception { 365: String topic = topics[1]; 366: // create topic	
	污染路径: 无	
75	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 42
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 40: @Description("test connection count") 41: @Test 42: public void connectionCountTest() throws Exception { 43: Properties properties = new Properties(); 44: String url = "jdbc:TAOS-WS://" + HOST + ":" + mockA.getListenPort()	

	污染路径: 无	
79	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBJNIConnector.java	行号: 69
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 67: final String pattern = "dynamic libraries `{0}` not found in: `{1}`"; 68: final String msg = MessageFormat.format(pattern, fn, lp); 69: throw new RuntimeException(msg); 70: } 71: }	
	污染路径: 无	
80	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSBlobTest.java	行号: 41
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 39: } 40: @Test 41: public void testInsertNull() throws Exception { 42: statement.executeUpdate("insert into sub_t_a using " + DB_NAME + "." + TABLE_NORMAL + " tags(\"123456abcdef\") values(now, NULL)"); 43: try (resultSet resultSet = statement.executeQuery("select c1, t1 from " + DB_NAME + "." + TABLE_NORMAL)) {	
	污染路径: 无	
81	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSVarbinaryTest.java	行号: 26
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 24: 25: @Test 26: public void testInsert() throws Exception {	

	27: statement.executeUpdate("insert into " + DB_NAME + "." + TABLE_NATIVE + " values(now, \"\\x\" + TEST_STR + "\\")"); 28: ResultSet resultSet = statement.executeQuery("select c1 from " + DB_NAME + "." + TABLE_NATIVE);	
	污染路径: 无	
82	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBPreparedStatement.java	行号: 728
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 726: } 727: } catch (UnsupportedEncodingException e) { 728: throw new RuntimeException(e.getMessage()); 729: } 730: tagDataList.put(b);	
	污染路径: 无	
83	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/FetchRespTest.java	行号: 89
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 87: */ 88: @Test 89: public void testJsonDeserialization() throws Exception { 90: // Deserialize JSON to FetchResp 91: FetchResp deserialized = objectMapper.readValue(TEST_JSON, FetchResp.class);	
	污染路径: 无	
84	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号: 298
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段:	

	296: 297: @Test 298: public void testCreateSuperTable() throws Exception { 299: String topic = topics[1]; 300: // create topic	
	污染路径: 无	
85	缺陷发生位置: /src/test/java/com/taosdata/jdbc/GeometryTest.java	行号: 26
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 24: 25: @Test 26: public void testInsert() throws Exception { 27: String sql = "insert into ? using stable3 tags(?) values(?,?)"; 28:	
	污染路径: 无	
86	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 247
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 245: mockA.start(); 246: } catch (IOException e) { 247: throw new RuntimeException(e); 248: } 249: latch.countDown();	
	污染路径: 无	
87	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 335
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 333: 334: @Test	

	335: public void testCreateVirtualChildTable() throws Exception { 336: String topic = "topic_vt_child_" + DB_NAME; 337: statement.executeUpdate("drop topic if exists " + topic);	
	污染路径: 无	
88	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/FetchBlockDataTest.java	行号: 66
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 64: // test normal response 65: @Test 66: public void testNormalDataBlock() throws Exception { 67: ByteBuffer buffer = PooledByteBufferAllocator.DEFAULT.heapBuffer(200); 68: buffer.writeBytes(normalData);	
	污染路径: 无	
89	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerOffsetSeekTest.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: 35: @Test 36: public void testGetOffset() throws Exception { 37: Properties properties = new Properties(); 38: properties.setProperty(TMQConstants.CONNECT_TYPE, "ws");	
	污染路径: 无	
90	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtNsTest.java	行号: 149
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 147: 148: } catch (Exception e) {	

	149: throw new RuntimeException(e); 150: } 151: connection.close();	
	污染路径: 无	
91	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBResultSetRowData.java	行号: 219
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 217: data.set(col, new String(value, TaosGlobalConfig.getCharset())); 218: } catch (UnsupportedEncodingException e) { 219: throw new RuntimeException(e.getMessage()); 220: } 221: }	
	污染路径: 无	
92	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WConsumerMetaMainTest.java	行号: 150
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 148: 149: @Test 150: public void testAlterMultiTableTags() throws Exception { 151: String stName = "st_multi_tags"; 152: String topic = "topic_multi_tags_" + DB_NAME;	
	污染路径: 无	
93	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ WConsumerSubscribeDBTest.java	行号: 171
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 169: 170: @Test 171: public void testWSEhnMapStable() throws Exception { 172: AtomicInteger a = new AtomicInteger(1);	

	173: String topic = topics[0];	
	污染路径: 无	
94	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ConsumerCommittedTest.java	行号: 38
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 36: 37: @Test 38: public void testJNI() throws Exception { 39: Properties properties = new Properties(); 40: properties.setProperty(TMQConstants.CONNECT_TYPE, "jni");	
	污染路径: 无	
95	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/CommitRespTest.java	行号: 88
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 86: 87: @Test 88: public void testJsonDeserializeWithMissingField() throws Exception { 89: String json = "{}"; 90: CommitResp deserialized = objectMapper.readValue(json, CommitResp.class);	
	污染路径: 无	
96	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 167
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 165: @Description("test connection count after node down") 166: @Test 167: public void connectionCountAfterCloseTest() throws	

	Exception { 168: Properties properties = new Properties(); 169: String url = "jdbc:TAOS-WS://" + HOST + ":" + mockA.getListenPort()	
	污染路径: 无	
97	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WConsumerNullTest.java	行号: 31
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 29: 30: @Test 31: public void testWSBeanObject() throws Exception { 32: try { 33: statement.executeUpdate("insert into " + DB_NAME + ".ct0 (ts) values(now)");	
	污染路径: 无	
98	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utis/DataTypeConvertUtil.java	行号: 545
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 543: tmp = new String((byte[]) value, charset); 544: } catch (UnsupportedEncodingException e) { 545: throw new RuntimeException(e.getMessage()); 546: } 547: return new BigDecimal(tmp);	
	污染路径: 无	
99	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utis/Utils.java	行号: 199
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 197: return declaredConstructor.newInstance(); 198: } catch (NoSuchMethodException e) { 199: throw new RuntimeException("Could not find a	

	public no-argument constructor for " + c.getName(), e); 200: } catch (ReflectiveOperationException RuntimeException e) { 201: throw new RuntimeException("Could not instantiate class " + c.getName(), e);	
	污染路径: 无	
100	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utis/HttpClientPoolUtilTest.java	行号: 215
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 213: } 214: 215: private void testErrorStatusCode(int statusCode, String statusText) throws Exception { 216: // Arrange 217: String endpoint = "/error";	
	污染路径: 无	
101	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/ConsumerCommitTest.java	行号: 34
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 32: 33: @Test 34: public void testSync() throws Exception { 35: Properties properties = new Properties(); 36: properties.setProperty(TMQConstants.MSG_WITH_TABLE_NAME , "true");	
	污染路径: 无	
102	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMainTest.java	行号: 115
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 113:	

	114: @Test 115: public void testWSBeanObject() throws Exception { 116: AtomicInteger a = new AtomicInteger(1); 117: List<String> strings = Arrays.asList("a", "b", "c");	
	污染路径: 无	
103	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTmqTest.java	行号: 41
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 39: 40: @Test 41: public void testTmqFailOver() throws Exception { 42: AtomicInteger a = new AtomicInteger(1); 43: List<String> strings = Arrays.asList("a", "b", "c");	
	污染路径: 无	
104	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ RebalanceManagerTest.java	行号: 69
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 67: return field; 68: } catch (NoSuchFieldException e) { 69: throw new RuntimeException("Private field '" + fieldName + "' not found in " + clazz.getName(), e); 70: } 71: }	
	污染路径: 无	
105	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/entity/FetchRespTest.java	行号: 51
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 49: 50: @Test	

	<pre> 51: public void testJsonPropertyAnnotations() throws Exception { 52: ObjectMapper mapper = new ObjectMapper(); 53: String json = "{\"id\":999,\"completed\":true,\"lengths\": [1,2,3],\"rows\":50}"; </pre>	
	污染路径: 无	
106	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 146
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 144: @Description("test no rebalance when connection ratio is below threshold") 145: @Test 146: public void testNoRebalanceOnRatioBelowThreshold() throws Exception { 147: Properties properties = getRebalanceProperties(); 148: properties.setProperty(TSDBDriver.PROPERTY_KEY_REBALANCE _THRESHOLD, "50"); // Adjust threshold to 200% </pre>	
	污染路径: 无	
107	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 381
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 379: 380: @Test 381: public void testAlterVirtualTableAddColumnWithRef() throws Exception { 382: String topic = topics[1]; 383: statement.executeUpdate(</pre>	
	污染路径: 无	
108	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/	行号: 261

	MinimumConnectionCountTest.java	
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 259: 260: @Test 261: public void testAutoReconnectOff() throws Exception { 262: String url = "jdbc:TAOS-WS://" + 263: HOST + ":" + mockA.getListenPort() + "," +	
	污染路径: 无	
109	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/DeserializerNullTest.java	行号: 25
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 23: 24: @Test 25: public void JNI_01_TestWithBean() throws Exception { 26: Properties properties = new Properties(); 27: properties.setProperty(TMQConstants.MSG_WITH_TABLE_NAME , "true");	
	污染路径: 无	
110	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/CommitRespTest.java	行号: 49
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 47: 48: @Test 49: public void testJsonDeserializeAnnotation() throws Exception { 50: SimpleModule module = new SimpleModule(); 51: module.addDeserializer(Long.class, new UInt64Deserializer());	
	污染路径: 无	
111	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalance2Test.java	24
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 22: @Description("query") 23: @Test(expected = SQLException.class) 24: public void queryBlockWithMasterSlaveDown() throws Exception { 25: TaosAdapterMock mockB = new TaosAdapterMock(); 26: TaosAdapterMock mockC = new TaosAdapterMock();	
	污染路径: 无	
112	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionValidationTest.java	行号: 215
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 213: 214: @Test 215: public void testIsValidThrowsExceptionOnConnectionLost() throws Exception { 216: TaosAdapterMock mockB = new TaosAdapterMock(); 217: mockB.start();	
	污染路径: 无	
113	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ WSConsumerSubscribeDBTest.java	行号: 87
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 85: 86: @Test 87: public void testWSEhnMapDBAllType() throws Exception { 88: AtomicInteger a = new AtomicInteger(1); 89: String topic = topics[0];	
	污染路径:	

	无	
114	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDecimalTest.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: 35: @Test 36: public void testInsert() throws Exception { 37: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NORMAL + " tags(1) values(now, \"12.32\", \"1234567890111.12345678\")"); 38: try (ResultSet resultSet = statement.executeQuery("select d1, d2 from " + DB_NAME + "." + TABLE_NORMAL)) {	
	污染路径: 无	
115	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utis/DataTypeConvertUtil.java	行号: 505
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 503: time = DateTimeUtils.parseTime(tmp, zoneId); 504: } catch (DateTimeParseException e) { 505: throw new RuntimeException(e.getMessage()); 506: } 507: return time;	
	污染路径: 无	
116	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utis/JsonUtilTest.java	行号: 38
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 36: 37: @Test 38: public void testJavaTimeModule() throws Exception { 39: String json = "{\"localDateTime\":\"2023-10-01T12:00:00\"}"; 40: TestClassWithJavaTime result = objectMapper.readValue(json, TestClassWithJavaTime.class);	

	101: public void testExecute_SuccessfulPostRequest_ReturnsResponseBody() throws Exception { 102: // Arrange 103: String endpoint = "/test";	
	污染路径: 无	
123	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBPreparedStatement.java	行号: 515
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 513: this.tagValueLength += value.getBytes(charset).length; 514: } catch (UnsupportedEncodingException e) { 515: throw new RuntimeException(e.getMessage()); 516: } 517: }	
	污染路径: 无	
124	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSConFailOverTest.java	行号: 67
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 65: e.printStackTrace(); 66: } catch (InterruptedException e) { 67: throw new RuntimeException(e); 68: } 69:	
	污染路径: 无	
125	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ RebalanceManagerTest.java	行号: 82
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 80: map.clear();	

	<pre> 81: } catch (IllegalAccessException e) { 82: throw new RuntimeException("Failed to clear private map '" + fieldName + "'", e); 83: } 84: }</pre>	
	污染路径: 无	
126	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/TaosConsumerTest.java	行号: 79
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 77: 78: @Test 79: public void JNI_01_TestWithBean() throws Exception { 80: AtomicInteger a = new AtomicInteger(1); 81: List<String> strings = Arrays.asList("a", "b", "c");</pre>	
	污染路径: 无	
127	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utils/DataTypeConvertUtil.java	行号: 375
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 373: tmp = new String((byte[]) value, charset); 374: } catch (UnsupportedEncodingException e) { 375: throw new RuntimeException(e.getMessage()); 376: } 377: return Float.parseFloat(tmp);</pre>	
	污染路径: 无	
128	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utils/HttpClientPoolUtilTest.java	行号: 501
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 499: 500: @Test 501: public void</pre>	

	testExecute_LargeResponseBody_HandlesCorrectly() throws Exception { 502: // Arrange 503: String endpoint = "/large";	
	污染路径: 无	
129	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerEnterpriseTest.java	行号: 164
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 162: 163: @BeforeClass 164: public static void setUp() throws Exception { 165: TestUtils.runInEnterprise(); 166:	
	污染路径: 无	
130	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utlis/JsonUtilTest.java	行号: 30
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 28: 29: @Test 30: public void testDateFormat() throws Exception { 31: TestClassWithDate testClass = new TestClassWithDate(); 32: testClass.date = new SimpleDateFormat("yyyy-MM-dd HH:mm:ss").parse("2023-10-01 12:00:00");	
	污染路径: 无	
131	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerNullValueTest.java	行号: 36
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 34: } 35: @Test 36: public void testWSBeanObject() throws Exception {	

	37: insertOneRow(); 38:	
	污染路径: 无	
132	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号: 92
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 90: 91: @Test 92: public void testAutoCreateChildTable() throws Exception { 93: String topic = topics[0]; 94: // create topic	
	污染路径: 无	
133	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBPreparedStatement.java	行号: 528
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 526: this.tagValueLength += value.getBytes(charset).length; 527: } catch (UnsupportedEncodingException e) { 528: throw new RuntimeException(e.getMessage()); 529: } 530: }	
	污染路径: 无	
134	缺陷发生位置: /src/test/java/com/taosdata/jdbc/Utils/JsonUtilTest.java	行号: 14
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 12: 13: @Test 14: public void testIgnoreUnknownProperties() throws Exception { 15: String json =	

	<pre> {"knownProperty\\":\\"value\\", \"unknownProperty\\":\\"value\\"} ; 16: TestKnownPropertyClass result = objectMapper.readValue(json, TestKnownPropertyClass.class); </pre>	
	污染路径: 无	
135	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 163
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 161: @Description("test connection count after node down") 162: @Test 163: public void connectionCountAfterCloseTest() throws Exception { 164: Properties properties = new Properties(); 165: String url = "jdbc:TAOS-WS://" + HOST + ":" + mockA.getListenPort() </pre>	
	污染路径: 无	
136	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 485
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 483: 484: @BeforeClass 485: public static void beforeClass() throws Exception { 486: Properties properties = new Properties(); 487: properties.setProperty(TSDBDriver.PROPERTY_KEY_CHARSET, "UTF-8"); </pre>	
	污染路径: 无	
137	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 42
	步骤描述:	

	Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 381: return DateTimeUtils.parseTimestamp(tmp, null); 382: } catch (UnsupportedEncodingException e) { 383: throw new RuntimeException(e.getMessage()); 384: } 385: }</pre>	
	污染路径: 无	
141	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 111
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 109: @Description("test connection count after node down") 110: @Test 111: public void connectionCountAfterNodeDownTest() throws Exception { 112: Properties properties = new Properties(); 113: String url = "jdbc:TAOS-WS://" + HOST + ":" + mockA.getListenPort()</pre>	
	污染路径: 无	
142	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBPreparedStatement.java	行号: 871
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: <pre> 869: } 870: } catch (UnsupportedEncodingException e) { 871: throw new RuntimeException(e.getMessage()); 872: } 873:</pre>	
	污染路径: 无	

143	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaDeleteTest.java	行号: 47
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 45: 46: @Test 47: public void testDeleteData() throws Exception { 48: String topic = topics[0]; 49: // create topic	
	污染路径: 无	
144	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号: 28
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 26: 27: @Test 28: public void testCreateChildTable() throws Exception { 29: String topic = topics[0]; 30: // create topic	
	污染路径: 无	
145	缺陷发生位置: /src/main/java/com/taosdata/jdbc/Utils/Utils.java	行号: 184
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 182: return Class.forName(key, true, contextClassLoader); 183: } catch (ClassNotFoundException e) { 184: throw new RuntimeException(e); 185: } 186: }	
	污染路径: 无	
146	缺陷发生位置: /src/main/java/com/taosdata/jdbc/Utils/TaosInfo.java	行号: 18
	步骤描述:	

	Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 16: server.registerMBean(TaosInfo.getInstance(), name); 17: } catch (MalformedObjectNameException InstanceAlreadyExistsException MBeanRegistrationException NotCompliantMBeanException ignored) { 18: throw new RuntimeException("registerMBean failed"); 19: } 20: }	
	污染路径: 无	
147	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSGeometryTest.java	行号: 27
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 25: 26: @Test 27: public void testInsert() throws Exception { 28: String sql = "insert into ? using stable3 tags(?) values(?,?)"; 29:	
	污染路径: 无	
148	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumer336Test.java	行号: 30
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 28: private static final String[] topics = {"topic_ws_map" + DB_NAME, "topic_ws_bean" + DB_NAME}; 29: @Test 30: public void testWSMap() throws Exception { 31: AtomicInteger a = new AtomicInteger(1); 32: ScheduledExecutorService scheduledExecutorService = Executors.newSingleThreadScheduledExecutor(r -> {	
	污染路径: 无	

149	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerEnterpriseTest.java	行号: 190
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 188: 189: @AfterClass 190: public static void tearDown() throws Exception { 191: if (statement != null) { 192: statement.executeUpdate("drop topic if exists " + topicName);	
	污染路径: 无	
150	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSVarcharAsStringTest.java	行号: 107
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 105: 106: @Test 107: public void testWSEhnMapDB() throws Exception { 108: AtomicInteger a = new AtomicInteger(1); 109: String topic = TOPIC_DATABASE;	
	污染路径: 无	
151	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionValidationTest.java	行号: 297
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 295: return field.get(target); 296: } 297: private void setFinalPrivateField(Object target, Class<? > originalClass, String fieldName, Object value) throws Exception { 298: Field field = findFieldInClassHierarchy(originalClass, fieldName); 299: if (field == null) {	
	污染路径: 无	

152	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 230
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 228: @Description("test concurrent rebalance without connection conflicts or leaks") 229: @Test 230: public void testConcurrentRebalance() throws Exception { 231: Properties properties = getRebalanceProperties(); 232: String url = getClusterUrl();	
	污染路径: 无	
153	缺陷发生位置: /src/main/java/com/taosdata/jdbc/ws/BlockResultSet.java	行号: 250
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 248: tmp = new String((byte[]) value, charset); 249: } catch (UnsupportedEncodingException e) { 250: throw new RuntimeException(e.getMessage()); 251: } 252: } else {	
	污染路径: 无	
154	缺陷发生位置: /src/test/java/com/taosdata/jdbc/tmq/TaosConsumerTest.java	行号: 30
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 28: 29: @Test 30: public void JNI_01_Test() throws Exception { 31: AtomicInteger a = new AtomicInteger(1); 32: ScheduledExecutorService scheduledExecutorService = Executors.newSingleThreadScheduledExecutor(r -> {	
	污染路径: 无	

155	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSQueryTimeoutTest.java	行号: 27
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 25: @Description("query") 26: @Test 27: public void queryTimeoutTest() throws Exception { 28: TaosAdapterMock mockA = new TaosAdapterMock(); 29:	
	污染路径: 无	
156	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumer336Test.java	行号: 81
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 79: 80: @Test 81: public void testWSBeanObject() throws Exception { 82: AtomicInteger a = new AtomicInteger(1); 83: List<String> strings = Arrays.asList("a", "b", "c");	
	污染路径: 无	
157	缺陷发生位置: /src/main/java/com/taosdata/jdbc/Utils/Utils.java	行号: 193
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 191: public static <T> T newInstance(Class<T> c) { 192: if (c == null) 193: throw new RuntimeException("class cannot be null"); 194: try { 195: Constructor<T> declaredConstructor = c.getDeclaredConstructor();	
	污染路径: 无	
158	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerEnterpriseTest.java	行号: 159

	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 157: } 158: 159: private Connection getTestConnection() throws Exception { 160: return DriverManager.getConnection("jdbc:TAOS- WS://" + host + ":" + TestEnvUtil.getWsPort() + "?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword()); 161: }	
	污染路径: 无	
159	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utlis/HttpClientPoolUtilTest.java	行号: 356
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 354: 355: @Test 356: public void testExecute_WithExistingQueryParamsAndRequestId_Appends Correctly() throws Exception { 357: // Arrange 358: String endpoint = "/test?param=value";	
	污染路径: 无	
160	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ RebalanceManagerTest.java	行号: 111
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 109: throw new RuntimeException("Private method '" + methodName + "' not found in " + clazz.getName(), e); 110: } catch (Exception e) { 111: throw new RuntimeException("Failed to invoke private method '" + methodName + "'", e); 112: } 113: }	

	污染路径: 无	
161	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 279
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 277: 278: @Test 279: public void testOtherClusterNoRebalance() throws Exception { 280: Properties propertiesA = getRebalanceProperties(); 281: Properties propertiesB = getRebalanceProperties();	
	污染路径: 无	
162	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utils/DataTypeConvertUtil.java	行号: 496
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 494: tmp = new String((byte[]) value, charset); 495: } catch (UnsupportedEncodingException e) { 496: throw new RuntimeException(e.getMessage()); 497: } 498: } else {	
	污染路径: 无	
163	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utils/RuntimeUtils.java	行号: 23
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 21: proc = Runtime.getRuntime().exec("taos -V"); 22: } catch (IOException e) { 23: throw new RuntimeException(e.getMessage()); 24: } 25:	
	污染路径:	

	无	
164	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionValidationTest.java	行号: 345
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 343: * Invoke private method via reflection 344: */ 345: private Object invokePrivateMethod(Object target, Class<?> originalClass, String methodName, Class<?>[] paramTypes, Object... params) throws Exception { 346: Method method = findMethodInClassHierarchy(originalClass, methodName, paramTypes); 347: method.setAccessible(true);	
	污染路径: 无	
165	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 507
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 505: 506: @Test 507: public void testAlterVirtualTableAlterColumnRef() throws Exception { 508: String topic = topics[1]; 509: statement.executeUpdate(	
	污染路径: 无	
166	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaMainTest.java	行号: 196
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 194: 195: @Test 196: public void testAlterStableTagWithFilter() throws Exception { 197: String stName = "st_tag_filter"; 198: String topic = "topic_tag_filter_" + DB_NAME;	

	污染路径: 无	
167	缺陷发生位置: /src/test/java/com/taosdata/jdbc/utlis/JsonUtilTest.java	行号: 21
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 19: 20: @Test 21: public void testSerializationWithoutNull() throws Exception { 22: TestNullPropertyClass testClass = new TestNullPropertyClass(); 23: testClass.name = "John";	
	污染路径: 无	
168	缺陷发生位置: /src/main/java/com/taosdata/jdbc/TSDBJNICConnector.java	行号: 81
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 79: "Java system properties to specify the search path for dynamic libraries `{1}`"; 80: final String msg = MessageFormat.format(pattern, name, fn); 81: throw new RuntimeException(msg, e); 82: } 83: }	
	污染路径: 无	
169	缺陷发生位置: /src/main/java/com/taosdata/jdbc/utlis/DataTypeConvertUtil.java	行号: 261
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 259: tmp = new String((byte[]) value, charset); 260: } catch (UnsupportedEncodingException e) { 261: throw new RuntimeException(e.getMessage()); 262: }	

	263: return Integer.parseInt(tmp);	
	污染路径: 无	
170	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 197
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 195: 196: @Test 197: public void testConcurrentConnections() throws Exception { 198: String url = "jdbc:TAOS-WS://" + 199: HOST + ":" + mockA.getListenPort() + "," +	
	污染路径: 无	
171	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ WSConsumerWithDiffType336Test.java	行号: 89
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 87: 88: @Test 89: public void testWSBeanMap() throws Exception { 90: insertOneRow(); 91:	
	污染路径: 无	
172	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/ CommitOffsetRespTest.java	行号: 161
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 159: 160: @Test 161: public void testDeserializationWithMissingFields() throws Exception {	

	162: Mapper mapper = new Mapper(); 163:	
	污染路径: 无	
173	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/FetchBlockDataTest.java	行号: 205
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 203: // test backpressure handling 204: @Test 205: public void testBackpressure() throws Exception { 206: for (int i = 0; i < 5; i++) { 207: ByteBuffer buffer = PooledByteBufferAllocator.DEFAULT.heapBuffer(200);	
	污染路径: 无	
174	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTest.java	行号: 30
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 28: @Test 29: @Test 30: public void queryBlock() throws Exception { 31: TaosAdapterMock mockB = new TaosAdapterMock(); 32: TaosAdapterMock mockC = new TaosAdapterMock();	
	污染路径: 无	
175	缺陷发生位置: /src/main/java/com/taosdata/jdbc/Utils/Utils.java	行号: 201
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 199: throw new RuntimeException("Could not find a public no-argument constructor for " + c.getName(), e); 200: } catch (ReflectiveOperationException RuntimeException e) { 201: throw new RuntimeException("Could not	

	36: try (Statement statement = connection.createStatement()) { 37:	
	污染路径: 无	
179	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTest.java	行号: 151
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 149: @Description("query") 150: @Test 151: public void queryIpv6() throws Exception { 152: Properties properties = new Properties(); 153: String url = SpecifyAddress.getInstance().getWebSocketWithoutUrl();	
	污染路径: 无	
180	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/tmq/entity/CommitRespTest.java	行号: 77
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 75: 76: @Test 77: public void testSerializationAndDeserializationCycle() throws Exception { 78: CommitResp original = new CommitResp(); 79: original.setMsgId(987654321L);	
	污染路径: 无	
181	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionValidationTest.java	行号: 334
	步骤描述: Define and throw a dedicated exception instead of using a generic one.	
	代码片段: 332: 333: @SuppressWarnings("unchecked") 334: private <T> T getPrivateStaticField(Class<?> clazz,	

	String fieldName) throws Exception { 335: Field field = findFieldInClassHierarchy(clazz, fieldName); 336: if (field == null) {
	污染路径: 无

5.2.1.2 CWE459 资源未关闭/释放

缺陷数量：838 个		
缺陷描述： 软件在使用后没有正确“清理”并删除临时的或支持的资源。		
修复意见： 临时文件和其他支持资源应在不再需要后立即删除/发布。Java 应用程序中流资源应该在 finally 块中释放。		
1	缺陷发生位置： /src/test/java/com/taosdata/jdbc/cases/ InvalidResultSetPointerTest.java	行号： 151
	步骤描述： Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段： 149: try (Statement statement = connection.createStatement()) { 150: long start = System.currentTimeMillis(); 151: ResultSet resultSet = statement.executeQuery(sql); 152: long end = System.currentTimeMillis(); 153: printSql(sql, (end - start));	
	污染路径: 无	
2	缺陷发生位置： /src/test/java/com/taosdata/jdbc/block/TSDBlockJsonTagTest.java	行号： 782
	步骤描述： Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段： 780: @Description("where condition with 'and'") 781: public void case10_selectAndOr03() throws SQLException {	

	782: ResultSet resultSet = statement 783: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='shanghai'"); 784: int count = 0;	
	污染路径: 无	
3	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsEfficientWritingTest.java	行号: 372
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 370: public void before() throws SQLException { 371: connection = getConnection(false); 372: Statement statement = connection.createStatement(); 373: statement.execute("drop database if exists " + db_name); 374: statement.execute("create database " + db_name);	
	污染路径: 无	
4	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 1092
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1090: @Description("query metadata for one json result") 1091: public void case19_selectMetadata03() throws SQLException { 1092: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_6"); 1093: ResultSetMetaData metaData = resultSet.getMetaData(); 1094: int columnType = metaData.getColumnType(1);	
	污染路径: 无	
5	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/UnsignedNumberJniTest.java	行号: 56
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	54: long now = System.currentTimeMillis(); 55: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 127, 32767,2147483647, 18446744073709551614)"); 56: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); 57: ResultSetMetaData meta = rs.getMetaData(); 58: assertResultSetMetaData(meta);	
	污染路径: 无	
6	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSelectTest.java	行号: 45
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 43: long start = System.nanoTime(); 44: for (int i = 0; i < 1; i++) { 45: ResultSet resultSet = statement.executeQuery("select ts,c1,c2,c3,c4,c5,c6,c7,c8,c9,c10,c11,c12,c13,c14,c15 from " + DATABASE_NAME + ".alltype_query limit 3000"); 46: 47: ResultSetMetaData metaData = resultSet.getMetaData();	
	污染路径: 无	
7	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/BlockResultSetTest.java	行号: 234
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 232: stmt.close(); 233: if (conn != null) { 234: Statement statement = conn.createStatement(); 235: statement.execute("drop database if exists " + DB_NAME); 236: statement.close();	
	污染路径: 无	

8	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1026
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1024: @Description("group by and order by json tag asc") 1025: public void case16_selectGroupOrder02() throws SQLException { 1026: ResultSet resultSet = statement 1027: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' asc"); 1028: int count = 0;	
	污染路径: 无	
9	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 76
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 74: 75: // execute 76: stmt = conn.createStatement(); 77: int affectedRow = stmt.executeUpdate("insert into weather(ts, f1) values(now," + random.nextInt(100) + ")"); 78: Assert.assertEquals(1, affectedRow);	
	污染路径: 无	
10	缺陷发生位置: /src/test/java/com/taosdata/jdbc/GeometryTest.java	行号: 30
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 28: 29: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NATIVE + " tags(\"POINT(3 5)\") values(now, \"POINT(1 2)\")"); 30: ResultSet resultSet = statement.executeQuery("select c1 from subt_a"); 31: 32: resultSet.next();	

	污染路径: 无	
11	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 124
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 122: ((AbstractConnection)connection).writeRaw(line, SchemalessProtocolType.LINE, SchemalessTimestampType.NANO_SECONDS, 10000, 100L); 123: // then 124: Statement statement = connection.createStatement(); 125: statement.executeUpdate("use " + DB_NAME); 126: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
12	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 552
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 550: @Description("where condition support '=' for double") 551: public void case07_selectValue01() throws SQLException { 552: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=1.232"); 553: int count = 0; 554: while (resultSet.next()) {	
	污染路径: 无	
13	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/BatchErrorIgnoreTest.java	行号: 23
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 21: url = "jdbc:TAOS://" + HOST + ":" + TestEnvUtil.getJniPort() + "/?user=" + TestEnvUtil.getUser() +	

	<pre> 148: public void testCreateStatement() throws SQLException { 149: Statement stmt = conn.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY); 150: ResultSet rs = stmt.executeQuery("show cluster alive"); 151: rs.next(); 152: int status = rs.getInt("status"); </pre>	
	污染路径: 无	
17	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 156
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 154: RebalanceTestUtil.waitHealthCheckFinishedIgnoreException(pa ram.getEndpoints().get(2)); 155: 156: Connection connection4 = DriverManager.getConnection(url, properties); 157: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(2)).getConnectCount()); 158: </pre>	
	污染路径: 无	
18	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertNewTest.java	行号: 77
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 75: 76: // then 77: Statement statement = conn.createStatement(); 78: ResultSet rs = statement.executeQuery("show stables"); 79: Assert.assertNotNull(rs); </pre>	

	statement.executeQuery("select jtag from jsons1_1"); 229: resultSet.next(); 230: String result = resultSet.getString(1);	
	污染路径: 无	
22	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 867
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 865: @Description("where condition like") 866: public void case12_selectWhere01() throws SQLException { 867: ResultSet resultSet = statement.executeQuery("select *,tbname from jsons1 where jtag->'tag2' like 'bei%'"); 868: int count = 0; 869: while (resultSet.next()) {	
	污染路径: 无	
23	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 93
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 91: statement1.close(); 92: 93: Statement statement2 = connection4.createStatement(); 94: ResultSet rs2 = statement2.executeQuery("show databases;"); 95: rs2.close();	
	污染路径: 无	
24	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 944
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	942: Assert.assertEquals(1, result); 943: try (Statement stmt = conn.createStatement()) { 944: ResultSet rs = stmt.executeQuery("select * from t1"); 945: ResultSetMetaData meta = rs.getMetaData(); 946: assertMetaData(meta);	
	污染路径: 无	
25	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 265
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 263: @Description("select a json tag, the value is empty") 264: public void case04_select10() throws SQLException { 265: ResultSet resultSet = statement.executeQuery("select jtag->'tag2' from jsons1_6"); 266: resultSet.next(); 267: String result = resultSet.getString(1);	
	污染路径: 无	
26	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 612
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 610: @Test 611: public void bindDataQueryTest() throws SQLException { 612: Statement stmt = conn.createStatement(); 613: stmt.execute("drop table if exists weather_test");	
	污染路径: 无	
27	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 302
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 300: @Description("select a json tag, the value is double")	

	301: public void case04_select14() throws SQLException { 302: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_5"); 303: resultSet.next(); 304: String string = resultSet.getString(1);	
	污染路径: 无	
28	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/SelectTest.java	行号: 70
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 68: public void close() throws SQLException { 69: if (connection != null) { 70: Statement stmt = connection.createStatement(); 71: stmt.executeUpdate("drop database " + dbName); 72: stmt.close();	
	污染路径: 无	
29	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 325
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 323: @Description("select a json tag, the result number equals tables number") 324: public void case04_select16() throws SQLException { 325: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1"); 326: int count = 0; 327: while (resultSet.next()) {	
	污染路径: 无	
30	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 201
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 199: final String query = "select * from " + TB_NAME_1;	

	200: try (Statement stmt = conn.createStatement()) { 201: ResultSet rs = stmt.executeQuery(query); 202: rs.next(); 203: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
31	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 925
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 923: @Description("where condition match") 924: public void case12_selectWhere06() throws SQLException { 925: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2' match 'jing\$'"); 926: int count = 0; 927: while (resultSet.next()) {	
	污染路径: 无	
32	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ JDBCTypeAndTypeCompareTest.java	行号: 32
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 30: stmt.execute("insert into weather values(now, 1, 2, 3.0, 4.0, 5, 6, true, 'test','test')"); 31: 32: ResultSet rs = stmt.executeQuery("select * from weather"); 33: ResultSetMetaData meta = rs.getMetaData(); 34: while (rs.next()) {	
	污染路径: 无	
33	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 391
	步骤描述:	

	Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 389: Properties properties = new Properties(); 390: connection = DriverManager.getConnection(url, properties); 391: Statement statement = connection.createStatement(); 392: statement.execute("drop database if exists " + DB_NAME); 393: statement.execute("create database " + DB_NAME);	
	污染路径: 无	
34	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 71
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 69: ((AbstractConnection)conn).write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.NANO_SECONDS, 10000, 100L); 70: // then 71: Statement statement = conn.createStatement(); 72: statement.executeUpdate("use " + dbname); 73: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
35	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 1026
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1024: Assert.assertEquals(1, result); 1025: try (Statement stmt = conn.createStatement()) { 1026: ResultSet rs = stmt.executeQuery("select * from t1"); 1027: ResultSetMetaData meta = rs.getMetaData(); 1028: assertMetaData(meta);	
	污染路径: 无	

36	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 513
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 511: 512: Statement statement = conn.createStatement(); 513: ResultSet rs = statement.executeQuery("select * from measurement_neg_req"); 514: Assert.assertTrue(rs.next()); 515: rs.close();	
	污染路径: 无	
37	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 668
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 666: @Description("where conditional support 'is null'") 667: public void case09_select02() throws SQLException { 668: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag is null"); 669: int count = 0; 670: while (resultSet.next()) {	
	污染路径: 无	
38	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 827
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 825: Assert.assertEquals(1, result); 826: try (Statement stmt = conn.createStatement()) { 827: ResultSet rs = stmt.executeQuery("select * from t1"); 828: ResultSetMetaData meta = rs.getMetaData(); 829: assertMetaData(meta);	
	污染路径:	

	无	
39	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 123
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 121: final String query = "select * from " + TB_NAME_1; 122: try (Statement stmt = conn.createStatement()) { 123: ResultSet rs = stmt.executeQuery(query); 124: rs.next(); 125: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
40	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 844
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 842: @Description("test with tbname/normal column") 843: public void case11_selectTbName03() throws SQLException { 844: ResultSet resultSet = statement 845: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=3"); 846: int count = 0;	
	污染路径: 无	
41	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 254
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 252: 253: // then 254: Statement statement = connection.createStatement(); 255: statement.executeUpdate("use " + DB_NAME); 256: ResultSet rs = statement.executeQuery("show tables");	

	污染路径: 无	
42	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSVarbinaryTest.java	行号: 64
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 62: preparedStatement.columnDataAddBatch(); 63: preparedStatement.columnDataExecuteBatch(); 64: ResultSet resultSet = statement.executeQuery("select c1 from " + DB_NAME + "." + TABLE_STMT); 65: while (resultSet.next()) { 66: Assert.assertArrayEquals(expectedArray, resultSet.getBytes(1));	
	污染路径: 无	
43	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 446
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 444: @Description("where condition support '=' empty") 445: public void case05_symbolOperation06() throws SQLException { 446: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'='"); 447: int count = 0; 448: while (resultSet.next()) {	
	污染路径: 无	
44	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 154
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 152: Assert.assertEquals(1, result); 153: try (Statement stmt = conn.createStatement()) { 154: ResultSet rs = stmt.executeQuery("select * from t1");	

	155: ResultSetMetaData meta = rs.getMetaData(); 156: assertMetaData(meta);	
	污染路径: 无	
45	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 175
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 173: final String query = "select * from t1"; 174: try (Statement stmt = conn.createStatement()) { 175: ResultSet rs = stmt.executeQuery(query); 176: rs.next(); 177: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
46	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 828
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 826: @Description("test with tbname/normal column") 827: public void case11_selectTbName02() throws SQLException { 828: ResultSet resultSet = statement 829: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3'"); 830: int count = 0;	
	污染路径: 无	
47	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSQueryTest.java	行号: 64
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 62: properties.setProperty(TSDBDriver.PROPERTY_KEY_MESSAGE_ WAIT_TIMEOUT, "70000"); 63: connection = DriverManager.getConnection(url,	

	代码片段: 41: Assert.assertEquals(4, num); 42: // then 43: Statement statement = conn.createStatement(); 44: ResultSet rs = statement.executeQuery("select count(*) from measurement"); 45: Assert.assertNotNull(rs);	
	污染路径: 无	
51	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 391
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 389: @Description("where condition support '>=' for character") 390: public void case05_symbolOperation02() throws SQLException { 391: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'>='beijing"); 392: int count = 0; 393: while (resultSet.next()) {	
	污染路径: 无	
52	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/BatchFetchTest.java	行号: 60
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 58: 59: long start = System.currentTimeMillis(); 60: ResultSet rs = stmt.executeQuery("select * from weather"); 61: while (rs.next()) { 62: // do nothing	
	污染路径: 无	
53	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtSubTableTest.java	行号: 25

	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 23: public void testInsertSubTable() throws SQLException { 24: String sql = "insert into ? using " + db_name + "." + superTable + " tags (?) values(?, ?)"; 25: TSWSPreparedStatement statement = (TSWSPreparedStatement) connection.prepareStatement(sql); 26: for (int i = 0; i < 10; i++) { 27: long current = System.currentTimeMillis();	
	污染路径: 无	
54	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/WConnectionEnterpriseTest.java	78
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 76: connection = DriverManager.getConnection(url, properties); 77: Statement statement = connection.createStatement(); 78: ResultSet resultSet = statement.executeQuery("show databases"); 79: resultSet.next(); 80: resultSet.close();	
55	污染路径: 无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/JsonTagTest.java	791
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 789: @Description("where condition with 'or'") 790: public void case10_selectAndOr04() throws SQLException { 791: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'=13 or jtag->'tag2'>35"); 792: int count = 0; 793: while (resultSet.next()) {	

	污染路径: 无	
56	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 303
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 301: String sql = "select * from weather_test"; 302: PreparedStatement statement = conn.prepareStatement(sql); 303: ResultSet rs = statement.executeQuery(); 304: int rows = 0; 305: while (rs.next()) {	
	污染路径: 无	
57	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 572
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 570: @Test 571: public void bindDataWithMultipleTagsTest() throws SQLException { 572: Statement stmt = conn.createStatement(); 573: 574: stmt.execute("drop table if exists weather_test");	
	污染路径: 无	
58	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 528
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 526: @Description("where conditional support '!=' for int") 527: public void case06_selectValue07() throws SQLException { 528: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'!=55"); 529: int count = 0;	

	530: while (resultSet.next()) {	
	污染路径: 无	
59	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/UnsignedNumberJniTest.java	行号: 115
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 113: long now = System.currentTimeMillis(); 114: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 254, 65534,4294967294, 18446744073709551614)"); 115: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); 116: ResultSetMetaData meta = rs.getMetaData(); 117: assertResultSetMetaData(meta);	
	污染路径: 无	
60	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 115
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 113: ((AbstractConnection)conn).writeRaw(line, SchemalessProtocolType.LINE, SchemalessTimestampType.NANO_SECONDS, 10000, 100L); 114: // then 115: Statement statement = conn.createStatement(); 116: statement.executeUpdate("use " + dbname); 117: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
61	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 1060
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1058: @Description("subquery json tag") 1059: public void case18_selectSubquery01() throws	

	<pre> SQLException { 1060: ResultSet resultSet = statement.executeQuery("select * from (select jtag, dataint from jsons1)"); 1061: int count = 0; 1062: while (resultSet.next()) { </pre>	
	污染路径: 无	
62	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 113
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 111: Assert.assertEquals(1, result); 112: try (Statement stmt = conn.createStatement()) { 113: ResultSet rs = stmt.executeQuery("select * from t1"); 114: ResultSetMetaData meta = rs.getMetaData(); 115: assertMetaData(meta); </pre>	
	污染路径: 无	
63	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 152
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 150: Thread.sleep(3000); 151: 152: Connection connection4 = DriverManager.getConnection(url, properties); 153: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(2)).getConnectCount()); 154: </pre>	
	污染路径: 无	
64	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 743

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 741: @Description("contains with no exist tag") 742: public void case09_select12() throws SQLException { 743: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag_no_exist'"); 744: int count = 0; 745: while (resultSet.next()) {	
	污染路径: 无	
65	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSQueryBIModeTest.java	行号: 150
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 148: Properties properties = new Properties(); 149: connection = DriverManager.getConnection(url, properties); 150: Statement statement = connection.createStatement(); 151: 152: statement.executeQuery("drop database if exists ws_bi_mode");	
	污染路径: 无	
66	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 444
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 442: int numOfRows = 1; 443: 444: TSWSPreparedStatement s = (TSWSPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?,?) (ts, f2) values(?, ?)"); 445: s.setTableName("w2"); 446: s.setTagInt(0, 1);	

	污染路径: 无	
67	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 803
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 801: @Description("where condition with 'and' and contains") 802: public void case10_selectAndOr06() throws SQLException { 803: ResultSet resultSet = statement 804: .executeQuery("select * from jsons1 where jtag->'tag1'='femail' and jtag contains 'tag3'"); 805: int count = 0;	
	污染路径: 无	
68	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 439
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 437: 438: statement.execute("use " + dbname2); 439: ResultSet rs2 = statement.executeQuery("select * from measurement_db2"); 440: Assert.assertTrue(rs2.next()); 441: rs2.close();	
	污染路径: 无	
69	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 663
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 661: @Description("where condition support '!=' for boolean") 662: public void case08_boolOperation03() throws SQLException { 663: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-	

	>'tag1'!=false"); 664: int count = 0; 665: while (resultSet.next()) {	
	污染路径: 无	
70	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 275
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 273: @Description("select a json tag, the value is int") 274: public void case04_select11() throws SQLException { 275: ResultSet resultSet = statement.executeQuery("select jtag->'tag2' from jsons1_1"); 276: resultSet.next(); 277: double d = resultSet.getDouble(1);	
	污染路径: 无	
71	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 255
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 253: @Description("select a json tag") 254: public void case04_select09() throws SQLException { 255: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_1"); 256: resultSet.next(); 257: String result = resultSet.getString(1);	
	污染路径: 无	
72	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 54
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 52: properties.setProperty(TSDBDriver.PROPERTY_KEY_HEALTH_CHECK_RECOVERY_COUNT, "1");	

	代码片段: 310: Assert.assertEquals(1, count); 311: 312: Statement statement = conn.createStatement(); 313: ResultSet rs = statement.executeQuery("select * from measurement_raw_params"); 314: Assert.assertTrue(rs.next());	
	污染路径: 无	
76	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionJNITest.java	行号: 27
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 25: public void testCase1() { 26: try (Statement stmt = conn.createStatement()) { 27: ResultSet rs = stmt.executeQuery("select last_row(ts) from " + MS_TIMESTAMP_DB + ".weather"); 28: rs.next(); 29: long ts = rs.getTimestamp(1).getTime();	
	污染路径: 无	
77	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ NanoSecondTimestampRestfulTest.java	行号: 130
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 128: ResultSet rs = null; 129: try (Statement stmt = conn.createStatement()) { 130: rs = stmt.executeQuery("select * from weather"); 131: rs.next(); 132: }	
	污染路径: 无	
78	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 297
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 295: 296: Statement statement = conn.createStatement(); 297: ResultSet rs = statement.executeQuery("select * from measurement_deprecated"); 298: Assert.assertTrue(rs.next()); 299: rs.close();	
	污染路径: 无	
79	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 708
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 706: @Description("where condition support one tag 'is null'") 707: public void case09_select06() throws SQLException { 708: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag4' is null"); 709: int count = 0; 710: while (resultSet.next()) {	
	污染路径: 无	
80	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTest.java	行号: 58
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 56: mockB.stop(); 57: } 58: resultSet = statement.executeQuery("select ts from " + DB_NAME + "." + TABLE_NAME + " limit 1;"); 59: 60: }catch (SQLException e){	
	污染路径: 无	
81	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/TimestampFormatTest.java	行号: 89

	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 87: try { 88: if (null != conn) { 89: Statement stmt = conn.createStatement(); 90: stmt.execute("drop database if exists " + DB_NAME); 91: stmt.close(); </pre>	
	污染路径: 无	
82	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 439
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 437: @Description("where condition support '=' empty") 438: public void case05_symbolOperation06() throws SQLException { 439: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'=''); 440: int count = 0; 441: while (resultSet.next()) { </pre>	
	污染路径: 无	
83	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 976
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 974: @Description("test duplicate key with normal column") 975: public void case14_selectDump02() throws SQLException { 976: ResultSet resultSet = statement.executeQuery(977: "select *,tbname,jtag from jsons1 where jtag- >'datastr' match '是' and datastr match 'js'"); 978: int count = 0; </pre>	
	污染路径: 无	

84	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ImportTest.java	行号: 98
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 96: if (connection != null) { 97: try { 98: Statement statement = connection.createStatement(); 99: statement.executeUpdate("drop database " + DB_NAME); 100: statement.close(); </pre>	
	污染路径: 无	
85	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 235
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 233: @Test(expected = SQLFeatureNotSupportedException.class) 234: public void testPrepareStatement1() throws SQLException { 235: PreparedStatement pstmt = conn.prepareStatement("show cluster alive", 236: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 237: ResultSet rs = pstmt.executeQuery(); </pre>	
	污染路径: 无	
86	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/AuthenticationTest.java	行号: 103
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 101: Assert.assertNotNull(stmt); 102: stmt.execute("show databases"); 103: ResultSet rs = stmt.getResultSet(); 104: ResultSetMetaData meta = rs.getMetaData(); 105: while (rs.next()) { </pre>	

	污染路径: 无	
87	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 578
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 576: Assert.assertEquals(1, result); 577: try (Statement stmt = conn.createStatement()) { 578: ResultSet rs = stmt.executeQuery("select * from t1"); 579: ResultSetMetaData meta = rs.getMetaData(); 580: assertMetaData(meta);	
	污染路径: 无	
88	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ TimestampPrecisionInNanoRestTest.java	行号: 53
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 51: @After 52: public void afterEach() throws SQLException { 53: Statement stmt = conn.createStatement(); 54: stmt.execute("drop database if exists " + NS_TIMESTAMP_DB); 55: stmt.execute("create database if not exists " + NS_TIMESTAMP_DB + " precision 'ns'");	
	污染路径: 无	
89	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 1056
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1054: @Description("subquery json tag") 1055: public void case18_selectSubquery01() throws SQLException { 1056: ResultSet resultSet =	

	statement.executeQuery("select * from (select jtag, dataint from jsons1)"); 1057: int count = 0; 1058: while (resultSet.next()) {	
	污染路径: 无	
90	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/ WsPstmtReconnectQueryTest.java	行号: 110
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 108: Properties properties = new Properties(); 109: connection = DriverManager.getConnection(url, properties); 110: Statement statement = connection.createStatement(); 111: statement.execute("drop database if exists " + DB_NAME); 112: statement.execute("create database " + DB_NAME);	
	污染路径: 无	
91	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 73
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 71: + "," + HOST + ":" + mockC.getListenPort() + "/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword(); 72: 73: Connection connection4 = DriverManager.getConnection(url2, properties); 74: Assert.assertEquals(2, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount()); 75: Connection connection5 = DriverManager.getConnection(url2, properties);	
	污染路径:	

	无	
92	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UseNowInsertTimestampTest.java	行号: 51
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 49: stmt.execute("insert into weather values(now, 1)"); 50: 51: ResultSet rs = stmt.executeQuery("select * from weather"); 52: rs.next(); 53: Timestamp ts = rs.getTimestamp("ts");	
	污染路径: 无	
93	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1065
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1063: @Description("query metadata for json") 1064: public void case19_selectMetadata01() throws SQLException { 1065: ResultSet resultSet = statement.executeQuery("select jtag from jsons1"); 1066: ResultSetMetaData metaData = resultSet.getMetaData(); 1067: int columnType = metaData.getColumnType(1);	
	污染路径: 无	
94	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 1046
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1044: @Description("stddev with group by json tag") 1045: public void case17_selectStddev01() throws SQLException { 1046: ResultSet resultSet = statement.executeQuery("select stddev(dataint) from jsons1	

	group by jtag->'tag1'"); 1047: String s = ""; 1048: int count = 0;	
	污染路径: 无	
95	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 266
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 264: public void testULongOutOfRange2() throws SQLException { 265: String sql = "insert into " + dbName + "." + tableName2 + " values(?, ?, ?, ?, ?)"; 266: PreparedStatement statement = connection.prepareStatement(sql); 267: statement.setTimestamp(1, new Timestamp(0)); 268: statement.setShort(2, (short) 0);	
	污染路径: 无	
96	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 367
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 365: @Description("where condition equation has chinese") 366: public void case04_select23() throws SQLException { 367: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- ->'tag1'='收到货'); 368: int count = 0; 369: while (resultSet.next()) {	
	污染路径: 无	
97	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 543
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 541: @Description("where conditional support '!=' for int	

	and result is nothing") 542: public void case06_selectValue08() throws SQLException { 543: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=10"); 544: int count = 0; 545: while (resultSet.next()) {	
	污染路径: 无	
98	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionRestfulTest.java	行号: 151
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 149: try { 150: if (conn1 != null) { 151: Statement statement = conn1.createStatement(); 152: statement.execute("drop database if exists " + MS_TIMESTAMP_DB); 153: statement.execute("drop database if exists " + US_TIMESTAMP_DB);	
99	污染路径: 无	
	缺陷发生位置: /src/test/java/com/taosdata/jdbc/BlobTest.java	行号: 38
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 36: public void testInsertNull() throws Exception { 37: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NATIVE + " tags(\"123456abcdef\") values(now, NULL)"); 38: ResultSet resultSet = statement.executeQuery("select c1, t1 from " + DB_NAME + "." + TABLE_NATIVE); 39: resultSet.next(); 40: Assert.assertArrayEquals(null, resultSet.getBytes(1));	

	>'tag1',jtag from jsons1 where jtag->'tag2'='beijing'); 351: int count = 0;	
	污染路径: 无	
103	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/WasNullTest.java	行号: 54
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 52: stmt.execute("insert into " + dbName + ".weather values('2021-01-01 00:00:00.000', 1, 100, 3.1415, 3.1415926, NULL, 10, 10, true, '涛思数据')"); 53: 54: ResultSet rs = stmt.executeQuery("select * from " + dbName + ".weather"); 55: ResultSetMetaData meta = rs.getMetaData(); 56: while (rs.next()) {	
	污染路径: 无	
104	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 465
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 463: writer.writeRaw(line, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS); 464: 465: Statement statement = conn.createStatement(); 466: 467: ResultSet rs1 = statement.executeQuery("show stables");	
	污染路径: 无	
105	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 1316
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 1314: public void before() { 1315: try {	

	1316: Statement stmt = conn.createStatement(); 1317: stmt.execute("drop table if exists weather"); 1318: stmt.execute("create table if not exists weather(ts timestamp, f1 int, f2 bigint, f3 float, f4 double, f5 smallint, f6 tinyint, f7 bool, f8 binary(64), f9 nchar(64)) tags(loc nchar(64))");	
	污染路径: 无	
106	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 520
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 518: @Test(expected = SQLException.class) 519: public void setMaxTableNameTest() throws SQLException { 520: Statement stmt = conn.createStatement(); 521: 522: stmt.execute("drop table if exists weather_test");	
	污染路径: 无	
107	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UnsignedNumberRestfulTest.java	行号: 156
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 154: } 155: conn = DriverManager.getConnection(url, properties); 156: Statement stmt = conn.createStatement(); 157: stmt.execute("drop database if exists " + DB_NAME); 158: stmt.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
108	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 445

	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 443: @Test 444: public void testCloseMultipleTimes() throws SQLException { 445: Connection tempConn = DriverManager.getConnection(conn.getMetaData().getURL()); 446: assertFalse("Connection should be open initially", tempConn.isClosed()); 447:	
	污染路径: 无	
109	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	238
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
110	代码片段: 236: Assert.assertEquals(1, result); 237: try (Statement stmt = conn.createStatement()) { 238: ResultSet rs = stmt.executeQuery("select * from t1"); 239: ResultSetMetaData meta = rs.getMetaData(); 240: assertMetaData(meta);	
	污染路径: 无	
	缺陷发生位置:	行号:
110	/src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	1080
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1078: @Description("query metadata for json") 1079: public void case19_selectMetadata02() throws SQLException { 1080: ResultSet resultSet = statement.executeQuery("select *,jtag from jsons1"); 1081: ResultSetMetaData metaData = resultSet.getMetaData(); 1082: int columnType = metaData.getColumnType(6);	
	污染路径:	

	1008: resultSet.next();	
	污染路径: 无	
114	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 731
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 729: @Description("contains") 730: public void case09_select11() throws SQLException { 731: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag3'"); 732: int count = 0; 733: while (resultSet.next()) {	
	污染路径: 无	
115	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 223
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 221: public void testCreateStatement1() throws SQLException { 222: Statement stmt = conn.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 223: ResultSet rs = stmt.executeQuery("show cluster alive"); 224: rs.next(); 225: int status = rs.getInt("status");	
	污染路径: 无	
116	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 42
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	40: pstmt.setString(1, TB_NAME_1); 41: 42: ResultSet rs = pstmt.executeQuery(); 43: rs.next(); 44: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
117	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 807
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 805: @Description("where condition with 'and' and contains") 806: public void case10_selectAndOr06() throws SQLException { 807: ResultSet resultSet = statement 808: .executeQuery("select * from jsons1 where jtag->'tag1'='femail' and jtag contains 'tag3'"); 809: int count = 0;	
	污染路径: 无	
118	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtNsTest.java	行号: 72
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 70: public void testExecuteBatchInsert() throws SQLException { 71: String sql = "insert into " + db_name + "." + tableName + " values(?, ?)"; 72: PreparedStatement statement = connection.prepareStatement(sql); 73: for (int i = 0; i < 10; i++) { 74: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis() + i));	
	污染路径: 无	
119	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/	行号: 484

	TimestampPrecisionInNanoRestTest.java	
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 482: public void canIntervalAndSlidingAcceptNsUnitForFirstCol() { 483: try (Statement stmt = conn.createStatement()) { 484: ResultSet rs = stmt.executeQuery("select sum(f1) from " + NS_TIMESTAMP_DB + ".weather where ts >= '" + DATE_2 + "' and ts <= '" + DATE_3 + "' interval(100000000b) sliding(100000000b)"); 485: rs.next(); 486: long sum = rs.getLong(1); </pre>	
	污染路径: 无	
120	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulPreparedStatementTest.java	行号: 902
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 900: conn = DriverManager.getConnection(url); 901: 902: Statement stmt = conn.createStatement(); 903: stmt.execute("drop database if exists " + DB_NAME); 904: stmt.execute("create database if not exists " + DB_NAME); </pre>	
	污染路径: 无	
121	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 363
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 361: final String query = "select * from " + TB_NAME_1; 362: try (Statement stmt = conn.createStatement()) { 363: ResultSet rs = stmt.executeQuery(query); 364: rs.next(); 365: long timestamp = rs.getTimestamp(1).getTime(); </pre>	

	污染路径: 无	
122	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ PreparedStatementBatchInsertRestfulTest.java	行号: 64
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 62: // then 63: try (Statement stmt = conn.createStatement()) { 64: ResultSet rs = stmt.executeQuery("select * from meters"); 65: int count = 0; 66: while (rs.next()) {	
	污染路径: 无	
123	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/SelectTest.java	行号: 55
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 53: 54: String sql = "select * from " + dbName + "." + tName; 55: ResultSet resSet = stmt.executeQuery(sql); 56: 57: int num = 0;	
	污染路径: 无	
124	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 587
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 585: @Description("where condition support '>' for double") 586: public void case07_doubleOperation03() throws SQLException { 587: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'>1.23");	

	<pre> 645: @Description("where condition support '=' for boolean") 646: public void case08_boolOperation02() throws SQLException { 647: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=false"); 648: int count = 0; 649: while (resultSet.next()) { </pre>								
	污染路径: 无								
128	<table border="1"> <tr> <td data-bbox="469 714 1241 831"> 缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ ResultSetMetaShouldNotBeNullRestfulTest.java </td><td data-bbox="1241 714 1380 831"> 行号: 44 </td></tr> <tr> <td colspan="2" data-bbox="469 831 1380 920"> 步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause. </td></tr> <tr> <td colspan="2" data-bbox="469 920 1380 1335"> 代码片段: <pre> 42: 43: // when 44: Statement statement = connection.createStatement(); 45: execute = statement.execute("select * from weather"); 46: metaData = statement.getResultSet().getMetaData(); </pre> </td></tr> <tr> <td colspan="2" data-bbox="469 1335 1380 1417"> 污染路径: 无 </td></tr> </table>	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ ResultSetMetaShouldNotBeNullRestfulTest.java	行号: 44	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.		代码片段: <pre> 42: 43: // when 44: Statement statement = connection.createStatement(); 45: execute = statement.execute("select * from weather"); 46: metaData = statement.getResultSet().getMetaData(); </pre>		污染路径: 无	
缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ ResultSetMetaShouldNotBeNullRestfulTest.java	行号: 44								
步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.									
代码片段: <pre> 42: 43: // when 44: Statement statement = connection.createStatement(); 45: execute = statement.execute("select * from weather"); 46: metaData = statement.getResultSet().getMetaData(); </pre>									
污染路径: 无									
129	<table border="1"> <tr> <td data-bbox="469 1424 1241 1503"> 缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java </td><td data-bbox="1241 1424 1380 1503"> 行号: 483 </td></tr> <tr> <td colspan="2" data-bbox="469 1503 1380 1592"> 步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause. </td></tr> <tr> <td colspan="2" data-bbox="469 1592 1380 1998"> 代码片段: <pre> 481: @Description("where condition support '<=' for int") 482: public void case06_selectValue03() throws SQLException { 483: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'<=11"); 484: int count = 0; 485: while (resultSet.next()) { </pre> </td></tr> </table>	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 483	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		代码片段: <pre> 481: @Description("where condition support '<=' for int") 482: public void case06_selectValue03() throws SQLException { 483: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'<=11"); 484: int count = 0; 485: while (resultSet.next()) { </pre>			
缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 483								
步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.									
代码片段: <pre> 481: @Description("where condition support '<=' for int") 482: public void case06_selectValue03() throws SQLException { 483: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'<=11"); 484: int count = 0; 485: while (resultSet.next()) { </pre>									

	污染路径: 无	
130	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MultiConnectionWithDifferentDbTest.java	行号: 90
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 88: } 89: try (Connection conn = DriverManager.getConnection(url)) { 90: Statement stmt = conn.createStatement(); 91: stmt.execute("drop database if exists " + DB_1); 92: stmt.execute("create database if not exists " + DB_1);	
	污染路径: 无	
131	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 407
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 405: @Description("where condition support '<' for character") 406: public void case05_symbolOperation03() throws SQLException { 407: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'<'beijing'"); 408: int count = 0; 409: while (resultSet.next()) {	
	污染路径: 无	
132	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 278
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 276: @Description("select a json tag, the value is boolean") 277: public void case04_select12() throws SQLException { 278: ResultSet resultSet =	

	statement.executeQuery("select jtag->'tag3' from jsons1_1"); 279: resultSet.next(); 280: String string = resultSet.getString(1);	
	污染路径: 无	
133	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 146
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 144: @Test 145: public void executeTest() throws SQLException { 146: Statement stmt = conn.createStatement(); 147: 148: int numOfRows = 1000;	
	污染路径: 无	
134	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 386
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 384: String sql = "select * from weather_test"; 385: PreparedStatement statement = conn.prepareStatement(sql); 386: ResultSet rs = statement.executeQuery(); 387: int rows = 0; 388: while (rs.next()) {	
	污染路径: 无	
135	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	行号: 34
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 32: public void test001_ExecuteUpdate() throws SQLException { 33: String sql = "insert into " + db_name + "." +	

	tableName + " values(?, ?)"; 34: PreparedStatement statement = connection.prepareStatement(sql); 35: statement.setTimestamp(1, new Timestamp(1746870173341L)); 36: statement.setInt(2, 1);	
	污染路径: 无	
136	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/TSWSPreparedStatementTest.java	行号: 1173
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 1171: public static void afterClass() { 1172: try { 1173: Statement statement = conn.createStatement(); 1174: statement.execute("drop database if exists " + DB_NAME); 1175: statement.execute("drop database if exists dbtest");	
	污染路径: 无	
137	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 355
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 353: @Description("where condition result is null") 354: public void case04_select21() throws SQLException { 355: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'='beijing'"); 356: int count = 0; 357: while (resultSet.next()) {	
	污染路径: 无	
138	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 1000

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 998: Assert.assertEquals(1, result); 999: try (Statement stmt = conn.createStatement()) { 1000: ResultSet rs = stmt.executeQuery("select * from t1"); 1001: ResultSetMetaData meta = rs.getMetaData(); 1002: assertMetaData(meta); </pre>	
	污染路径: 无	
139	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 431
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 429: @Description("where condition support '!=' in character") 430: public void case05_symbolOperation05() throws SQLException { 431: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'!='beijing"); 432: int count = 0; 433: while (resultSet.next()) { </pre>	
	污染路径: 无	
140	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/WSConFailOverTest.java	行号: 92
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 90: 91: connection = DriverManager.getConnection(url, properties); 92: Statement statement = connection.createStatement(); 93: statement.execute("drop database if exists " + dbName); 94: statement.execute("create database " + dbName); </pre>	

	污染路径: 无	
141	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 490
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 488: int numOfRows = 1; 489: 490: TSDBPreparedStatement s = (TSDBPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?) values(?, ?, ?)"); 491: Random r = new Random(); 492: s.setTableName("w1");	
	污染路径: 无	
142	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 870
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 868: @Description("where condition like") 869: public void case12_selectWhere01() throws SQLException { 870: ResultSet resultSet = statement.executeQuery("select *,tbname from jsons1 where jtag->'tag2' like 'bei%'"); 871: int count = 0; 872: while (resultSet.next()) {	
	污染路径: 无	
143	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ResetQueryCacheTest.java	行号: 26
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 24: url += "&timezone=UTC-8&charset=UTF- 8&locale=en_US.UTF-8"; 25: } 26: Connection connection =	

	409: 410: String sql = "select * from weather_test"; 411: PreparedStatement statement = conn.prepareStatement(sql); 412: ResultSet rs = statement.executeQuery(); 413: int rows = 0;	
	污染路径: 无	
147	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 479
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 477: @Description("where condition support '<=' for int") 478: public void case06_selectValue03() throws SQLException { 479: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'<=11"); 480: int count = 0; 481: while (resultSet.next()) {	
	污染路径: 无	
148	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 412
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 410: String sql = "select * from weather_test"; 411: PreparedStatement statement = conn.prepareStatement(sql); 412: ResultSet rs = statement.executeQuery(); 413: int rows = 0; 414: while (rs.next()) {	
	污染路径: 无	
149	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 394
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 392: @Description("where condition support '>=' for character") 393: public void case05_symbolOperation02() throws SQLException { 394: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag2'>='beijing'"); 395: int count = 0; 396: while (resultSet.next()) {		
	污染路径: 无		
150	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 337	
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 335: @Description("where condition '=' for string") 336: public void case04_select19() throws SQLException { 337: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag2'='beijing'"); 338: int count = 0; 339: while (resultSet.next()) {		
	污染路径: 无		
151	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 242	
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.		
	代码片段: 240: writer.write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS, 3600, 1001L); 241: 242: Statement statement = conn.createStatement(); 243: ResultSet rs = statement.executeQuery("select * from measurement_both"); 244: Assert.assertTrue(rs.next());		
	污染路径: 无		

152	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 248
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 246: @Description("select a json tag") 247: public void case04_select09() throws SQLException { 248: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_1"); 249: resultSet.next(); 250: String result = resultSet.getString(1);	
	污染路径: 无	
153	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulDatabaseMetaDataTest.java	行号: 1082
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 1080: } 1081: connection = DriverManager.getConnection(url, properties); 1082: Statement stmt = connection.createStatement(); 1083: stmt.execute("drop database if exists " + DB_NAME); 1084: stmt.execute("create database if not exists " + DB_NAME + " precision 'us'");	
	污染路径: 无	
154	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DoubleQuoteInSqlTest.java	行号: 61
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 59: 60: conn = DriverManager.getConnection(url, properties); 61: Statement stmt = conn.createStatement(); 62: stmt.execute("drop database if exists " + DB_NAME); 63: stmt.execute("create database if not exists " + DB_NAME);	

	污染路径: 无	
155	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DatetimeBefore1970Test.java	行号: 142
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 140: stmt.executeUpdate("insert into weather(ts) values('1970-01-01 00:00:00.000000001')"); 141: stmt.executeUpdate("insert into weather(ts) values(" + now + ")"); 142: ResultSet rs = stmt.executeQuery("select * from weather order by ts asc"); 143: ResultSetMetaData metaData = rs.getMetaData(); 144: Assert.assertEquals(2, metaData.getColumnCount());	
	污染路径: 无	
156	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBlockJsonTagTest.java	行号: 612
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 610: @Description("where condition support '!=' for double") 611: public void case07_doubleOperation05() throws SQLException { 612: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=1.232"); 613: int count = 0; 614: while (resultSet.next()) {	
	污染路径: 无	
157	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 268
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 266: @Description("select a json tag, the value is int")	

	267: public void case04_select11() throws SQLException { 268: ResultSet resultSet = statement.executeQuery("select jtag->'tag2' from jsons1_1"); 269: resultSet.next(); 270: double d = resultSet.getDouble(1);	
	污染路径: 无	
158	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SetConfigurationInJNITest.java	行号: 142
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 140: url = "jdbc:TAOS://" + host + ":0/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword() + ""; 141: } 142: Connection conn = DriverManager.getConnection(url, props); 143: Statement stmt = conn.createStatement(); 144: Assert.assertNotNull(stmt);	
	污染路径: 无	
159	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 648
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 646: @Description("where condition support '=' for boolean") 647: public void case08_boolOperation02() throws SQLException { 648: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'=false"); 649: int count = 0; 650: while (resultSet.next()) {	
	污染路径: 无	
160	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 551

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 549: @Description("where condition support '=' for double") 550: public void case07_selectValue01() throws SQLException { 551: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'=1.232"); 552: int count = 0; 553: while (resultSet.next()) {	
	污染路径: 无	
161	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 469
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 467: String sql = "select * from weather_test"; 468: PreparedStatement statement = conn.prepareStatement(sql); 469: ResultSet rs = statement.executeQuery(); 470: int rows = 0; 471: while (rs.next()) {	
	污染路径: 无	
162	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1039
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1037: @Description("stddev with group by json tag") 1038: public void case17_selectStddev01() throws SQLException { 1039: ResultSet resultSet = statement.executeQuery("select stddev(dataint) from jsons1 group by jtag->'tag1'"); 1040: String s = ""; 1041: int count = 0;	

	污染路径: 无	
163	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 314
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 312: @Test 313: public void bindDataWithSingleTagTest() throws SQLException { 314: Statement stmt = conn.createStatement(); 315: 316: String[] types = new String[]{"tinyint", "smallint", "int", "bigint", "bool", "float", "double", "binary(10)", "nchar(10)"};	
	污染路径: 无	
164	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 207
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 205: @Description("where condition tag is null") 206: public void case04_select04() throws SQLException { 207: ResultSet resultSet = statement.executeQuery("select jtag from jsons1 where jtag is null"); 208: int count = 0; 209: while (resultSet.next()) {	
	污染路径: 无	
165	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 285
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 283: @Description("select a json tag, the value is boolean") 284: public void case04_select12() throws SQLException { 285: ResultSet resultSet = statement.executeQuery("select jtag->'tag3' from jsons1_1");	

	286: resultSet.next(); 287: String string = resultSet.getString(1);	
	污染路径: 无	
166	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 420
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 418: @Test 419: public void testSchemalessWriterDatabaseSwitch() throws SQLException { 420: Statement statement = conn.createStatement(); 421: String dbname2 = "test_schemaless_writer2"; 422: statement.execute("drop database if exists " + dbname2);	
	污染路径: 无	
167	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDbBlockJsonTagTest.java	行号: 769
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 767: @Description("where condition with 'or'") 768: public void case10_selectAndOr02() throws SQLException { 769: ResultSet resultSet = statement 770: .executeQuery("select * from jsons1 where jtag->'tag1'=false or jtag->'tag2'='beijing'"); 771: int count = 0;	
	污染路径: 无	
168	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 476
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 474: @Description("where condition support '<=' for int") 475: public void case06_selectValue03() throws SQLException {	

	<pre> 476: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'<=11"); 477: int count = 0; 478: while (resultSet.next()) { </pre>	
	污染路径: 无	
169	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/AuthenticationTest.java	行号: 113
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 111: 112: // change password back 113: conn = DriverManager.getConnection(url); 114: stmt = conn.createStatement(); 115: stmt.execute("alter user " + USER + " pass '" + TestEnvUtil.getPassword() + "'"); </pre>	
	污染路径: 无	
170	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/ WsPstmtReconnectFetchTest.java	行号: 89
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 87: Properties properties = new Properties(); 88: connection = DriverManager.getConnection(url, properties); 89: Statement statement = connection.createStatement(); 90: statement.execute("drop database if exists " + DB_NAME); 91: statement.execute("create database " + DB_NAME); </pre>	
	污染路径: 无	
171	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 377
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 375: 376: Statement statement = conn.createStatement(); 377: ResultSet rs = statement.executeQuery("select * from measurement_close"); 378: Assert.assertTrue(rs.next()); 379: rs.close();	
	污染路径: 无	
172	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 308
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 306: @Description("select a json tag, the key is not exist") 307: public void case04_select15() throws SQLException { 308: ResultSet resultSet = statement.executeQuery("select jtag->'tag10' from jsons1_4"); 309: resultSet.next(); 310: String string = resultSet.getString(1);	
	污染路径: 无	
173	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 707
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 705: @Description("where condition support one tag 'is null'") 706: public void case09_select06() throws SQLException { 707: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag4' is null"); 708: int count = 0; 709: while (resultSet.next()) {	
	污染路径: 无	
174	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 467
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 465: Statement statement = conn.createStatement(); 466: 467: ResultSet rs1 = statement.executeQuery("show stables"); 468: int stableCount = 0; 469: while (rs1.next()) { </pre>	
	污染路径: 无	
175	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ GetLongWithDifferentTimestampPrecisionTest.java	行号: 65
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 63: stmt.execute("insert into weather values('" + dateTimeStr + "', 1)"); 64: 65: ResultSet rs = stmt.executeQuery("select * from weather"); 66: rs.next(); 67: long actual = rs.getLong("ts"); </pre>	
	污染路径: 无	
176	缺陷发生位置: /src/test/java/com/taosdata/jdbc/WasNullTest.java	行号: 45
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 43: @Test 44: public void nextWasNullString() throws SQLException { 45: ResultSet resultSet = statement.executeQuery("select * from " + TABLE_NAME); 46: resultSet.next(); 47: resultSet.getString("c2"); </pre>	
	污染路径: 无	
177	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cloud/CloudSchemalessTest.java	行号: 45

	无	
180	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 611
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 609: @Description("where condition support '!=' for double") 610: public void case07_doubleOperation05() throws SQLException { 611: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=1.232"); 612: int count = 0; 613: while (resultSet.next()) { </pre>	
	污染路径: 无	
181	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJDBCTest.java	行号: 93
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 91: 92: try (Statement statement = connection.createStatement()) { 93: ResultSet rs = statement.executeQuery(sql); 94: 95: ResultSetMetaData meta = rs.getMetaData(); </pre>	
	污染路径: 无	
182	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 401
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 399: public static void afterClass() throws SQLException { 400: if (conn != null) { 401: Statement statement = conn.createStatement(); 402: statement.execute("drop database if exists "+ DB_NAME); </pre>	

	403: statement.close();	
	污染路径: 无	
183	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 166
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 164: @Description("normal select stable") 165: public void case04_select01() throws SQLException { 166: ResultSet resultSet = statement.executeQuery("select dataint from jsons1"); 167: int count = 0; 168: while (resultSet.next()) {	
	污染路径: 无	
184	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 154
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 152: stmt.execute("create table weather_test(ts timestamp, f1 nchar(4), f2 float, f3 double, f4 timestamp, f5 int, f6 bool, f7 binary(10))"); 153: 154: TSWSPreparedStatement s = (TSWSPreparedStatement) conn.prepareStatement("insert into weather_test values(?, ?, ?, ?, ?, ?, ?, ?)"); 155: Random r = new Random(); 156:	
	污染路径: 无	
185	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 808
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 806: Assert.assertEquals(1, result); 807: try (Statement stmt = conn.createStatement()) {	

	808: ResultSet rs = stmt.executeQuery("select * from t1"); 809: ResultSetMetaData meta = rs.getMetaData(); 810: assertMetaData(meta);	
	污染路径: 无	
186	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 189
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 187: 188: // then 189: Statement statement = conn.createStatement(); 190: ResultSet rs = statement.executeQuery("show tables"); 191: Assert.assertNotNull(rs);	
	污染路径: 无	
187	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSelectTest.java	行号: 41
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 39: @Test 40: public void testWSSelect() throws SQLException { 41: Statement statement = connection.createStatement(); 42: int count = 0; 43: long start = System.nanoTime();	
	污染路径: 无	
188	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 211
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 209: @Description("where condition tag is null") 210: public void case04_select04() throws SQLException { 211: ResultSet resultSet =	

	<pre>statement.executeQuery("select jtag from jsons1 where jtag is null"); 212: int count = 0; 213: while (resultSet.next()) {</pre>	
	污染路径: 无	
189	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/WSLoadBalanceTest.java	行号: 197
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre>195: static public void after() throws SQLException { 196: if (null != connection) { 197: Statement statement = connection.createStatement(); 198: statement.execute("drop database if exists " + DB_NAME); 199: statement.close();</pre>	
	污染路径: 无	
190	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 548
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre>546: @Description("where condition support '=' for double") 547: public void case07_selectValue01() throws SQLException { 548: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=1.232"); 549: int count = 0; 550: while (resultSet.next()) {</pre>	
	污染路径: 无	
191	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 245
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 243: @Description("select not exist json tag") 244: public void case04_select08() throws SQLException { 245: ResultSet resultSet = statement.executeQuery("select jtag from jsons1_9"); 246: resultSet.next(); 247: String result = resultSet.getString(1);	
	污染路径: 无	
192	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtSubTableTest.java	46
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 44: Assert.assertEquals(10, count); 45: 46: statement = (TSWSPreparedStatement) connection.prepareStatement(47: "insert into ? using " + db_name + "." + superTable1 + 48: " tags (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) values (?, ?)");	
193	污染路径: 无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/cases/ TimestampPrecisionInNanoInJniTest.java	432
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 430: public void canIntervalAndSlidingAcceptNsUnitForSecondCol() throws SQLException { 431: try (Statement stmt = conn.createStatement()) { 432: ResultSet rs = stmt.executeQuery("select sum(f1) from " + NS_TIMESTAMP_DB + ".weather where ts2 >= '" + DATE_2 + "' and ts <= '" + DATE_3 + "' interval(100000000b) sliding(100000000b)"); 433: rs.next(); 434: long sum = rs.getLong(1);	

	污染路径: 无	
194	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 284
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 282: 283: // then 284: Statement statement = connection.createStatement(); 285: statement.executeUpdate("use " + DB_NAME); 286: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
195	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 1007
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1005: @Description("select json tag from join") 1006: public void case15_selectJoin02() throws SQLException { 1007: ResultSet resultSet = statement.executeQuery(1008: "select 'sss',33,a.jtag->'tag3' from jsons2 a,jsons3 b where a.ts=b.ts and a.jtag->'tag1'=b.jtag->'tag1'"); 1009: resultSet.next();	
	污染路径: 无	
196	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDatabaseMetaDataTest.java	行号: 58
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 56: public void testShowTables() throws SQLException { 57: 58: Statement stmt = connection.createStatement(); 59: ResultSet resultSet = stmt.executeQuery("show `"+ DB_NAME +"`.tables");	

	60: while (resultSet.next()) {	
	污染路径: 无	
197	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 956
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 954: @Description("distinct json tag") 955: public void case13_selectDistinct02() throws SQLException { 956: ResultSet resultSet = statement.executeQuery("select distinct jtag->'tag1' from jsons1"); 957: int count = 0; 958: while (resultSet.next()) {	
	污染路径: 无	
198	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBParameterMetaDataTest.java	行号: 204
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 202: pstmtSelect.close(); 203: if (conn != null) { 204: Statement statement = conn.createStatement(); 205: statement.execute("drop database if exists " + DB_NAME); 206: statement.close();	
	污染路径: 无	
199	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 704
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 702: @Description("where condition support one tag 'is null'") 703: public void case09_select06() throws SQLException {	

	704: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag4' is null"); 705: int count = 0; 706: while (resultSet.next()) {	
	污染路径: 无	
200	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 512
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 510: writer.write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS, null, -1L); 511: 512: Statement statement = conn.createStatement(); 513: ResultSet rs = statement.executeQuery("select * from measurement_neg_req"); 514: Assert.assertTrue(rs.next());	
	污染路径: 无	
201	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 281
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 279: @Description("select a json tag, the value is boolean") 280: public void case04_select12() throws SQLException { 281: ResultSet resultSet = statement.executeQuery("select jtag->'tag3' from jsons1_1"); 282: resultSet.next(); 283: String string = resultSet.getString(1);	
	污染路径: 无	
202	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 128
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段:	

	<pre> 126: ConnectionParam param = ((WSConnection)connection1).getParam(); 127: Connection connection2 = DriverManager.getConnection(url, properties); 128: Connection connection3 = DriverManager.getConnection(url, properties); 129: 130: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount()); </pre>	
	污染路径: 无	
203	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 1030
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 1028: @Description("group by and order by json tag asc") 1029: public void case16_selectGroupOrder02() throws SQLException { 1030: ResultSet resultSet = statement 1031: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' asc"); 1032: int count = 0; </pre>	
	污染路径: 无	
204	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 858
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 856: @Description("test with tbname/normal column") 857: public void case11_selectTbName04() throws SQLException { 858: ResultSet resultSet = statement 859: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=23"); 860: int count = 0; </pre>	
	污染路径: 无	

205	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 197
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 195: public void testUShortOutOfRange() throws SQLException { 196: String sql = "insert into " + dbName + "." + tableName2 + " values(?, ?, ?, ?, ?)"; 197: PreparedStatement statement = connection.prepareStatement(sql); 198: statement.setTimestamp(1, new Timestamp(0)); 199: statement.setShort(2, (short) 0); </pre>	
	污染路径: 无	
206	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 601
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 599: 600: String sql = "select * from weather_test"; 601: PreparedStatement statement = conn.prepareStatement(sql); 602: ResultSet rs = statement.executeQuery(); 603: int rows = 0; </pre>	
	污染路径: 无	
207	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 282
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 280: @Description("select a json tag, the value is boolean") 281: public void case04_select12() throws SQLException { 282: ResultSet resultSet = statement.executeQuery("select jtag->'tag3' from jsons1_1"); 283: resultSet.next(); 284: String string = resultSet.getString(1); </pre>	
	污染路径:	

	无	
208	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 151
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 149: 150: // then 151: Statement statement = conn.createStatement(); 152: statement.executeUpdate("use " + dbname); 153: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
209	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1053
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1051: @Description("subquery json tag") 1052: public void case18_selectSubquery01() throws SQLException { 1053: ResultSet resultSet = statement.executeQuery("select * from (select jtag, dataint from jsons1)"); 1054: int count = 0; 1055: while (resultSet.next()) {	
	污染路径: 无	
210	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 443
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 441: @Description("where condition support '=' empty") 442: public void case05_symbolOperation06() throws SQLException { 443: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'=''); 444: int count = 0;	

	statement.executeQuery("select * from jsons1 where jtag->'tag2'>='beijing'"); 399: int count = 0; 400: while (resultSet.next()) {	
	污染路径: 无	
214	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 567
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 565: @Description("where condition support '<' for double") 566: public void case07_doubleOperation01() throws SQLException { 567: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'<1.232"); 568: int count = 0; 569: while (resultSet.next()) {	
	污染路径: 无	
215	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 500
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 498: @Description("where condition support '>=' for int") 499: public void case06_selectValue05() throws SQLException { 500: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'>=5"); 501: int count = 0; 502: while (resultSet.next()) {	
	污染路径: 无	
216	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ImportTest.java	行号: 86
	步骤描述:	

	Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 84: connection = DriverManager.getConnection(url, properties); 85: 86: Statement stmt = connection.createStatement(); 87: stmt.execute("create database if not exists " + DB_NAME); 88: stmt.execute("create table if not exists " + DB_NAME + "." + T_NAME + " (ts timestamp, k int, v int)");	
	污染路径: 无	
217	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 264
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 262: 263: // then 264: Statement statement = conn.createStatement(); 265: ResultSet rs = statement.executeQuery("show tables"); 266: Assert.assertNotNull(rs);	
	污染路径: 无	
218	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 362
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 360: @Description("where condition result is null") 361: public void case04_select21() throws SQLException { 362: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'='beijing'"); 363: int count = 0; 364: while (resultSet.next()) {	
	污染路径: 无	
219	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java		118
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.		
	代码片段: 116: 117: // then 118: Statement statement = conn.createStatement(); 119: ResultSet rs = statement.executeQuery("show tables"); 120: Assert.assertNotNull(rs);		
	污染路径: 无		
220	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java		行号: 480
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 478: @Description("where condition support '<=' for int") 479: public void case06_selectValue03() throws SQLException { 480: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'<=11"); 481: int count = 0; 482: while (resultSet.next()) {		
	污染路径: 无		
221	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java		行号: 475
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 473: rs1.close(); 474: 475: ResultSet rs2 = statement.executeQuery("show tables"); 476: int tableCount = 0; 477: while (rs2.next()) {		
	污染路径: 无		

222	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 1153
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1151: } 1152: 1153: ResultSet resultSet = statement.executeQuery("select jsons5_jtag from batch_test"); 1154: ResultSetMetaData metaData = resultSet.getMetaData(); 1155: String columnName = metaData.getColumnName(1);	
	污染路径: 无	
223	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 752
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 750: @Description("where condition with and") 751: public void case10_selectAndOr01() throws SQLException { 752: ResultSet resultSet = statement 753: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='beijing'"); 754: int count = 0;	
	污染路径: 无	
224	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 1366
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 1364: public static void afterClass() { 1365: try { 1366: Statement statement = conn.createStatement(); 1367: statement.execute("drop database if exists " + DB_NAME); 1368: statement.execute("drop database if exists	

	dbtest");	
	污染路径: 无	
225	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/BatchInsertTest.java	行号: 100
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 98: 99: try { 100: Statement statement = connection.createStatement(); 101: ResultSet rs = statement.executeQuery("select * from meters"); 102: int num = 0;	
	污染路径: 无	
226	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 224
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 222: writer.write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS, null, 1000L); 223: 224: Statement statement = conn.createStatement(); 225: ResultSet rs = statement.executeQuery("select * from measurement_reqid"); 226: Assert.assertTrue(rs.next());	
	污染路径: 无	
227	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 584
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 582: @Description("where condition support '>' for double") 583: public void case07_doubleOperation03() throws SQLException {	

	584: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'>1.23"); 585: int count = 0; 586: while (resultSet.next()) {	
	污染路径: 无	
228	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 31
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 29: public void testExecuteUpdate() throws SQLException { 30: String sql = "insert into " + dbName + "." + tableName + " values(?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)"; 31: PreparedStatement statement = connection.prepareStatement(sql); 32: long current = System.currentTimeMillis(); 33: statement.setTimestamp(1, new Timestamp(current));	
	污染路径: 无	
229	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MultiConnectionWithDifferentDbTest.java	行号: 49
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 47: } 48: try (Connection connection = DriverManager.getConnection(url)) { 49: Statement stmt = connection.createStatement(); 50: 51: ResultSet rs = stmt.executeQuery("select * from weather");	
	污染路径: 无	
230	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDriverBaseTest.java	行号: 60

	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 58: properties.setProperty(TSDBDriver.PROPERTY_KEY_BATCH_LOAD, "false"); 59: connection = DriverManager.getConnection(url, properties); 60: Statement statement = connection.createStatement(); 61: statement.execute("drop database if exists " + db_name); 62: statement.execute("create database " + db_name);	
	污染路径: 无	
231	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ResetQueryCacheTest.java	行号: 27
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 25: } 26: Connection connection = DriverManager.getConnection(url); 27: Statement statement = connection.createStatement(); 28: 29: // when	
	污染路径: 无	
232	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 467
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 465: @Description("where conditional support '<' for int") 466: public void case06_selectValue02() throws SQLException { 467: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'<54"); 468: int count = 0;	

	469: while (resultSet.next()) {	
	污染路径: 无	
233	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 272
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 270: @Description("select a json tag, the value is int") 271: public void case04_select11() throws SQLException { 272: ResultSet resultSet = statement.executeQuery("select jtag->'tag2' from jsons1_1"); 273: resultSet.next(); 274: double d = resultSet.getDouble(1);	
	污染路径: 无	
234	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/TimeZoneTest.java	行号: 68
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 66: 67: try (Connection connection = DriverManager.getConnection(url, props)) { 68: Statement stmt = connection.createStatement(); 69: System.out.println(Zoneld.systemDefault()); 70:	
	污染路径: 无	
235	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/BatchFetchTest.java	行号: 36
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 34: 35: long start = System.currentTimeMillis(); 36: ResultSet rs = stmt.executeQuery("select * from weather"); 37: while (rs.next()) { 38: // do nothing	

	26: String sql = "select symbol,max(high) from " + dbName + "." + tName + " where kline_type = '1m' group by symbol;"; 27: 28: ResultSet resultSet = statement.executeQuery(sql); 29: resultSet.next(); 30: Assert.assertEquals("1m", resultSet.getString(1));	
	污染路径: 无	
242	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 69
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 67: final String query = "select * from " + TBNAME_1; 68: try (PreparedStatement pstmt = conn.prepareStatement(query)) { 69: ResultSet rs = pstmt.executeQuery(); 70: rs.next(); 71: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
243	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/UnsignedNumberJniTest.java	行号: 21
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 19: public void testCase001() throws SQLException { 20: try (Statement stmt = conn.createStatement()) { 21: ResultSet rs = stmt.executeQuery("select * from us_table"); 22: ResultSetMetaData meta = rs.getMetaData(); 23: assertResultSetMetaData(meta);	
	污染路径: 无	
244	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBConnectionTest.java	行号: 130
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	

	代码片段: <pre> 128: @Test(expected = SQLFeatureNotSupportedException.class) 129: public void testCreateStatement() throws SQLException { 130: Statement stmt = conn.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY); 131: ResultSet rs = stmt.executeQuery("show cluster alive"); 132: rs.next(); </pre>	
	污染路径: 无	
245	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 527
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 525: } 526: conn = DriverManager.getConnection(url); 527: Statement stmt = conn.createStatement(); 528: stmt.execute("drop database if exists " + dbname); 529: stmt.execute("create database if not exists " + dbname + " precision 'ns'"); </pre>	
	污染路径: 无	
246	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/TimestampFormatTest.java	行号: 59
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 57: 58: // then 59: ResultSet rs = stmt.executeQuery("select * from weather"); 60: while (rs.next()) { 61: Object value = rs.getObject("ts"); </pre>	
	污染路径: 无	
247	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	305
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 303: @Description("select a json tag, the value is double") 304: public void case04_select14() throws SQLException { 305: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_5"); 306: resultSet.next(); 307: String string = resultSet.getString(1);	
	污染路径: 无	
248	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WsConFailOverTest.java	行号: 44
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 42: taosAdapterMock.stop(); 43: } 44: resultSet = statement.executeQuery("select ts from " + dbName + "." + TABLE_NAME + " limit 1;"); 45: 46: }catch (SQLException e){	
	污染路径: 无	
249	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/TimeStampFormatTest.java	行号: 35
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 33: try (Connection conn = DriverManager.getConnection(url); 34: Statement stmt = conn.createStatement()) { 35: ResultSet rs = stmt.executeQuery("select * from weather"); 36: while (rs.next()) { 37: Object value = rs.getObject("ts");	
	污染路径: 无	

250	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 1080
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 1078: 1079: String sql = "INSERT INTO weather_001 USING weather TAGS ('tag_001') VALUES ('2023-10-01 12:00:00', 25, 1234567890123, 23.45, 67.89, 10, 1, true, 'example_binary_data', 'example_nchar_data');"; 1080: Statement stmt = conn.createStatement(); 1081: stmt.execute(sql); 1082: stmt.close();	
	污染路径: 无	
251	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SetConfigurationInJNITest.java	行号: 84
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 82: url = "jdbc:TAOS://" + host + ":0/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword() + ""; 83: } 84: Connection conn = DriverManager.getConnection(url, props); 85: Statement stmt = conn.createStatement(); 86: Assert.assertNotNull(stmt);	
	污染路径: 无	
252	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 315
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 313: @Description("select a json tag, the key is not exist") 314: public void case04_select15() throws SQLException { 315: ResultSet resultSet = statement.executeQuery("select jtag->'tag10' from jsons1_4"); 316: resultSet.next();	

	317: String string = resultSet.getString(1);	
	污染路径: 无	
253	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 206
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 204: writer.write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS, 3600, null); 205: 206: Statement statement = conn.createStatement(); 207: ResultSet rs = statement.executeQuery("select * from measurement_ttl"); 208: Assert.assertTrue(rs.next());	
	污染路径: 无	
254	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionJNITest.java	行号: 41
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 39: public void testCase2() { 40: try (Statement stmt = conn.createStatement()) { 41: ResultSet rs = stmt.executeQuery("select last_row(ts) from " + US_TIMESTAMP_DB + ".weather"); 42: rs.next(); 43:	
	污染路径: 无	
255	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 231
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 229: @Description("select json tag") 230: public void case04_select07() throws SQLException { 231: ResultSet resultSet = statement.executeQuery("select jtag from jsons1_1");	

	232: resultSet.next(); 233: String result = resultSet.getString(1);	
	污染路径: 无	
256	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/UnsignedNumberJniTest.java	行号: 152
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 150: } 151: conn = DriverManager.getConnection(url, properties); 152: Statement stmt = conn.createStatement(); 153: stmt.execute("drop database if exists unsign_jni"); 154: stmt.execute("create database if not exists unsign_jni");	
	污染路径: 无	
257	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 258
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 256: 257: Statement statement = conn.createStatement(); 258: ResultSet rs = statement.executeQuery("select count(*) from measurement_single"); 259: rs.next(); 260: Assert.assertEquals(1, rs.getInt(1));	
	污染路径: 无	
258	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 917
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 915: @Description("where condition match") 916: public void case12_selectWhere05() throws SQLException { 917: ResultSet resultSet =	

	<pre>statement.executeQuery("select * from jsons1 where jtag->'tag1' match 'ma\$'"); 918: int count = 0; 919: while (resultSet.next()) {</pre>	
	污染路径: 无	
259	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/MinimumConnectionCountTest.java	行号: 184
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre>182: ConnectionParam param = ((WSConnection)connection1).getParam(); 183: Connection connection2 = DriverManager.getConnection(url, properties); 184: Connection connection3 = DriverManager.getConnection(url, properties); 185: 186: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount());</pre>	
	污染路径: 无	
260	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 422
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre>420: @Description("where condition support '<=' in character") 421: public void case05_symbolOperation04() throws SQLException { 422: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag2'<='beijing'"); 423: int count = 0; 424: while (resultSet.next()) {</pre>	
	污染路径: 无	

261	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 96
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 94: final String query = "select * from " + TBNAME_1; 95: try (PreparedStatement pstmt = conn.prepareStatement(query)) { 96: ResultSet rs = pstmt.executeQuery(); 97: rs.next(); 98: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
262	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 434
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 432: @Description("where condition support '!=' in character") 433: public void case05_symbolOperation05() throws SQLException { 434: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'!='beijing"); 435: int count = 0; 436: while (resultSet.next()) {	
	污染路径: 无	
263	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 905
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 903: @Description("where condition match") 904: public void case12_selectWhere04() throws SQLException { 905: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1' match 'ma");	

	68: conn = DriverManager.getConnection(url, properties); 69: 70: Statement stmt = conn.createStatement(); 71: stmt.execute("drop database if exists " + MS_TIMESTAMP_DB); 72: stmt.execute("create database if not exists " + MS_TIMESTAMP_DB + " precision 'ms'");	
	污染路径: 无	
267	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1013
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1011: @Description("group by and order by json tag desc") 1012: public void case16_selectGroupOrder01() throws SQLException { 1013: ResultSet resultSet = statement 1014: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' desc"); 1015: int count = 0;	
	污染路径: 无	
268	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessTest.java	行号: 173
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 171: 172: // then 173: Statement statement = connection.createStatement(); 174: statement.executeUpdate("use " + DB_NAME); 175: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
269	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 49

	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 47: } 48: conn = DriverManager.getConnection(url, properties); 49: stmt = conn.createStatement(); 50: int affectedRow = stmt.executeUpdate("insert into weather(ts, f1) values(now," + random.nextInt(100) + ")"); 51: Assert.assertEquals(1, affectedRow);	
	污染路径: 无	
270	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 235
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 233: @Description("select json tag") 234: public void case04_select07() throws SQLException { 235: ResultSet resultSet = statement.executeQuery("select jtag from jsons1_1"); 236: resultSet.next(); 237: String result = resultSet.getString(1);	
	污染路径: 无	
271	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	行号: 285
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 283: Properties properties = new Properties(); 284: connection = DriverManager.getConnection(url, properties); 285: Statement statement = connection.createStatement(); 286: statement.execute("drop database if exists " + db_name); 287: statement.execute("create database " + db_name);	
	污染路径: 无	

	SQLException { 636: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'=true"); 637: int count = 0; 638: while (resultSet.next()) {	
	污染路径: 无	
275	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 163
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 161: 162: // then 163: Statement statement = connection.createStatement(); 164: ResultSet rs = statement.executeQuery("show tables"); 165: Assert.assertNotNull(rs);	
	污染路径: 无	
276	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSQueryTimeoutTest.java	行号: 50
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 48: Statement statement2 = connection.createStatement()) { 49: statement1.setQueryTimeout(1); 50: ResultSet resultSet1 = statement1.executeQuery("show databases;"); 51: while (resultSet1.next()) { 52: String dbName = resultSet1.getString(1);	
	污染路径: 无	
277	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 345
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 343: @Description("select and where condition '=' for string") 344: public void case04_select20() throws SQLException { 345: ResultSet resultSet = statement 346: .executeQuery("select dataint,tbname,jtag->'tag1',jtag from jsons1 where jtag->'tag2'='beijing'"); 347: int count = 0;	
	污染路径: 无	
278	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/UnsignedNumberJniTest.java	行号: 95
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 93: long now = System.currentTimeMillis(); 94: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 127, 65534,4294967294, 18446744073709551614)"); 95: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); 96: ResultSetMetaData meta = rs.getMetaData(); 97: assertResultSetMetaData(meta);	
	污染路径: 无	
279	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 1017
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1015: @Description("group by and order by json tag desc") 1016: public void case16_selectGroupOrder01() throws SQLException { 1017: ResultSet resultSet = statement 1018: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' desc"); 1019: int count = 0;	
	污染路径: 无	
280	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionRestfulTest.java		29
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 27: public void testCase1() throws SQLException { 28: try (Statement stmt = conn1.createStatement()) { 29: ResultSet rs = stmt.executeQuery("select last_row(ts) from " + MS_TIMESTAMP_DB + ".weather"); 30: rs.next(); 31: long ts = rs.getTimestamp(1).getTime();		
	污染路径: 无		
281	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java		行号: 334
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 332: @Description("where condition '=' for string") 333: public void case04_select19() throws SQLException { 334: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'='beijing'"); 335: int count = 0; 336: while (resultSet.next()) {		
	污染路径: 无		
282	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java		行号: 902
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 900: @Description("where condition match") 901: public void case12_selectWhere04() throws SQLException { 902: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1' match 'ma'"); 903: int count = 0; 904: while (resultSet.next()) {		

	污染路径: 无	
283	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 280
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 278: Assert.assertEquals(1, result); 279: try (Statement stmt = conn.createStatement()) { 280: ResultSet rs = stmt.executeQuery("select * from t1"); 281: ResultSetMetaData meta = rs.getMetaData(); 282: assertMetaData(meta);	
	污染路径: 无	
284	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 209
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 207: 208: // then 209: Statement statement = connection.createStatement(); 210: statement.executeUpdate("use " + DB_NAME); 211: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
285	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SetConfigurationInJNITest.java	行号: 288
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 286: url += "&debugFlag=abc&rpcTimer=abc"; 287: } 288: Connection conn = DriverManager.getConnection(url); 289: Statement stmt = conn.createStatement(); 290: Assert.assertNotNull(stmt);	

	污染路径: 无	
286	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 434
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 432: public static void afterClass() throws SQLException { 433: if (conn != null) { 434: Statement statement = conn.createStatement(); 435: statement.execute("drop database if exists " + DB_NAME); 436: statement.close();	
	污染路径: 无	
287	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSTimeZoneTest.java	行号: 72
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 70: public void TimeZoneStmtTimestampTest() throws SQLException, InterruptedException { 71: String sql = "insert into " + dbName + "." + TABLE_NAME + " values(?, ?)"; 72: PreparedStatement statement = connection.prepareStatement(sql); 73: 74: LocalDateTime localDateTime = LocalDateTime.of(2024, 1, 2, 1, 2, 3, 123456789);	
	污染路径: 无	
288	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DatetimeBefore1970Test.java	行号: 89
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 87: stmt.executeUpdate("insert into weather(ts) values('1970-01-01 00:00:00.000001')"); 88: stmt.executeUpdate("insert into weather(ts) values(" + now + ")");	

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 41: preparedStatement.addBatch(); 42: preparedStatement.executeBatch(); 43: ResultSet resultSet = statement.executeQuery("select c1 from " + DB_NAME + "." + TABLE_STMT); 44: while (resultSet.next()) { 45: Assert.assertArrayEquals(expectedArray, resultSet.getBytes(1)); </pre>	
	污染路径: 无	
292	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 397
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 395: @Test 396: public void bindDataWithMultipleTagsTest() throws SQLException { 397: Statement stmt = conn.createStatement(); 398: 399: stmt.execute("drop table if exists weather_test"); </pre>	
	污染路径: 无	
293	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 1072
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 1070: @Description("query metadata for json") 1071: public void case19_selectMetadata01() throws SQLException { 1072: ResultSet resultSet = statement.executeQuery("select jtag from jsons1"); 1073: ResultSetMetaData metaData = resultSet.getMetaData(); 1074: int columnType = metaData.getColumnType(1); </pre>	

	污染路径: 无	
294	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 82
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 80: 81: // then 82: Statement statement = conn.createStatement(); 83: ResultSet rs = statement.executeQuery("show stables"); 84: Assert.assertNotNull(rs);	
	污染路径: 无	
295	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 33
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 31: url = "jdbc:TAOS://" + HOST + ":" + TestEnvUtil.getJniPort() + "/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword(); 32: } 33: Connection conn = DriverManager.getConnection(url, properties); 34: Statement stmt = conn.createStatement(); 35: stmt.execute("drop database if exists " + DB_NAME);	
	污染路径: 无	
296	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 863
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 861: Assert.assertEquals(1, result); 862: try (Statement stmt = conn.createStatement()) { 863: ResultSet rs = stmt.executeQuery("select * from t1"); 864: ResultSetMetaData meta = rs.getMetaData();	

	<pre> 59: Statement statement = conn.createStatement(); 60: statement.execute("drop database if exists " + dbName); 61: statement.close(); </pre>	
	污染路径: 无	
300	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	行号: 45
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 43: public void test002_ReuseStmtExecuteUpdate() throws SQLException { 44: String sql = "insert into " + db_name + "." + tableName + " values(?, ?)"; 45: PreparedStatement statement = connection.prepareStatement(sql); 46: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis())); 47: statement.setInt(2, 1); </pre>	
	污染路径: 无	
301	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionJNITest.java	行号: 87
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 85: try { 86: if (conn != null) { 87: Statement statement = conn.createStatement(); 88: statement.execute("drop database " + MS_TIMESTAMP_DB); 89: statement.execute("drop database " + US_TIMESTAMP_DB); </pre>	
	污染路径: 无	
302	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 321

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 319: @Description("select a json tag, the result number equals tables number") 320: public void case04_select16() throws SQLException { 321: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1"); 322: int count = 0; 323: while (resultSet.next()) {	
	污染路径: 无	
303	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/SchemalessRawInsertNewTest.java	134
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 132: } 133: conn = DriverManager.getConnection(url); 134: Statement stmt = conn.createStatement(); 135: stmt.execute("drop database if exists " + dbName); 136: stmt.execute("create database if not exists " + dbName + " precision 'ns'");	
304	污染路径: 无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	301
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
305	代码片段: 299: @Description("select a json tag, the value is double") 300: public void case04_select14() throws SQLException { 301: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_5"); 302: resultSet.next(); 303: String string = resultSet.getString(1);	
	污染路径: 无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	599

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 597: @Description("where condition support '>=' for double") 598: public void case07_doubleOperation04() throws SQLException { 599: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'>=1.232"); 600: int count = 0; 601: while (resultSet.next()) {	
	污染路径: 无	
306	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	941
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause. 代码片段: 939: @Description("where condition match") 940: public void case12_selectWhere07() throws SQLException { 941: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1' match '收到'"); 942: int count = 0; 943: while (resultSet.next()) {	
	污染路径: 无	
307	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/TSWSPreparedStatementTest.java	1133
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause. 代码片段: 1131: @Before 1132: public void before() throws SQLException { 1133: Statement stmt = conn.createStatement(); 1134: stmt.execute("drop table if exists weather"); 1135: stmt.execute("create table if not exists weather(ts timestamp, f1 int, f2 bigint, f3 float, f4 double, f5 smallint, f6	

	tinyint, f7 bool, f8 binary(64), f9 nchar(64)) tags(loc nchar(64))");	
	污染路径: 无	
308	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 1081
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1079: @Description("query metadata for json") 1080: public void case19_selectMetadata02() throws SQLException { 1081: ResultSet resultSet = statement.executeQuery("select *,jtag from jsons1"); 1082: ResultSetMetaData metaData = resultSet.getMetaData(); 1083: int columnType = metaData.getColumnType(6);	
	污染路径: 无	
309	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 81
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 79: boolean flag = stmt.execute("insert into weather(ts, f1) values(now + 10s," + random.nextInt(100) + ")"); 80: Assert.assertEquals(false, flag); 81: ResultSet rs = stmt.executeQuery("select count(*) from weather"); 82: rs.next(); 83: int count = rs.getInt("count(*)");	
	污染路径: 无	
310	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 355
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 353: pstmt.setTimestamp(3, new Timestamp(0));	

	354: 355: ResultSet rs = pstmt.executeQuery(); 356: rs.next(); 357: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
311	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 169
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 167: @Description("normal select stable") 168: public void case04_select01() throws SQLException { 169: ResultSet resultSet = statement.executeQuery("select dataint from jsons1"); 170: int count = 0; 171: while (resultSet.next()) {	
	污染路径: 无	
312	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 835
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 833: @Description("test with tbname/normal column") 834: public void case11_selectTbName02() throws SQLException { 835: ResultSet resultSet = statement 836: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3'"); 837: int count = 0;	
	污染路径: 无	
313	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UnsignedNumberRestfulTest.java	行号: 119
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 117: long now = System.currentTimeMillis();	

	118: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 254, 65534,4294967294, 18446744073709551614)"); 119: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); 120: ResultSetMetaData meta = rs.getMetaData(); 121: assertResultSetMetaData(meta);	
	污染路径: 无	
314	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 914
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 912: @Description("where condition match") 913: public void case12_selectWhere05() throws SQLException { 914: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1' match 'ma\$"); 915: int count = 0; 916: while (resultSet.next()) {	
	污染路径: 无	
315	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDatabaseMetaDataTest.java	行号: 77
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 75: 76: connection = DriverManager.getConnection(url, properties); 77: Statement stmt = connection.createStatement(); 78: stmt.execute("drop database if exists `" + DB_NAME + "`"); 79: stmt.execute("create database if not exists `" + DB_NAME + "` precision 'us'");	
	污染路径: 无	
316	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	708
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 706: stmt.execute("create table weather_test(ts timestamp, c1 int) tags (t1 int)"); 707: 708: TSDBPreparedStatement s = (TSDBPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?) values(?, ?)"); 709: String tbname = stringGenerator(193); 710: s.setTableName(tbname);	
	污染路径: 无	
317	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 614
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 612: Assert.assertEquals(1, result); 613: try (Statement stmt = conn.createStatement()) { 614: ResultSet rs = stmt.executeQuery("select * from t1"); 615: ResultSetMetaData meta = rs.getMetaData(); 616: assertMetaData(meta);	
	污染路径: 无	
318	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 282
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 280: Assert.assertEquals(0, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount()); 281: 282: conn = DriverManager.getConnection(url, properties); 283: mockA.stop();	

	284: Thread.sleep(100);	
	污染路径: 无	
319	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UseNowInsertTimestampTest.java	行号: 44
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 42: public void microsec() throws SQLException { 43: try (Connection conn = DriverManager.getConnection(url)) { 44: Statement stmt = conn.createStatement(); 45: stmt.execute("drop database if exists " + DB_NAME); 46: stmt.execute("create database if not exists " + DB_NAME + " precision 'us'");	
	污染路径: 无	
320	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ TimestampPrecisionInNanoInJniTest.java	行号: 41
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 39: conn = DriverManager.getConnection(url, properties); 40: 41: Statement stmt = conn.createStatement(); 42: stmt.execute("drop database if exists " + NS_TIMESTAMP_DB); 43: stmt.execute("create database if not exists " + NS_TIMESTAMP_DB + " precision 'ns'");	
	污染路径: 无	
321	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/WasNullTest.java	行号: 90
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段:	

	<pre> 88: public void after() throws SQLException { 89: if (conn != null) { 90: Statement statement = conn.createStatement(); 91: statement.execute("drop database if exists " + dbName); 92: conn.close(); </pre>	
	污染路径: 无	
322	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 624
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 622: @Description("where condition support '!=' for double") 623: public void case07_doubleOperation06() throws SQLException { 624: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=3.232"); 625: int count = 0; 626: while (resultSet.next()) { </pre>	
	污染路径: 无	
323	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ RawBlockBinaryLengthTest.java	行号: 29
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 27: @Test 28: public void nativeQuery() throws SQLException { 29: ResultSet resultSet = statement.executeQuery("select body from `stb_sba_tem_bdr`"); 30: resultSet.next(); 31: String body = resultSet.getString("body"); </pre>	
	污染路径: 无	
324	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/rs/RestfulJDBCTest.java	147
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 145: public static void afterClass() throws SQLException { 146: if (connection != null) { 147: Statement stmt = connection.createStatement(); 148: stmt.execute("drop database if exists " + DB_NAME); 149: stmt.close(); </pre>	
325	污染路径: 无	
	缺陷发生位置: /src/test/java/com/taosdata/jdbc/GeometryTest.java	行号: 60
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
326	代码片段: <pre> 58: preparedStatement.columnDataAddBatch(); 59: preparedStatement.columnDataExecuteBatch(); 60: ResultSet resultSet = statement.executeQuery("select c1 from subt_b order by ts asc"); 61: if (resultSet.next()) { 62: Assert.assertArrayEquals(byteArray, resultSet.getBytes(1)); </pre>	
	污染路径: 无	
	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 516
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 514: @Description("where conditional support '!= ' for int") 515: public void case06_selectValue06() throws SQLException { 516: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=5"); 517: int count = 0; 518: while (resultSet.next()) { </pre>	

	unsign_jni"); 166: statement.close();	
	污染路径: 无	
330	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSBigQueryTest.java	行号: 55
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 53: Properties properties = new Properties(); 54: connection = DriverManager.getConnection(url, properties); 55: Statement statement = connection.createStatement(); 56: statement.execute("drop database if exists " + db_name); 57: statement.execute("create database " + db_name);	
	污染路径: 无	
331	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/BatchInsertTest.java	行号: 46
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 44: connection = DriverManager.getConnection(url, properties); 45: 46: Statement statement = connection.createStatement(); 47: statement.executeUpdate("drop database if exists " + DB_NAME); 48: statement.executeUpdate("create database if not exists " + DB_NAME);	
	污染路径: 无	
332	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 755
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	753: @Description("where condition with and") 754: public void case10_selectAndOr01() throws SQLException { 755: ResultSet resultSet = statement 756: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='beijing'"); 757: int count = 0;	
	污染路径: 无	
333	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/NullValueInResultSetTest.java	行号: 36
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 34: stmt.execute("create table weather(ts timestamp, f1 timestamp, f2 int, f3 bigint, f4 float, f5 double, f6 smallint, f7 tinyint, f8 bool, f9 binary(64), f10 nchar(64));"); 35: stmt.executeUpdate("insert into weather(ts, f1) values(now+1s, " + TimestampUtil.datetimeToLong("2021-04- 21 12:00:00.000") + ")"); 36: ResultSet rs = stmt.executeQuery("select * from weather"); 37: rs.next(); 38:	
	污染路径: 无	
334	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtSubTableTest.java	行号: 91
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 89: statement.close(); 90: 91: statement = (TSWSPreparedStatement) connection.prepareStatement(92: "insert into ? using " + db_name + "." + superTable2 + 93: " tags (?) values (?, ?)");	
	污染路径: 无	

335	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessTest.java	行号: 249
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 247: 248: // then 249: Statement statement = connection.createStatement(); 250: statement.executeUpdate("use " + DB_NAME); 251: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
336	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtStbNsTest.java	行号: 48
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 46: 47: private void initDbAndTable(String precision) throws SQLException, InterruptedException{ 48: Statement statement = connection.createStatement(); 49: statement.execute("drop database if exists " + db_name); 50: TestUtils.waitTransactionDone(connection);	
	污染路径: 无	
337	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 964
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 962: Assert.assertEquals(1, result); 963: try (Statement stmt = conn.createStatement()) { 964: ResultSet rs = stmt.executeQuery("select * from t1"); 965: ResultSetMetaData meta = rs.getMetaData(); 966: assertMetaData(meta);	

	污染路径: 无	
338	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ParameterBindTest.java	行号: 175
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 173: try { 174: conn = DriverManager.getConnection(url); 175: Statement stmt = conn.createStatement(); 176: stmt.execute("drop database if exists " + DB_NAME); 177: stmt.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
339	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtNsTest.java	行号: 41
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 39: // init pstmt, and insert one row successfully 40: String sql = "insert into " + db_name + "." + tableName + " values(?, ?)"; 41: PreparedStatement statement = connection.prepareStatement(sql); 42: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis())); 43: statement.setInt(2, 1);	
	污染路径: 无	
340	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/PreparedStatementBatchInsertJNITest.java	行号: 64
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 62: // then 63: try (Statement stmt = conn.createStatement()) { 64: ResultSet rs = stmt.executeQuery("select * from	

	meters"); 65: int count = 0; 66: while (rs.next()) {	
	污染路径: 无	
341	缺陷发生位置: /src/main/java/com/taosdata/jdbc/ws/WSRowPreparedStatement.java	行号: 730
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 728: if (this.getResultSet() == null) 729: return null; 730: return getResultSet().getMetaData(); 731: } 732:	
	污染路径: 无	
342	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UseNowInsertTimestampTest.java	行号: 66
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 64: long now_time = System.currentTimeMillis() * 1000_000L + 123456; 65: try (Connection conn = DriverManager.getConnection(url)) { 66: Statement stmt = conn.createStatement(); 67: stmt.execute("drop database if exists " + DB_NAME); 68: stmt.execute("create database if not exists " + DB_NAME + " precision 'ns'");	
	污染路径: 无	
343	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 635
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 633: @Description("where condition support '=' for	

	boolean") 634: public void case08_boolOperation01() throws SQLException { 635: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=true"); 636: int count = 0; 637: while (resultSet.next()) {	
	污染路径: 无	
344	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionRestfulTest.java	行号: 71
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 69: public void testCase4() throws SQLException { 70: try (Statement stmt = conn2.createStatement()) { 71: ResultSet rs = stmt.executeQuery("select last_row(ts) from " + US_TIMESTAMP_DB + ".weather"); 72: rs.next(); 73:	
	污染路径: 无	
345	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 298
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 296: @Description("select a json tag, the value is double") 297: public void case04_select14() throws SQLException { 298: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_5"); 299: resultSet.next(); 300: String string = resultSet.getString(1);	
	污染路径: 无	
346	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 527
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 525: @Description("where conditional support '!=' for int") 526: public void case06_selectValue07() throws SQLException { 527: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'!=55"); 528: int count = 0; 529: while (resultSet.next()) {	
	污染路径: 无	
347	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 1029
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1027: @Description("group by and order by json tag asc") 1028: public void case16_selectGroupOrder02() throws SQLException { 1029: ResultSet resultSet = statement 1030: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' asc"); 1031: int count = 0;	
	污染路径: 无	
348	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 536
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 534: @Description("where conditional support '!=' for int and result is nothing") 535: public void case06_selectValue08() throws SQLException { 536: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'=10"); 537: int count = 0; 538: while (resultSet.next()) {	

	污染路径: 无	
349	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSVarbinaryTest.java	行号: 51
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 49: @Test 50: public void testPrepareOld() throws SQLException { 51: TSWSPreparedStatement preparedStatement = (TSWSPreparedStatement) connection.prepareStatement("insert into " + DB_NAME + "." + TABLE_STMT + " values (?, ?)"); 52: 53: long current = System.currentTimeMillis();	
	污染路径: 无	
350	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 492
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 490: @Description("where conditional support '>' for int") 491: public void case06_selectValue04() throws SQLException { 492: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'>4"); 493: int count = 0; 494: while (resultSet.next()) {	
	污染路径: 无	
351	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 644
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 642: @Description("where condition support '=' for boolean") 643: public void case08_boolOperation02() throws SQLException {	

	644: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'=false"); 645: int count = 0; 646: while (resultSet.next()) {	
	污染路径: 无	
352	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 271
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 269: @Description("select a json tag, the value is int") 270: public void case04_select11() throws SQLException { 271: ResultSet resultSet = statement.executeQuery("select jtag->'tag2' from jsons1_1"); 272: resultSet.next(); 273: double d = resultSet.getDouble(1);	
	污染路径: 无	
353	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 455
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 453: @Description("where condition support '=' for int") 454: public void case06_selectValue01() throws SQLException { 455: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'=5"); 456: int count = 0; 457: while (resultSet.next()) {	
	污染路径: 无	
354	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 104
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段:	

	102: 103: // then 104: Statement statement = conn.createStatement(); 105: statement.executeUpdate("use " + dbname); 106: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
355	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 732
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 730: @Description("contains") 731: public void case09_select11() throws SQLException { 732: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag3'"); 733: int count = 0; 734: while (resultSet.next()) {	
	污染路径: 无	
356	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ PreparedStatementBatchInsertRestfulTest.java	行号: 80
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 78: } 79: conn = DriverManager.getConnection(url); 80: Statement stmt = conn.createStatement(); 81: stmt.execute("drop database if exists " + DB_NAME); 82: stmt.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
357	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 816
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 814: @Description("test with tbname/normal column") 815: public void case11_selectTbName01() throws SQLException { 816: ResultSet resultSet = statement.executeQuery("select * from jsons1 where tbname = 'jsons1_1'"); 817: int count = 0; 818: while (resultSet.next()) {		
	污染路径: 无		
358	缺陷发生位置:	行号:	
	/src/test/java/com/taosdata/jdbc/WasNullTest.java	30	
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 28: @Test 29: public void nextWasNullInt() throws SQLException { 30: ResultSet resultSet = statement.executeQuery("select * from " + TABLE_NAME); 31: resultSet.next(); 32: resultSet.getInt("c1");		
359	污染路径: 无		
	缺陷发生位置:	行号:	
	/src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	660	
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
359	代码片段: 658: @Description("where condition support '!=' for boolean") 659: public void case08_boolOperation03() throws SQLException { 660: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'!=false"); 661: int count = 0; 662: while (resultSet.next()) {		
	污染路径: 无		

360	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 175
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 173: Assert.assertEquals(1, result); 174: try (Statement stmt = conn.createStatement()) { 175: ResultSet rs = stmt.executeQuery("select * from t1"); 176: ResultSetMetaData meta = rs.getMetaData(); 177: assertMetaData(meta);	
	污染路径: 无	
361	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ NullValueInResultSetJNITest.java	行号: 22
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 20: public void test() throws SQLException { 21: try (Statement stmt = conn.createStatement()) { 22: ResultSet rs = stmt.executeQuery("select * from weather"); 23: ResultSetMetaData meta = rs.getMetaData(); 24: while (rs.next()) {	
	污染路径: 无	
362	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 202
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 200: ConnectionParam param = ((WSConnection) connections.get(0)).getParam(); 201: 202: Statement stmt = connections.get(0).createStatement(); 203: ResultSet rs = stmt.executeQuery("SELECT 1"); 204:	

	污染路径: 无	
363	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 322
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 320: pstmt.setTimestamp(3, new Timestamp(0)); 321: 322: ResultSet rs = pstmt.executeQuery(); 323: rs.next(); 324: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
364	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1003
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1001: @Description("select json tag from join") 1002: public void case15_selectJoin02() throws SQLException { 1003: ResultSet resultSet = statement.executeQuery(1004: "select 'sss',33,a.jtag->'tag3' from jsons2 a,jsons3 b where a.ts=b.ts and a.jtag->'tag1'=b.jtag->'tag1'"); 1005: resultSet.next();	
	污染路径: 无	
365	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 862
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 860: Assert.assertEquals(1, result); 861: try (Statement stmt = conn.createStatement()) { 862: ResultSet rs = stmt.executeQuery("select * from t1"); 863: ResultSetMetaData meta = rs.getMetaData(); 864: assertMetaData(meta);	

	污染路径: 无	
366	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 325
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 323: static public void after() throws SQLException { 324: if (null != connection) { 325: Statement statement = connection.createStatement(); 326: statement.execute("drop database if exists " + DB_NAME); 327: statement.close();	
	污染路径: 无	
367	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 178
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 176: @Description("select all column from stable") 177: public void case04_select02() throws SQLException { 178: ResultSet resultSet = statement.executeQuery("select * from jsons1"); 179: int count = 0; 180: while (resultSet.next()) {	
	污染路径: 无	
368	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 1033
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1031: @Description("group by and order by json tag asc") 1032: public void case16_selectGroupOrder02() throws SQLException { 1033: ResultSet resultSet = statement 1034: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' asc");	

	1035: int count = 0;	
	污染路径: 无	
369	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ PreparedStatementBatchInsertJNITest.java	行号: 93
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 91: public void after() { 92: try { 93: Statement stmt = conn.createStatement(); 94: stmt.execute("drop database if exists " + DB_NAME); 95: stmt.close();	
	污染路径: 无	
370	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 403
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 401: @Description("where condition support '<' for character") 402: public void case05_symbolOperation03() throws SQLException { 403: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'<'beijing'"); 404: int count = 0; 405: while (resultSet.next()) {	
	污染路径: 无	
371	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 639
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 637: @Description("where condition support '=' for boolean")	

	638: public void case08_boolOperation01() throws SQLException { 639: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=true"); 640: int count = 0; 641: while (resultSet.next()) {		
	污染路径: 无		
372	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/ WsPstmtReconnectQueryTest.java	行号: 63	
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 61: pstmt.setTimestamp(2, Timestamp.valueOf("2018- 10-03 14:39:00")); 62: 63: ResultSet rs = pstmt.executeQuery(); 64: while (rs.next()) { 65: resultCount++;		
	污染路径: 无		
373	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 293	
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.		
	代码片段: 291: } 292: conn = DriverManager.getConnection(url); 293: Statement stmt = conn.createStatement(); 294: stmt.executeUpdate("drop database if exists " + dbname); 295: stmt.executeUpdate("create database if not exists " + dbname + " precision 'ns'");		
	污染路径: 无		
374	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ NanoSecondTimestampRestfulTest.java	行号: 79	

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 77: try (Statement stmt = conn.createStatement()) { 78: stmt.executeUpdate("insert into weather(ts, temperature, humidity) values(" + ns + ", 12.3, 4)"); 79: ResultSet rs = stmt.executeQuery("select * from weather"); 80: rs.next(); 81:	
	污染路径: 无	
375	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ParameterBindTest.java	125
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 123: private void assertRows(String tbname, int rows) { 124: try (Statement stmt = conn.createStatement()) { 125: ResultSet rs = stmt.executeQuery("select count(*) from " + tbname); 126: while (rs.next()) { 127: int count = rs.getInt(1);	
376	污染路径: 无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	437
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 435: @Test 436: public void bindDataQueryTest() throws SQLException { 437: Statement stmt = conn.createStatement(); 438: 439: stmt.execute("drop table if exists weather_test");	
377	污染路径: 无	
	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/JsonTagTest.java		238
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 236: @Description("select not exist json tag") 237: public void case04_select08() throws SQLException { 238: ResultSet resultSet = statement.executeQuery("select jtag from jsons1_9"); 239: resultSet.next(); 240: String result = resultSet.getString(1);		
	污染路径: 无		
378	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBConnectionTest.java		行号: 143
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 141: PreparedStatement pstmt = conn.prepareStatement("show cluster alive", 142: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY); 143: ResultSet rs = pstmt.executeQuery(); 144: rs.next(); 145: int status = rs.getInt("status");		
	污染路径: 无		
379	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java		行号: 861
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 859: @Description("test with tbname/normal column") 860: public void case11_selectTbName04() throws SQLException { 861: ResultSet resultSet = statement 862: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=23"); 863: int count = 0;		
	污染路径: 无		

380	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 555
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 553: @Description("where condition support '=' for double") 554: public void case07_selectValue01() throws SQLException { 555: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=1.232"); 556: int count = 0; 557: while (resultSet.next()) { </pre>	
	污染路径: 无	
381	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 285
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 283: } 284: conn = DriverManager.getConnection(url); 285: Statement stmt = conn.createStatement(); 286: stmt.executeUpdate("drop database if exists " + dbname); 287: stmt.executeUpdate("create database if not exists " + dbname + " precision 'ns'"); </pre>	
	污染路径: 无	
382	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ PreparedStatementBatchInsertJNITest.java	行号: 82
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 80: } 81: conn = DriverManager.getConnection(url); 82: Statement stmt = conn.createStatement(); 83: stmt.execute("drop database if exists " + DB_NAME); 84: stmt.execute("create database if not exists " + </pre>	

	DB_NAME);	
	污染路径: 无	
383	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSelectTest.java	行号: 143
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 141: 142: statement.execute("insert into " + DATABASE_NAME + ".alltype_query values (NOW, null, null, null, null, null, null, null, null, null, null, null, null, null, null, null)"); 143: resultSet = statement.executeQuery("select ts,c1,c2,c3,c4,c5,c6,c7,c8,c9,c10,c11,c12,c13,c14,c15 from " + DATABASE_NAME + ".alltype_query where c1 is null"); 144: if (resultSet.next()) { 145: assertNull(resultSet.getObject("c1", Boolean.class));	
	污染路径: 无	
384	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 979
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 977: @Description("test duplicate key with normal column") 978: public void case14_selectDump02() throws SQLException { 979: ResultSet resultSet = statement.executeQuery(980: "select *,tbname,jtag from jsons1 where jtag-> 'datastr' match '是' and datastr match 'js'"); 981: int count = 0;	
	污染路径: 无	
385	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 494
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 492: Assert.assertEquals(1, count);	

	493: 494: Statement statement = conn.createStatement(); 495: ResultSet rs = statement.executeQuery("select * from measurement_zero_ttl"); 496: Assert.assertTrue(rs.next());	
	污染路径: 无	
386	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 655
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 653: @Test 654: public void setTagNullTest()throws SQLException { 655: Statement stmt = conn.createStatement(); 656: 657: stmt.execute("drop table if exists weather_test");	
	污染路径: 无	
387	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/BadLocaleSettingTest.java	行号: 54
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 52: public void afterClass() throws SQLException { 53: if (conn != null) { 54: Statement statement = conn.createStatement(); 55: statement.execute("drop database " + DB_NAME); 56: statement.close();	
	污染路径: 无	
388	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 579
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 577: @Description("where condition support '<=' for double") 578: public void case07_doubleOperation02() throws SQLException {	

	579: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'<=1.232"); 580: int count = 0; 581: while (resultSet.next()) {	
	污染路径: 无	
389	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 311
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 309: @Test 310: public void executeTest() throws SQLException { 311: Statement stmt = conn.createStatement(); 312: 313: int numOfRows = 1000;	
	污染路径: 无	
390	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 539
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 537: @Test @Description("where conditional support '!= ' for int and result is nothing") 538: public void case06_selectValue08() throws SQLException { 539: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'=10"); 540: int count = 0; 541: while (resultSet.next()) {	
	污染路径: 无	
391	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 603
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	<pre> 601: @Description("where condition support '>=' for double") 602: public void case07_doubleOperation04() throws SQLException { 603: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'>=1.232"); 604: int count = 0; 605: while (resultSet.next()) { </pre> 污染路径: 无		
392	<table border="1" data-bbox="469 714 1380 792"> <tr> <td data-bbox="469 714 1241 792">缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java</td><td data-bbox="1241 714 1380 792">行号: 383</td></tr> </table> 步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause. 代码片段: <pre> 381: @Description("where condition support '>' for character") 382: public void case05_symbolOperation01() throws SQLException { 383: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'>'beijing'"); 384: int count = 0; 385: while (resultSet.next()) { </pre> 污染路径: 无	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 383
缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 383		
393	<table border="1" data-bbox="469 1424 1380 1503"> <tr> <td data-bbox="469 1424 1241 1503">缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSBigQueryTest.java</td><td data-bbox="1241 1424 1380 1503">行号: 23</td></tr> </table> 步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause. 代码片段: <pre> 21: public void testExecuteBatchInsert() throws SQLException { 22: String sql = "insert into " + db_name + "." + tableName + " (ts, c1) values(?, ?)"; 23: PreparedStatement statement = connection.prepareStatement(sql); 24: HashSet<Object> collect = new HashSet<>(); 25: </pre>	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSBigQueryTest.java	行号: 23
缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSBigQueryTest.java	行号: 23		

	污染路径: 无	
394	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 342
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 340: @Description("select and where condition '=' for string") 341: public void case04_select20() throws SQLException { 342: ResultSet resultSet = statement 343: .executeQuery("select dataint,tbname,jtag->'tag1',jtag from jsons1 where jtag->'tag2'='beijing'"); 344: int count = 0;	
	污染路径: 无	
395	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 503
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 501: @Description("where condition support '>=' for int") 502: public void case06_selectValue05() throws SQLException { 503: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'>=5"); 504: int count = 0; 505: while (resultSet.next()) {	
	污染路径: 无	
396	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 916
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 914: Assert.assertEquals(1, result); 915: try (Statement stmt = conn.createStatement()) { 916: ResultSet rs = stmt.executeQuery("select * from t1"); 917: ResultSetMetaData meta = rs.getMetaData();	

	918: assertMetaData(meta);	
	污染路径: 无	
397	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 531
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 529: @Description("where conditional support '!=' for int") 530: public void case06_selectValue07() throws SQLException { 531: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=55"); 532: int count = 0; 533: while (resultSet.next()) {	
	污染路径: 无	
398	缺陷发生位置: /src/test/java/com/taosdata/jdbc/GeometryTest.java	行号: 39
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 37: @Test 38: public void testPrepare() throws SQLException { 39: TSDBPreparedStatement preparedStatement = (TSDBPreparedStatement) connection.prepareStatement("insert into ? using " + DB_NAME + "." + TABLE_STMT + " tags(?) values (?, ?)"); 40: preparedStatement.setTableName("subt_b"); 41: preparedStatement.setTagGeometry(0, expectedArray);	
	污染路径: 无	
399	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 619
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 617: int numOfRows = 1;	

	618: 619: TSDBPreparedStatement s = (TSDBPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?,?) (ts, f2) values(?, ?)"); 620: s.setTableName("w2"); 621: s.setTagInt(0, 1);	
	污染路径: 无	
400	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 330
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 328: @Description("where condition '=' for string") 329: public void case04_select19() throws SQLException { 330: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'='beijing"); 331: int count = 0; 332: while (resultSet.next()) {	
	污染路径: 无	
401	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 197
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 195: @Description("select json tag from stable") 196: public void case04_select03() throws SQLException { 197: ResultSet resultSet = statement.executeQuery("select jtag from jsons1"); 198: ResultSetMetaData metaData = resultSet.getMetaData(); 199: metaData.getColumnTypeName(1);	
	污染路径: 无	
402	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 506
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	

	代码片段: 504: public static void afterClass() throws SQLException { 505: if (conn != null) { 506: Statement statement = conn.createStatement(); 507: statement.execute("drop database if exists " + DB_NAME); 508: statement.close();	
	污染路径: 无	
403	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 699
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 697: @Description("where condition support one tag '='") 698: public void case09_select04() throws SQLException { 699: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag_no_exist'=3"); 700: int count = 0; 701: while (resultSet.next()) {	
	污染路径: 无	
404	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 48
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 46: 47: // when 48: ResultSet rs = pstmtSelect.executeQuery(); 49: ResultSetMetaData meta = rs.getMetaData(); 50: rs.next();	
	污染路径: 无	
405	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 898
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 896: @Description("where condition match") 897: public void case12_selectWhere04() throws SQLException { 898: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1' match 'ma'"); 899: int count = 0; 900: while (resultSet.next()) { 污染路径: 无	
406	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 312
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 310: @Description("select a json tag, the key is not exist") 311: public void case04_select15() throws SQLException { 312: ResultSet resultSet = statement.executeQuery("select jtag->'tag10' from jsons1_4"); 313: resultSet.next(); 314: String string = resultSet.getString(1);	
	污染路径: 无	
407	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 257
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 255: writer.write(line, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS); 256: 257: Statement statement = conn.createStatement(); 258: ResultSet rs = statement.executeQuery("select count(*) from measurement_single"); 259: rs.next();	
	污染路径: 无	
408	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 957

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 955: @Description("distinct json tag") 956: public void case13_selectDistinct02() throws SQLException { 957: ResultSet resultSet = statement.executeQuery("select distinct jtag->'tag1' from jsons1"); 958: int count = 0; 959: while (resultSet.next()) {	
	污染路径: 无	
409	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 684
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 682: Assert.assertEquals(1, result); 683: try (Statement stmt = conn.createStatement()) { 684: ResultSet rs = stmt.executeQuery("select * from t1"); 685: ResultSetMetaData meta = rs.getMetaData(); 686: assertMetaData(meta);	
	污染路径: 无	
410	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 382
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 380: @Description("where condition support '>' for character") 381: public void case05_symbolOperation01() throws SQLException { 382: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'>'beijing'"); 383: int count = 0; 384: while (resultSet.next()) {	

	212: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 213: ResultSet rs = pstmt.executeQuery();	
	污染路径: 无	
414	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 129
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 127: Connection connection1 = DriverManager.getConnection(url, properties); 128: ConnectionParam param = ((WSConnection)connection1).getParam(); 129: Connection connection2 = DriverManager.getConnection(url, properties); 130: Connection connection3 = DriverManager.getConnection(url, properties); 131:	
	污染路径: 无	
415	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 75
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 73: Connection connection4 = DriverManager.getConnection(url2, properties); 74: Assert.assertEquals(2, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount()); 75: Connection connection5 = DriverManager.getConnection(url2, properties); 76: Assert.assertEquals(2, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount()); 77: Assert.assertEquals(2, rebalanceManager.getEndpointInfo(param.getEndpoints().get(	

	2)).getConnectCount());	
	污染路径: 无	
416	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ ResultSetMetaShouldBeNullRestfulTest.java	行号: 62
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 60: } 61: connection = DriverManager.getConnection(url); 62: Statement stmt = connection.createStatement(); 63: stmt.execute("drop database if exists " + DB_NAME); 64: stmt.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
417	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 913
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 911: @Description("where condition match") 912: public void case12_selectWhere05() throws SQLException { 913: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1' match 'ma\$"); 914: int count = 0; 915: while (resultSet.next()) {	
	污染路径: 无	
418	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertNewTest.java	行号: 112
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 110: 111: // then 112: Statement statement = conn.createStatement();	

	statement.executeQuery("select * from jsons1 where jtag->'tag2' match 'jing\$'"); 923: int count = 0; 924: while (resultSet.next()) {	
	污染路径: 无	
422	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 47
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 45: Assert.assertEquals(4, num); 46: // then 47: Statement statement = conn.createStatement(); 48: ResultSet rs = statement.executeQuery("select count(*) from measurement"); 49: Assert.assertNotNull(rs);	
	污染路径: 无	
423	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 277
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 275: writer.write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS); 276: 277: Statement statement = conn.createStatement(); 278: ResultSet rs = statement.executeQuery("select count(*) from measurement_list"); 279: rs.next();	
	污染路径: 无	
424	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ TimestampPrecisionInNanoRestTest.java	行号: 42
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 40: conn = DriverManager.getConnection(url,	

	properties); 41: 42: Statement stmt = conn.createStatement(); 43: stmt.execute("drop database if exists " + NS_TIMESTAMP_DB); 44: stmt.execute("create database if not exists " + NS_TIMESTAMP_DB + " precision 'ns'");	
	污染路径: 无	
425	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 190
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 188: @Description("select json tag from stable") 189: public void case04_select03() throws SQLException { 190: ResultSet resultSet = statement.executeQuery("select jtag from jsons1"); 191: ResultSetMetaData metaData = resultSet.getMetaData(); 192: metaData.getColumnTypeName(1);	
	污染路径: 无	
426	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 346
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 344: @Description("select and where condition '=' for string") 345: public void case04_select20() throws SQLException { 346: ResultSet resultSet = statement 347: .executeQuery("select dataint,tbname,jtag-> 'tag1',jtag from jsons1 where jtag->'tag2'='beijing'"); 348: int count = 0;	
	污染路径: 无	
427	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	行号: 88
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 86: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis() - 1000)); 87: statement.setTimestamp(2, new Timestamp(System.currentTimeMillis() + 1000)); 88: ResultSet resultSet = statement.executeQuery(); 89: while (resultSet.next()) { 90: System.out.println(resultSet.getTimestamp(1) + " " + resultSet.getInt(2)); </pre>	
	污染路径: 无	
428	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 480
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 478: @Test 479: public void setTagNullTest() throws SQLException { 480: Statement stmt = conn.createStatement(); 481: 482: stmt.execute("drop table if exists weather_test"); </pre>	
	污染路径: 无	
429	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 819
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 817: @Description("test with tbname/normal column") 818: public void case11_selectTbName01() throws SQLException { 819: ResultSet resultSet = statement.executeQuery("select * from jsons1 where tbname = 'jsons1_1'"); 820: int count = 0; 821: while (resultSet.next()) { </pre>	
	污染路径: 无	

430	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBConnectionTest.java	行号: 201
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 199: public void testCreateStatement1() throws SQLException { 200: Statement stmt = conn.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 201: ResultSet rs = stmt.executeQuery("show cluster alive"); 202: rs.next(); 203: int status = rs.getInt("status"); </pre>	
	污染路径: 无	
431	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 882
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 880: @Description("where condition like") 881: public void case12_selectWhere02() throws SQLException { 882: ResultSet resultSet = statement .executeQuery("select *,tbname from jsons1 where jtag->'tag1' like 'fe%' and jtag->'tag2' is not null"); 884: int count = 0; </pre>	
	污染路径: 无	
432	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 696
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 694: @Description("where condition support one tag '='") 695: public void case09_select04() throws SQLException { 696: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag_no_exist'=3"); </pre>	

	697: int count = 0; 698: while (resultSet.next()) {	
	污染路径: 无	
433	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 1020
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1018: @Description("group by and order by json tag desc") 1019: public void case16_selectGroupOrder01() throws SQLException { 1020: ResultSet resultSet = statement 1021: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' desc"); 1022: int count = 0;	
	污染路径: 无	
434	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 561
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 559: String sql = "select * from weather_test"; 560: PreparedStatement statement = conn.prepareStatement(sql); 561: ResultSet rs = statement.executeQuery(); 562: int rows = 0; 563: while (rs.next()) {	
	污染路径: 无	
435	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 488
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 486: @Description("where conditional support '>' for int") 487: public void case06_selectValue04() throws SQLException { 488: ResultSet resultSet =	

	statement.executeQuery("select * from jsons1 where jtag->'tag1'>4"); 489: int count = 0; 490: while (resultSet.next()) {	
	污染路径: 无	
436	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSelectTest.java	行号: 82
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 80: Statement statement = connection.createStatement(); 81: 82: ResultSet resultSet = statement.executeQuery("select ts,c1,c2,c3,c4,c5,c6,c7,c8,c9,c10,c11,c12,c13,c14,c15 from " + DATABASE_NAME + ".alltype_query limit 3000"); 83: if (resultSet.next()) { 84: // Test LocalDateTime (Timestamp)	
	污染路径: 无	
437	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 953
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 951: @Description("distinct json tag") 952: public void case13_selectDistinct02() throws SQLException { 953: ResultSet resultSet = statement.executeQuery("select distinct jtag->'tag1' from jsons1"); 954: int count = 0; 955: while (resultSet.next()) {	
	污染路径: 无	
438	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 419
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 417: @Description("where condition support '<=' in character") 418: public void case05_symbolOperation04() throws SQLException { 419: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'<='beijing'"); 420: int count = 0; 421: while (resultSet.next()) { </pre>	
	污染路径: 无	
439	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UnsignedNumberRestfulTest.java	行号: 79
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 77: long now = System.currentTimeMillis(); 78: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 127, 32767,4294967294, 18446744073709551614)"); 79: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); 80: ResultSetMetaData meta = rs.getMetaData(); 81: assertResultSetMetaData(meta); </pre>	
	污染路径: 无	
440	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UnsignedNumberRestfulTest.java	行号: 60
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 58: long now = System.currentTimeMillis(); 59: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 127, 32767,2147483647, 18446744073709551614)"); 60: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); </pre>	

	61: ResultSetMetaData meta = rs.getMetaData(); 62: assertResultSetMetaData(meta);	
	污染路径: 无	
441	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 901
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 899: @Description("where condition match") 900: public void case12_selectWhere04() throws SQLException { 901: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1' match 'ma'"); 902: int count = 0; 903: while (resultSet.next()) {	
	污染路径: 无	
442	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/TimestampFormatTest.java	行号: 76
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 74: } 75: conn = DriverManager.getConnection(url); 76: Statement stmt = conn.createStatement(); 77: stmt.execute("drop database if exists " + DB_NAME); 78: stmt.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
443	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 395
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 393: @Description("where condition support '>=' for character") 394: public void case05_symbolOperation02() throws	

	<pre> SQLException { 395: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'>='beijing"); 396: int count = 0; 397: while (resultSet.next()) { </pre>	
	污染路径: 无	
444	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBConnectionTest.java	行号: 30
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 28: public void prepareStatement() throws SQLException { 29: PreparedStatement pstmt = conn.prepareStatement("show cluster alive"); 30: ResultSet rs = pstmt.executeQuery(); 31: rs.next(); 32: int status = rs.getInt("status"); </pre>	
	污染路径: 无	
445	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 687
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 685: @Description("where condition support 'is not null'") 686: public void case09_select03() throws SQLException { 687: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag is not null"); 688: int count = 0; 689: while (resultSet.next()) { </pre>	
	污染路径: 无	
446	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ NullValueInResultSetRestfulTest.java	行号: 22
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 20: public void test() throws SQLException { 21: try (Statement stmt = conn.createStatement()) { 22: ResultSet rs = stmt.executeQuery("select * from weather"); 23: ResultSetMetaData meta = rs.getMetaData(); 24: while (rs.next()) {		
	污染路径: 无		
447	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 889	
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 887: Assert.assertEquals(1, result); 888: try (Statement stmt = conn.createStatement()) { 889: ResultSet rs = stmt.executeQuery("select * from t1"); 890: ResultSetMetaData meta = rs.getMetaData(); 891: assertMetaData(meta);		
	污染路径: 无		
448	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 600	
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 598: @Description("where condition support '>=' for double") 599: public void case07_doubleOperation04() throws SQLException { 600: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'>=1.232"); 601: int count = 0; 602: while (resultSet.next()) {		
	污染路径: 无		
449	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 278	

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 276: 277: Statement statement = conn.createStatement(); 278: ResultSet rs = statement.executeQuery("select count(*) from measurement_list"); 279: rs.next(); 280: Assert.assertEquals(2, rs.getInt(1));	
	污染路径: 无	
450	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/cases/SelectTest.java	36
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 34: connection = DriverManager.getConnection(url, properties); 35: 36: Statement stmt = connection.createStatement(); 37: stmt.execute("drop database if exists " + dbName); 38: stmt.execute("create database if not exists " + dbName);	
451	污染路径: 无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	759
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
452	代码片段: 757: @Description("where condition with and") 758: public void case10_selectAndOr01() throws SQLException { 759: ResultSet resultSet = statement 760: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='beijing'"); 761: int count = 0;	
	污染路径: 无	
	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionRestfulTest.java	101
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 99: public void testCase6() throws SQLException { 100: try (Statement stmt = conn3.createStatement()) { 101: ResultSet rs = stmt.executeQuery("select last_row(ts) from " + US_TIMESTAMP_DB + ".weather"); 102: rs.next(); 103: </pre>	
	污染路径: 无	
453	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 525
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 523: stmt.execute("create table weather_test(ts timestamp, c1 int) tags (t1 int)"); 524: 525: TSWSPreparedStatement s = (TSWSPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?) values(?, ?)"); 526: String tbname = stringGenerator(193); 527: s.setTableName(tbname); </pre>	
	污染路径: 无	
454	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSGeometryTest.java	行号: 61
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 59: preparedStatement.columnDataAddBatch(); 60: preparedStatement.columnDataExecuteBatch(); 61: ResultSet resultSet = statement.executeQuery("select c1 from subt_b order by ts asc"); 62: if (resultSet.next()) { 63: Assert.assertArrayEquals(byteArray, </pre>	

	resultSet.getBytes(1));	
	污染路径: 无	
455	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	行号: 110
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 108: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis() - 1000)); 109: statement.setTimestamp(2, new Timestamp(System.currentTimeMillis() + 1000)); 110: ResultSet resultSet = statement.executeQuery(); 111: while (resultSet.next()) { 112: System.out.println(resultSet.getTimestamp(1) + " " + resultSet.getInt(2)); </pre>	
	污染路径: 无	
456	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtStmt2Test.java	行号: 391
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 389: Properties properties = new Properties(); 390: connection = DriverManager.getConnection(url, properties); 391: Statement statement = connection.createStatement(); 392: statement.execute("drop database if exists " + db_name); 393: statement.execute("create database " + db_name); </pre>	
	污染路径: 无	
457	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 40
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 38: pstmt.setString(1, TBNAME_1); </pre>	

	39: 40: ResultSet rs = pstmt.executeQuery(); 41: rs.next(); 42: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
458	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTest.java	行号: 185
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 183: 184: connection = DriverManager.getConnection(url, properties); 185: Statement statement = connection.createStatement(); 186: statement.execute("drop database if exists " + DB_NAME); 187: statement.execute("create database " + DB_NAME);	
	污染路径: 无	
459	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionRestfulTest.java	行号: 41
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 39: public void testCase2() throws SQLException { 40: try (Statement stmt = conn1.createStatement()) { 41: ResultSet rs = stmt.executeQuery("select last_row(ts) from " + US_TIMESTAMP_DB + ".weather"); 42: rs.next(); 43:	
	污染路径: 无	
460	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulCompressTest.java	行号: 64
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	

	代码片段: 62: public static void afterClass() throws SQLException { 63: if (connection != null) { 64: Statement stmt = connection.createStatement(); 65: stmt.execute("drop database if exists " + DB_NAME); 66: stmt.close();	
	污染路径: 无	
461	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 358
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 356: writer.writeRaw(line, SchemalessProtocolType.LINE, SchemalessTimestampType.NANO_SECONDS); 357: 358: Statement statement = conn.createStatement(); 359: ResultSet rs = statement.executeQuery("select * from measurement_ns"); 360: Assert.assertTrue(rs.next());	
	污染路径: 无	
462	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBConnectionTest.java	行号: 18
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 16: public void createStatement() { 17: try (Statement stmt = conn.createStatement()) { 18: ResultSet rs = stmt.executeQuery("show cluster alive"); 19: rs.next(); 20: int status = rs.getInt("status");	
	污染路径: 无	
463	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtNsTest.java	行号: 81
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	

	代码片段: 79: 80: String sql1 = "select * from " + db_name + "." + tableName; 81: statement = connection.prepareStatement(sql1); 82: boolean b = statement.execute(); 83: Assert.assertTrue(b);	
	污染路径: 无	
464	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 359
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 357: 358: Statement statement = conn.createStatement(); 359: ResultSet rs = statement.executeQuery("select * from measurement_ns"); 360: Assert.assertTrue(rs.next()); 361: rs.close();	
	污染路径: 无	
465	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/TSWSPreparedStatementTest.java	行号: 257
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 255: @Test 256: public void bindDataSelectColumnTest() throws SQLException { 257: Statement stmt = conn.createStatement(); 258: 259: int numOfRows = 1000;	
	污染路径: 无	
466	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/BgHealthCheckTest.java	行号: 125
	步骤描述:	

	Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 123: properties.setProperty(TSDBDriver.PROPERTY_KEY_HEALTH_CHECK_RECOVERY_COUNT, "1"); 124: 125: Connection connection1 = DriverManager.getConnection(url, properties); 126: ConnectionParam param = ((WSConnection)connection1).getParam(); 127: Connection connection2 = DriverManager.getConnection(url, properties); </pre>	
	污染路径: 无	
467	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	1016
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 1014: @Description("group by and order by json tag desc") 1015: public void case16_selectGroupOrder01() throws SQLException { 1016: ResultSet resultSet = statement 1017: .executeQuery("select count(*) from jsons1 group by jtag->'tag1' order by jtag->'tag1' desc"); 1018: int count = 0; </pre>	
468	污染路径: 无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	107
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 105: public void test006_QuerySyntaxError() throws SQLException { 106: String sql = "select * from " + db_name + "." + tableName + " wheree ts > ? and ts < ?"; 107: PreparedStatement statement = connection.prepareStatement(sql); 108: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis() - 1000)); </pre>	

	109: statement.setTimestamp(2, new Timestamp(System.currentTimeMillis() + 1000));	
	污染路径: 无	
469	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 579
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 577: int numOfRows = 1; 578: 579: TSDBPreparedStatement s = (TSDBPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?,?) (ts, f2) values(?, ?)"); 580: s.setTableName("w2"); 581: s.setTagInt(0, 1);	
	污染路径: 无	
470	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 273
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 271: 272: connection = DriverManager.getConnection(url, properties); 273: Statement statement = connection.createStatement(); 274: statement.execute("drop database if exists " + DB_NAME); 275: statement.execute("create database " + DB_NAME);	
	污染路径: 无	
471	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 130
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段:	

	206: while (resultSet.next()) {	
	污染路径: 无	
474	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 322
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 320: @Description("select a json tag, the result number equals tables number") 321: public void case04_select16() throws SQLException { 322: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1"); 323: int count = 0; 324: while (resultSet.next()) {	
	污染路径: 无	
475	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DatetimeBefore1970Test.java	行号: 249
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 247: } 248: conn = DriverManager.getConnection(url); 249: Statement stmt = conn.createStatement(); 250: stmt.execute("drop database if exists " + DB_NAME); 251: stmt.execute(createSql);	
	污染路径: 无	
476	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 217
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 215: Assert.assertEquals(1, result); 216: try (Statement stmt = conn.createStatement()) { 217: ResultSet rs = stmt.executeQuery("select * from t1"); 218: ResultSetMetaData meta = rs.getMetaData();	

	219: assertMetaData(meta);	
	污染路径: 无	
477	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 938
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 936: @Description("where condition match") 937: public void case12_selectWhere07() throws SQLException { 938: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1' match '收到'"); 939: int count = 0; 940: while (resultSet.next()) {	
	污染路径: 无	
478	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 931
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 929: Assert.assertEquals(1, result); 930: try (Statement stmt = conn.createStatement()) { 931: ResultSet rs = stmt.executeQuery("select * from t1"); 932: ResultSetMetaData meta = rs.getMetaData(); 933: assertMetaData(meta);	
	污染路径: 无	
479	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ResetQueryCacheTest.java	行号: 49
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 47: url += "&timezone=UTC-8&charset=UTF- 8&locale=en_US.UTF-8"; 48: }	

	49: Connection connection = DriverManager.getConnection(url); 50: Statement statement = connection.createStatement(); 51:	
	污染路径: 无	
480	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 491
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 489: @Description("where conditional support '>' for int") 490: public void case06_selectValue04() throws SQLException { 491: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'>4"); 492: int count = 0; 493: while (resultSet.next()) {	
	污染路径: 无	
481	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ TimestampPrecisionInNanoInJniTest.java	行号: 65
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 63: try { 64: if (conn != null) { 65: Statement statement = conn.createStatement(); 66: statement.execute("drop database if exists " + NS_TIMESTAMP_DB); 67: statement.close();	
	污染路径: 无	
482	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/CharsetTest.java	行号: 40
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 38: 39: // then 40: ResultSet rs = stmt.executeQuery("select * from weather"); 41: while (rs.next()) { 42: Object value = rs.getObject("temperature"); </pre>	
	污染路径: 无	
483	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/AuthenticationTest.java	行号: 87
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 85: } 86: conn = DriverManager.getConnection(url); 87: Statement stmt = conn.createStatement(); 88: stmt.execute("alter user " + USER + " pass '" + PASSWORD + "'"); 89: stmt.close(); </pre>	
	污染路径: 无	
484	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 871
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 869: @Description("where condition like") 870: public void case12_selectWhere01() throws SQLException { 871: ResultSet resultSet = statement.executeQuery("select *,tbname from jsons1 where jtag->'tag2' like 'bei%'"); 872: int count = 0; 873: while (resultSet.next()) { </pre>	
	污染路径: 无	
485	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 173

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 171: @Description("normal select stable") 172: public void case04_select01() throws SQLException { 173: ResultSet resultSet = statement.executeQuery("select dataint from jsons1"); 174: int count = 0; 175: while (resultSet.next()) {	
	污染路径: 无	
486	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 418
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 416: @Description("where condition support '<=' in character") 417: public void case05_symbolOperation04() throws SQLException { 418: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'<='beijing'"); 419: int count = 0; 420: while (resultSet.next()) {	
	污染路径: 无	
487	缺陷发生位置: /src/test/java/com/taosdata/jdbc/VarbinaryTest.java	行号: 52
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 50: preparedStatement.columnDataAddBatch(); 51: preparedStatement.columnDataExecuteBatch(); 52: ResultSet resultSet = statement.executeQuery("select c1 from " + DB_NAME + "." + TABLE_STMT); 53: while (resultSet.next()) { 54: Assert.assertArrayEquals(expectedArray, resultSet.getBytes(1));	

	污染路径: 无	
488	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSConFailOverTest.java	行号: 120
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 118: public void after() throws SQLException { 119: if (null != connection) { 120: Statement statement = connection.createStatement(); 121: statement.setQueryTimeout(60); 122: statement.execute("drop database if exists " + dbName);	
	污染路径: 无	
489	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 683
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 681: @Description("where condition support 'is not null'") 682: public void case09_select03() throws SQLException { 683: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag is not null"); 684: int count = 0; 685: while (resultSet.next()) {	
	污染路径: 无	
490	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 719
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 717: @Description("contains") 718: public void case09_select10() throws SQLException { 719: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag1'");	

	720: int count = 0; 721: while (resultSet.next()) {	
	污染路径: 无	
491	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 241
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 239: @Description("select not exist json tag") 240: public void case04_select08() throws SQLException { 241: ResultSet resultSet = statement.executeQuery("select jtag from jsons1_9"); 242: resultSet.next(); 243: String result = resultSet.getString(1);	
	污染路径: 无	
492	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBResultSetTest.java	行号: 944
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 942: @Test 943: public void testClosedResultSetMethodCalls() throws SQLException { 944: Statement statement = conn.createStatement(); 945: ResultSet newRs = statement.executeQuery("select * from " + DB_NAME + ".weather"); 946: newRs.close();	
	污染路径: 无	
493	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessTest.java	行号: 108
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 106: 107: // then 108: Statement statement = connection.createStatement();	

	109: statement.executeUpdate("use " + DB_NAME); 110: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
494	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBConnectionTest.java	行号: 131
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 129: public void testCreateStatement() throws SQLException { 130: Statement stmt = conn.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY); 131: ResultSet rs = stmt.executeQuery("show cluster alive"); 132: rs.next(); 133: int status = rs.getInt("status");	
	污染路径: 无	
495	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 649
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 647: Assert.assertEquals(1, result); 648: try (Statement stmt = conn.createStatement()) { 649: ResultSet rs = stmt.executeQuery("select * from t1"); 650: ResultSetMetaData meta = rs.getMetaData(); 651: assertMetaData(meta);	
	污染路径: 无	
496	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ ResultSetMetaShouldNotBeNullRestfulTest.java	行号: 72
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	

	181: 182: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount());	
	污染路径: 无	
502	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	行号: 61
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 59: public void test003_ExecuteBatchInsert() throws SQLException { 60: String sql = "insert into " + db_name + "." + tableName + " (ts, c1) values(?, ?);" 61: PreparedStatement statement = connection.prepareStatement(sql); 62: for (int i = 0; i < 10; i++) { 63: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis() + i)); }	
	污染路径: 无	
503	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 163
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 161: PreparedStatement pstmt = conn.prepareStatement("show cluster alive", 162: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY); 163: ResultSet rs = pstmt.executeQuery(); 164: rs.next(); 165: int status = rs.getInt("status");	
	污染路径: 无	
504	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 575
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 573: @Description("where condition support '<=' for double") 574: public void case07_doubleOperation02() throws SQLException { 575: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'<=1.232"); 576: int count = 0; 577: while (resultSet.next()) {		
	污染路径: 无		
505	缺陷发生位置:	行号:	
	/src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	376	
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.		
	代码片段: 374: writer.close(); 375: 376: Statement statement = conn.createStatement(); 377: ResultSet rs = statement.executeQuery("select * from measurement_close"); 378: Assert.assertTrue(rs.next());		
506	污染路径:		
	无		
	缺陷发生位置:	行号:	
	/src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	161	
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.		
	代码片段: 159: @Test(expected = SQLFeatureNotSupportedException.class) 160: public void testPrepareStatement() throws SQLException { 161: PreparedStatement pstmt = conn.prepareStatement("show cluster alive", 162: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY); 163: ResultSet rs = pstmt.executeQuery();		
	污染路径:		

	无	
507	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 199
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 197: final String query = "select * from " + TBNAME_1; 198: try (Statement stmt = conn.createStatement()) { 199: ResultSet rs = stmt.executeQuery(query); 200: rs.next(); 201: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
508	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 359
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 357: @Description("where condition result is null") 358: public void case04_select21() throws SQLException { 359: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> >'tag1'='beijing'"); 360: int count = 0; 361: while (resultSet.next()) {	
	污染路径: 无	
509	缺陷发生位置: /src/test/java/com/taosdata/jdbc/BlobTest.java	行号: 29
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 27: public void testInsert() throws Exception { 28: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NATIVE + " tags(\"123456abcdef\") values(now, \"\\x\" + TEST_STR + "\\"); 29: ResultSet resultSet = statement.executeQuery("select c1, t1 from " + DB_NAME + "." + TABLE_NATIVE);	

	30: resultSet.next(); 31: Assert.assertArrayEquals(expectedArray, resultSet.getBytes(1));	
	污染路径: 无	
510	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 684
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 682: @Description("where condition support 'is not null'") 683: public void case09_select03() throws SQLException { 684: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag is not null"); 685: int count = 0; 686: while (resultSet.next()) {	
	污染路径: 无	
511	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/FailOverTest.java	行号: 21
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 19: while (System.currentTimeMillis() < end) { 20: try (Connection conn = DriverManager.getConnection(url); Statement stmt = conn.createStatement()) { 21: ResultSet rs = stmt.executeQuery("show dnodes"); 22: ResultSetMetaData meta = rs.getMetaData(); 23: while (rs.next()) {	
	污染路径: 无	
512	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 615
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 613: @Description("where condition support '!=' for	

	double") 614: public void case07_doubleOperation05() throws SQLException { 615: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=1.232"); 616: int count = 0; 617: while (resultSet.next()) {	
	污染路径: 无	
513	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/QueryTimeoutTest.java	行号: 24
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 22: final int timeout = 1; 23: final String sql = "show cluster alive"; 24: TSDBStatement stmt = (TSDBStatement) conn.createStatement(); 25: 26: // when and Then	
	污染路径: 无	
514	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSIpv6Test.java	行号: 41
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 39: @Test 40: public void testWSSelect() throws SQLException { 41: Statement statement = connection.createStatement(); 42: int count = 0; 43: long start = System.nanoTime();	
	污染路径: 无	
515	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 130
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	

	代码片段: 128: 129: // then 130: Statement statement = conn.createStatement(); 131: ResultSet rs = statement.executeQuery("show tables"); 132: Assert.assertNotNull(rs);	
	污染路径: 无	
516	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 452
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 450: @Description("where condition support '=' for int") 451: public void case06_selectValue01() throws SQLException { 452: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'=5"); 453: int count = 0; 454: while (resultSet.next()) {	
	污染路径: 无	
517	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 740
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 738: @Description("contains with no exist tag") 739: public void case09_select12() throws SQLException { 740: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag_no_exist'"); 741: int count = 0; 742: while (resultSet.next()) {	
	污染路径: 无	
518	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/BatchErrorIgnoreTest.java	行号: 66

	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 64: url += "&batchErrorIgnore=true"; 65: } 66: Connection conn = DriverManager.getConnection(url); 67: 68: // when </pre>	
	污染路径: 无	
519	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 193
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 191: @Description("select json tag from stable") 192: public void case04_select03() throws SQLException { 193: ResultSet resultSet = statement.executeQuery("select jtag from jsons1"); 194: ResultSetMetaData metaData = resultSet.getMetaData(); 195: metaData.getColumnTypeName(1); </pre>	
	污染路径: 无	
520	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 253
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 251: public void testULongOutOfRange() throws SQLException { 252: String sql = "insert into " + dbName + "." + tableName2 + " values(?, ?, ?, ?, ?)"; 253: PreparedStatement statement = connection.prepareStatement(sql); 254: statement.setTimestamp(1, new Timestamp(0)); 255: statement.setShort(2, (short) 0); </pre>	
	污染路径: 无	

521	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 675
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 673: @Description("where conditional support 'is null'") 674: public void case09_select02() throws SQLException { 675: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag is null"); 676: int count = 0; 677: while (resultSet.next()) {	
	污染路径: 无	
522	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/AuthenticationTest.java	行号: 99
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 97: url += "?user=" + USER + "&password=" + PASSWORD; 98: } 99: conn = DriverManager.getConnection(url); 100: stmt = conn.createStatement(); 101: Assert.assertNotNull(stmt);	
	污染路径: 无	
523	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 588
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 586: @Description("where condition support '>' for double") 587: public void case07_doubleOperation03() throws SQLException { 588: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'>1.23"); 589: int count = 0; 590: while (resultSet.next()) {	

	污染路径: 无	
524	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SetConfigurationInJNITest.java	行号: 171
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 169: url = "jdbc:TAOS://" + host + ":0/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword() + ""; 170: } 171: Connection conn = DriverManager.getConnection(url, props); 172: Statement stmt = conn.createStatement(); 173: Assert.assertNotNull(stmt);	
	污染路径: 无	
525	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ NanoSecondTimestampJNITest.java	行号: 126
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 124: // when 125: try (Statement stmt = conn.createStatement()) { 126: ResultSet rs = stmt.executeQuery("select * from weather"); 127: rs.next(); 128: // then	
	污染路径: 无	
526	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 572
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 570: @Description("where condition support '<=' for double") 571: public void case07_doubleOperation02() throws SQLException {	

	572: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'<=1.232"); 573: int count = 0; 574: while (resultSet.next()) {	
	污染路径: 无	
527	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 188
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 186: 187: Statement statement = conn.createStatement(); 188: ResultSet rs = statement.executeQuery("select count(*) from measurement_array"); 189: rs.next(); 190: Assert.assertEquals(2, rs.getInt(1));	
	污染路径: 无	
528	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulCompressTest.java	行号: 50
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 48: properties.setProperty(TSDBDriver.PROPERTY_KEY_ENABLE_COMPRESSION, "true"); 49: connection = DriverManager.getConnection(url, properties); 50: Statement statement = connection.createStatement(); 51: statement.execute("drop database if exists " + DB_NAME); 52: statement.execute("create database " + DB_NAME);	
	污染路径: 无	
529	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 651

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 649: @Description("where condition support '=' for boolean") 650: public void case08_boolOperation02() throws SQLException { 651: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'=false"); 652: int count = 0; 653: while (resultSet.next()) {	
	污染路径: 无	
530	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 756
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 754: @Description("where condition with and") 755: public void case10_selectAndOr01() throws SQLException { 756: ResultSet resultSet = statement 757: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='beijing'"); 758: int count = 0;	
	污染路径: 无	
531	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSTimeZoneTest.java	行号: 121
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 119: public void TimeZoneStmtAllTimeTypeTest() throws SQLException, InterruptedException { 120: String sql = "insert into " + dbName + "." + FULL_TABLE_NAME + " values(?, ?, ?, ?, ?, ?)"; 121: PreparedStatement statement = connection.prepareStatement(sql); 122: 123: // 创建一个 LocalDateTime 对象，表示特定的日期和时间	

	污染路径: 无	
532	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 427
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 425: String sql = "select * from weather_test"; 426: PreparedStatement statement = conn.prepareStatement(sql); 427: ResultSet rs = statement.executeQuery(); 428: int rows = 0; 429: while (rs.next()) {	
	污染路径: 无	
533	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 456
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 454: @Description("where condition support '=' for int") 455: public void case06_selectValue01() throws SQLException { 456: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'=5"); 457: int count = 0; 458: while (resultSet.next()) {	
	污染路径: 无	
534	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 564
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 562: @Description("where condition support '<' for double") 563: public void case07_doubleOperation01() throws SQLException {	

	564: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'<1.232"); 565: int count = 0; 566: while (resultSet.next()) {	
	污染路径: 无	
535	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 121
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 119: final String query = "select * from " + TBNAME_1; 120: try (Statement stmt = conn.createStatement()) { 121: ResultSet rs = stmt.executeQuery(query); 122: rs.next(); 123: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
536	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 220
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 218: @Description("where condition tag is not null") 219: public void case04_select05() throws SQLException { 220: ResultSet resultSet = statement.executeQuery("select jtag from jsons1 where jtag is not null"); 221: int count = 0; 222: while (resultSet.next()) {	
	污染路径: 无	
537	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 735
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 733: @Description("contains")	

	<pre>734: public void case09_select11() throws SQLException { 735: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag3'"); 736: int count = 0; 737: while (resultSet.next()) {</pre>	
	污染路径: 无	
538	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 747
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 745: @Description("contains with no exist tag") 746: public void case09_select12() throws SQLException { 747: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag_no_exist'"); 748: int count = 0; 749: while (resultSet.next()) {	
	污染路径: 无	
539	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/NullValueInResultSetTest.java	行号: 70
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 68: stmt.execute("create table weather(ts timestamp, f1 timestamp, f2 int, f3 bigint, f4 float, f5 double, f6 smallint, f7 tinyint, f8 bool, f9 binary(64), f10 nchar(64));"); 69: stmt.executeUpdate("insert into weather(ts, f1) values(now+1s, " + TimestampUtil.datetimeToLong("2021-04- 21 12:00:00.000") + ")"); 70: ResultSet rs = stmt.executeQuery("select * from weather"); 71: rs.next(); 72:	
	污染路径: 无	
540	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java		487
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.		
	代码片段: 485: int numOfRows = 1; 486: 487: TSWSPreparedStatement s = (TSWSPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?,?,?,?,?,?,?,?) values(?, ?)"); 488: s.setTableName("w3"); 489: s.setTagNull(0, TSDBConstants.TSDB_DATA_TYPE_TINYINT);		
	污染路径: 无		
541	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java		行号: 723
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 721: @Description("contains") 722: public void case09_select10() throws SQLException { 723: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag1'"); 724: int count = 0; 725: while (resultSet.next()) {		
	污染路径: 无		
542	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java		行号: 459
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 457: @Description("where condition support '=' for int") 458: public void case06_selectValue01() throws SQLException { 459: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=5"); 460: int count = 0;		

	461: while (resultSet.next()) {	
	污染路径: 无	
543	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 754
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 752: Assert.assertEquals(1, result); 753: try (Statement stmt = conn.createStatement()) { 754: ResultSet rs = stmt.executeQuery("select * from t1"); 755: ResultSetMetaData meta = rs.getMetaData(); 756: assertMetaData(meta);	
	污染路径: 无	
544	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cloud/CloudSchemalessNewTest.java	行号: 45
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 43: ((AbstractConnection)connection).write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS); 44: // then 45: Statement statement = connection.createStatement(); 46: ResultSet rs = statement.executeQuery("select * from javatest.st order by _ts DESC limit 1"); 47: Assert.assertNotNull(rs);	
	污染路径: 无	
545	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 716
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 714: @Description("contains") 715: public void case09_select10() throws SQLException { 716: ResultSet resultSet =	

	statement.executeQuery("select * from jsons1 where jtag contains 'tag1'"); 717: int count = 0; 718: while (resultSet.next()) {	
	污染路径: 无	
546	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ PreparedStatementBatchInsertRestfulTest.java	行号: 89
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 87: @After 88: public void after() throws SQLException { 89: Statement stmt = conn.createStatement(); 90: stmt.execute("drop database if exists " + DB_NAME); 91: stmt.close();	
	污染路径: 无	
547	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 306
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 304: pstmt.setTimestamp(4, new Timestamp(0)); 305: 306: ResultSet rs = pstmt.executeQuery(); 307: rs.next(); 308: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
548	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UnsignedNumberRestfulTest.java	行号: 25
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 23: public void testCase001() throws SQLException { 24: try (Statement stmt = conn.createStatement()) {	

	25: ResultSet rs = stmt.executeQuery("select * from " + DB_NAME + ".us_table"); 26: ResultSetMetaData meta = rs.getMetaData(); 27: assertResultSetMetaData(meta);	
	污染路径: 无	
549	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 318
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 316: @Description("select a json tag, the result number equals tables number") 317: public void case04_select16() throws SQLException { 318: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1"); 319: int count = 0; 320: while (resultSet.next()) {	
	污染路径: 无	
550	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 778
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 776: @Description("where condition with 'and'") 777: public void case10_selectAndOr03() throws SQLException { 778: ResultSet resultSet = statement 779: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='shanghai'); 780: int count = 0;	
	污染路径: 无	
551	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 251
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 249: @Description("select a json tag")	

	250: public void case04_select09() throws SQLException { 251: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_1"); 252: resultSet.next(); 253: String result = resultSet.getString(1);	
	污染路径: 无	
552	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ ConnectMultiTaosdByRestfulWithDifferentTokenTest.java	行号: 35
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 33: private void executeSelectStatus(Connection connection) throws SQLException { 34: try (Statement stmt = connection.createStatement()) { 35: ResultSet rs = stmt.executeQuery("select 1"); 36: ResultSetMetaData meta = rs.getMetaData(); 37: Assert.assertNotNull(meta);	
	污染路径: 无	
553	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 223
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 221: @Description("where condition tag is not null") 222: public void case04_select05() throws SQLException { 223: ResultSet resultSet = statement.executeQuery("select jtag from jsons1 where jtag is not null"); 224: int count = 0; 225: while (resultSet.next()) {	
	污染路径: 无	
554	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 34
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: <pre> 32: public void createStatement() throws SQLException { 33: try (Statement stmt = conn.createStatement()) { 34: ResultSet rs = stmt.executeQuery("show cluster alive"); 35: rs.next(); 36: int status = rs.getInt("status"); </pre>	
	污染路径: 无	
555	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDatabaseConnectionTest.java	行号: 141
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 139: @Test(expected = SQLFeatureNotSupportedException.class) 140: public void testPrepareStatement() throws SQLException { 141: PreparedStatement pstmt = conn.prepareStatement("show cluster alive", 142: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY); 143: ResultSet rs = pstmt.executeQuery(); </pre>	
	污染路径: 无	
556	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 50
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 48: 49: // then 50: Statement statement = conn.createStatement(); 51: ResultSet rs = statement.executeQuery("show tables"); 52: Assert.assertNotNull(rs); </pre>	
	污染路径: 无	
557	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/	行号: 24

	JDBCTypeAndTypeCompareTest.java	
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 22: } 23: conn = DriverManager.getConnection(url, TestEnvUtil.getUser(), TestEnvUtil.getPassword()); 24: Statement stmt = conn.createStatement(); 25: 26: stmt.execute("drop database if exists " + DB_NAME); </pre>	
	污染路径: 无	
558	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/UnsignedNumberJniTest.java	行号: 75
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 73: long now = System.currentTimeMillis(); 74: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 127, 32767,4294967294, 18446744073709551614)"); 75: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); 76: ResultSetMetaData meta = rs.getMetaData(); 77: assertResultSetMetaData(meta); </pre>	
	污染路径: 无	
559	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/MinimumConnectionCountTest.java	行号: 181
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 179: properties.setProperty(TSDBDriver.PROPERTY_KEY_HEALTH_CHECK_RECOVERY_COUNT, "1"); 180: 181: Connection connection1 = DriverManager.getConnection(url, properties); 182: ConnectionParam param = ((WSConnection)connection1).getParam(); </pre>	

	<pre> 87: // check the connection count 88: Statement statement1 = connection1.createStatement(); 89: ResultSet rs = statement1.executeQuery("show databases;"); 90: rs.close(); </pre>	
	污染路径: 无	
563	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/SQLTest.java	行号: 579
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 577: @AfterClass 578: public static void after() throws SQLException { 579: Statement stmt = connection.createStatement(); 580: stmt.execute("drop database if exists " + DB_NAME); 581: stmt.close(); </pre>	
	污染路径: 无	
564	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 313
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 311: 312: connection = DriverManager.getConnection(url, properties); 313: Statement statement = connection.createStatement(); 314: statement.execute("drop database if exists " + DB_NAME); 315: statement.execute("create database " + DB_NAME); </pre>	
	污染路径: 无	
565	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 46
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 44: public void prepareStatement() throws SQLException { 45: PreparedStatement pstmt = conn.prepareStatement("show cluster alive"); 46: ResultSet rs = pstmt.executeQuery(); 47: rs.next(); 48: int status = rs.getInt("status"); </pre>	
	污染路径: 无	
566	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	239
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 237: public void testUIntOutOfRange2() throws SQLException { 238: String sql = "insert into " + dbName + "." + tableName2 + " values(?, ?, ?, ?, ?)"; 239: PreparedStatement statement = connection.prepareStatement(sql); 240: statement.setTimestamp(1, new Timestamp(0)); 241: statement.setShort(2, (short) 0); </pre>	
	污染路径: 无	
567	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	563
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 561: @Description("where condition support '<' for double") 562: public void case07_doubleOperation01() throws SQLException { 563: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'<1.232"); 564: int count = 0; 565: while (resultSet.next()) { </pre>	
	污染路径:	

	无	
568	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 343
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 341: writer.writeRaw(line, SchemalessProtocolType.LINE, SchemalessTimestampType.MICRO_SECONDS); 342: 343: Statement statement = conn.createStatement(); 344: ResultSet rs = statement.executeQuery("select * from measurement_us"); 345: Assert.assertTrue(rs.next());	
	污染路径: 无	
569	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtNsTest.java	行号: 106
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 104: 105: sql = "select * from " + db_name + "." + tableName + " where ts > ? and ts < ?"; 106: statement = connection.prepareStatement(sql); 107: statement.setTimestamp(1, new Timestamp(0)); 108: statement.setTimestamp(2, new Timestamp(System.currentTimeMillis() + 1000));	
	污染路径: 无	
570	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WsConnectionEnterpriseTest.java	行号: 77
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 75: properties.setProperty(TSDBDriver.PROPERTY_KEY_BATCH_LOAD, "true"); 76: connection = DriverManager.getConnection(url, properties); 77: Statement statement = connection.createStatement();	

	78: ResultSet resultSet = statement.executeQuery("show databases"); 79: resultSet.next();	
	污染路径: 无	
571	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 781
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 779: @Description("where condition with 'and'") 780: public void case10_selectAndOr03() throws SQLException { 781: ResultSet resultSet = statement 782: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='shanghai'"); 783: int count = 0;	
	污染路径: 无	
572	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 95
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 93: 94: // then 95: Statement statement = conn.createStatement(); 96: ResultSet rs = statement.executeQuery("show tables"); 97: Assert.assertNotNull(rs);	
	污染路径: 无	
573	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 831
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 829: @Description("test with tbname/normal column") 830: public void case11_selectTbName02() throws SQLException {	

	831: ResultSet resultSet = statement 832: .executeQuery("select * from jsons1 where tbyname = 'jsons1_1' and jtag contains 'tag3'"); 833: int count = 0;	
	污染路径: 无	
574	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 262
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 260: @Description("select a json tag, the value is empty") 261: public void case04_select10() throws SQLException { 262: ResultSet resultSet = statement.executeQuery("select jtag->'tag2' from jsons1_6"); 263: resultSet.next(); 264: String result = resultSet.getString(1);	
	污染路径: 无	
575	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ParameterBindTest.java	行号: 188
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 186: public void after() { 187: try { 188: Statement stmt = conn.createStatement(); 189: stmt.execute("drop database if exists " + DB_NAME); 190: if (conn != null)	
	污染路径: 无	
576	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DatetimeBefore1970Test.java	行号: 195
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 193: stmt.executeUpdate("insert into weather(ts) values('1970-01-01 00:00:00.000000001')"); 194: stmt.executeUpdate("insert into weather(ts)	

	values(" + now + ")); 195: ResultSet rs = stmt.executeQuery("select * from weather order by ts asc"); 196: ResultSetMetaData metaData = rs.getMetaData(); 197: Assert.assertEquals(2, metaData.getColumnCount());	
	污染路径: 无	
577	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 552
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 550: public void createTwoSameDbTest() throws SQLException { 551: // when 552: Statement stmt = conn.createStatement(); 553: stmt.execute("create database dbtest"); 554: stmt.execute("create database dbtest");	
	污染路径: 无	
578	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionRestfulTest.java	行号: 88
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 86: public void testCase5() throws SQLException { 87: try (Statement stmt = conn3.createStatement()) { 88: ResultSet rs = stmt.executeQuery("select last_row(ts) from " + MS_TIMESTAMP_DB + ".weather"); 89: rs.next(); 90: Timestamp actual = rs.getTimestamp(1);	
	污染路径: 无	
579	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 258
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 256: @Description("select a json tag, the value is empty") 257: public void case04_select10() throws SQLException { 258: ResultSet resultSet = statement.executeQuery("select jtag->'tag2' from jsons1_6"); 259: resultSet.next(); 260: String result = resultSet.getString(1);	
	污染路径: 无	
580	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	225
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 223: public void testUIntOutOfRange() throws SQLException { 224: String sql = "insert into " + dbName + "." + tableName2 + " values(?, ?, ?, ?, ?)"; 225: PreparedStatement statement = connection.prepareStatement(sql); 226: statement.setTimestamp(1, new Timestamp(0)); 227: statement.setShort(2, (short) 0);	
	污染路径: 无	
581	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/cases/ ResultSetMetaShouldNotBeNullRestfulTest.java	27
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 25: 26: // when 27: Statement statement = connection.createStatement(); 28: metaData = statement.executeQuery("select * from weather").getMetaData(); 29: columnCount = metaData.getColumnCount();	
	污染路径: 无	

	污染路径: 无	
585	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 507
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 505: @Description("where condition support '>=' for int") 506: public void case06_selectValue05() throws SQLException { 507: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'>=5"); 508: int count = 0; 509: while (resultSet.next()) {	
	污染路径: 无	
586	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 1050
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1048: Assert.assertEquals(1, result); 1049: try (Statement stmt = conn.createStatement()) { 1050: ResultSet rs = stmt.executeQuery("select * from t1"); 1051: ResultSetMetaData meta = rs.getMetaData(); 1052: assertMetaData(meta);	
	污染路径: 无	
587	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/GroupByFetchBlockTest.java	行号: 30
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 28: String sql = "select symbol,max(high) from " + dbName + "." + tName + " where kline_type = '1m' group by symbol;"; 29: 30: ResultSet resultSet = statement.executeQuery(sql); 31: resultSet.next();	

	32: Assert.assertEquals("1m", resultSet.getString(1));	
	污染路径: 无	
588	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 929
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 927: @Description("where condition match") 928: public void case12_selectWhere06() throws SQLException { 929: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag2' match 'jing\$'"); 930: int count = 0; 931: while (resultSet.next()) {	
	污染路径: 无	
589	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 671
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 669: @Description("where conditional support 'is null'") 670: public void case09_select02() throws SQLException { 671: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag is null"); 672: int count = 0; 673: while (resultSet.next()) {	
	污染路径: 无	
590	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 261
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 259: @Description("select a json tag, the value is empty") 260: public void case04_select10() throws SQLException { 261: ResultSet resultSet =	

	statement.executeQuery("select jtag->'tag2' from jsons1_6"); 262: resultSet.next(); 263: String result = resultSet.getString(1);	
	污染路径: 无	
591	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UseNowInsertTimestampTest.java	行号: 29
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 27: stmt.execute("insert into weather values(now, 1)"); 28: 29: ResultSet rs = stmt.executeQuery("select * from weather"); 30: rs.next(); 31: Timestamp ts = rs.getTimestamp("ts");	
	污染路径: 无	
592	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 1084
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1082: @Description("query metadata for json") 1083: public void case19_selectMetadata02() throws SQLException { 1084: ResultSet resultSet = statement.executeQuery("select *,jtag from jsons1"); 1085: ResultSetMetaData metaData = resultSet.getMetaData(); 1086: int columnType = metaData.getColumnType(6);	
	污染路径: 无	
593	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 302
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	

	代码片段: 300: 301: String sql = "select * from weather_test"; 302: PreparedStatement statement = conn.prepareStatement(sql); 303: ResultSet rs = statement.executeQuery(); 304: int rows = 0;	
	污染路径: 无	
594	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ResetQueryCacheTest.java	行号: 50
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 48: } 49: Connection connection = DriverManager.getConnection(url); 50: Statement statement = connection.createStatement(); 51: 52: // when	
	污染路径: 无	
595	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 1068
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1066: @Description("query metadata for json") 1067: public void case19_selectMetadata01() throws SQLException { 1068: ResultSet resultSet = statement.executeQuery("select jtag from jsons1"); 1069: ResultSetMetaData metaData = resultSet.getMetaData(); 1070: int columnType = metaData.getColumnType(1);	
	污染路径: 无	
596	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionTest.java	行号: 132

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 130: connection = DriverManager.getConnection(url, properties); 131: Statement statement = connection.createStatement(); 132: ResultSet resultSet = statement.executeQuery("show databases"); 133: resultSet.next(); 134: resultSet.close(); </pre>	
	污染路径: 无	
597	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 754
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 752: Assert.assertEquals(1, result); 753: try (Statement stmt = conn.createStatement()) { 754: ResultSet rs = stmt.executeQuery("select * from t1"); 755: ResultSetMetaData meta = rs.getMetaData(); 756: assertMetaData(meta); </pre>	
	污染路径: 无	
598	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 810
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 808: @Description("where condition with 'and' and contains") 809: public void case10_selectAndOr06() throws SQLException { 810: ResultSet resultSet = statement 811: .executeQuery("select * from jsons1 where jtag->'tag1'='femail' and jtag contains 'tag3'"); 812: int count = 0; </pre>	

	<pre> SQLException { 442: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'='"); 443: int count = 0; 444: while (resultSet.next()) { </pre>	
	污染路径: 无	
602	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UseNowInsertTimestampTest.java	行号: 73
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 71: stmt.execute("insert into weather values(" + now_time + ", 1)"); 72: 73: ResultSet rs = stmt.executeQuery("select * from weather"); 74: rs.next(); 75: </pre>	
	污染路径: 无	
603	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 934
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 932: @Description("where condition match") 933: public void case12_selectWhere07() throws SQLException { 934: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1' match '收到'"); 935: int count = 0; 936: while (resultSet.next()) { </pre>	
	污染路径: 无	
604	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 371

	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 369: @Description("where condition equation has chinese") 370: public void case04_select23() throws SQLException { 371: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'='收到货'"); 372: int count = 0; 373: while (resultSet.next()) {	
	污染路径: 无	
605	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 468
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 466: @Description("where conditional support '<' for int") 467: public void case06_selectValue02() throws SQLException { 468: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'<54"); 469: int count = 0; 470: while (resultSet.next()) {	
	污染路径: 无	
606	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDatabaseMetaDataTest.java	行号: 59
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 57: 58: Statement stmt = connection.createStatement(); 59: ResultSet resultSet = stmt.executeQuery("show `"+ DB_NAME + "` .tables"); 60: while (resultSet.next()) { 61: System.out.println(resultSet.getString(1));	
	污染路径: 无	

607	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 854
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 852: @Description("test with tbname/normal column") 853: public void case11_selectTbName04() throws SQLException { 854: ResultSet resultSet = statement 855: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=23"); 856: int count = 0;	
	污染路径: 无	
608	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSIpv6Test.java	行号: 70
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 68: properties.setProperty(TSDBDriver.PROPERTY_KEY_BATCH_LOAD, "true"); 69: connection = DriverManager.getConnection(url, properties); 70: Statement statement = connection.createStatement(); 71: statement.execute("drop database if exists " + DATABASE_NAME); 72: statement.execute("create database " + DATABASE_NAME);	
	污染路径: 无	
609	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 459
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 457: @Test 458: public void testIsClosedStatus() throws SQLException { 459: Connection tempConn =	

	DriverManager.getConnection(conn.getMetaData().getURL()); 460: 461: // Initial state: open	
	污染路径: 无	
610	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulResultSetMetaDataTest.java	行号: 219
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 217: stmt.close(); 218: if (conn != null) { 219: Statement statement = conn.createStatement(); 220: statement.execute("drop database if exists " + DB_NAME); 221: statement.close();	
	污染路径: 无	
611	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 515
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 513: @Description("where conditional support '!=' for int") 514: public void case06_selectValue06() throws SQLException { 515: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=5"); 516: int count = 0; 517: while (resultSet.next()) {	
	污染路径: 无	
612	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 512
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 510: @Description("where conditional support '!=' for int")	

	511: public void case06_selectValue06() throws SQLException { 512: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'!=5"); 513: int count = 0; 514: while (resultSet.next()) {	
	污染路径: 无	
613	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 76
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 74: 75: // then 76: Statement statement = conn.createStatement(); 77: statement.executeUpdate("use " + dbname); 78: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
614	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 246
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 244: String sql = "select * from weather_test"; 245: PreparedStatement statement = conn.prepareStatement(sql); 246: ResultSet rs = statement.executeQuery(); 247: int rows = 0; 248: while (rs.next()) {	
	污染路径: 无	
615	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SetConfigurationInJNITest.java	行号: 200
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	

	代码片段: 198: url = "jdbc:TAOS://" + host + ":0/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword() + ""; 199: } 200: Connection conn = DriverManager.getConnection(url, props); 201: Statement stmt = conn.createStatement(); 202: Assert.assertNotNull(stmt);	
	污染路径: 无	
616	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 236
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 234: 235: // then 236: Statement statement = conn.createStatement(); 237: ResultSet rs = statement.executeQuery("show tables"); 238: Assert.assertNotNull(rs);	
	污染路径: 无	
617	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 602
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 600: String sql = "select * from weather_test"; 601: PreparedStatement statement = conn.prepareStatement(sql); 602: ResultSet rs = statement.executeQuery(); 603: int rows = 0; 604: while (rs.next()) {	
	污染路径: 无	
618	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cloud/CloudTest.java	行号: 27
	步骤描述:	

	污染路径: 无	
621	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1089
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1087: @Description("query metadata for one json result") 1088: public void case19_selectMetadata03() throws SQLException { 1089: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_6"); 1090: ResultSetMetaData metaData = resultSet.getMetaData(); 1091: int columnType = metaData.getColumnType(1);	
	污染路径: 无	
622	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 324
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 322: int numOfRows = 1; 323: 324: TSWSPreparedStatement s = (TSWSPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?) values(?, ?, ?)"); 325: Random r = new Random(); 326: s.setTableName("w1");	
	污染路径: 无	
623	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSGeometryTest.java	行号: 40
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 38: @Test 39: public void testPrepare() throws SQLException { 40: TSWSPreparedStatement preparedStatement = (TSWSPreparedStatement)	

	<pre>connection.prepareStatement("insert into ? using " + DB_NAME + "." + TABLE_STMT + " tags(?) values (?, ?)"); 41: preparedStatement.setTableName("subt_b"); 42: preparedStatement.setTagGeometry(0, expectedArray);</pre>	
	污染路径: 无	
624	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ NanoSecondTimestampRestfulTest.java	行号: 98
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre>96: try (Statement stmt = conn.createStatement()) { 97: stmt.executeUpdate("insert into weather(ts, temperature, humidity) values(" + timestampStr + ", 12.3, 4)"); 98: ResultSet rs = stmt.executeQuery("select * from weather"); 99: rs.next(); 100:</pre>	
	污染路径: 无	
625	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 972
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre>970: @Description("test duplicate key with normal column") 971: public void case14_selectDump02() throws SQLException { 972: ResultSet resultSet = statement.executeQuery(973: "select *,tbname,jtag from jsons1 where jtag- >'datastr' match '是' and datastr match 'js'"); 974: int count = 0;</pre>	
	污染路径: 无	
626	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 794
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 792: @Description("where condition with 'or'") 793: public void case10_selectAndOr04() throws SQLException { 794: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'=13 or jtag->'tag2'>35"); 795: int count = 0; 796: while (resultSet.next()) {	
	污染路径: 无	
627	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtNsTest.java	行号: 118
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 116: 117: private void initDbAndTable(String precision) throws SQLException, InterruptedException{ 118: Statement statement = connection.createStatement(); 119: statement.execute("drop database if exists " + db_name); 120: TestUtils.waitTransactionDone(connection);	
	污染路径: 无	
628	缺陷发生位置: /src/test/java/com/taosdata/jdbc/VarbinaryTest.java	行号: 37
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 35: @Test 36: public void testPrepare() throws SQLException { 37: TSDBPreparedStatement preparedStatement = (TSDBPreparedStatement) connection.prepareStatement("insert into ? using " + DB_NAME + "." + TABLE_STMT + " tags(?) values (?, ?)"); 38: preparedStatement.setTableName("subt_b"); 39: preparedStatement.setTagVarbinary(0, new byte[] {1,2,3,4,5,6});	

	789: try (Statement stmt = conn.createStatement()) { 790: ResultSet rs = stmt.executeQuery("select * from t1"); 791: ResultSetMetaData meta = rs.getMetaData(); 792: assertMetaData(meta);	
	污染路径: 无	
632	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 820
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 818: @Description("test with tbname/normal column") 819: public void case11_selectTbName01() throws SQLException { 820: ResultSet resultSet = statement.executeQuery("select * from jsons1 where tbname = 'jsons1_1'"); 821: int count = 0; 822: while (resultSet.next()) {	
	污染路径: 无	
633	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 71
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 69: final String query = "select * from " + TB_NAME_1; 70: try (PreparedStatement pstmt = conn.prepareStatement(query)) { 71: ResultSet rs = pstmt.executeQuery(); 72: rs.next(); 73: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
634	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 680
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 678: @Description("where condition support 'is not null'") 679: public void case09_select03() throws SQLException { 680: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag is not null"); 681: int count = 0; 682: while (resultSet.next()) {	
	污染路径: 无	
635	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 313
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 311: 312: Statement statement = conn.createStatement(); 313: ResultSet rs = statement.executeQuery("select * from measurement_raw_params"); 314: Assert.assertTrue(rs.next()); 315: rs.close();	
	污染路径: 无	
636	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 80
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 78: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(1)).getConnectCount()); 79: 80: Connection connection6 = DriverManager.getConnection(url, properties); 81: Assert.assertEquals(2, rebalanceManager.getEndpointInfo(param.getEndpoints().get(1)).getConnectCount()); 82:	
	污染路径:	

	无	
637	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 879
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 877: @Description("where condition like") 878: public void case12_selectWhere02() throws SQLException { 879: ResultSet resultSet = statement 880: .executeQuery("select *,tbname from jsons1 where jtag->'tag1' like 'fe%' and jtag->'tag2' is not null"); 881: int count = 0; </pre>	
	污染路径: 无	
638	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 540
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 538: @Description("where conditional support '!=' for int and result is nothing") 539: public void case06_selectValue08() throws SQLException { 540: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'=10"); 541: int count = 0; 542: while (resultSet.next()) { </pre>	
	污染路径: 无	
639	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 396
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 394: final String query = "select * from " + TBNAME_1; 395: try (Statement stmt = conn.createStatement()) { 396: ResultSet rs = stmt.executeQuery(query); 397: rs.next(); </pre>	

	1095: public void case19_selectMetadata03() throws SQLException { 1096: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_6"); 1097: ResultSetMetaData metaData = resultSet.getMetaData(); 1098: int columnType = metaData.getColumnType(1);	
	污染路径: 无	
643	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulResponseCodeTest.java	行号: 38
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 36: try (Connection connection = DriverManager.getConnection(url); 37: Statement statement = connection.createStatement()) { 38: ResultSet rs = statement.executeQuery("select 1"); 39: rs.next(); 40: Assert.assertEquals(1, rs.getInt(1));	
	污染路径: 无	
644	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 110
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 108: Assert.assertEquals(1, result); 109: try (Statement stmt = conn.createStatement()) { 110: ResultSet rs = stmt.executeQuery("select * from t1"); 111: ResultSetMetaData meta = rs.getMetaData(); 112: assertMetaData(meta);	
	污染路径: 无	
645	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 798
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 796: @Description("where condition with 'or'") 797: public void case10_selectAndOr04() throws SQLException { 798: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'=13 or jtag->'tag2'>35"); 799: int count = 0; 800: while (resultSet.next()) {	
	污染路径: 无	
646	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDbConnectionTest.java	行号: 200
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 198: @Test(expected = SQLFeatureNotSupportedException.class) 199: public void testCreateStatement1() throws SQLException { 200: Statement stmt = conn.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 201: ResultSet rs = stmt.executeQuery("show cluster alive"); 202: rs.next();	
	污染路径: 无	
647	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 265
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 263: query = "select * from t2"; 264: try (Statement stmt = conn.createStatement()) { 265: ResultSet rs = stmt.executeQuery(query); 266: rs.next(); 267: long timestamp = rs.getTimestamp(1).getTime();	

	污染路径: 无	
648	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSQueryBIModeTest.java	行号: 27
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 25: public void queryTbname() { 26: try (Statement statement = connection.createStatement()) { 27: ResultSet resultSet = statement.executeQuery("SELECT * FROM ws_bi_mode.meters LIMIT 1"); 28: resultSet.next(); 29: Assert.assertEquals(7, resultSet.getMetaData().getColumnCount()); 	
	污染路径: 无	
649	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 835
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 833: Assert.assertEquals(1, result); 834: try (Statement stmt = conn.createStatement()) { 835: ResultSet rs = stmt.executeQuery("select * from t1"); 836: ResultSetMetaData meta = rs.getMetaData(); 837: assertMetaData(meta); 	
	污染路径: 无	
650	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SetConfigurationInJNITest.java	行号: 55
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 53: url = "jdbc:TAOS://" + host + ":0/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword() + ""; 54: } 	

	55: Connection conn = DriverManager.getConnection(url, props); 56: Statement stmt = conn.createStatement(); 57: Assert.assertNotNull(stmt);	
	污染路径: 无	
651	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 662
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 660: int numOfRows = 1; 661: 662: TSDBPreparedStatement s = (TSDBPreparedStatement) conn.prepareStatement("insert into ? using weather_test tags(?,?,?,?,?,?,?) values(?, ?)"); 663: s.setTableName("w3"); 664: s.setTagNull(0, TSDBConstants.TSDB_DATA_TYPE_TINYINT);	
	污染路径: 无	
652	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 54
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 52: boolean flag = stmt.execute("insert into weather(ts, f1) values(now + 10s," + random.nextInt(100) + ")"); 53: Assert.assertEquals(false, flag); 54: ResultSet rs = stmt.executeQuery("select count(*) from weather"); 55: rs.next(); 56: int count = rs.getInt("count(*)");	
	污染路径: 无	
653	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 222
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段:	

	<pre> 220: @Test(expected = SQLFeatureNotSupportedException.class) 221: public void testCreateStatement1() throws SQLException { 222: Statement stmt = conn.createStatement(ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 223: ResultSet rs = stmt.executeQuery("show cluster alive"); 224: rs.next(); </pre>	
	污染路径: 无	
654	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSGeometryTest.java	行号: 31
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 29: 30: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NATIVE + " tags(\"POINT(3 5)\") values(now, \"POINT(1 2)\")"); 31: ResultSet resultSet = statement.executeQuery("select c1 from subt_a"); 32: 33: resultSet.next(); </pre>	
	污染路径: 无	
655	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ WSConsumerAutoCommitTest.java	行号: 123
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 121: @AfterClass 122: public static void after() throws InterruptedException, SQLException { 123: Statement statement = connection.createStatement(); 124: statement.executeUpdate("drop topic if exists " + TOPIC); </pre>	

	25: public void testExecuteUpdate() throws SQLException { 26: String sql = "insert into " + db_name + "." + tableName + " values(?, ?)"; 27: PreparedStatement statement = connection.prepareStatement(sql); 28: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis())); 29: statement.setInt(2, 1);	
	污染路径: 无	
659	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 659
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 657: @Description("where condition support '!=' for boolean") 658: public void case08_boolOperation03() throws SQLException { 659: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'!=false"); 660: int count = 0; 661: while (resultSet.next()) {	
	污染路径: 无	
660	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ ResultSetMetaShouldNotBeNullRestfulTest.java	行号: 28
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 26: // when 27: Statement statement = connection.createStatement(); 28: metaData = statement.executeQuery("select * from weather").getMetaData(); 29: columnCount = metaData.getColumnCount(); 30:	
	污染路径:	

	无	
661	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 45
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 43: @Test 44: public void prepareStatement() throws SQLException { 45: PreparedStatement pstmt = conn.prepareStatement("show cluster alive"); 46: ResultSet rs = pstmt.executeQuery(); 47: rs.next();	
	污染路径: 无	
662	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DatetimeBefore1970Test.java	行号: 41
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 39: stmt.executeUpdate("insert into weather(ts) values('1970-01-01 00:00:00.001')"); 40: stmt.executeUpdate("insert into weather(ts) values(" + now + ")"); 41: ResultSet rs = stmt.executeQuery("select * from weather order by ts asc"); 42: ResultSetMetaData metaData = rs.getMetaData(); 43: Assert.assertEquals(2, metaData.getColumnCount());	
	污染路径: 无	
663	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 265
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 263: stmt.execute("create table weather_test(ts timestamp, f1 nchar(4), f2 float, f3 double, f4 timestamp, f5 int, f6 bool, f7 binary(10))"); 264: 265: TSWSPreparedStatement s =	

	(TSWSPreparedStatement) conn.prepareStatement("insert into weather_test (ts, f1, f7) values(?, ?, ?)"); 266: Random r = new Random(); 267:	
	污染路径: 无	
664	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 495
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 493: @Description("where conditional support '>' for int") 494: public void case06_selectValue04() throws SQLException { 495: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'>4"); 496: int count = 0; 497: while (resultSet.next()) {	
	污染路径: 无	
665	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessTest.java	行号: 132
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 130: 131: // then 132: Statement statement = connection.createStatement(); 133: statement.executeUpdate("use " + DB_NAME); 134: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
666	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 972
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	<pre> 970: Assert.assertEquals(1, result); 971: try (Statement stmt = conn.createStatement()) { 972: ResultSet rs = stmt.executeQuery("select * from t1"); 973: ResultSetMetaData meta = rs.getMetaData(); 974: assertMetaData(meta); </pre>	
	污染路径: 无	
667	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	430
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 428: @Description("where condition support '!=' in character") 429: public void case05_symbolOperation05() throws SQLException { 430: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'!='beijing"); 431: int count = 0; 432: while (resultSet.next()) { </pre>	
	污染路径: 无	
668	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	471
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 469: @Description("where conditional support '<' for int") 470: public void case06_selectValue02() throws SQLException { 471: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'<54"); 472: int count = 0; 473: while (resultSet.next()) { </pre>	
	污染路径: 无	
669	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java		196
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: <pre> 194: Assert.assertEquals(1, result); 195: try (Statement stmt = conn.createStatement()) { 196: ResultSet rs = stmt.executeQuery("select * from t1"); 197: ResultSetMetaData meta = rs.getMetaData(); 198: assertMetaData(meta); </pre>		
	污染路径: 无		
670	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java		行号: 772
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: <pre> 770: @Description("where condition with 'or'") 771: public void case10_selectAndOr02() throws SQLException { 772: ResultSet resultSet = statement 773: .executeQuery("select * from jsons1 where jtag->'tag1'=false or jtag->'tag2'='beijing'"); 774: int count = 0; </pre>		
	污染路径: 无		
671	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDatabaseMetaDataTest.java		行号: 44
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.		
	代码片段: <pre> 42: public void testShowDatabase() throws SQLException { 43: 44: Statement stmt = connection.createStatement(); 45: ResultSet resultSet = stmt.executeQuery("show user databases"); 46: while (resultSet.next()) { </pre>		
	污染路径: 无		
672	缺陷发生位置:		行号:

	/src/test/java/com/taosdata/jdbc/ws/WSTBigQueryTest.java	35
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 33: 34: String sql1 = "select * from " + db_name + "." + tableName; 35: statement = connection.prepareStatement(sql1); 36: boolean b = statement.execute(); 37: Assert.assertTrue(b);	
	污染路径: 无	
673	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SetConfigurationInJNITest.java	行号: 229
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 227: url = "jdbc:TAOS://" + host + ":0/?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword() + ""; 228: } 229: Connection conn = DriverManager.getConnection(url, props); 230: Statement stmt = conn.createStatement(); 231: Assert.assertNotNull(stmt);	
	污染路径: 无	
674	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/NanoSecondTimestampJNITest.java	行号: 79
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 77: try (Statement stmt = conn.createStatement()) { 78: stmt.executeUpdate("insert into weather(ts, temperature, humidity) values(" + ns + ", 12.3, 4)"); 79: ResultSet rs = stmt.executeQuery("select * from weather"); 80: rs.next(); 81: // then	

	污染路径: 无	
675	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 344
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 342: 343: Statement statement = conn.createStatement(); 344: ResultSet rs = statement.executeQuery("select * from measurement_us"); 345: Assert.assertTrue(rs.next()); 346: rs.close();	
	污染路径: 无	
676	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 241
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 239: 240: // then 241: Statement statement = conn.createStatement(); 242: ResultSet rs = statement.executeQuery("show tables"); 243: Assert.assertNotNull(rs);	
	污染路径: 无	
677	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSVarbinaryTest.java	行号: 28
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 26: public void testInsert() throws Exception { 27: statement.executeUpdate("insert into " + DB_NAME + "." + TABLE_NATIVE + " values(now, '\\x" + TEST_STR + "\\")"); 28: ResultSet resultSet = statement.executeQuery("select c1 from " + DB_NAME + "." + TABLE_NATIVE); 29:	

	30: resultSet.next();	
	污染路径: 无	
678	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 34
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 32: } 33: Connection conn = DriverManager.getConnection(url, properties); 34: Statement stmt = conn.createStatement(); 35: stmt.execute("drop database if exists " + DB_NAME); 36: stmt.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
679	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSCompressTest.java	行号: 114
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 112: try (Statement statement = connection.createStatement()) { 113: 114: ResultSet resultSet = statement.executeQuery("select current from " + DB_NAME + ".meters order by _ts desc limit 1"); 115: resultSet.next(); 116: Assert.assertTrue(resultSet.getFloat(1) > 10.3);	
	污染路径: 无	
680	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 744
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 742: @Description("contains with no exist tag") 743: public void case09_select12() throws SQLException { 744: ResultSet resultSet =	

	statement.executeQuery("select * from jsons1 where jtag contains 'tag_no_exist'"); 745: int count = 0; 746: while (resultSet.next()) {	
	污染路径: 无	
681	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 656
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 654: @Description("where condition support '!=' for boolean") 655: public void case08_boolOperation03() throws SQLException { 656: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'!=false"); 657: int count = 0; 658: while (resultSet.next()) {	
	污染路径: 无	
682	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 423
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 421: @Test 422: public void bindDataSelectColumnTest() throws SQLException { 423: Statement stmt = conn.createStatement(); 424: 425: int numOfRows = 1000;	
	污染路径: 无	
683	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 1074
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	1072: Assert.assertEquals(1, result); 1073: try (Statement stmt = conn.createStatement()) { 1074: ResultSet rs = stmt.executeQuery("select * from t1"); 1075: ResultSetMetaData meta = rs.getMetaData(); 1076: assertMetaData(meta);	
	污染路径: 无	
684	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 427
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 425: @Description("where condition support '!=' in character") 426: public void case05_symbolOperation05() throws SQLException { 427: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag2'!='beijing"); 428: int count = 0; 429: while (resultSet.next()) {	
	污染路径: 无	
685	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 806
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 804: @Description("where condition with 'and' and contains") 805: public void case10_selectAndOr06() throws SQLException { 806: ResultSet resultSet = statement 807: .executeQuery("select * from jsons1 where jtag->'tag1'='femail' and jtag contains 'tag3'"); 808: int count = 0;	
	污染路径: 无	
686	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java		857
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 855: @Description("test with tbname/normal column") 856: public void case11_selectTbName04() throws SQLException { 857: ResultSet resultSet = statement 858: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=23"); 859: int count = 0;		
	污染路径: 无		
687	缺陷发生位置:		行号:
	/src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java		720
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 718: @Description("contains") 719: public void case09_select10() throws SQLException { 720: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag contains 'tag1'"); 721: int count = 0; 722: while (resultSet.next()) {		
688	污染路径: 无		
	缺陷发生位置:		行号:
	/src/test/java/com/taosdata/jdbc/cases/BatchInsertTest.java		117
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.		
	代码片段: 115: try { 116: if (connection != null) { 117: Statement statement = connection.createStatement(); 118: statement.execute("drop database if exists " + DB_NAME); 119: statement.close();		
	污染路径:		

	无	
689	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 823
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 821: @Description("test with tbname/normal column") 822: public void case11_selectTbName01() throws SQLException { 823: ResultSet resultSet = statement.executeQuery("select * from jsons1 where tbname = 'jsons1_1'"); 824: int count = 0; 825: while (resultSet.next()) { </pre>	
	污染路径: 无	
690	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/QueryDataTest.java	行号: 53
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 51: 52: String querySql = "select * from " + STB_NAME; 53: ResultSet rs = statement.executeQuery(querySql); 54: 55: while (rs.next()) { </pre>	
	污染路径: 无	
691	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulCompressTest.java	行号: 34
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 32: " ('d31001', 'California.SanFrancisco', 2, '2021-07-13 14:06:59.779', 10.16, 217, 0.33)"); 33: 34: ResultSet resultSet = statement.executeQuery("select * from " + DB_NAME + "." + TABLE_NAME + " order by ts desc limit 1"); 35: resultSet.next(); </pre>	

	36:	Assert.assertTrue(resultSet.getFloat(2) > 10.15);
	污染路径:	无
692	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	186
	步骤描述:	
	Use try-with-resources or close this "Statement" in a "finally" clause.	
692	代码片段:	
	184:	
	185: // then	
	186: Statement statement = conn.createStatement();	
692	187: ResultSet rs = statement.executeQuery("show tables");	
	188: Assert.assertNotNull(rs);	
	污染路径:	
	无	
693	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/cases/	499
	TimestampPrecisionInNanoRestTest.java	
	步骤描述:	
693	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	
	497: public void	
	canIntervalAndSlidingAcceptNsUnitForSecondCol() {	
693	498: try (Statement stmt = conn.createStatement()) {	
	499: ResultSet rs = stmt.executeQuery("select	
	sum(f1) from " + NS_TIMESTAMP_DB + ".weather where ts2	
	>= " + DATE_2 + " and ts <= " + DATE_3 + "	
693	interval(100000000b) sliding(100000000b));	
	500: rs.next();	
	501: long sum = rs.getLong(1);	
	污染路径:	
694	无	
	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/JsonTagTest.java	910
	步骤描述:	
694	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	
	908: @Description("where condition match")	
	909: public void case12 selectWhere05() throws	

	<pre> SQLException { 910: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1' match 'ma\$"); 911: int count = 0; 912: while (resultSet.next()) { </pre>	
	污染路径: 无	
695	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 296
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 294: writer.write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.MILLI_SECONDS, dbname, null, null); 295: 296: Statement statement = conn.createStatement(); 297: ResultSet rs = statement.executeQuery("select * from measurement_deprecated"); 298: Assert.assertTrue(rs.next()); </pre>	
	污染路径: 无	
696	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 153
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 151: 152: // then 153: Statement statement = conn.createStatement(); 154: statement.executeUpdate("use " + dbname); 155: ResultSet rs = statement.executeQuery("show tables"); </pre>	
	污染路径: 无	
697	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBlockJsonTagTest.java	行号: 832
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 830: @Description("test with tbname/normal column") 831: public void case11_selectTbName02() throws SQLException { 832: ResultSet resultSet = statement 833: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3'"); 834: int count = 0; 	
	污染路径: 无	
698	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 333
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 331: @Description("where condition '=' for string") 332: public void case04_select19() throws SQLException { 333: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'='beijing'"); 334: int count = 0; 335: while (resultSet.next()) {	
	污染路径: 无	
699	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSVarbinaryTest.java	行号: 37
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 35: @Test 36: public void testPrepare() throws SQLException { 37: TSWSPreparedStatement preparedStatement = (TSWSPreparedStatement) connection.prepareStatement("insert into " + DB_NAME + "." + TABLE_STMT + " values (?, ?)"); 38: preparedStatement.setTimestamp(1, new Timestamp(System.currentTimeMillis())); 39:	
	污染路径: 无	

700	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSCompressTest.java	行号: 70
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 68: " ('d31001', 'California.SanFrancisco', 2, '2021-07-13 14:06:59.779', 10.16, 217, 0.33)); 69: 70: ResultSet resultSet = statement.executeQuery("select * from " + DB_NAME + "." + TABLE_NAME + " order by ts desc limit 1"); 71: resultSet.next(); 72: Assert.assertTrue(resultSet.getFloat(2) > 10.15); </pre>	
	污染路径: 无	
701	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 48
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 46: url = url + DB_NAME + "?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword(); 47: } 48: conn = DriverManager.getConnection(url, properties); 49: stmt = conn.createStatement(); 50: int affectedRow = stmt.executeUpdate("insert into weather(ts, f1) values(now," + random.nextInt(100) + ")"); </pre>	
	污染路径: 无	
702	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 1069
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 1067: @Description("query metadata for json") 1068: public void case19_selectMetadata01() throws SQLException { 1069: ResultSet resultSet = </pre>	

	statement.executeQuery("select jtag from jsons1"); 1070: ResultSetMetaData metaData = resultSet.getMetaData(); 1071: int columnType = metaData.getColumnType(1);	
	污染路径: 无	
703	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 170
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 168: public void testUtinyIntOutOfRange() throws SQLException { 169: String sql = "insert into " + dbName + "." + tableName2 + " values(?, ?, ?, ?, ?)"; 170: PreparedStatement statement = connection.prepareStatement(sql); 171: statement.setTimestamp(1, new Timestamp(0)); 172: statement.setShort(2, (short) (TSDBCConstants.MAX_UNSIGNED_BYTE + 1));	
	污染路径: 无	
704	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSDatabaseMetaDataTest.java	行号: 45
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 43: 44: Statement stmt = connection.createStatement(); 45: ResultSet resultSet = stmt.executeQuery("show user databases"); 46: while (resultSet.next()) { 47: System.out.println(resultSet.getString(1));	
	污染路径: 无	
705	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerEnterpriseTest.java	行号: 93
	步骤描述: Use try-with-resources or close this "!Unknown!" in a "finally" clause.	
	代码片段:	

	<pre> 91: try (Connection conn = getTestConnection(); 92: Statement stmt = conn.createStatement()) { 93: ResultSet rs = stmt.executeQuery("CREATE TOKEN " + tokenName + " FROM user " + TestEnvUtil.getUser() + " ENABLE 1 PROVIDER 'root' ttl 1"); 94: TestUtils.waitTransactionDone(conn); 95: rs.next(); </pre>	
	污染路径: 无	
706	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSIpv6Test.java	行号: 45
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 43: long start = System.nanoTime(); 44: for (int i = 0; i < 1; i++) { 45: ResultSet resultSet = statement.executeQuery("select ts,c1,c2,c3 from " + DATABASE_NAME + ".alltype_query limit 3000"); 46: while (resultSet.next()) { 47: count++; </pre>	
	污染路径: 无	
707	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java	行号: 70
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: <pre> 68: 69: String sql1 = "select * from " + db_name + "." + tableName; 70: statement = connection.prepareStatement(sql1); 71: boolean b = statement.execute(); 72: Assert.assertTrue(b); </pre>	
	污染路径: 无	
708	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 251
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 249: pstmt.setInt(1, 1); 250: 251: ResultSet rs = pstmt.executeQuery(); 252: rs.next(); 253: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
709	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 328
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 326: Assert.assertEquals(1, count); 327: 328: Statement statement = conn.createStatement(); 329: ResultSet rs = statement.executeQuery("select * from measurement_raw_deprecated"); 330: Assert.assertTrue(rs.next());	
	污染路径: 无	
710	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 495
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 493: 494: Statement statement = conn.createStatement(); 495: ResultSet rs = statement.executeQuery("select * from measurement_zero_ttl"); 496: Assert.assertTrue(rs.next()); 497: rs.close();	
	污染路径: 无	
711	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 591
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	<pre> 589: @Description("where condition support '>' for double") 590: public void case07_doubleOperation03() throws SQLException { 591: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'>1.23"); 592: int count = 0; 593: while (resultSet.next()) { </pre> 污染路径: 无		
712	<table border="1" data-bbox="470 712 1380 790"> <tr> <td>缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java</td><td>行号: 144</td></tr> </table> 步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause. 代码片段: <pre> 142: public void testExecuteCriticalValue() throws SQLException { 143: String sql = "insert into " + dbName + "." + tableName + " values(?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)"; 144: TSWSPreparedStatement statement = connection.prepareStatement(sql).unwrap(TSWSPreparedStatement.class); 145: statement.setTimestamp(1, new Timestamp(0)); 146: statement.setByte(2, (byte) 127); </pre> 污染路径: 无	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 144
缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 144		
713	<table border="1" data-bbox="470 1422 1380 1500"> <tr> <td>缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java</td><td>行号: 374</td></tr> </table> 步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause. 代码片段: <pre> 372: @Description("where condition equation has chinese") 373: public void case04_select23() throws SQLException { 374: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag1'='收到货'"); 375: int count = 0; 376: while (resultSet.next()) { </pre> 污染路径:	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 374
缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 374		

	无	
714	缺陷发生位置： /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号： 53
	步骤描述： Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段： 51: properties.setProperty(TSDBDriver.PROPERTY_KEY_MESSAGE_WAIT_TIMEOUT, "5000"); 52: 53: Connection connection1 = DriverManager.getConnection(url, properties); 54: ConnectionParam param = ((WSConnection)connection1).getParam(); 55: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount());	
	污染路径： 无	
715	缺陷发生位置： /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号： 874
	步骤描述： Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段： 872: @Description("where condition like") 873: public void case12_selectWhere01() throws SQLException { 874: ResultSet resultSet = statement.executeQuery("select *,tbname from jsons1 where jtag->'tag2' like 'bei%'"); 875: int count = 0; 876: while (resultSet.next()) {	
	污染路径： 无	
716	缺陷发生位置： /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号： 232
	步骤描述： Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段： 230: @Description("select json tag")	

	231: public void case04_select07() throws SQLException { 232: ResultSet resultSet = statement.executeQuery("select jtag from jsons1_1"); 233: resultSet.next(); 234: String result = resultSet.getString(1);	
	污染路径: 无	
717	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/DatetimeBefore1970Test.java	行号: 265
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 263: public void after() throws SQLException { 264: if (conn != null) { 265: Statement stmt = conn.createStatement(); 266: stmt.execute("drop database if exists " + DB_NAME); 267: stmt.close();	
	污染路径: 无	
718	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 216
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 214: @Description("where condition tag is not null") 215: public void case04_select05() throws SQLException { 216: ResultSet resultSet = statement.executeQuery("select jtag from jsons1 where jtag is not null"); 217: int count = 0; 218: while (resultSet.next()) {	
	污染路径: 无	
719	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/AuthenticationTest.java	行号: 114
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 112: // change password back	

	113: conn = DriverManager.getConnection(url); 114: stmt = conn.createStatement(); 115: stmt.execute("alter user " + USER + " pass '" + TestEnvUtil.getPassword() + "'"); 116: stmt.close();	
	污染路径: 无	
720	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 170
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 168: @Description("normal select stable") 169: public void case04_select01() throws SQLException { 170: ResultSet resultSet = statement.executeQuery("select dataint from jsons1"); 171: int count = 0; 172: while (resultSet.next()) {	
	污染路径: 无	
721	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 243
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 241: 242: Statement statement = conn.createStatement(); 243: ResultSet rs = statement.executeQuery("select * from measurement_both"); 244: Assert.assertTrue(rs.next()); 245: rs.close();	
	污染路径: 无	
722	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 245
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 243:	

	244: String sql = "select * from weather_test"; 245: PreparedStatement statement = conn.prepareStatement(sql); 246: ResultSet rs = statement.executeQuery(); 247: int rows = 0;	
	污染路径: 无	
723	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MicroSecondPrecisionRestfulTest.java	行号: 134
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 132: conn3 = DriverManager.getConnection(url2, properties); 133: 134: Statement stmt = conn1.createStatement(); 135: stmt.execute("drop database if exists " + MS_TIMESTAMP_DB); 136: stmt.execute("create database if not exists " + MS_TIMESTAMP_DB + " precision 'ms'");	
	污染路径: 无	
724	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ NanoSecondTimestampJNITest.java	行号: 97
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 95: try (Statement stmt = conn.createStatement()) { 96: stmt.executeUpdate("insert into weather(ts, temperature, humidity) values('" + timestampStr + "', 12.3, 4)"); 97: ResultSet rs = stmt.executeQuery("select * from weather"); 98: rs.next(); 99: // then	
	污染路径: 无	
725	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java		177
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.		
	代码片段: 175: properties.setProperty(TSDBDriver.PROPERTY_KEY_HEALTH_CHECK_RECOVERY_COUNT, "1"); 176: 177: Connection connection1 = DriverManager.getConnection(url, properties); 178: ConnectionParam param = ((WSConnection)connection1).getParam(); 179: Connection connection2 = DriverManager.getConnection(url, properties);		
	污染路径: 无		
726	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java		行号: 53
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 51: 52: // when 53: ResultSet rs = pstmtSelect.executeQuery(); 54: ResultSetMetaData meta = rs.getMetaData(); 55: rs.next();		
	污染路径: 无		
727	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java		行号: 301
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.		
	代码片段: 299: Assert.assertEquals(1, result); 300: try (Statement stmt = conn.createStatement()) { 301: ResultSet rs = stmt.executeQuery("select * from t1"); 302: ResultSetMetaData meta = rs.getMetaData(); 303: assertMetaData(meta);		

	污染路径: 无	
728	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSQueryTimeoutTest.java	行号: 61
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 59: 60: haveRecords = false; 61: ResultSet resultSet2 = statement2.executeQuery("show databases;"); 62: while (resultSet2.next()) { 63: String dbName = resultSet2.getString(1);	
	污染路径: 无	
729	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 358
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 356: @Description("where condition result is null") 357: public void case04_select21() throws SQLException { 358: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'='beijing'"); 359: int count = 0; 360: while (resultSet.next()) {	
	污染路径: 无	
730	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 285
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 283: static public void after() throws SQLException { 284: if (null != connection) { 285: Statement statement = connection.createStatement(); 286: statement.execute("drop database if exists " + DB_NAME);	

	287: statement.close();	
	污染路径: 无	
731	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 960
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 958: @Description("distinct json tag") 959: public void case13_selectDistinct02() throws SQLException { 960: ResultSet resultSet = statement.executeQuery("select distinct jtag->'tag1' from jsons1"); 961: int count = 0; 962: while (resultSet.next()) {	
	污染路径: 无	
732	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 480
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 478: @Test 479: public void bindDataWithSingleTagTest() throws SQLException { 480: Statement stmt = conn.createStatement(); 481: 482: String[] types = new String[]{"tinyint", "smallint", "int", "bigint", "timestamp", "bool", "float", "double", "binary(10)", "nchar(10)", "varbinary(10)", "geometry(50)"};	
	污染路径: 无	
733	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 259
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 257: Assert.assertEquals(1, result); 258: try (Statement stmt = conn.createStatement()) {	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 107: statement.setTimestamp(1, new Timestamp(0)); 108: statement.setTimestamp(2, new Timestamp(System.currentTimeMillis() + 1000)); 109: ResultSet resultSet = statement.executeQuery(); 110: 111: int i = 0;	
	污染路径: 无	
737	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 466
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 464: 465: String sql = "select * from weather_test where t1 >= ? and t1 <= ?"; 466: TSWSPreparedStatement s1 = (TSWSPreparedStatement) conn.prepareStatement(sql); 467: s1.setInt(1, 0); 468: s1.setInt(2, 10);	
	污染路径: 无	
738	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cloud/CloudTest.java	行号: 26
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 24: } 25: 26: Connection conn = DriverManager.getConnection(url); 27: Statement stmt = conn.createStatement(); 28: ResultSet rs = stmt.executeQuery("select server_version()");	
	污染路径: 无	
739	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	519
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 517: @Description("where conditional support '!= ' for int") 518: public void case06_selectValue06() throws SQLException { 519: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag1'!=5"); 520: int count = 0; 521: while (resultSet.next()) {	
	污染路径: 无	
740	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBConnectionTest.java	行号: 213
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 211: PreparedStatement pstmt = conn.prepareStatement("show cluster alive", 212: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 213: ResultSet rs = pstmt.executeQuery(); 214: rs.next(); 215: int status = rs.getInt("status");	
	污染路径: 无	
741	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 692
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 690: @Description("where condition support one tag '='") 691: public void case09_select04() throws SQLException { 692: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag_no_exist'=3"); 693: int count = 0; 694: while (resultSet.next()) {	

	'abc')(now+1s, '涛思数据')"); 33: rs = stmt.executeQuery("select * from javatest.t0"); 34: ResultSetMetaData meta = rs.getMetaData(); 35: Assert.assertTrue(Arrays.stream(types).collect(Collectors.toSet() ()).contains(meta.getColumnTypeName(2)));	
	污染路径: 无	
745	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	1093
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1091: @Description("query metadata for one json result") 1092: public void case19_selectMetadata03() throws SQLException { 1093: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_6"); 1094: ResultSetMetaData metaData = resultSet.getMetaData(); 1095: int columnType = metaData.getColumnType(1);	
	污染路径: 无	
746	缺陷发生位置:	行号:
	/src/test/java/com/taosdata/jdbc/ws/WSSelectTest.java	80
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 78: @Test 79: public void testGetObject() throws SQLException { 80: Statement statement = connection.createStatement(); 81: 82: ResultSet resultSet = statement.executeQuery("select ts,c1,c2,c3,c4,c5,c6,c7,c8,c9,c10,c11,c12,c13,c14,c15 from " + DATABASE_NAME + ".alltype_query limit 3000");	
	污染路径: 无	
747	缺陷发生位置:	行号:

	tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=3"); 850: int count = 0;	
	污染路径: 无	
750	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 288
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 286: @Description("select a json tag, the value is null") 287: public void case04_select13() throws SQLException { 288: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_4"); 289: resultSet.next(); 290: String string = resultSet.getString(1);	
	污染路径: 无	
751	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/StableTest.java	行号: 40
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 38: } 39: connection = DriverManager.getConnection(url, properties); 40: Statement statement = connection.createStatement(); 41: statement.execute("drop database if exists " + DB_NAME); 42: statement.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
752	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1150
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1148: } 1149:	

	1150: ResultSet resultSet = statement.executeQuery("select jsons5tag from batch_test"); 1151: ResultSetMetaData metaData = resultSet.getMetaData(); 1152: String columnName = metaData.getColumnNames(1);	
	污染路径: 无	
753	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 242
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 240: @Description("select not exist json tag") 241: public void case04_select08() throws SQLException { 242: ResultSet resultSet = statement.executeQuery("select jtag from jsons1_9"); 243: resultSet.next(); 244: String result = resultSet.getString(1);	
	污染路径: 无	
754	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 703
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 701: @Test(expected = SQLException.class) 702: public void setMaxTableNameTest()throws SQLException { 703: Statement stmt = conn.createStatement(); 704: stmt.execute("drop table if exists weather_test");	
	污染路径: 无	
755	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/UnsignedNumberRestfulTest.java	行号: 41
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	39: public void testCase002() throws SQLException { 40: try (Statement stmt = conn.createStatement()) { 41: ResultSet rs = stmt.executeQuery("select * from us_table"); 42: ResultSetMetaData meta = rs.getMetaData(); 43: assertResultSetMetaData(meta); 		
	污染路径: 无		
756	缺陷发生位置:	行号:	
	/src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtTest.java		85
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.		
	代码片段: 83: public void test004_Query() throws SQLException { 84: String sql = "select * from " + db_name + "." + tableName + " where ts > ? and ts < ?"; 85: PreparedStatement statement = connection.prepareStatement(sql); 86: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis() - 1000)); 87: statement.setTimestamp(2, new Timestamp(System.currentTimeMillis() + 1000)); 		
757	污染路径:		无
	缺陷发生位置:	行号:	
	/src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java		468
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.		
758	代码片段: 466: 467: String sql = "select * from weather_test"; 468: PreparedStatement statement = conn.prepareStatement(sql); 469: ResultSet rs = statement.executeQuery(); 470: int rows = 0; 		
	污染路径:		无
	缺陷发生位置:	行号:	
	/src/test/java/com/taosdata/jdbc/cloud/CloudTest.java		28
	步骤描述:		

	污染路径: 无	
764	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/AuthenticationTest.java	行号: 86
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 84: url = "jdbc:TAOS-RS://" + HOST + ":" + TestEnvUtil.getRsPort() + "/?user=" + USER + "&password=" + TestEnvUtil.getPassword(); 85: } 86: conn = DriverManager.getConnection(url); 87: Statement stmt = conn.createStatement(); 88: stmt.execute("alter user " + USER + " pass '" + PASSWORD + "'");	
	污染路径: 无	
765	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 898
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 896: Assert.assertEquals(1, result); 897: try (Statement stmt = conn.createStatement()) { 898: ResultSet rs = stmt.executeQuery("select * from t1"); 899: ResultSetMetaData meta = rs.getMetaData(); 900: assertMetaData(meta);	
	污染路径: 无	
766	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 252
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 250: @Description("select a json tag") 251: public void case04_select09() throws SQLException { 252: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_1");	

	253: resultSet.next(); 254: String result = resultSet.getString(1);	
	污染路径: 无	
767	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 339
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 337: pstmt.setTimestamp(4, new Timestamp(0)); 338: 339: ResultSet rs = pstmt.executeQuery(); 340: rs.next(); 341: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
768	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 148
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 146: final String query = "select * from " + TB_NAME_1; 147: try (Statement stmt = conn.createStatement()) { 148: ResultSet rs = stmt.executeQuery(query); 149: rs.next(); 150: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
769	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 146
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 144: final String query = "select * from " + TBNAME_1; 145: try (Statement stmt = conn.createStatement()) { 146: ResultSet rs = stmt.executeQuery(query); 147: rs.next();	

	148: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
770	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 104
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 102: 103: // then 104: Statement statement = connection.createStatement(); 105: ResultSet rs = statement.executeQuery("show tables"); 106: Assert.assertNotNull(rs);	
	污染路径: 无	
771	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBResultSetTest.java	行号: 738
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 736: @Test 737: public void testClosedOperations() throws SQLException { 738: Statement statement = conn.createStatement(); 739: ResultSet newRs = statement.executeQuery("select * from weather"); 740: newRs.close();	
	污染路径: 无	
772	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertTest.java	行号: 271
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 269: 270: // then 271: Statement statement = conn.createStatement(); 272: ResultSet rs = statement.executeQuery("show	

	tables"); 273: Assert.assertNotNull(rs);	
	污染路径: 无	
773	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtSubTableTest.java	行号: 130
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 128: Properties properties = new Properties(); 129: connection = DriverManager.getConnection(url, properties); 130: Statement statement = connection.createStatement(); 131: statement.execute("drop database if exists " + db_name); 132: statement.execute("create database " + db_name);	
	污染路径: 无	
774	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/BatchInsertTest.java	行号: 101
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 99: try { 100: Statement statement = connection.createStatement(); 101: ResultSet rs = statement.executeQuery("select * from meters"); 102: int num = 0; 103: while (rs.next()) {	
	污染路径: 无	
775	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 695
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 693: @Description("where condition support one tag '=') 694: public void case09_select04() throws SQLException {	

	<pre> 695: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- >'tag_no_exist'=3"); 696: int count = 0; 697: while (resultSet.next()) { </pre>	
	污染路径: 无	
776	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 64
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: <pre> 62: Assert.assertEquals(0, rebalanceManager.getEndpointInfo(param.getEndpoints().get(2)).getConnectCount()); 63: 64: Connection connection3 = DriverManager.getConnection(url, properties); 65: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(0)).getConnectCount()); 66: Assert.assertEquals(1, rebalanceManager.getEndpointInfo(param.getEndpoints().get(1)).getConnectCount()); </pre>	
	污染路径: 无	
777	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 1077
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 1075: @Description("query metadata for json") 1076: public void case19_selectMetadata02() throws SQLException { 1077: ResultSet resultSet = statement.executeQuery("select *,jtag from jsons1"); 1078: ResultSetMetaData metaData = resultSet.getMetaData(); 1079: int columnType = metaData.getColumnType(6); </pre>	

	污染路径: 无	
778	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConnectionEnterpriseTest.java	行号: 36
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 34: try (Connection conn = DriverManager.getConnection("jdbc:TAOS-WS://" + host + ":" + port + "?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword()); 35: Statement statement = conn.createStatement());{ 36: ResultSet rs = statement.executeQuery("CREATE TOKEN jdbc_token FROM user root ENABLE 1 PROVIDER 'root' ttl 1"); 37: TestUtils.waitTransactionDone(conn); 38: rs.next(); </pre>	
	污染路径: 无	
779	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSelectTest.java	行号: 167
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: <pre> 165: properties.setProperty(TSDBDriver.PROPERTY_KEY_BATCH_LOAD, "true"); 166: connection = DriverManager.getConnection(url, properties); 167: Statement statement = connection.createStatement(); 168: statement.execute("drop database if exists " + DATABASE_NAME); 169: statement.execute("create database " + DATABASE_NAME); </pre>	
	污染路径: 无	
780	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 711
	步骤描述:	

	608: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'!=1.232"); 609: int count = 0; 610: while (resultSet.next()) {	
	污染路径: 无	
783	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 719
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 717: Assert.assertEquals(1, result); 718: try (Statement stmt = conn.createStatement()) { 719: ResultSet rs = stmt.executeQuery("select * from t1"); 720: ResultSetMetaData meta = rs.getMetaData(); 721: assertMetaData(meta);	
	污染路径: 无	
784	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 841
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 839: @Description("test with tbname/normal column") 840: public void case11_selectTbName03() throws SQLException { 841: ResultSet resultSet = statement 842: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=3"); 843: int count = 0;	
	污染路径: 无	
785	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 185
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段:	

	183: @Description("select all column from stable") 184: public void case04_select02() throws SQLException { 185: ResultSet resultSet = statement.executeQuery("select * from jsons1"); 186: int count = 0; 187: while (resultSet.next()) {	
	污染路径: 无	
786	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/NullValueInResultSetTest.java	行号: 100
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 98: public void after() throws SQLException { 99: if (conn != null) { 100: Statement statement = conn.createStatement(); 101: statement.execute("drop database if exists " + dbName); 102: statement.close();	
	污染路径: 无	
787	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/ RestfulParameterMetaDataTest.java	行号: 188
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 186: pstmt_select.close(); 187: if (conn != null) { 188: Statement statement = conn.createStatement(); 189: statement.execute("drop database if exists " + DB_NAME); 190: statement.close();	
	污染路径: 无	
788	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 1043
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	

	代码片段: 1041: @Description("stddev with group by json tag") 1042: public void case17_selectStddev01() throws SQLException { 1043: ResultSet resultSet = statement.executeQuery("select stddev(dataint) from jsons1 group by jtag->'tag1'"); 1044: String s = ""; 1045: int count = 0;	
	污染路径: 无	
789	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 406
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 404: @Description("where condition support '<' for character") 405: public void case05_symbolOperation03() throws SQLException { 406: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag2'<'beijing'"); 407: int count = 0; 408: while (resultSet.next()) {	
	污染路径: 无	
790	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtNsTest.java	行号: 96
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 94: public void testQuery() throws SQLException { 95: String sql = "insert into " + db_name + "." + tableName + " values(?, ?)"; 96: PreparedStatement statement = connection.prepareStatement(sql); 97: for (int i = 0; i < 10; i++) { 98: statement.setTimestamp(1, new Timestamp(System.currentTimeMillis() + i));	

	污染路径: 无	
794	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/DatabaseSpecifiedTest.java	行号: 56
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 54: url = "jdbc:TAOS-RS://" + HOST + ":" + TestEnvUtil.getRsPort() + "?user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword(); 55: } 56: Connection connection = DriverManager.getConnection(url); 57: Statement stmt = connection.createStatement(); 58:	
	污染路径: 无	
795	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 845
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 843: @Description("test with tbname/normal column") 844: public void case11_selectTbName03() throws SQLException { 845: ResultSet resultSet = statement 846: .executeQuery("select * from jsons1 where tbname = 'jsons1_1' and jtag contains 'tag3' and dataint=3"); 847: int count = 0;	
	污染路径: 无	
796	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 1010
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 1008: @Description("select json tag from join") 1009: public void case15_selectJoin02() throws SQLException { 1010: ResultSet resultSet = statement.executeQuery(1011: "select 'sss',33,a.jtag->'tag3' from jsons2	

	a, jsons3 b where a.ts=b.ts and a.jtag->'tag1'=b.jtag->'tag1'"); 1012: resultSet.next();	
	污染路径: 无	
797	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 937
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 935: @Description("where condition match") 936: public void case12_selectWhere07() throws SQLException { 937: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1' match '收到'"); 938: int count = 0; 939: while (resultSet.next()) {	
	污染路径: 无	
798	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterRestfulTest.java	行号: 98
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 96: final String query = "select * from " + TB_NAME_1; 97: try (PreparedStatement pstmt = conn.prepareStatement(query)) { 98: ResultSet rs = pstmt.executeQuery(); 99: rs.next(); 100: long timestamp = rs.getTimestamp(1).getTime();	
	污染路径: 无	
799	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 385
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 383:	

	384: String sql = "select * from weather_test"; 385: PreparedStatement statement = conn.prepareStatement(sql); 386: ResultSet rs = statement.executeQuery(); 387: int rows = 0;	
	污染路径: 无	
800	缺陷发生位置: /src/test/java/com/taosdata/jdbc/TSDBPreparedStatementTest.java	行号: 431
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 429: stmt.execute("create table weather_test(ts timestamp, f1 nchar(4), f2 float, f3 double, f4 timestamp, f5 int, f6 bool, f7 binary(10))"); 430: 431: TSDBPreparedStatement s = (TSDBPreparedStatement) conn.prepareStatement("insert into ? (ts, f1, f7) values(?, ?, ?)"); 432: Random r = new Random(); 433: s.setTableName("weather_test");	
	污染路径: 无	
801	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/InsertDbwithoutUseDbTest.java	行号: 69
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 67: } 68: Connection conn = DriverManager.getConnection(url, properties); 69: Statement stmt = conn.createStatement(); 70: stmt.execute("drop database if exists " + DB_NAME); 71: stmt.execute("create database if not exists " + DB_NAME);	
	污染路径: 无	
802	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 329
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 327: 328: Statement statement = conn.createStatement(); 329: ResultSet rs = statement.executeQuery("select * from measurement_raw_deprecated"); 330: Assert.assertTrue(rs.next()); 331: rs.close();	
	污染路径: 无	
803	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 182
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 180: @Description("select all column from stable") 181: public void case04_select02() throws SQLException { 182: ResultSet resultSet = statement.executeQuery("select * from jsons1"); 183: int count = 0; 184: while (resultSet.next()) {	
	污染路径: 无	
804	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 127
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 125: Connection connection1 = DriverManager.getConnection(url, properties); 126: ConnectionParam param = ((WSConnection)connection1).getParam(); 127: Connection connection2 = DriverManager.getConnection(url, properties); 128: Connection connection3 = DriverManager.getConnection(url, properties); 129:	
	污染路径: 无	

805	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 926
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 924: @Description("where condition match") 925: public void case12_selectWhere06() throws SQLException { 926: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2' match 'jing\$'"); 927: int count = 0; 928: while (resultSet.next()) {	
	污染路径: 无	
806	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 207
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 205: 206: Statement statement = conn.createStatement(); 207: ResultSet rs = statement.executeQuery("select * from measurement_ttl"); 208: Assert.assertTrue(rs.next()); 209: rs.close();	
	污染路径: 无	
807	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessInsertNewTest.java	行号: 48
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 46: 47: // then 48: Statement statement = conn.createStatement(); 49: ResultSet rs = statement.executeQuery("show tables"); 50: Assert.assertNotNull(rs);	
	污染路径:	

	无	
808	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 975
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 973: @Description("test duplicate key with normal column") 974: public void case14_selectDump02() throws SQLException { 975: ResultSet resultSet = statement.executeQuery(976: "select *,tbname,jtag from jsons1 where jtag- >'datastr' match '是' and datastr match 'js'"); 977: int count = 0; </pre>	
	污染路径: 无	
809	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ UnsignedNumberRestfulTest.java	行号: 99
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 97: long now = System.currentTimeMillis(); 98: stmt.executeUpdate("insert into us_table(ts,f1,f2,f3,f4) values(" + now + ", 127, 65534,4294967294, 18446744073709551614)"); 99: ResultSet rs = stmt.executeQuery("select * from us_table where ts = " + now); 100: ResultSetMetaData meta = rs.getMetaData(); 101: assertResultSetMetaData(meta); </pre>	
	污染路径: 无	
810	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDDBlockJsonTagTest.java	行号: 795
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: <pre> 793: @Description("where condition with 'or'") 794: public void case10_selectAndOr04() throws SQLException { 795: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag- </pre>	

	>'tag1'=13 or jtag->'tag2'>35"); 796: int count = 0; 797: while (resultSet.next()) {	
	污染路径: 无	
811	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 504
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 502: @Description("where condition support '>=' for int") 503: public void case06_selectValue05() throws SQLException { 504: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'>=5"); 505: int count = 0; 506: while (resultSet.next()) {	
	污染路径: 无	
812	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSelectTest.java	行号: 27
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 25: 26: private static void testInsert() throws SQLException { 27: Statement statement = connection.createStatement(); 28: long cur = System.currentTimeMillis(); 29: List<String> timeList = new ArrayList<>();	
	污染路径: 无	
813	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/RestfulJsonTagTest.java	行号: 785
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 783: @Description("where condition with 'and'") 784: public void case10_selectAndOr03() throws	

	SQLException { 785: ResultSet resultSet = statement 786: .executeQuery("select * from jsons1 where jtag->'tag1'=false and jtag->'tag2'='shanghai'"); 787: int count = 0;	
	污染路径: 无	
814	缺陷发生位置: /src/test/java/com/taosdata/jdbc/SchemalessRawInsertTest.java	行号: 434
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 432: 433: statement.execute("use " + dbname); 434: ResultSet rs1 = statement.executeQuery("select * from measurement_db1"); 435: Assert.assertTrue(rs1.next()); 436: rs1.close();	
	污染路径: 无	
815	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	行号: 288
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 286: Properties properties = new Properties(); 287: connection = DriverManager.getConnection(url, properties); 288: Statement statement = connection.createStatement(); 289: statement.execute("drop database if exists " + dbName); 290: statement.execute("create database " + dbName + " keep 36500");	
	污染路径: 无	
816	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InsertSpecialCharacterJniTest.java	行号: 263
	步骤描述:	

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 179: @Description("select all column from stable") 180: public void case04_select02() throws SQLException { 181: ResultSet resultSet = statement.executeQuery("select * from jsons1"); 182: int count = 0; 183: while (resultSet.next()) {	
	污染路径: 无	
820	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/ TSWSPreparedStatementTest.java	行号: 426
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 424: 425: String sql = "select * from weather_test"; 426: PreparedStatement statement = conn.prepareStatement(sql); 427: ResultSet rs = statement.executeQuery(); 428: int rows = 0;	
	污染路径: 无	
821	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 415
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 413: @Description("where condition support '<=' in character") 414: public void case05_symbolOperation04() throws SQLException { 415: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag-> 'tag2'<='beijing"); 416: int count = 0; 417: while (resultSet.next()) {	
	污染路径: 无	

822	缺陷发生位置: /src/test/java/com/taosdata/jdbc/JsonTagTest.java	行号: 765
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 763: @Description("where condition with 'or'") 764: public void case10_selectAndOr02() throws SQLException { 765: ResultSet resultSet = statement 766: .executeQuery("select * from jsons1 where jtag->'tag1'=false or jtag->'tag2'='beijing'"); 767: int count = 0;	
	污染路径: 无	
823	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ BgHealthCheckTest.java	行号: 179
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 177: Connection connection1 = DriverManager.getConnection(url, properties); 178: ConnectionParam param = ((WSConnection)connection1).getParam(); 179: Connection connection2 = DriverManager.getConnection(url, properties); 180: Connection connection3 = DriverManager.getConnection(url, properties); 181:	
	污染路径: 无	
824	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 55
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 53: ((AbstractConnection)connection).write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.NANO_SECONDS); 54: // then 55: Statement statement =	

	connection.createStatement(); 56: statement.executeUpdate("use " + DB_NAME); 57: ResultSet rs = statement.executeQuery("show tables");	
	污染路径: 无	
825	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ MinimumConnectionCountTest.java	行号: 127
	步骤描述: Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段: 125: properties.setProperty(TSDBDriver.PROPERTY_KEY_HEALTH_CHECK_RECOVERY_COUNT, "1"); 126: 127: Connection connection1 = DriverManager.getConnection(url, properties); 128: ConnectionParam param = ((WSCConnection)connection1).getParam(); 129: Connection connection2 = DriverManager.getConnection(url, properties);	
	污染路径: 无	
826	缺陷发生位置: /src/test/java/com/taosdata/jdbc/VarbinaryTest.java	行号: 30
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 28: public void testInsert() throws Exception { 29: statement.executeUpdate("insert into subt_a using " + DB_NAME + "." + TABLE_NATIVE + " tags('\\\\ x123456abcdef") values(now, '\\\\x" + TEST_STR + "\\"); 30: ResultSet resultSet = statement.executeQuery("select c1, t1 from " + DB_NAME + "." + TABLE_NATIVE); 31: resultSet.next(); 32: Assert.assertArrayEquals(expectedArray, resultSet.getBytes(1));	
	污染路径:	

	无	
827	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 291
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 289: @Description("select a json tag, the value is null") 290: public void case04_select13() throws SQLException { 291: ResultSet resultSet = statement.executeQuery("select jtag->'tag1' from jsons1_4"); 292: resultSet.next(); 293: String string = resultSet.getString(1);	
	污染路径: 无	
828	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/loadbalance/ ConnectionRebalanceTest.java	行号: 407
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 405: public static void afterClass() throws SQLException { 406: if (null != connection) { 407: Statement statement = connection.createStatement(); 408: statement.execute("drop database if exists " + DB_NAME); 409: statement.close();	
	污染路径: 无	
829	缺陷发生位置: /src/test/java/com/taosdata/jdbc/confprops/TimeZoneTest.java	行号: 78
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 76: stmt.execute("insert into timezone_test.weather(ts, temperature) values('1970-01-01 00:00:00', 1.0)"); 77: 78: ResultSet rs = stmt.executeQuery("select * from timezone_test.weather"); 79: while (rs.next()) {	

	80:	Timestamp ts = rs.getTimestamp("ts");	
	污染路径:	无	
830	缺陷发生位置:	/src/test/java/com/taosdata/jdbc/ws/WSSchemalessNewTest.java	行号: 80
	步骤描述:	Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段:	<pre> 78: ((AbstractConnection)connection).write(lines, SchemalessProtocolType.LINE, SchemalessTimestampType.NANO_SECONDS, 10000, 100L); 79: // then 80: Statement statement = connection.createStatement(); 81: statement.executeUpdate("use " + DB_NAME); 82: ResultSet rs = statement.executeQuery("show tables"); </pre>	
	污染路径:	无	
831	缺陷发生位置:	/src/test/java/com/taosdata/jdbc/TSDBJNIConnectorTest.java	行号: 241
	步骤描述:	Use try-with-resources or close this "Connection" in a "finally" clause.	
	代码片段:	<pre> 239: public void paramBindWithoutTableName() throws SQLException { 240: String url = "jdbc:TAOS://" + host + ":" + port + "/"? user=" + TestEnvUtil.getUser() + "&password=" + TestEnvUtil.getPassword(); 241: Connection connection = DriverManager.getConnection(url); 242: try (Statement statement = connection.createStatement()) { 243: statement.executeUpdate("drop database if exists " + DB_NAME); </pre>	
	污染路径:	无	
832	缺陷发生位置:	/src/test/java/com/taosdata/jdbc/rs/RestfulConnectionTest.java	行号: 237
	步骤描述:		

	Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 235: PreparedStatement pstmt = conn.prepareStatement("show cluster alive", 236: ResultSet.TYPE_FORWARD_ONLY, ResultSet.CONCUR_READ_ONLY, ResultSet.HOLD_CURSORS_OVER_COMMIT); 237: ResultSet rs = pstmt.executeQuery(); 238: rs.next(); 239: int status = rs.getInt("status");	
	污染路径: 无	
833	缺陷发生位置: /src/test/java/com/taosdata/jdbc/rs/DatabaseSpecifiedTest.java	行号: 76
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 74: try { 75: if (connection != null) { 76: Statement statement = connection.createStatement(); 77: statement.execute("drop database if exists " + dbname); 78: statement.close();	
	污染路径: 无	
834	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cloud/CloudSchemalessNewTest.java	行号: 27
	步骤描述: Use try-with-resources or close this "Statement" in a "finally" clause.	
	代码片段: 25: } 26: connection = DriverManager.getConnection(url); 27: Statement statement = connection.createStatement(); 28: statement.executeUpdate("use " + dbName); 29: }	
	污染路径: 无	
835	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtAllType336Test.java	211
	步骤描述: Use try-with-resources or close this "PreparedStatement" in a "finally" clause.	
	代码片段: 209: public void testUShortOutOfRange2() throws SQLException { 210: String sql = "insert into " + dbName + "." + tableName2 + " values(?, ?, ?, ?, ?)"; 211: PreparedStatement statement = connection.prepareStatement(sql); 212: statement.setTimestamp(1, new Timestamp(0)); 213: statement.setShort(2, (short) 0);	
	污染路径: 无	
836	缺陷发生位置: /src/test/java/com/taosdata/jdbc/block/TSDBBlockJsonTagTest.java	行号: 883
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 881: @Description("where condition like") 882: public void case12_selectWhere02() throws SQLException { 883: ResultSet resultSet = statement 884: .executeQuery("select *,tbname from jsons1 where jtag->'tag1' like 'fe%' and jtag->'tag2' is not null"); 885: int count = 0;	
	污染路径: 无	
837	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSJsonTagTest.java	行号: 370
	步骤描述: Use try-with-resources or close this "ResultSet" in a "finally" clause.	
	代码片段: 368: @Description("where condition equation has chinese") 369: public void case04_select23() throws SQLException { 370: ResultSet resultSet = statement.executeQuery("select * from jsons1 where jtag->'tag1'='收到货'); 371: int count = 0; 372: while (resultSet.next()) {	

所有请求，以便使消耗资源的速度比再次释放资源的速度更快。但是，这些解决方案中的第一个本身就是一个问题，因为它可能允许攻击者阻止特定有效用户使用系统。如果攻击者模拟有效用户，他们可能能够阻止用户访问相关服务器。第二种解决方案很难有效地制定 - 即使做得好，它也不能提供完整的解决方案。它只是使攻击需要攻击者提供更多资源。

1	缺陷发生位置： /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号： 245
	步骤描述： Use a StringBuilder instead.	
	代码片段： 243: String sql = "create table if not exists "; 244: for (int idx = 1; idx <= subTableNum; idx++) { 245: sql += 246: String.format(247: " %s using %s.%s tags(%s, '%s', %s)",	
	污染路径： 无	
2	缺陷发生位置： /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号： 522
	步骤描述： Use a StringBuilder instead.	
	代码片段： 520: String dropSql = "drop table if exists "; 521: for (int idx = 1; idx <= subTableNum; idx++) { 522: dropSql += " cht" + idx + ", "; 523: } 524:	
	污染路径： 无	
3	缺陷发生位置： /src/test/java/com/taosdata/jdbc/ws/stmt/WsEfficientWritingTest.java	行号： 41
	步骤描述： Use a StringBuilder instead.	
	代码片段： 39: String createSql = "create table"; 40: for (int i = 1; i <= numOfSubTable; i++) { 41: createSql += " if not exists d_bind_" + i + " using " + db_name + "." + tableName + " tags(" + i + ", \"location_" + i + "\")"; 42: } 43: try (Statement stmt = connection.createStatement()) {	

	污染路径: 无	
4	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/stmt/WsPstmtStmt2Test.java	行号: 326
	步骤描述: Use a StringBuilder instead.	
	代码片段: <pre> 324: String createSql = "create table"; 325: for (int i = 1; i <= numOfSubTable; i++) { 326: createSql += " if not exists d_bind_" + i + " using " + db_name + "." + tableName + " tags(" + i + ", \"location_ + i + "\")"; 327: } 328: try (Statement stmt = connection.createStatement()) { </pre>	
	污染路径: 无	
5	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ws/WSConsumerMetaTest.java	行号: 513
	步骤描述: Use a StringBuilder instead.	
	代码片段: <pre> 511: String sql = "create table if not exists "; 512: for (int idx = 1; idx <= subTableNum; idx++) { 513: sql += 514: String.format(515: " %s using %s.%s tags(%s, '%s', %s)", </pre>	
	污染路径: 无	

5.2.1.4 CWE375 将可变对象返回给不受信任的调用者

缺陷数量: 13 个
缺陷描述: 将未克隆的可变数据作为返回值发送可能会导致调用函数更改或删除该数据。 扩展说明: 在函数返回对可变数据的引用的情况下,调用该函数的外部代码可能会对发送的数据进行更改。如果以前未克隆此数据,则该类将使用可能违反其内部状态假设的已修改数据。

修复意见： 1.将不应更改的返回数据声明为常量或不可变。2.在返回对可变数据的引用之前克隆所有可变数据。这是首选的缓解措施。这样，无论对数据进行哪些更改，都会保留一个有效副本以供类使用。		
1	缺陷发生位置： /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSLoadBalanceTest.java	行号： 80
	步骤描述： Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段： 78: } catch (SQLException e) { 79: e.printStackTrace(); 80: } catch (InterruptedException e) { 81: throw new RuntimeException(e); 82: }	
	污染路径： 无	
2	缺陷发生位置： /src/test/java/com/taosdata/jdbc/confprops/TaosInfoMonitorTest.java	行号： 48
	步骤描述： Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段： 46: stmt.close(); 47: } 48: } catch (SQLException InterruptedException throwables) { 49: Assert.fail(); 50: }	
	污染路径： 无	
3	缺陷发生位置： /src/test/java/com/taosdata/jdbc/ws/loadbalance/ WSConFailOverTest.java	行号： 66
	步骤描述： Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段： 64: } catch (SQLException e) { 65: e.printStackTrace(); 66: } catch (InterruptedException e) { 67: throw new RuntimeException(e); 68: }	

	污染路径: 无	
4	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InvalidResultSetPointerTest.java	行号: 173
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 171: try { 172: Thread.sleep(1000); 173: } catch (InterruptedException e) { 174: System.out.println("Thread " + id + " interrupted."); 175: }	
	污染路径: 无	
5	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/BatchInsertTest.java	行号: 95
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 93: try { 94: executorService.awaitTermination(Long.MAX_VALUE, TimeUnit.NANOSECONDS); 95: } catch (InterruptedException e) { 96: e.printStackTrace(); 97: }	
	污染路径: 无	
6	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MultiConnectionWithDifferentDbTest.java	行号: 34
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 32: queryDb(); 33: TimeUnit.SECONDS.sleep(1); 34: } catch (InterruptedException ignored) { 35: } catch (SQLException throwables) { 36: fail();	

	污染路径: 无	
7	缺陷发生位置: /src/test/java/com/taosdata/jdbc/Utils/TestUtils.java	行号: 29
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 27: try { 28: Thread.sleep(1000); 29: } catch (InterruptedException ex) { 30: } 31: }	
	污染路径: 无	
8	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InvalidResultSetPointerTest.java	行号: 183
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 181: System.out.print(id + "s."); 182: Thread.sleep(1); 183: } catch (InterruptedException e) { 184: System.out.println("Thread " + id + " interrupted."); 185: }	
	污染路径: 无	
9	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ InvalidResultSetPointerTest.java	行号: 106
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 104: try { 105: instance[i].join(); 106: } catch (InterruptedException ie) { 107: ie.printStackTrace(); 108: }	

	污染路径: 无	
10	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/ MultiConnectionWithDifferentDbTest.java	行号: 74
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 72: try { 73: t.join(); 74: } catch (InterruptedException e) { 75: e.printStackTrace(); 76: }	
	污染路径: 无	
11	缺陷发生位置: /src/test/java/com/taosdata/jdbc/ParameterBindTest.java	行号: 93
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 91: try { 92: thread.join(); 93: } catch (InterruptedException e) { 94: e.printStackTrace(); 95: }	
	污染路径: 无	
12	缺陷发生位置: /src/test/java/com/taosdata/jdbc/cases/FailOverTest.java	行号: 32
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 30: rs.close(); 31: TimeUnit.SECONDS.sleep(5); 32: } catch (SQLException InterruptedException e) { 33: e.printStackTrace(); 34: }	
	污染路径: 无	
13	缺陷发生位置:	行号:

	/src/test/java/com/taosdata/jdbc/confprops/HttpKeepAliveTest.java	50
	步骤描述: Either re-interrupt this method or rethrow the "InterruptedException".	
	代码片段: 48: try { 49: thread.join(); 50: } catch (InterruptedException e) { 51: e.printStackTrace(); 52: }	
	污染路径: 无	