OurApp_vs_Obsidian

All-module UX evidence review

MyNotes 0.69.0 / code 69 vs Obsidian Android 1.15.0 / code 396

Expanded 6 November 2026 | Comparison first; no implementation fixes

What is now included: 37 functional-area chapters covering the identified MyNotes surfaces and every one of the 29 internal Obsidian module definitions in the retained version-pinned registry (28 exposed core controls). The original 20 detailed findings for the first two modules are preserved in the appendix.

What “all modules” means: All identified MyNotes functional families and all 29 internal Obsidian modules in the retained pinned-version registry; not all possible third-party extensions or full functional acceptance. MyNotes here means the standalone notes app, not unrelated Clock/Calculator or other MySpace apps.

What it does NOT mean: No new live touch session, physical-device study, participant study, matched task timing, frame-jank trace or bug-reproduction run was performed. This is expanded evidence review, NOT completion of the proper fresh hands-on testing requested. Every proposed module task is explicitly NOT RUN.

Main judgment: Our strongest established weaknesses are obstructed/crowded task views, unclear scope and storage concepts, a constrained portable-backup model and retained recognition-quality limits. Competitor complexity, setup failures and untested services remain visible rather than being treated as automatic wins.

Comparison rule: Compare shared user jobs, not feature totals. OCR, voice transcription, widgets, graph tools, Bases and cloud services are described without pretending they have identical counterparts or awarding extra-feature credit.

Whole native frames are proportionally placed, never recreated or retouched. A screenshot proves the captured state, not smoothness, correctness across all data or current-device bug recurrence.

How to read the evidence and the result

Label	What it establishes / what it does not
Visible issue / constraint	A retained state can be inspected, e.g. obscured preview or tiny editor viewport. Frequency and current-device reproduction remain unknown.
Source-supported limitation	A named implementation branch or documented bound exists, e.g. portable backup 8 MiB. This is not a newly observed execution or crash.
Retained measured limit	An earlier exact-source qualification receipt records bounded recognition results. This is historical evidence, not a new user study or a score against Obsidian.
Expert inference / scoped gap	A plausible usability concern or equivalent route not established in this inspection. Absence of evidence is not proof of absence across the entire app.
Different scope / not ranked	Capabilities do not match directly, or require accounts/permissions. An entry screen is not successful completion.

Presentation, efficiency, effectiveness, simplicity, discovery, feedback, safety, accessibility and performance are considered separately. There is no defensible overall star rating, pass percentage or speed winner from these unequal historical fixtures.

Review extent: 104 retained source frames are catalogued: 33 from phase one plus 71 additional unique frames inspected in contact sheets/context views. This does not mean every frame in either earlier audit was personally inspected. Source paths, dimensions and SHA-256 digests are in all-modules-evidence-manifest.json.

Known comparison limits: Earlier emulators, fixtures, keyboards, JPEG sizes and OS environments were not matched. Obsidian requested landscape stayed portrait. Its templates, audio recording and several context-dependent actions remained blocked/unverified. Our physical-device acceptance and recognition accuracy targets were not fully met.

No fixes: Only report data, report tooling and document-integrity tests changed. No Android build, installation, model training, login, purchase, cloud upload or app runtime modification was performed.

Your five concerns — expanded assessment

Unpolished existing features: Supported by retained obstruction/editor crowding and source/visual scope complexity. X01–X06, X22–X30 explain concrete risks without claiming every feature is broken.

Missing functionality: Internal-note relations/outline and structured database workflows are candidate scope gaps. Exact equivalents must be verified before declaring absence. Optional specialised tools and third-party plugins do not become mandatory just because Obsidian has them.

Pages are not simple: Library roles, row/block/table action scopes, appearance scopes and several storage/recovery concepts increase interpretation work. Proposed directions preserve the existing required tools rather than removing useful capability.

155 MB but feels empty: APK payloads are 155,195,444 and 14,511,986 bytes (~10.7:1). This is not installed footprint/RAM or proof of slowness. Judge time-to-first-useful-outcome and discoverability, not whitespace or seeded note counts.

Many bugs: Your report remains unresolved evidence to investigate. Candidate scope/empty-state cases, gesture failures, save/provider interruptions and physical playback need fresh reproduction. Historical test passes cannot refute reported friction.

The review does not dismiss your concerns; it identifies what the retained evidence supports and names the tests still missing. A long report is not a substitute for running those tasks.

Triage: what should be validated before fixing

Order	Area / evidence	Why / next validation
1	N01 + E01 / X01–X02	Historical visible preview obstruction and writing-context collapse. Recreate on the delivered signed app; verify large text, keyboard and safe content area.
2	X18–X19	Retained OCR/speech targets not all met. Use varied real scenes/speakers and measure correction effort; do not claim extra features compensate.
3	X23–X25 + X27	8 MiB backup bound, omitted categories and several durability concepts. Verify understandable export/recovery on disposable rich fixtures.
4	N07–N09 + X01	Source-supported global scope/body-result/empty-state candidates. Run populated, filtered and archived cases and inspect the actual visible feedback.
5	X03–X17 + X28–X30	Control scope, viewer return, copy/import fidelity and action discovery. Execute equivalent jobs where possible and state non-equivalence where not.
Parallel	X22 + X32–X33	Matched touch/assistive/performance and failure studies. No latency, jank or physical reliability result exists yet.

P1 means expert triage urgency, not observed incidence or a newly reproduced bug. Not ranked means the counterpart/result is not established; it does not mean the feature is unimportant.

Module directory — complete expanded scope

Each X chapter includes observed/reference evidence, comparative trade-offs, a scoped judgment, proposed direction and a specific manual task with acceptance checks. All live-task states remain NOT RUN. The earlier N/E detailed findings are in the appendix.

ID	Functional area	Triage
X01	Find, organise, label and reorder	P1
X02	Writing, reading and formatting	P1
X03	Checklists, numbering and list editing	P2
X04	Tables and direct cell editing	P1
X05	Images, attachments and inline media	P2
X06	Web hyperlinks and external opening	P2
X07	Internal links, backlinks, graph and previews	P1
X08	Long-note orientation, tags, footnotes and word count	P1
X09	Properties and Bases	Not ranked
X10	Quick capture, daily notes, templates and unique notes	P2
X11	Freehand drawing and Canvas	P2
X12	Diagrams, shapes, arrows and grouping	P2
X13	PDF reading, selection, search and markup	P1
X14	Word files and original-layout expectations	P1
X15	Large TXT and read-only text viewing	P2
X16	Spreadsheet previews and cached values	P2
X17	Markdown, HTML, RTF, ODT and slide imports	P1
X18	OCR, image-region text and scanned-page recognition	P1
X19	Voice recording, playback and transcription	P1
X20	Reminders and notifications	P1
X21	Home widget and Android entry points	P2
X22	Appearance, backgrounds, fonts and accessibility	P1
X23	First-use storage, private folders and optional App folder	P1
X24	Portable backup, import merge and full recovery	P1
X25	Trash, permanent deletion and recovery	P1
X26	Archive, pinning and bookmarks	P2
X27	Undo, redo, editing history and save feedback	P1
X28	Workspaces, tabs and mobile navigation	P1
X29	Settings, commands, quick actions and help discovery	P2
X30	Export, sharing, duplication and note composition	P1
X31	Local summary and text assistance	Not ranked
X32	Privacy, permission boundaries and diagnostic logs	P1
X33	Smoothness, speed, footprint and reliability	P1
X34	Core modules, community plugins and extensibility	Not ranked

ID	Functional area	Triage
X35	Sync, Publish, account and service boundaries	Not ranked
X36	Slides, presentation and reading projections	P2
X37	About, models, licences and honest help	P2

Manual study design — not executed

Matched setup: Use the same physical Android device/OS, font scale, keyboard, orientation, offline state and public dummy corpus. Pin both APK identities. Keep our installed user data untouched; do not uninstall/clear/downgrade the real library.

Tasks rather than scripts: Ask an operator to reach the stated module outcome without a coached tap sequence. Record detours, wrong scopes, failed outcomes, lost context and recovery. Expert walkthroughs and participant studies must remain separately identified.

Measurements: Time from deliberate input to visible response and to verified outcome; collect frame traces for drag/typing, cold/warm launch and file-open timings separately. Record task effectiveness, errors, correction time, help requests and reported confidence.

Safety/failure probes: Use disposable data for interrupted writes, denied permissions, revoked document access and recovery. Verify original bytes and intended destination content. Do not simulate destructive failure against private user notes.

Reporting: Publish observations, fixtures, exact versions, failures and non-equivalent tasks. Report account/paid/desktop/unsupported cases as blocked or out of scope, not zero scores. Do not imply a reproducible population statistic from a few demonstrations.


What is available now: Visual/source inspection plus retained qualification limitations. Module inclusion and document checks are not new live usability results; every chapter below names the task still to run.

X01 | Find, organise, label and reorder


P1 | Visible issue + source-supported candidates

Scope: Search, folders, labels/tags, list/grid, sorting and manual order

Evidence: The retained home has a floating New note overlapping preview words; Library combines destinations and creation actions. Current source makes a nonempty home query global, bypassing the current folder/workspace/label filters.

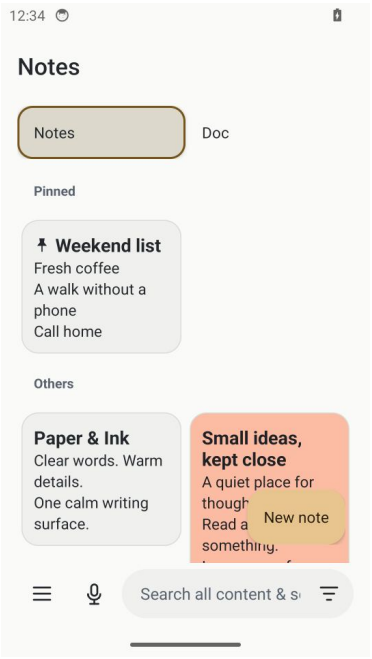

M01 | MyNotes 0.69.0 / code 69 | home

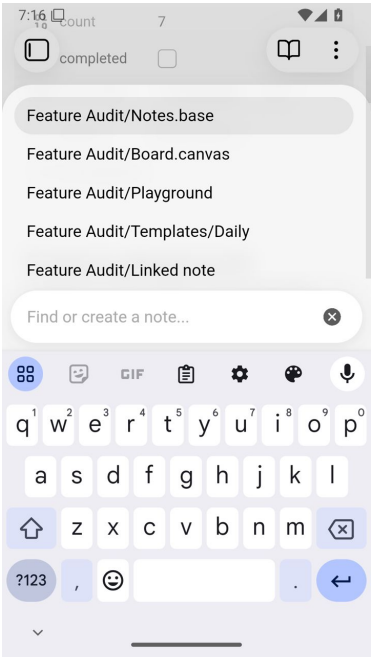

O01 | Obsidian 1.15.0 / code 396 | Quick switcher with file paths and Find or create input

Comparator / fairness: Quick switcher, file explorer, tags and full-content search are distinct Obsidian surfaces. Its empty search frame does not demonstrate better relevance or speed.

Judgment: Priority remains content visibility and a clearly stated search contract. Detailed findings N01–N10 are retained in the phase-one appendix.

Direction, not an implemented fix: Keep floating creation and cross-workspace search, but state scope and protect preview space; separate browsing from administration.

Manual task — NOT RUN: Find an archived body-only match while a folder filter is active; reorder a distant card, then return.

Acceptance / remaining evidence: Record actual scope, result passage, selected filters and persisted order; repeat list/grid, keyboard and large text. Measure drag continuity only in a new live session.

Source anchors: NotesController.java:renderHome/filterNow/renderUniversalResults; NotesBoard.java; LibraryOrderStore.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X02 | Writing, reading and formatting


P1 | Visible viewport constraint

Scope: Notes/Doc, selected text, new typing, headings and Markdown modes

Evidence: Format plus keyboard leaves only a short strip of writing context. The source already has selected-text/new-typing semantics and accessible selected controls; formatting is not declared broken.

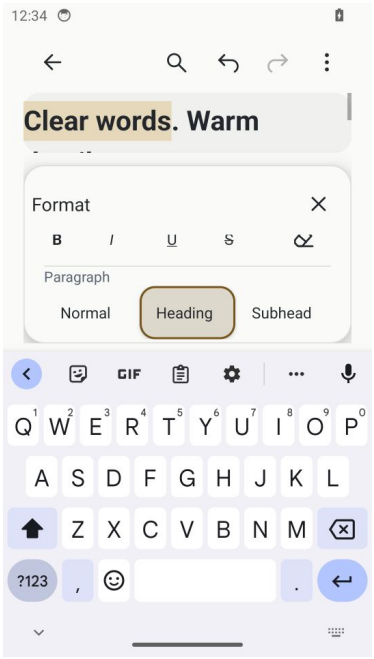

M09 | MyNotes 0.69.0 / code 69 | format-keyboard

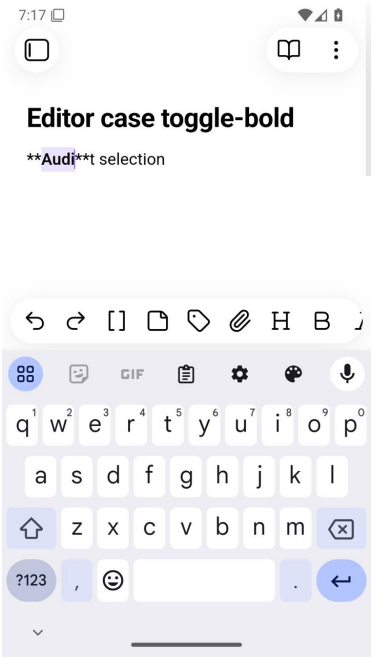

O06 | Obsidian 1.15.0 / code 396 | Bold action on dedicated scratch note; keyboard visible

Comparator / fairness: Obsidian keeps a compact keyboard toolbar but exposes Markdown syntax and icon-learning costs. It is not automatically simpler for a novice.

Judgment: E01–E10 in the appendix explain context, hierarchy and feedback problems. More controls are not a substitute for confident writing.

Direction, not an implemented fix: Adapt the existing single Format panel to the available viewport; preserve labels, selection, fifth Clear and direct editing.

Manual task — NOT RUN: Format the middle of a paragraph, type new text, undo, dismiss the keyboard and reopen the note.

Acceptance / remaining evidence: Retain surrounding prose, correct style target, caret and saved result. Repeat with large text; compare actual task completion and mistakes, not assertion counts.

Source anchors: NotesController.java:renderEditor; FormatControls.java; DocumentEditorView.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X03 | Checklists, numbering and list editing


P2 | Expert inference

Scope: Complete, indent, reorder, convert selected text and hide checked

Evidence: Our row sheet labels its target List item 1 and exposes Indent/Outdent/Remove; checklist-level actions occupy another sheet. That helps discoverability but requires understanding row versus whole-list scope.

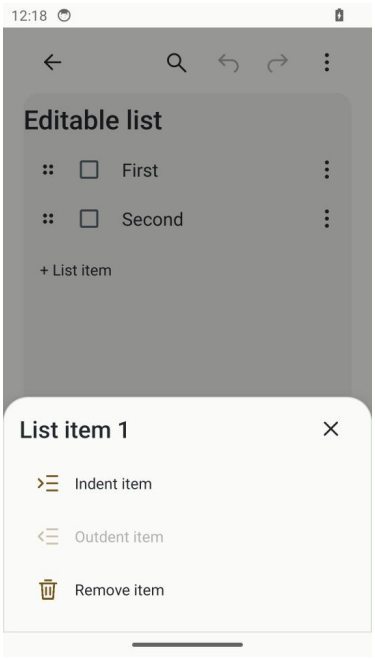

AM01 | MyNotes 0.69.0 / code 69 | checklist-item-actions

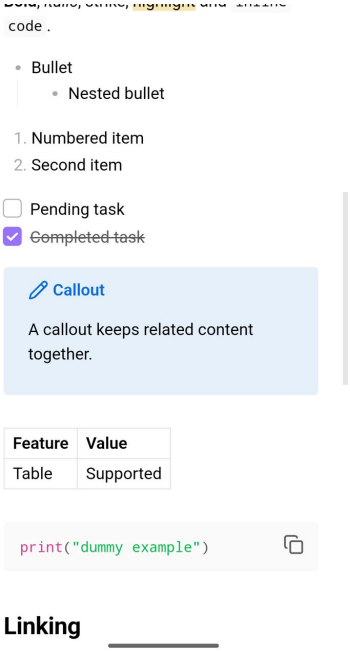

AO01 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 6

Comparator / fairness: Obsidian renders bullets, numbered items and checkboxes inside prose. The retained transformation readbacks establish narrow Markdown edits, not equal drag usability.

Judgment: Candidate friction is scope switching, not an established inability to edit lists. Do not remove our visible text labels just to imitate Markdown.

Direction, not an implemented fix: Keep row grips, direct item insertion, named lists and a non-drag Move route; make the affected list/item unmistakable.

Manual task — NOT RUN: Insert an item in the middle, indent it, move it past the viewport, hide completed rows and undo.

Acceptance / remaining evidence: No lost items, wrong-list operations or accidental workspace swipes. Verify numbering after insertion and Backspace exit at an empty item.

Source anchors: NotesController.java:convertNote; DocumentEditorView.java; AutoListContinuation.java; ParagraphNumbering.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X04 | Tables and direct cell editing


P1 | Expert inference

Scope: Cell/row/column operations, header role and wide content

Evidence: Our table is embedded with a named-content header and nearby pen/overflow actions. The captured compact table does not establish behavior for many columns, large fonts or long cells.

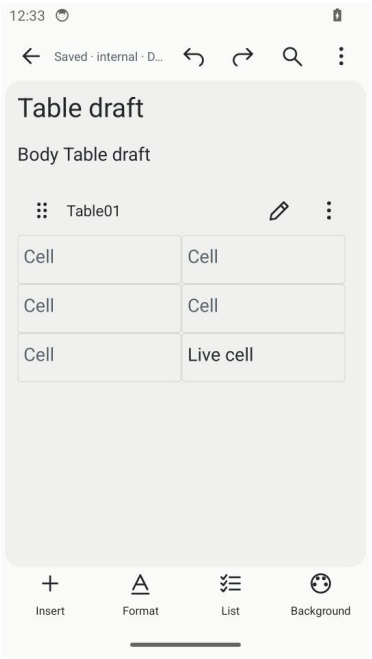

M14 | MyNotes 0.69.0 / code 69 | document-table

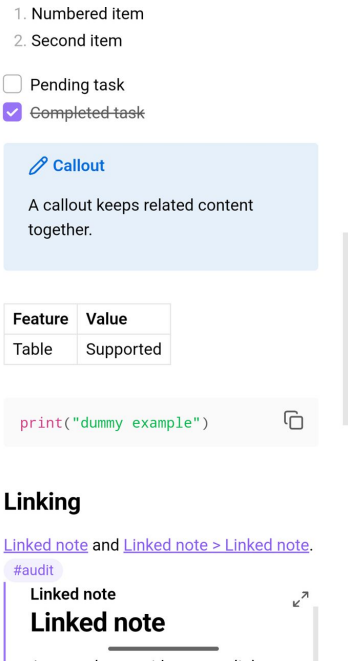

O08 | Obsidian 1.15.0 / code 396 | Rendered table within note prose

Comparator / fairness: Obsidian shows a readable rendered Markdown table; that is not evidence its cell editor, paste or column operations are faster.

Judgment: Scope ambiguity and narrow-screen navigation need validation. E08 already flags multiple neighboring action scopes.

Direction, not an implemented fix: Preserve direct cell editing, header toggles, boundaries, overflow cues and undoable confirmed deletion.

Manual task — NOT RUN: Edit a long cell in a wide table; insert a column beside it, toggle header role, delete a row and undo.

Acceptance / remaining evidence: Keep the active cell visible above the IME; no unexpected horizontal jump; restore content and header meaning after undo. Compare the same table, not these unequal fixtures.

Source anchors: DocumentEditorView.java; TableWidths.java; TextTable.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X05 | Images, attachments and inline media


P2 | Expert inference

Scope: Insert, name, select, crop/edit, remove and return to text

Evidence: Our image selection sheet presents Use text, Keep image, Read this area and selection controls together. This is a specialised workflow with several possible outcomes to interpret.

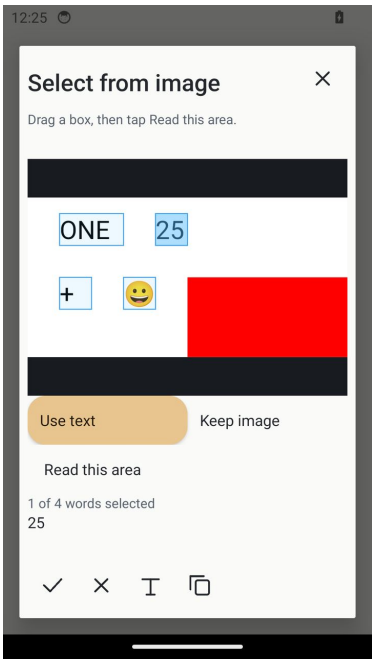

AM02 | MyNotes 0.69.0 / code 69 | image-text-selection

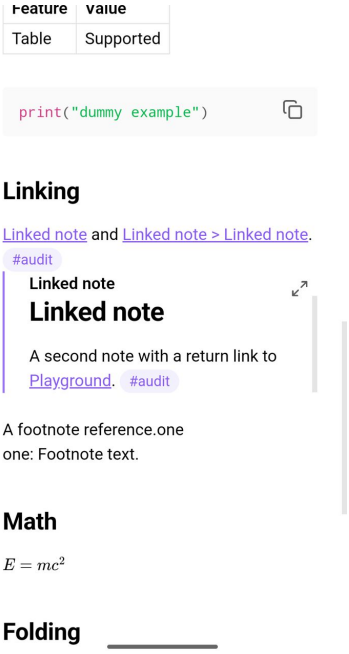

AO02 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 9

Comparator / fairness: Obsidian captures links and an embedded note. This is not a matched image crop or OCR interface, and media/PDF embed correctness was not functionally accepted.

Judgment: Candidate mental-model friction: selecting an image region, extracting words and editing an attachment must not appear to be the same destructive operation.

Direction, not an implemented fix: Explain what each action inserts or retains, preserve originals, and keep image management subordinate to reading.

Manual task — NOT RUN: Insert a photo, select two recognized words, keep the image, edit its crop, then remove only the intended attachment.

Acceptance / remaining evidence: Keep source bytes, unrelated blocks and names intact; make copy versus replacement clear. Verify offscreen word selection and explicit outside-tap dismissal.

Source anchors: ImageTextSelectionDialog.java; ImageTextSelectionView.java; ImageEditView.java; NoteImageFiles.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X06 | Web hyperlinks and external opening


P2 | Expert inference

Scope: Display text, safe URL validation, edit/remove and browser consent

Evidence: Our Hyperlink form separates display text and address; the captured invalid-address state shows an error affordance. Source limits web links to HTTP/HTTPS and confirms external opening.

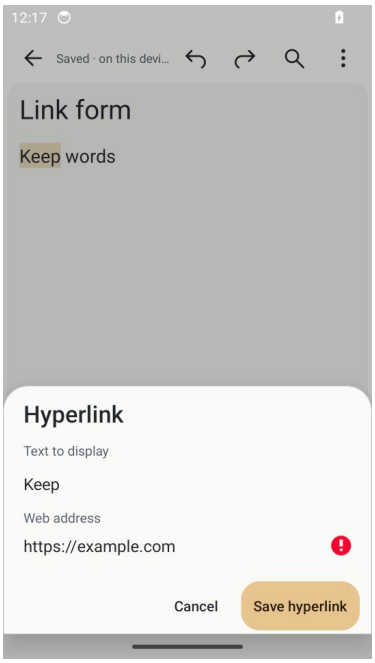

AM03 | MyNotes 0.69.0 / code 69 | word-link-form

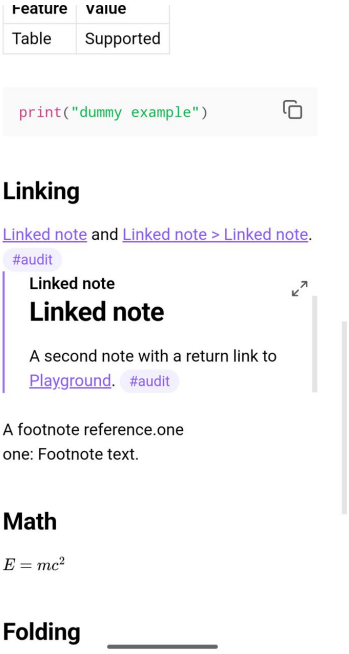

AO02 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 9

Comparator / fairness: Obsidian internal links and embeds are not the same operation as adding a web URL. Do not award a graph/navigation win for a web-link form.

Judgment: Validation visibility and multiline entry deserve a matched test; no claim of broken link handling follows from this captured fixture.

Direction, not an implemented fix: Keep visible URL errors and original words on Remove; identify when another app will open.

Manual task — NOT RUN: Add a long URL to selected words, correct a malformed address, reopen, edit and remove the link.

Acceptance / remaining evidence: No duplicate URL per line, changed neighboring prose or unnoticed external launch. Check keyboard visibility, wrapped fields and TalkBack error announcement.

Source anchors: NotesController.java:noteHyperlink; RichLinks.java; SafeLinks.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X07 | Internal links, backlinks, graph and previews


P1 | Comparator reference / scoped capability unknown

Scope: Connected-note navigation and local/global context

Evidence: The scoped MyNotes source inspection establishes web links; it does not establish an equivalent vault-wide internal-link/backlink/graph workflow. This is a candidate scope gap, not a proved app-wide absence.

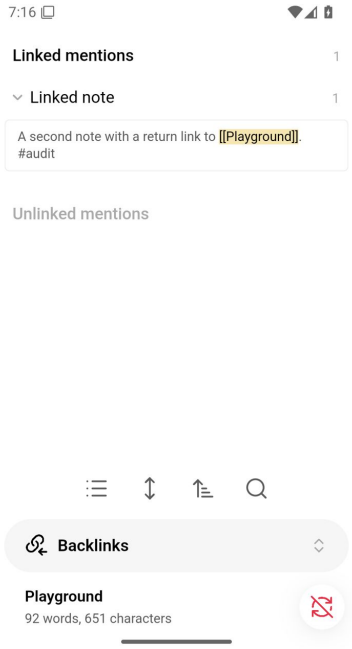

O12 | Obsidian 1.15.0 / code 396 | Backlinks pane

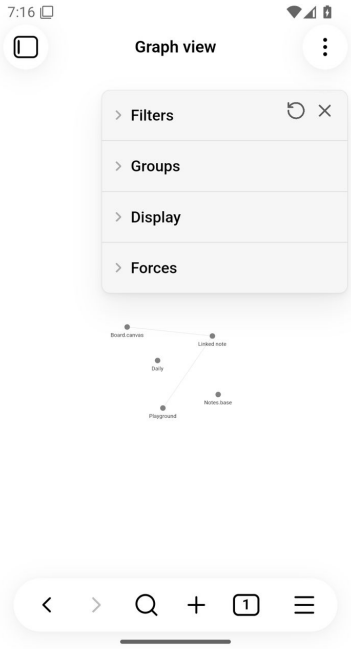

AO03 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 18

Comparator / fairness: Obsidian shows linked mentions with a passage, outgoing links, global/local graphs and an embedded note. A tiny graph with a large options panel also has cognitive and viewport costs.

Judgment: Potential effectiveness gap for connected research notes, not a reason to add a decorative graph to every simple note.

Direction, not an implemented fix: Validate whether users need stable internal-note references first. Prefer a small reliable related-note route before copying complex graph controls.

Manual task — NOT RUN: Link A to a heading in B, rename B, return through backlinks and preview the target without losing A.

Acceptance / remaining evidence: Target identity and rename behavior must be verified live; count wrong destinations and recovery steps. No graph speed or link-integrity winner has been measured.

Source anchors: NotesController.java; RichLinks.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X08 | Long-note orientation, tags, footnotes and word count

P1 | Scoped gap + explicit comparator blocker

Scope: Headings, jump/navigation, find and document context

Evidence: MyNotes supports headings and highlighted find return. The reviewed source/captures do not establish a heading-outline jump path equivalent to the captured Obsidian outline.

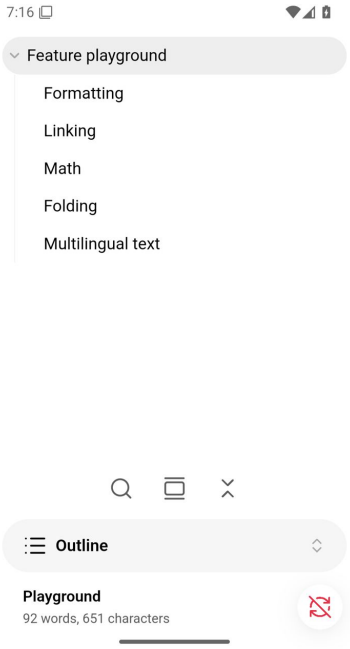

O09 | Obsidian 1.15.0 / code 396 | Heading outline pane



AO04 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 54

Comparator / fairness: Obsidian tags and outline are visible; the Footnotes pane says No footnotes found even though fixture text contains a footnote. Rendered detection was explicitly blocked, not accepted.

Judgment: Long-note orientation is a candidate gap; footnote and word-count completeness remain untested in our matching scope.

Direction, not an implemented fix: Keep fast highlighted Find, and validate a compact heading route rather than adding permanent chrome.

Manual task — NOT RUN: Locate a middle heading, find a repeated phrase, follow a footnote and return to the exact reading location.

Acceptance / remaining evidence: Verify target and return anchors, heading levels, counts and generated text treatment; do not infer footnote success from a registered command.

Source anchors: NoteFindDialog.java; FindInNote.java; DocumentEditorView.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.


X09 | Properties and Bases

Not ranked | Different product scope

Scope: Structured metadata, records and filtered views

Evidence: Our note properties include labels, color, folder and reminder state; arbitrary typed-property and database-view editing is not established by this inspection.

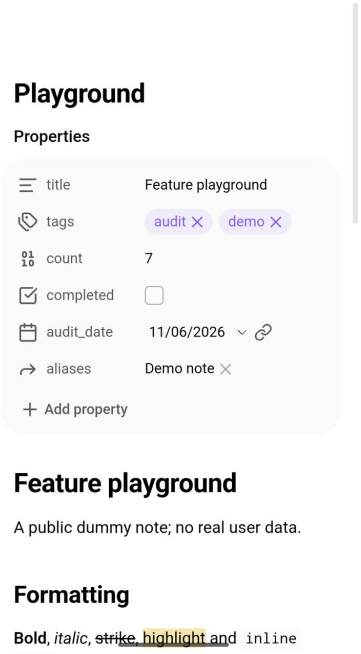

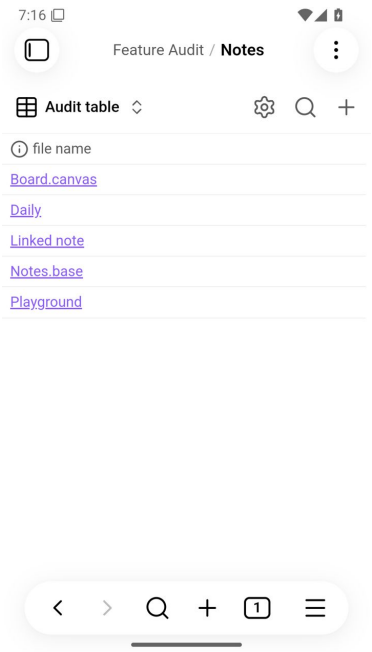

O11 | Obsidian 1.15.0 / code 396 | Properties in note; metadata occupies substantial space

AO05 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 13

Comparator / fairness: Obsidian shows typed properties and a Bases table of vault files. The canonical standalone Properties attempt was obscured; visible Properties is a layout reference, not proof of a successful properties interaction.

Judgment: Not a fair row-for-row comparison with our document tables. A Bases database is a different information architecture, not just more columns.

Direction, not an implemented fix: Treat structured-record management as a separate product decision. Do not burden everyday notes with unused metadata fields.

Manual task — NOT RUN: For users who need records, edit one typed field, filter a view, rename a file and reopen the view.

Acceptance / remaining evidence: Validate data types, retained filters, note identity and error recovery. No Bases performance, formulas or equivalent MyNotes capability is certified here.

Source anchors: NotesController.java:renderLabels/renderColours; Note.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X10 | Quick capture, daily notes, templates and unique notes


P2 | Shared capture task / optional workflows unknown

Scope: Start a useful note with low setup cost

Evidence: Our floating create action is direct, but a sparse fixture cannot establish first-use usefulness. The reviewed slice does not establish equivalent daily-note/template workflows.

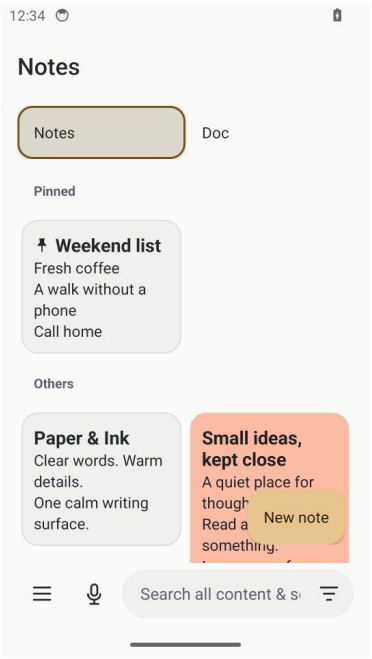

M01 | MyNotes 0.69.0 / code 69 | home

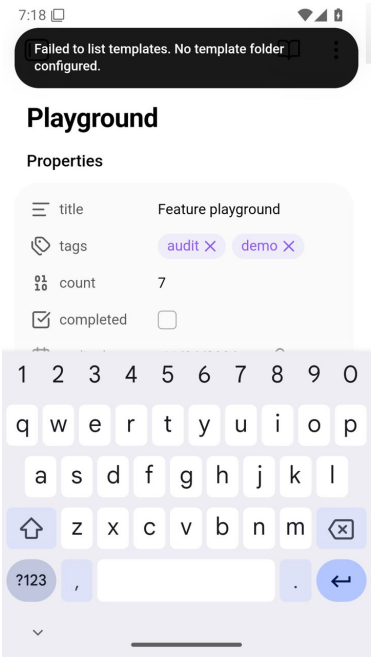

AO06 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 57

Comparator / fairness: Obsidian daily notes and timestamp names are visible. Template insertion failed because no template folder was configured; random-note invocation does not certify selection distribution.

Judgment: Capture efficiency is a shared job; daily notes/templates are optional aids, not automatic points. Setup failures must not be presented as competitor success.

Direction, not an implemented fix: Preserve immediate blank-note creation. Evaluate templates only against actual repeated writing tasks and explain required configuration.

Manual task — NOT RUN: From a cold start, capture a short thought; then create a repeated meeting structure and return tomorrow.

Acceptance / remaining evidence: Observe time to first saved words, setup mistakes, duplicate daily notes and return continuity. Do not populate fake user content to make the app feel busy.

Source anchors: NotesController.java:renderHome; Note.java

Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X11 | Freehand drawing and Canvas


P2 | Partially overlapping tools

Scope: Visual thinking, embedded drawings versus spatial boards

Evidence: Our dedicated drawing screen exposes labelled Pen/Pencil/Highlighter, width/color and undo tools; the frame alone does not measure pen latency, palm rejection or save reliability.



AM04 | MyNotes 0.69.0 / code 69 | drawing-tools

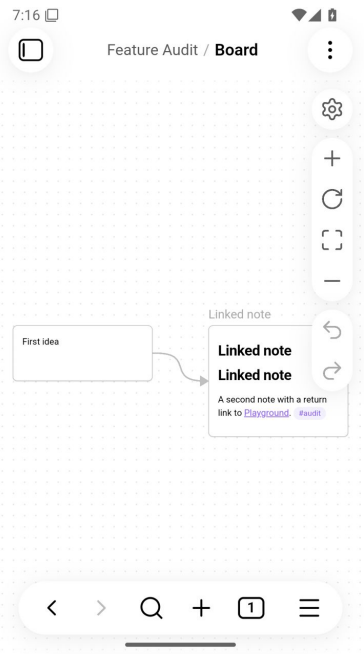

AO07 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 12

Comparator / fairness: Obsidian Canvas shows connected cards on a spatial board. It is not a native freehand drawing benchmark, and the requested landscape captures stayed portrait.

Judgment: These tools overlap in visual thinking but are not interchangeable. Do not score our pen tools against a card-board feature count.

Direction, not an implemented fix: Keep accessible drawing tools and clear draft/save meaning; make the transition back to the containing note predictable.

Manual task — NOT RUN: Draw a diagram annotation, leave and reopen it; in Canvas connect two cards, pan/zoom and reopen the board.

Acceptance / remaining evidence: Evaluate each tool against its own output goal. For common save/return work, preserve content and location; latency needs real stroke traces on matched hardware.

Source anchors: DrawingPad.java; NotesController.java:stashDrawing/renderDrawing; DrawingClipboard.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X12 | Diagrams, shapes, arrows and grouping


P2 | Expert inference

Scope: Create/edit a bounded structured visual

Evidence: Our diagram editor has shape selection plus a separate options sheet for Group shapes, Edit arrows and Split arrow. A large empty canvas in a one-shape fixture is not evidence of missing content.

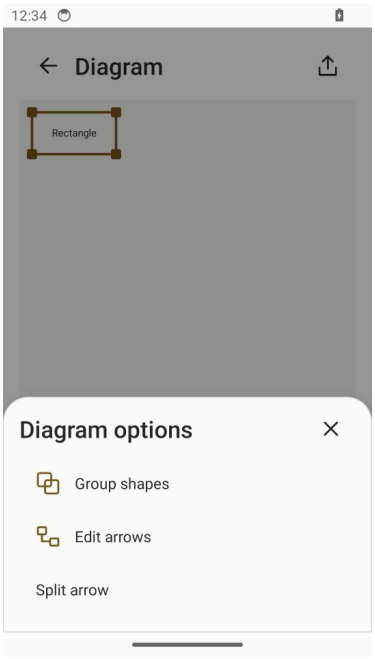

AM05 | MyNotes 0.69.0 / code 69 | diagram-options

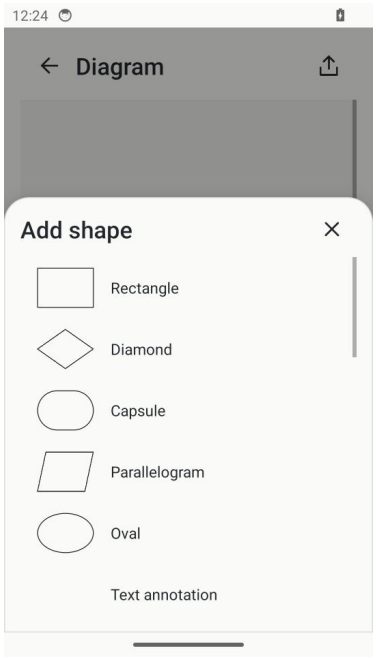

AM06 | MyNotes 0.69.0 / code 69 | shape-picker

Comparator / fairness: Canvas is the nearest retained Obsidian visual reference, not a matched shape-and-arrow editor. No successful comparator arrow/group gesture is established.

Judgment: Candidate discoverability issue: users must find contextual grouping and connection actions without confusing selection, editing and export.

Direction, not an implemented fix: Preserve colorless diagram options, pen-scoped names and direct arrow editing. Improve guidance at the relevant selection state, not with a permanent tutorial overlay.

Manual task — NOT RUN: Add two shapes, connect them, group, resize, split the arrow, undo and reopen.

Acceptance / remaining evidence: Check actual anchor geometry, target selection, retained names and no accidental duplication. Run long-press/context-menu actions with large text and TalkBack.

Source anchors: DiagramView.java; DiagramRenderer.java; Diagram.java; NotesController.java:renderDiagram


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X13 | PDF reading, selection, search and markup


P1 | Current-state reference / comparator workflow unverified

Scope: Open, scroll, zoom, find, annotate and export a marked copy

Evidence: Current retained frames show a compact filename toolbar, keyboard-adjacent find field and separate markup rail. Earlier rejected viewer duplication should not be reported as still present.

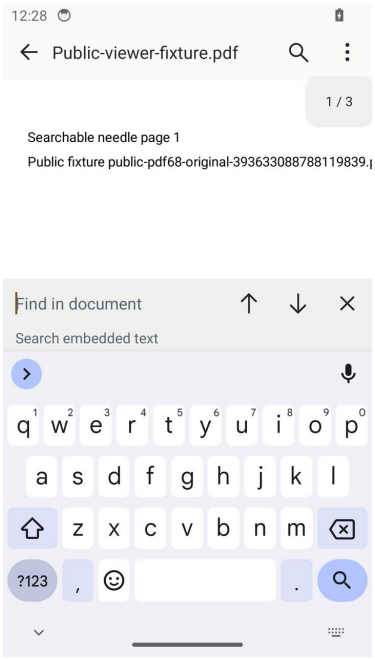

AM07 | MyNotes 0.69.0 / code 69 | pdf68-search-above-keyboard

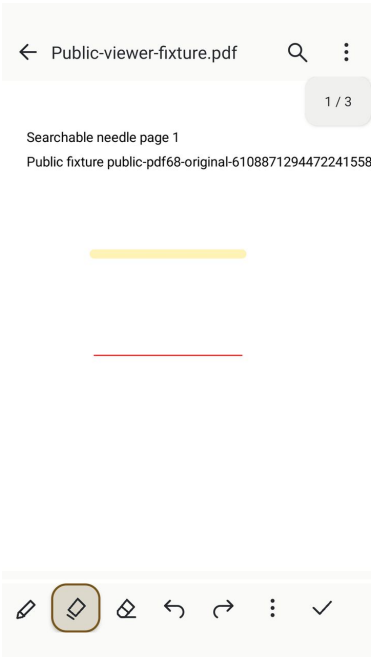

AM08 | MyNotes 0.69.0 / code 69 | pdf68-pen-and-highlighter-tools

Comparator / fairness: The Obsidian audit did not certify PDF embed/viewer workflows. No matched PDF search, annotation or original-preservation run exists for it.

Judgment: Current design has the requested shape; gesture precision, search latency, scrubber timeout and zoom continuity remain acceptance work, not proved polish.

Direction, not an implemented fix: Retain real file-wide zoom, selection-clearing outside tap, compact controls, loader and the hiding page scrubber. Do not reintroduce Go to page or duplicate counts.

Manual task — NOT RUN: Open a large scanned/mixed PDF, zoom a distant page, select offscreen text, find a hit with IME, mark a rotated page and export.

Acceptance / remaining evidence: Compare the original bytes; inspect hit position, highlight geometry and rendered export. Exercise cancellation and a partial destination; private markup drafts are outside Notes backups.

Source anchors: LocalPdfPreview.java; PdfTextLayer.java; PdfPageOcr.java; PdfMarkup.java; PdfMarkedCopy.java

Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X14 | Word files and original-layout expectations


P1 | Different file-format scope

Scope: DOCX preview, selection, zoom, import versus original reader

Evidence: Our filename toolbar is compact. Source explicitly says MyNotes pages are an approximate local preview and offers an original-layout reader or a separate editable copy.



AM09 | MyNotes 0.69.0 / code 69 | word68-attached-filename-toolbar

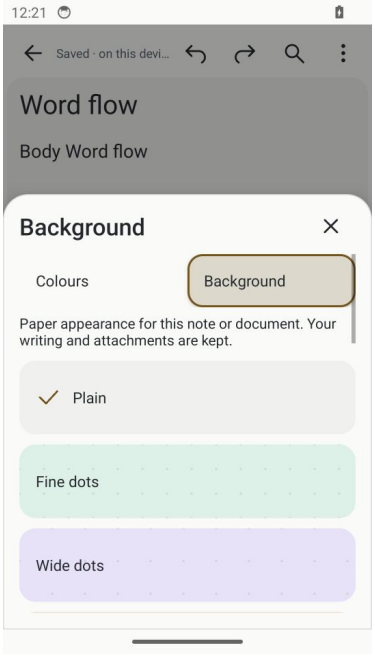

AM10 | MyNotes 0.69.0 / code 69 | word-appearance

Comparator / fairness: Obsidian is not a retained Word-layout comparator; its rendered Markdown cannot establish DOCX fidelity.

Judgment: Effectiveness depends on honest mode boundaries. A readable preview must not be mistaken for a faithful Office renderer or editable original.

Direction, not an implemented fix: Keep the original-only opening flow and clear disclosure. Separate page appearance controls from edits to imported content.

Manual task — NOT RUN: Open a DOCX with headers, inline images, wide tables and hard page breaks; select text, zoom and create an editable copy.

Acceptance / remaining evidence: Check original bytes and document return position, compare rendered pages with a suitable Word reference, and disclose any dropped layout/media. Do not invent fidelity from a synthetic one-page frame.

Source anchors: WordPageFile.java; StructuredWord.java; NotesController.java:openFile/openWordPages


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X15 | Large TXT and read-only text viewing


P2 | Current viewer reference / performance unmeasured

Scope: Pagination, selecting, find and creating an explicit editable copy

Evidence: Our retained TXT view shows real text, a 1/17 page indicator and page arrows rather than the note editor. It is an opening state, not a measured large-file completion test.

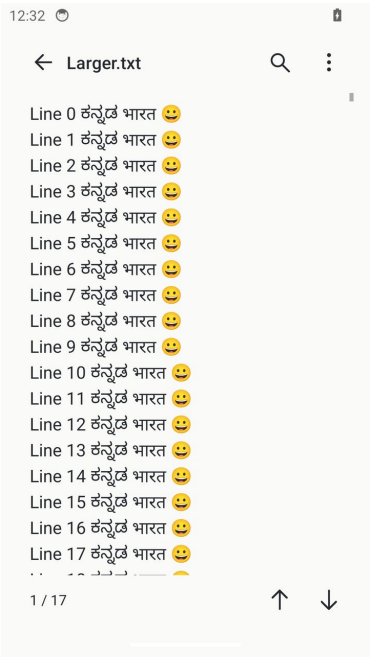

AM11 | MyNotes 0.69.0 / code 69 | e2e-large-txt-page-one

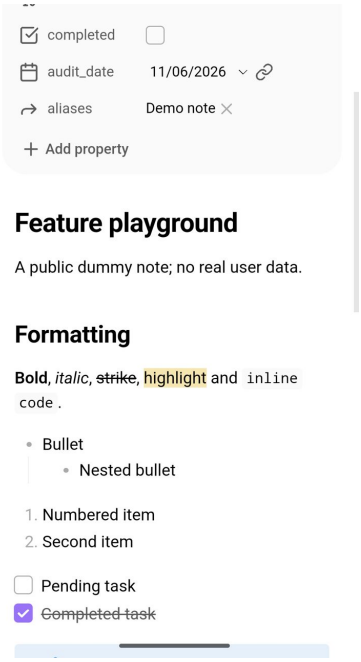

O07 | Obsidian 1.15.0 / code 396 | Rendered reading view of fixture

Comparator / fairness: Obsidian native Markdown reading is a text-oriented reference, but arbitrary TXT opening, pagination and selection were not matched.

Judgment: The shared job is locating and copying information without accidentally importing or overwriting the source. Input size alone is not proof of low latency.

Direction, not an implemented fix: Preserve read-only original viewing until explicit copy/edit, and stable search/selection across page boundaries.

Manual task — NOT RUN: Open a large multilingual TXT, find a repeated phrase near the end, select across the viewport and return to the prior file list.

Acceptance / remaining evidence: Measure open/find latency separately from rendering; inspect Unicode integrity, clear selection on deliberate tap, retained page and unchanged original.

Source anchors: NotesController.java:renderFileTextPreview; LocalOpenFile.java; TextPages.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X16 | Spreadsheet previews and cached values


P2 | Different data-model scope

Scope: CSV/XLSX grids, viewport navigation and data expectations

Evidence: Our preview exposes a 3-row, 2-column fixture with row/column coordinates. The inspected source opens CSV/XLSX through SpreadsheetFile and SpreadsheetPreview.

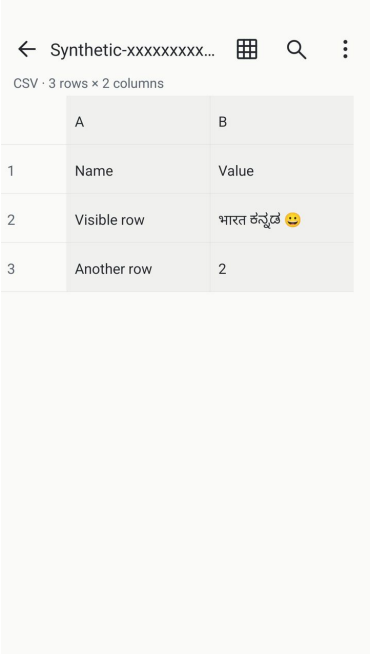

AM12 | MyNotes 0.69.0 / code 69 | spreadsheet-grid-viewport

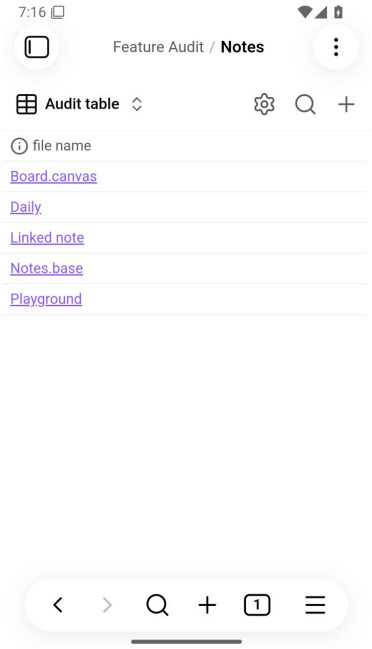

AO05 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 13

Comparator / fairness: Obsidian Bases is a vault-record view, not an Excel engine. Its table cannot establish XLSX formula execution, workbook fidelity or CSV compatibility.

Judgment: Do not imply a preview is a full spreadsheet editor. Cached-value handling and sheet ordering must be explained when creating text copies.

Direction, not an implemented fix: Keep grid context and explicit preview mode; provide readable wide-cell navigation without competing zoom/scroll gestures.

Manual task — NOT RUN: Open quoted CSV and a multi-sheet XLSX with formulas, missing cached results and wide cells; locate a value and copy it.

Acceptance / remaining evidence: Compare visible rows/columns and Unicode with source values, disclose cached-only results, retain sheet/scroll position and never execute macros or scripts.

Source anchors: SpreadsheetFile.java; SpreadsheetPreview.java; CommonFileText.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X17 | Markdown, HTML, RTF, ODT and slide imports


P1 | Source-supported fidelity limitation

Scope: Safe text extraction versus native rich rendering

Evidence: CommonFileText supports CSV/Markdown/HTML/RTF/ODT/XLSX/PPTX extraction. HTML strips script/style blocks; Office extraction does not promise layout, media or live formulas.

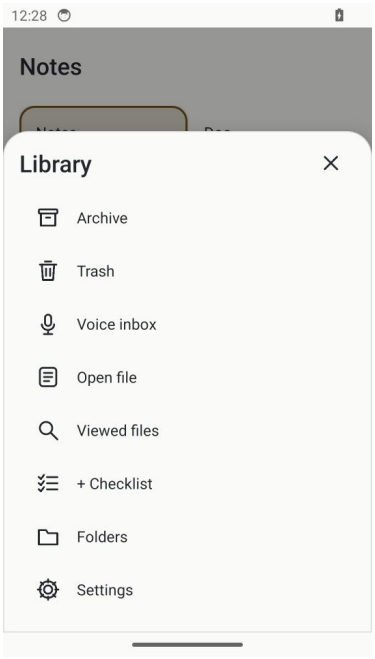

AM13 | MyNotes 0.69.0 / code 69 | e2e-library-viewed-files

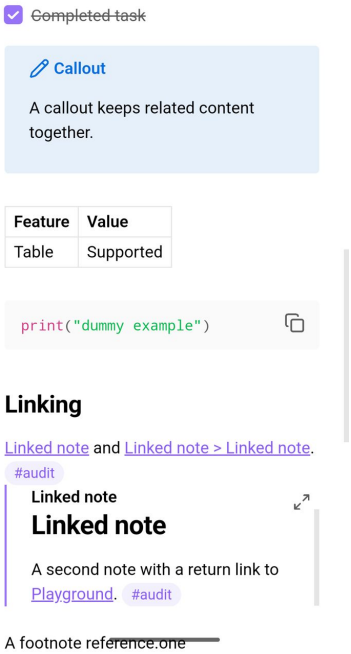

AO08 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 8

Comparator / fairness: Obsidian natively renders Markdown with code/callouts/math. This is not proof of equivalent import behavior for every other file type.

Judgment: Our supported-extension breadth should not hide a lower-fidelity text-copy contract. This is a source-supported limitation, not a reproduced corruption bug.

Direction, not an implemented fix: Explain exactly what a viewer preserves and what an editable copy drops before confirmation; keep other-reader privacy boundaries explicit.

Manual task — NOT RUN: Open one realistic file of each advertised type, inspect text order and unsupported elements, then cancel or create a copy.

Acceptance / remaining evidence: Record per-format fidelity and actionable errors; preserve originals, reject malformed/oversized archives safely and distinguish external-reader delegation from in-app support.

Source anchors: CommonFileText.java; LocalOpenFile.java; NotesController.java:openFile


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X18 | OCR, image-region text and scanned-page recognition


P1 | Retained measured limitation, not new live reproduction

Scope: English/Hindi/Kannada, correction, provenance and loaders

Evidence: The retained review screen requires checking text before saving. The delivered qualification receipt says OCR targets were met for 1512/1536 main observations; eight extra public scenes executed with zero exact outputs.

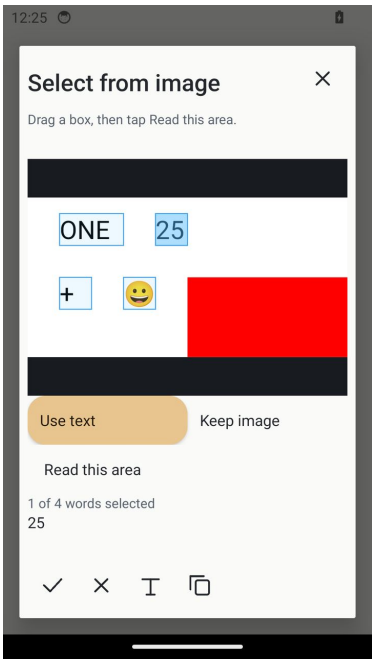

AM02 | MyNotes 0.69.0 / code 69 | image-text-selection

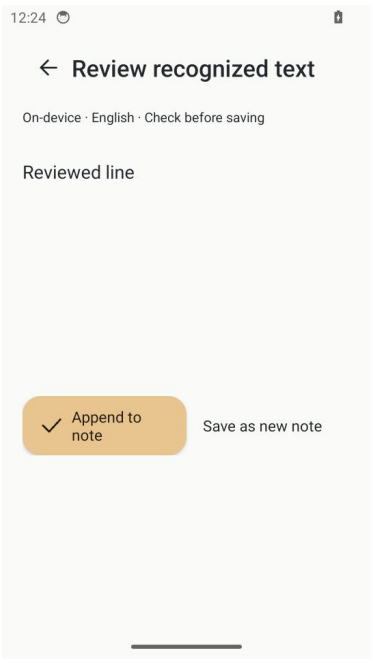

AM14 | MyNotes 0.69.0 / code 69 | ocr-review

Comparator / fairness: No equivalent built-in Obsidian OCR outcome was established. A denied/absent comparator workflow is not an accuracy win for us.

Judgment: Known recognition-quality limit, not merely a styling concern. Generated repeated-reference observations do not establish field accuracy on varied posters, tiny fonts or emoji.

Direction, not an implemented fix: Keep original images, explicit user-triggered OCR, visible loading, editable review and a clear insertion destination. Do not silently retry duplicates or invent unsupported-language text.

Manual task — NOT RUN: Read tiny/oblique/multilingual public scenes, blank controls and selected image regions; compare exact expected text and corrected output.

Acceptance / remaining evidence: Retain source hashes, full hypotheses, CER, omissions/false words, cold/warm latency and correction time. No new accuracy study or training occurred in this report.

Source anchors: OfflineOcr.java; ImageRegionText.java; PdfPageOcr.java; candidate69-markup-followup.md


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X19 | Voice recording, playback and transcription


P1 | Retained accuracy limitation / comparator recording blocked

Scope: Permission, pause/resume, originals, review and speech engines

Evidence: Our inbox displays transcript state, playback controls and a progress rail. Existing qualification met speech targets for 2528/3216 observations, not all. The optional engine is labelled experimental.

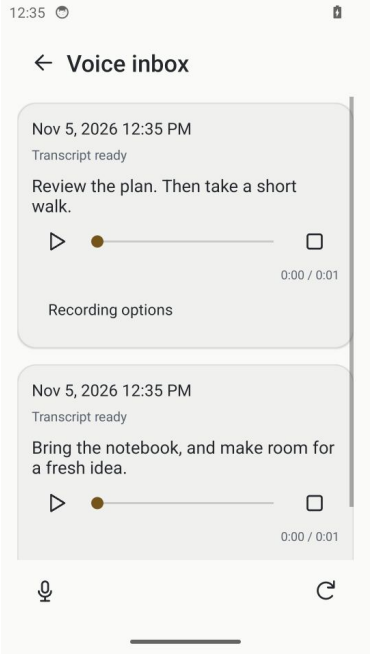

AM15 | MyNotes 0.69.0 / code 69 | voice-inbox

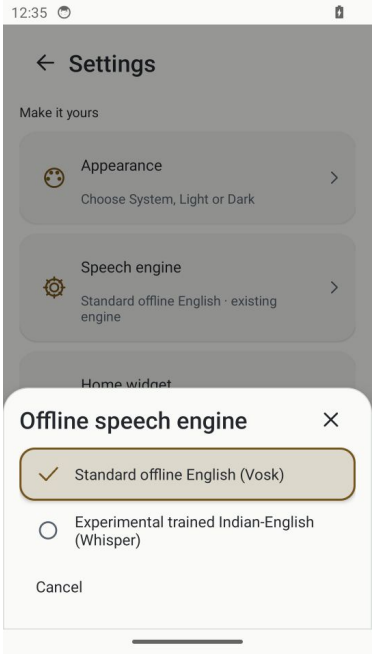

AM16 | MyNotes 0.69.0 / code 69 | e2e-speech-engine

Comparator / fairness: Obsidian audio recorder reached permission denial in its audit; successful recording, playback and quality were not certified. Recording audio is not equivalent to transcription.

Judgment: Known effectiveness limits must not be buried behind a polished inbox. Neither a playback icon nor an aggregate processing rate proves physical listening quality.

Direction, not an implemented fix: Preserve original audio independently of transcripts, honest engine labels, readable progress and review-before-use. Do not claim general Indian-accent competence from one adapted speaker.

Manual task — NOT RUN: Record varied Indian speakers, pause/resume, deny/regrant permission, play through a headset and correct names/numbers while listening.

Acceptance / remaining evidence: Measure word errors, boundary losses, time-to-review, seek accuracy and actual audible playback on physical hardware. Verify originals export separately from note backups.

Source anchors: VoiceCapture.java; VoicePlaybackCard.java; VoiceFiles.java; OfflineSpeech.java; voice-speaker-summary.json


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X20 | Reminders and notifications


P1 | Source-supported delivery boundary

Scope: Schedule, rename, deliver, cancel and reopen the intended note

Evidence: A native time picker is visible. LocalReminders schedules inexact alarms and checks notification permission/channel state; this is not proof that a reminder arrived on a physical device.

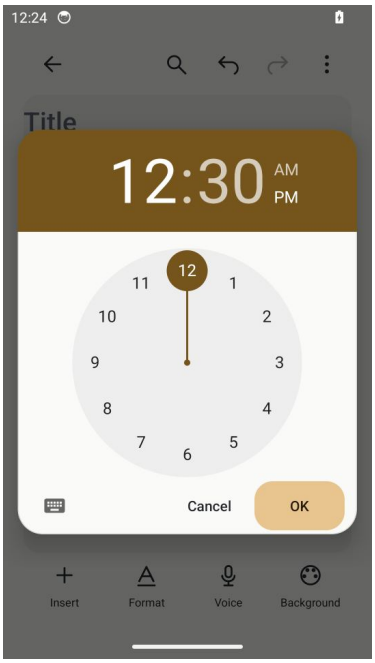

AM17 | MyNotes 0.69.0 / code 69 | reminder-time

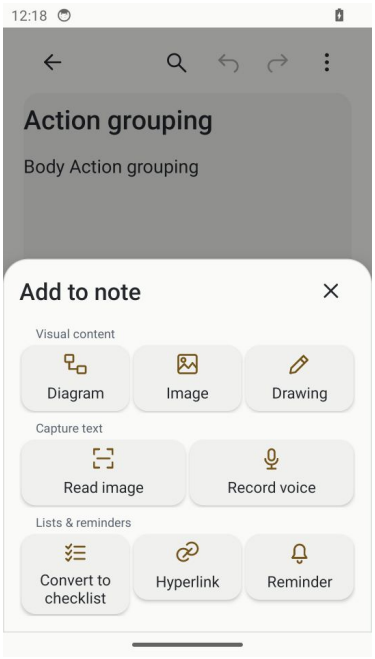

AM18 | MyNotes 0.69.0 / code 69 | add-reminder

Comparator / fairness: Daily-note creation in Obsidian is not equivalent to notification scheduling. No built-in matched reminder-delivery workflow is established.

Judgment: Delivery expectation is the key effectiveness risk: a selected time must not imply an exact-alarm guarantee the implementation does not provide.

Direction, not an implemented fix: Keep reminders optional, renameable and local; explain approximate timing and permission blocks at the point they matter.

Manual task — NOT RUN: Set, rename and reschedule a reminder, deny notifications, reboot and then tap the delivered notification.

Acceptance / remaining evidence: Use disposable notes; verify no stale/duplicate notification, correct note identity and sensible blocked-state feedback. Measure actual delivery under power restrictions separately.

Source anchors: LocalReminders.java; ReminderReceiver.java; LocalSurfaces.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X21 | Home widget and Android entry points


P2 | Source inspection only for launcher workflow

Scope: Pinned/recent projection, resizing, share-in and deep-link continuity

Evidence: Settings offers a Home widget. NotesWidget source renders up to four projected note titles and a first-use empty message; no launcher widget screenshot is used as visual acceptance evidence.

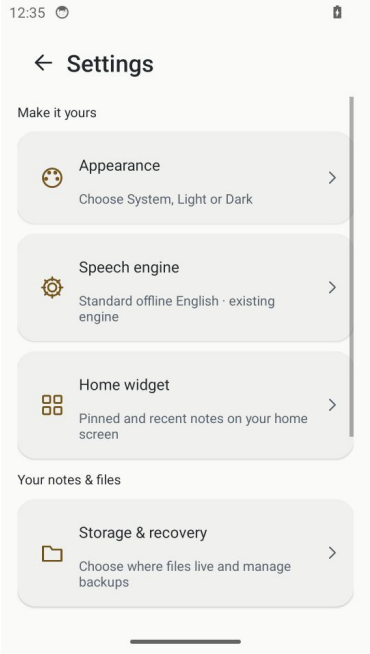

AM19 | MyNotes 0.69.0 / code 69 | e2e-settings

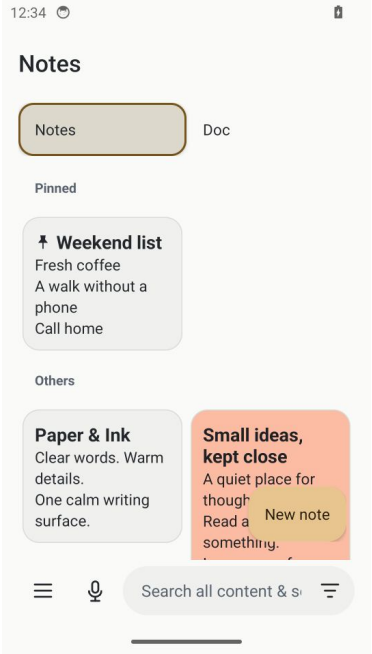

M01 | MyNotes 0.69.0 / code 69 | home

Comparator / fairness: The retained Obsidian mobile quick action is an in-app gesture, not proof of an equivalent Android home widget.

Judgment: Source presence is not launcher usability. Actual widget placement, refresh and accessibility are outstanding.

Direction, not an implemented fix: Preserve optional widget consent, pinned-first content and clear launch destinations; do not expose trashed notes through stale OS surfaces.

Manual task — NOT RUN: Place/resize the widget, pin and archive notes, share text from another app and open a reminder deep link.

Acceptance / remaining evidence: Verify labels, intended note, no duplicates and return context on real launchers, including large system text. Do not restore widget/notification consent silently during recovery.

Source anchors: NotesWidget.java; LocalSystemSurfaces.java; AndroidManifest.xml


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X22 | Appearance, backgrounds, fonts and accessibility


P1 | Expert inference

Scope: Theme, paper, writing lines, large text and assistive input

Evidence: Our theme sheet has System/Light/Dark choices, while note paper backgrounds and text formatting are separate controls. E04 already notes implementation-facing sp units; Obsidian also exposes pixels.

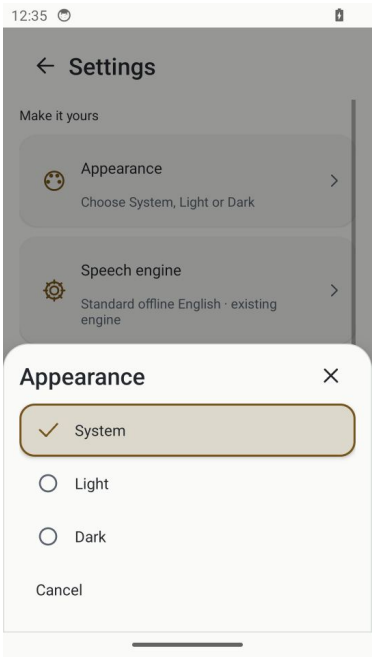

AM20 | MyNotes 0.69.0 / code 69 | e2e-appearance

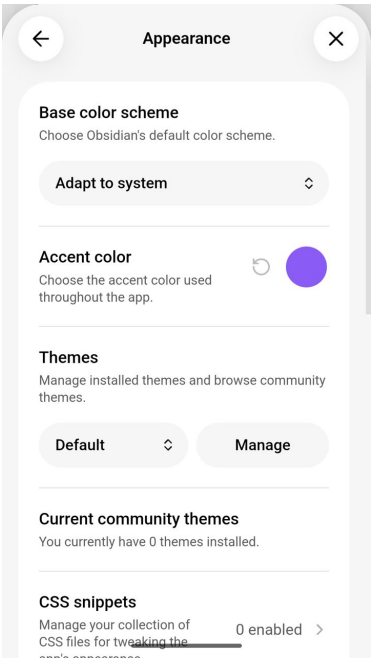

AO09 | Obsidian Android 1.15.0 / code 396 | settings frame 12

Comparator / fairness: Obsidian offers base scheme, accent, themes, fonts and CSS snippets. More appearance settings do not prove better contrast, legibility or accessible interaction.

Judgment: Potential confusion comes from several appearance scopes and cramped large-text editing, not a lack of decorative options.

Direction, not an implemented fix: Preserve system appearance, legible labels, writing-line independence and generous targets; clarify app theme versus note paper versus selected-text color.

Manual task — NOT RUN: Switch system theme, increase font scale, navigate with TalkBack and format selected text over a patterned background.

Acceptance / remaining evidence: Check clipping, announced scope/selection, contrast and focus order across orientations; screenshots alone do not establish 48dp targets or a successful screen-reader task.

Source anchors: NotesAppearance.java; NotesDesign.java; NoteBackground.java; FormatControls.java; EditorRails.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X23 | First-use storage, private folders and optional App folder


P1 | Source-supported model complexity

Scope: Where notes live, extra copies, reconnect and recovery expectations

Evidence: Our Storage & recovery page explains on-phone saving plus optional extra copies. A second dialog lists selectable categories and says active recording remains pending until stopped.

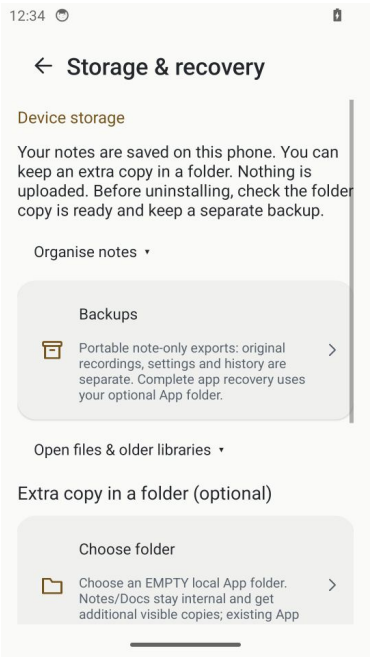

AM21 | MyNotes 0.69.0 / code 69 | storage

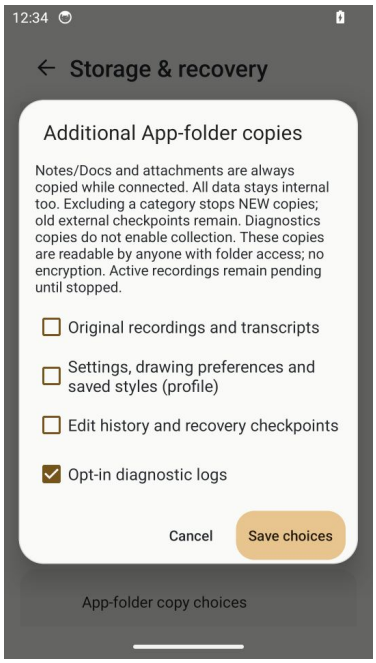

AM22 | MyNotes 0.69.0 / code 69 | app-folder-copy-choices

Comparator / fairness: Obsidian audit used private app storage; its vault is not an automatic cross-device backup. Private app storage is vulnerable to uninstall in both workflows.

Judgment: Our architecture asks users to distinguish private notes, organisational folders, extra App-folder copies and portable backup. This is a real mental-model burden, not evidence of current data loss.

Direction, not an implemented fix: Keep truthful copy/permission warnings but use progressive disclosure and one understandable status: saved privately, extra copy ready/pending, recovery needs verification.

Manual task — NOT RUN: Create notes offline, choose an empty optional folder, revoke access, save again and reconnect without clearing app data.

Acceptance / remaining evidence: Inspect exact copied categories and pending status; test reinstall/reselection only on disposable fixtures. Never tell the user to uninstall or clear their real library for this review.

Source anchors: NotesController.java:renderStorage; AppFolder.java; AppFolderTasks.java; NotesRepository.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X24 | Portable backup, import merge and full recovery


P1 | Documented/source-confirmed capability limitation

Scope: Verify output, disclose exclusions, restore without overwriting newer work

Evidence: The backup page visibly lists exclusions; restore previews added/skipped/conflicting notes before Confirm merge. BackupCodec and the UI explicitly cap portable backup at 8 MiB.

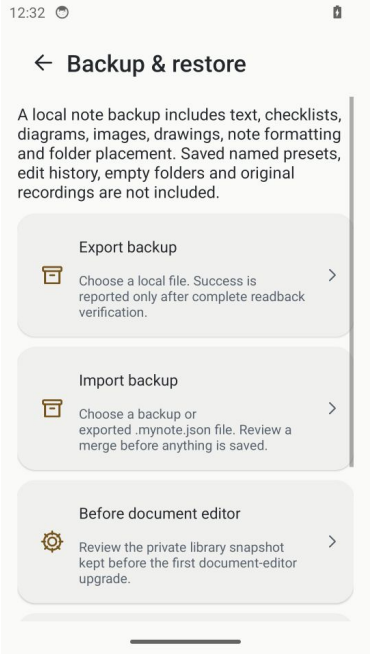

AM23 | MyNotes 0.69.0 / code 69 | backups

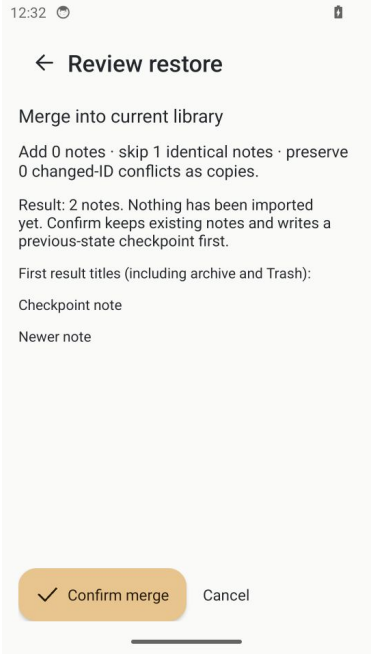

AM24 | MyNotes 0.69.0 / code 69 | restore-preview

Comparator / fairness: Obsidian file recovery is per-file history, not a certified full-vault backup/restore path. Sync is not used here as a backup benchmark.

Judgment: The 8 MiB bound is a concrete portability limitation for rich libraries. Original audio, empty folders, saved named presets and edit history are excluded; private PDF drafts need separate export.

Direction, not an implemented fix: Make backup scope and actual readiness legible before users rely on it. Preserve checksum/readback, non-destructive merge and checkpoints; plan larger-library portability only after comparison approval.

Manual task — NOT RUN: Export a near-limit rich library, exceed the limit safely, import identical and same-ID changed notes, then verify every supported content type.

Acceptance / remaining evidence: No silent partial success or overwrite; disclose omitted categories and readable/non-encrypted JSON. A complete App-folder checkpoint is a separate opt-in recovery mechanism, not this portable file.

Source anchors: BackupCodec.java; LocalBackupFiles.java; NotesController.java:renderBackups/renderPreview; AppFolder.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X25 | Trash, permanent deletion and recovery


P1 | Visible safety affordance / recovery execution unverified

Scope: Restore, seven-day retention policy, purge scope and safety

Evidence: Our confirmation explicitly says permanent deletion cannot be undone and that backups/original voice recordings are kept separately. The ordinary Trash view lists deleted note cards.

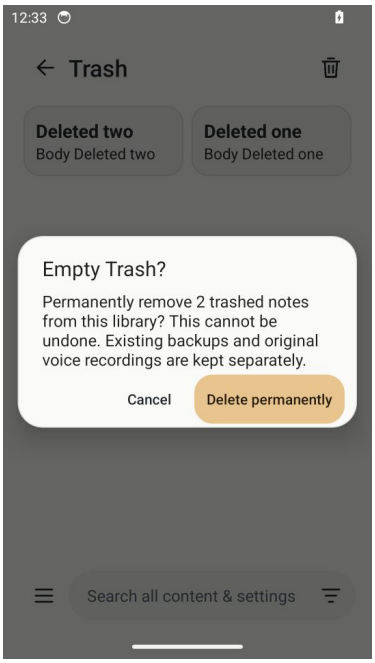

AM25 | MyNotes 0.69.0 / code 69 | trash-confirmation

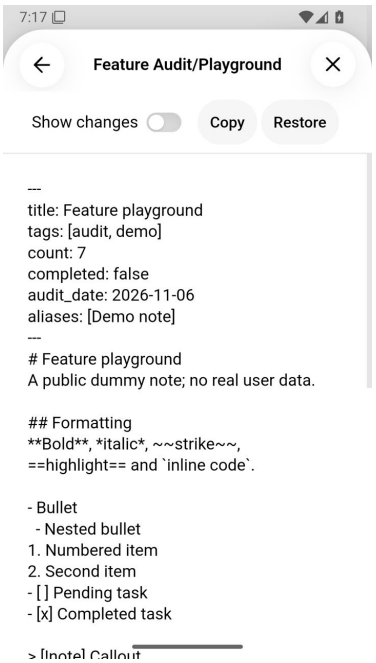

AO10 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 26

Comparator / fairness: Obsidian local recovery shows source text with Copy/Restore actions. It is not a matched Trash purge or successful restoration test.

Judgment: The visible warning is a strength to preserve. Recovery confidence still depends on explaining different lifetimes for a note, recording, backup and annotation draft.

Direction, not an implemented fix: Keep seven-day Trash/Undo and explicit destructive confirmation. Make restoration and separately retained copies understandable without alarming first-use notes.

Manual task — NOT RUN: Delete/restore a rich note, inspect what happens to its audio and exports, then purge only a disposable selected note.

Acceptance / remaining evidence: Verify the exact affected IDs, Undo boundaries, expiry policy and retained separate data. Never infer crash or power-loss recovery from a confirmation screenshot.

Source anchors: NotesController.java:confirmPermanentDelete/bulkState; NotesRepository.java; VoiceFiles.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X26 | Archive, pinning and bookmarks


P2 | Expert inference

Scope: Keep important content reachable without duplicating it

Evidence: Our Library offers Archive, and home distinguishes Pinned/Others. Source toggles archive/pin on note identities rather than making content copies.

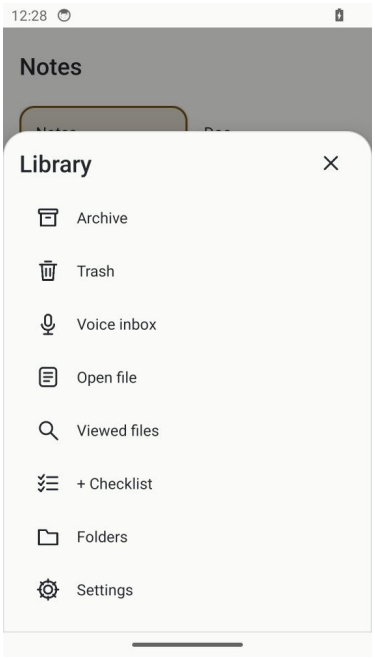

AM26 | MyNotes 0.69.0 / code 69 | e2e-library-archive

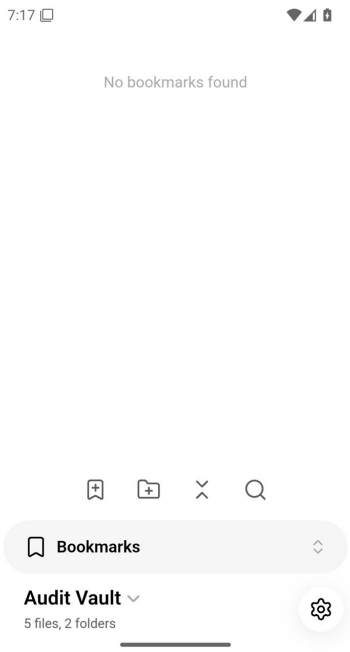

AO11 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 24

Comparator / fairness: Obsidian Bookmarks capture is empty. It establishes an entry point, not successful bookmark creation, folder organisation or persistence.

Judgment: Archive, pin, tab pin and bookmark are different concepts. The shared criterion is reliable return to important content, not equal label counts.

Direction, not an implemented fix: Keep pinning and Archive; state when global search includes archived content, and avoid teaching a second path that duplicates the same action.

Manual task — NOT RUN: Pin a note, archive it, find it globally, restore it and compare a saved Obsidian bookmark task.

Acceptance / remaining evidence: Check persisted identity/order, scope labels and no accidental duplicate. Bookmark persistence must be newly verified rather than inferred from its empty pane.

Source anchors: NotesController.java:bulkState/filterNow; LibraryFilter.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X27 | Undo, redo, editing history and save feedback


P1 | Expert inference

Scope: Session recovery, retained history and draft durability

Evidence: Our top bar exposes Undo/Redo. Source explains retained history bounds: up to 50 steps per note, 64 recently edited notes, 16 MiB on disk; it is not exported in portable backups.

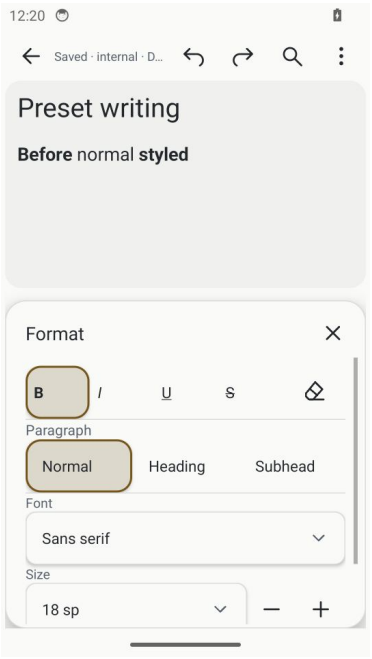

AM27 | MyNotes 0.69.0 / code 69 | document-saved-styles

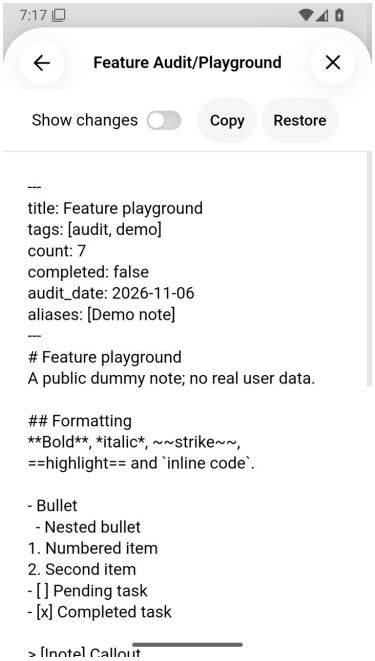

AO10 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 26

Comparator / fairness: Obsidian snapshots provide a source-text recovery view; not an equivalent guarantee for every rich-object undo or process interruption.

Judgment: Distinguish undo history, saved note, recovery snapshot and backup. A visible Saved label cannot prove every external copy is verified.

Direction, not an implemented fix: Keep clear private-save versus copy-pending feedback and safe Back. Do not fix perceived empty space by hiding durability warnings.

Manual task — NOT RUN: Edit text/table/image, undo and redo, leave and reopen; repeat after controlled process restart on disposable data.

Acceptance / remaining evidence: Verify exact rich payload and history matching the saved revision; preserve current content when history is invalid or trimmed. Never run destructive migration on the user library.

Source anchors: TextEditHistory.java; PersistentHistoryStore.java; NotesController.java:queueSave/undo; DocumentHistory.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X28 | Workspaces, tabs and mobile navigation


P1 | Expert inference

Scope: Notes/Doc, switching contexts, Back and layout restoration

Evidence: Our Library and Notes/Doc switcher support different destinations; workspace recall is an expert concern, not evidence two workspaces are inherently wrong.

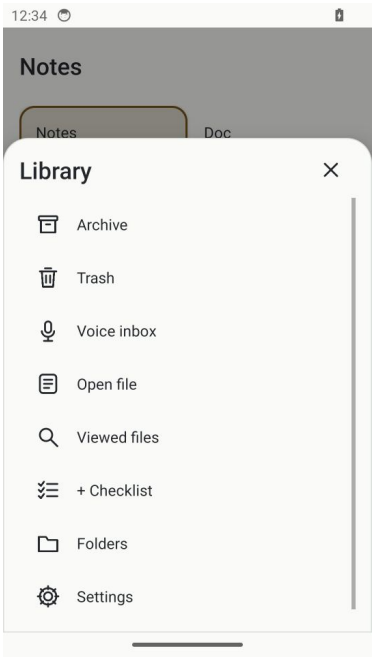

M02 | MyNotes 0.69.0 / code 69 | library

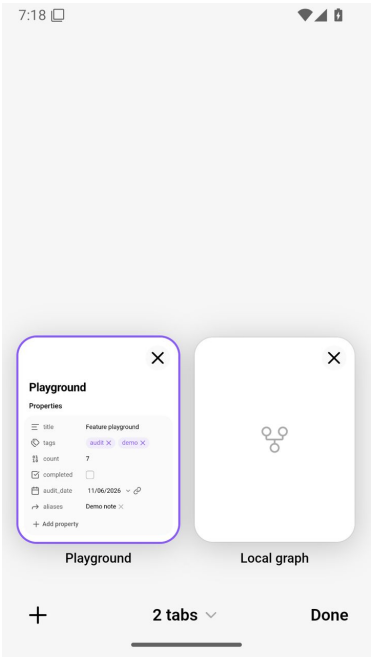

AO12 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 63

Comparator / fairness: Obsidian tab overview and Manage workspace layouts are visible. Saving/restoring a layout was not semantically certified, and mobile settings expose additional navigation variants.

Judgment: Two different navigation architectures both need a simple return path. Do not demand a desktop-style tab model for our app.

Direction, not an implemented fix: Preserve deliberate Notes/Doc switching and block accidental workspace swipes during drag. Keep route and cursor/scroll context on Back.

Manual task — NOT RUN: Switch between two notes, a PDF and Settings; reorder content near an edge, then return to the initial editing location.

Acceptance / remaining evidence: Log wrong destinations, lost context, accidental switches and state after restart. Workspace restoration is outstanding until a matching live task succeeds.

Source anchors: NotesController.java:openWorkspace/fileReturnTarget; LibraryGestureLayout.java; EditorRails.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X29 | Settings, commands, quick actions and help discovery


P2 | Expert inference

Scope: Find an action without memorising hidden gestures

Evidence: Our settings are grouped and globally searchable. The inspected scope does not establish a full action-command palette equivalent; this is not a claim settings search is missing.

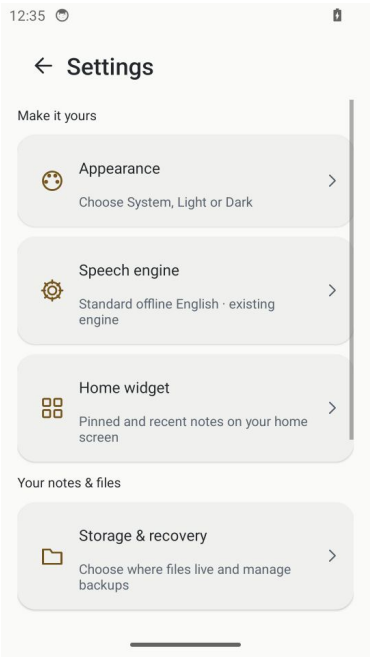

AM19 | MyNotes 0.69.0 / code 69 | e2e-settings

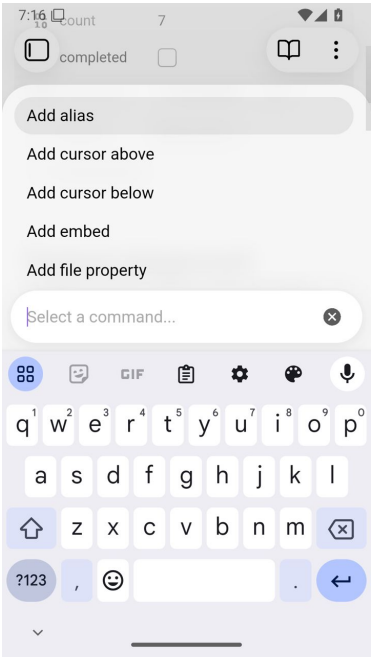

O04 | Obsidian 1.15.0 / code 396 | Command palette with actions

Comparator / fairness: Obsidian command palette, quick action and mobile-toolbar configuration are visible. Slash-command invocation was blocked and keyboard shortcuts do not guarantee touch reachability.

Judgment: The gap is discovering the right action at the right time, not simply matching the number of command rows.

Direction, not an implemented fix: Make common actions predictable in context, preserve readable labels and teach rare gestures progressively; evaluate command search only if tasks justify it.

Manual task — NOT RUN: Without a walkthrough, find move, undo, export, a setting and one uncommon editor action using touch alone.

Acceptance / remaining evidence: Observe search terms, wrong taps and help requests; distinguish disabled/contextual/unconfigured actions. Do not use all 205 inventoried commands as a usability success count.

Source anchors: NotesController.java:renderSettings/renderUniversalResults; EditorActions.java; InsertPalette.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X30 | Export, sharing, duplication and note composition


P1 | Source-supported format/scope boundaries

Scope: PDF/JSON/text, content copy versus flattening, merge safety

Evidence: Our PDF sheet exposes writing-guide export choice. Source Android text sharing uses plainText with a 100,000-character cap; merging moves sources to Trash and provides Undo.

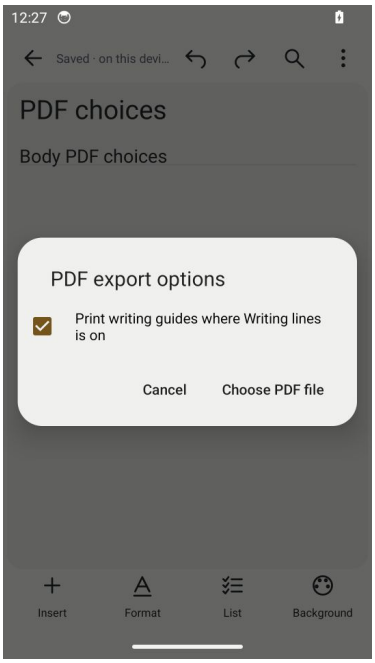

AM28 | MyNotes 0.69.0 / code 69 | document-pdf-options

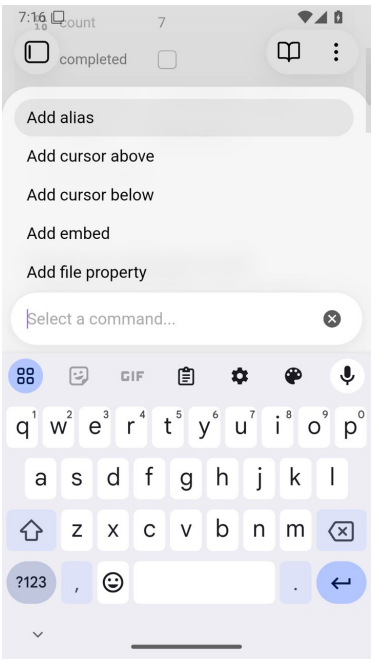

O04 | Obsidian 1.15.0 / code 396 | Command palette with actions

Comparator / fairness: Obsidian note-composer commands are inventoried, not a matched full compose/export/share acceptance run. Do not equate a command entry with a successful destination write.

Judgment: Different export routes preserve different things. Users need to know when they are sending plain text, a visual PDF, an editable note file or a recoverable backup.

Direction, not an implemented fix: State preservation scope before export, keep originals unchanged, retain per-content copy semantics and verify destination writing rather than reporting chooser launch as completion.

Manual task — NOT RUN: Share a mixed note, export PDF and JSON, duplicate it, merge selected notes and undo the merge.

Acceptance / remaining evidence: Check text/media/table fidelity for each promised format, exact source IDs and retained source copies; destination failure must not silently destroy content.

Source anchors: NotesController.java:exportPdf/shareSelected/mergeSelected; PdfExporter.java; ContentCopies.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X31 | Local summary and text assistance

Not ranked | Source-only / app-specific / not comparatively ranked

Scope: Extractive summary with source context, not generative AI

Evidence: NotesController.quickSummary uses a local sentence ranker and displays a warning that it may miss important details. The selected editor frame is context only, not a captured summary result.

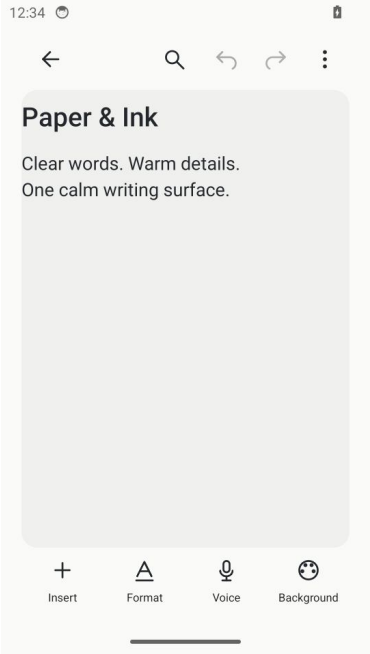

Context frame only. No matched comparator result is established for this tool. Do not interpret this blank comparison cell as a missing feature or a performance result.

M07 | MyNotes 0.69.0 / code 69 | editor

No matched interaction evidence

Comparator / fairness: No equivalent built-in summarizer was established in the Obsidian audit. Community AI plugins are outside the installed-core comparison.

Judgment: This app-specific tool receives no comparative feature credit. Effectiveness must be judged against faithful extraction and useful coverage, not generated-looking text.

Direction, not an implemented fix: Keep local-only, non-generative labelling, source context and explicit user review. Do not claim a language model or training where none is used.

Manual task — NOT RUN: Summarize varied notes with negation, dates and multilingual sentences; check the retained source and decide whether the result is useful.

Acceptance / remaining evidence: Verify each sentence comes from the source, essential cautions are not lost and limits are clear. No summary-quality test was executed in this report.

Source anchors: NotesController.java:quickSummary; LocalSummary.java


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X32 | Privacy, permission boundaries and diagnostic logs


P1 | Expert inference

Scope: Offline processing, opt-in collection, export and delete

Evidence: Diagnostics collection is visibly off in the retained frame; the log viewer states there are no matching records. The app manifest declares microphone, notifications and boot reception, not INTERNET.

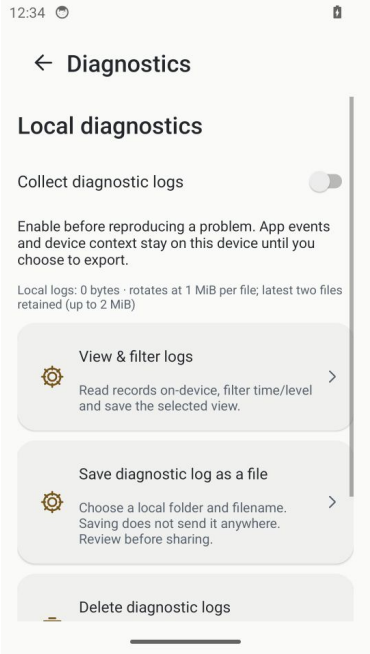

AM29 | MyNotes 0.69.0 / code 69 | diagnostics

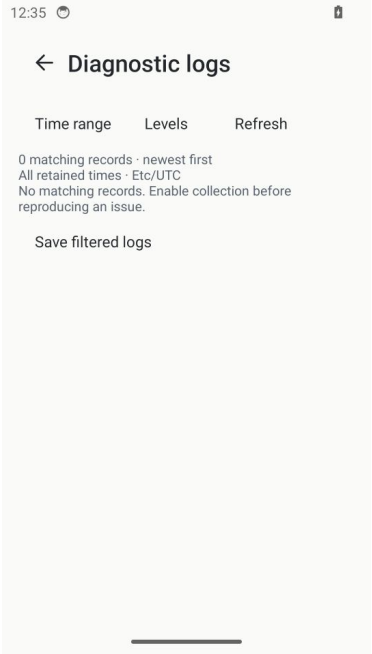

AM30 | MyNotes 0.69.0 / code 69 | e2e-diagnostic-log-viewer

Comparator / fairness: Obsidian has accounts/Sync and community-plugin trust boundaries. This does not imply ordinary local editing uploads content or that it is insecure.

Judgment: Our local/opt-in stance is worth preserving. A friendly sentence is not a complete privacy/security audit, especially when handing files to another reader.

Direction, not an implemented fix: Keep collection off until opted in; distinguish local save/export from upload and explain external-reader control. Never collect private content merely to make a diagnostic report fuller.

Manual task — NOT RUN: Deny microphone, use notes normally, enable logs for a dummy issue, filter/export/delete and inspect the resulting local file.

Acceptance / remaining evidence: Verify opt-out, readable levels/time range, explicit delete confirmation and exported content minimisation. Security of all native dependencies was not certified here.

Source anchors: Diagnostics.java; DiagnosticLogView.java; AndroidManifest.xml


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X33 | Smoothness, speed, footprint and reliability


P1 | Measured APK payload only / live performance unknown

Scope: Cold start, typing, drag, file open, search, crashes and memory

Evidence: The signed APK receipt is 155,195,444 bytes; the verified Obsidian APK is 14,511,986 bytes. Our retained report explicitly has physical_acceptance=false and recognition targets not all met.

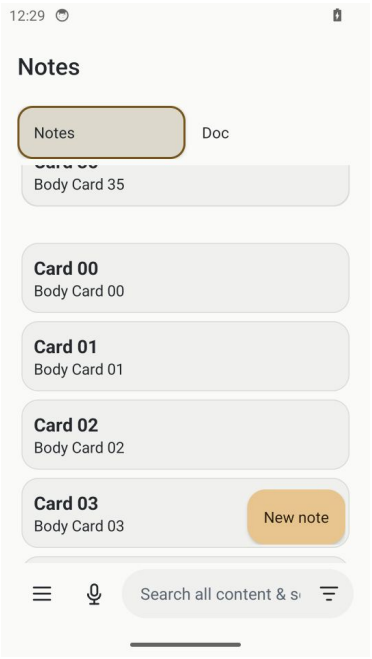

AM31 | MyNotes 0.69.0 / code 69 | home-notes-long-distance-drag

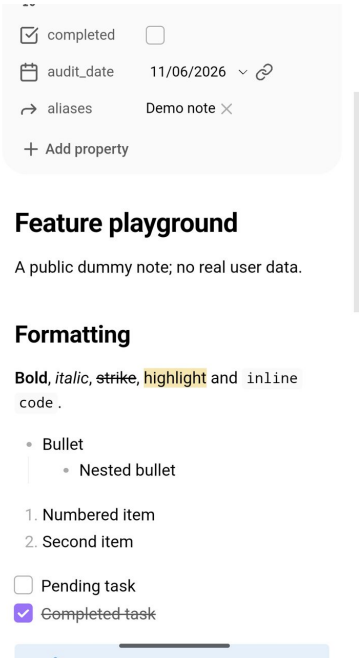

O07 | Obsidian 1.15.0 / code 396 | Rendered reading view of fixture

Comparator / fairness: APK size ratio is about 10.7:1, not installed storage, memory, startup latency or a causal explanation of bugs. A static Obsidian reading frame cannot establish a speed winner.

Judgment: Your complaints of sluggishness/bugs remain unresolved inputs. No new app-crash count, task latency, jank trace or matched user completion rate was measured.

Direction, not an implemented fix: First define common fixtures and success criteria. Separate bundled-model payload from startup/interaction work; do not trade away offline features solely to chase a tiny APK.

Manual task — NOT RUN: On matched hardware, cold start, create/type, search a large library, drag a distant card, open a large PDF and recover from a controlled failure.

Acceptance / remaining evidence: Collect touch-to-visible timings, frame trace, dropped frames, memory and exact failure logs. Distinguish timeouts/socket failures from app crashes and do not publish a fabricated global score.

Source anchors: candidate69-markup-followup.md; report-summary.json; README.md


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X34 | Core modules, community plugins and extensibility


Not ranked | Version-pinned module census / no plugin execution

Scope: Enable/disable, configuration burden and trust

Evidence: Our inspected app bundles first-party tools; an Obsidian-equivalent user-installable plugin marketplace is not established in this scope.

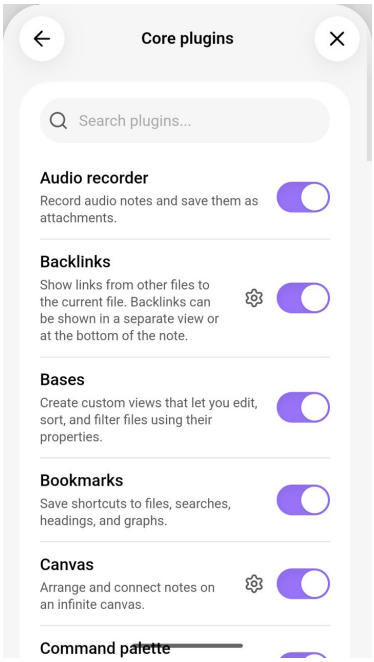

AO13 | Obsidian Android 1.15.0 / code 396 | settings frame 289

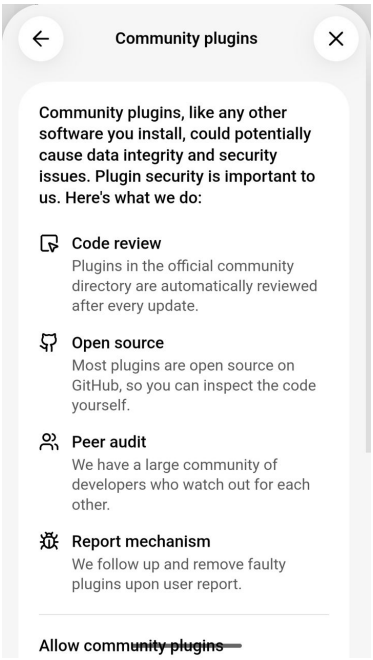

AO14 | Obsidian Android 1.15.0 / code 396 | settings frame 318

Comparator / fairness: Obsidian core toggles and community-plugin warning are visible. The audit records 29 internal module definitions, 28 exposed controls; editor-status is not an extra exposed toggle.

Judgment: Plugins change functionality and risk, not automatically UX quality. Missing a third-party extension is not a core-app defect in this comparison.

Direction, not an implemented fix: Keep default flows usable without setup. Treat optional complexity and code execution as separate consent decisions, not onboarding requirements.

Manual task — NOT RUN: Find a core module, understand its description, enable/disable it and identify changed controls; inspect restricted/plugin trust text without installing unknown code.

Acceptance / remaining evidence: Verify reversible configuration and a stable default note workflow. No community code was installed or executed; unknown plugins and future modules are outside this pinned-version inventory.

Source anchors: walkthrough-feature-inventory.json


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X35 | Sync, Publish, account and service boundaries


Not ranked | Account/paid/disabled workflow not tested

Scope: Local-first use versus optional cross-device/public services

Evidence: MyNotes explicitly presents itself as local/no-account. No matching built-in multi-device sync or publishing service was established.

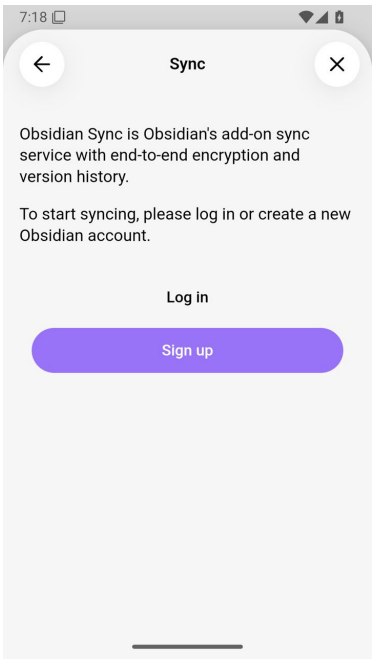

AO15 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 64

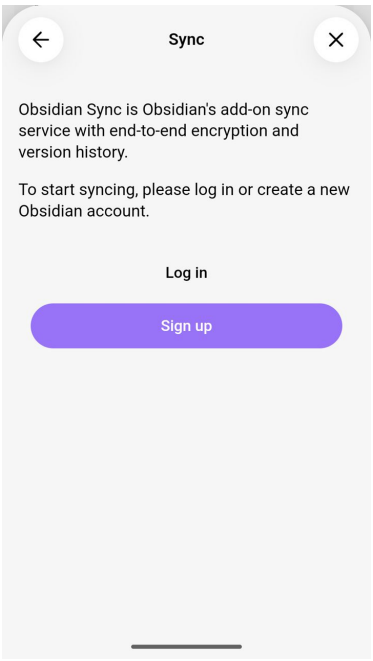

AO16 | Obsidian Android 1.15.0 / code 396 | settings frame 326

Comparator / fairness: Obsidian Sync sign-in is visible; Publish was disabled in the retained module inventory. Account/payment-dependent behavior was not executed or accepted.

Judgment: These are optional service-scope differences, not evidence that Obsidian synchronises perfectly or our local notes are empty/defective.

Direction, not an implemented fix: Do not bolt on cloud services to win a feature table. Explain local storage, backup and transfer clearly; assess a service only if the product requirement changes.

Manual task — NOT RUN: For a future explicitly authorised service study, evaluate offline edits, conflicts, account loss, export and deliberate public visibility with disposable data.

Acceptance / remaining evidence: No login, purchase, upload or publishing was performed. Conflict resolution, encryption, recovery and cost/value remain untested; an entry screen is not a passed sync task.

Source anchors: README.md; NotesController.java:renderModelInfo


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X36 | Slides, presentation and reading projections


P2 | Different output scope / visible comparator viewport constraint

Scope: View a note as a presentation without changing its source

Evidence: Our PDF export and PPTX text extraction are different operations from presenting a Markdown note. No equivalent built-in slide-show workflow is established.

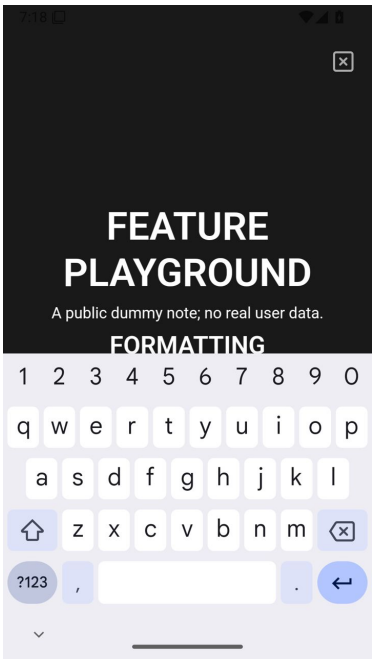

AO17 | Obsidian Android 1.15.0 / code 396 | walkthrough frame 59

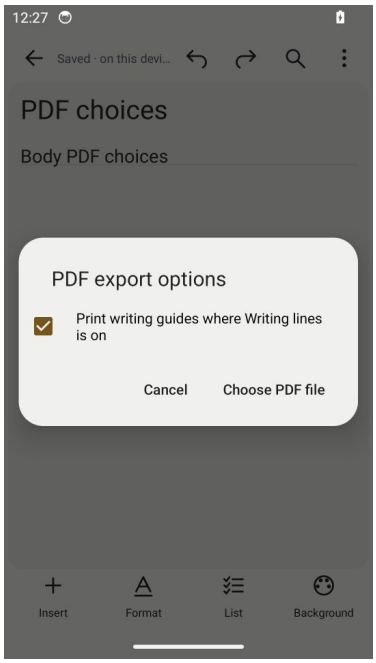

AM28 | MyNotes 0.69.0 / code 69 | document-pdf-options

Comparator / fairness: Obsidian shows a Slides title screen, but the software keyboard occupies much of the viewport. This captured constraint prevents claiming a polished full-screen presentation session.

Judgment: Presentation is a separate output job. Do not count PPTX extension support as presentation editing or a title screen as successful end-to-end presenting.

Direction, not an implemented fix: For current shared output tasks prioritise readable exports. If presentation becomes required, validate full-screen entry, controls, source preservation and return state.

Manual task — NOT RUN: Present a multi-slide disposable note, navigate, dismiss the keyboard, rotate and return to editing; compare PDF reading only as a separate output route.

Acceptance / remaining evidence: Verify every slide, media, controls and return location. Obsidian landscape was not qualified by its retained audit; no physical presentation run occurred here.

Source anchors: CommonFileText.java; PdfExporter.java; walkthrough-feature-results.json


Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

X37 | About, models, licences and honest help


P2 | Expert inference

Scope: Version identity, offline model claims and troubleshooting guidance

Evidence: Our About/model source describes bundled OCR/speech, optional experimental adaptation, disk/RAM costs and separate audio export. This is implementation disclosure, not a new training or accuracy result.

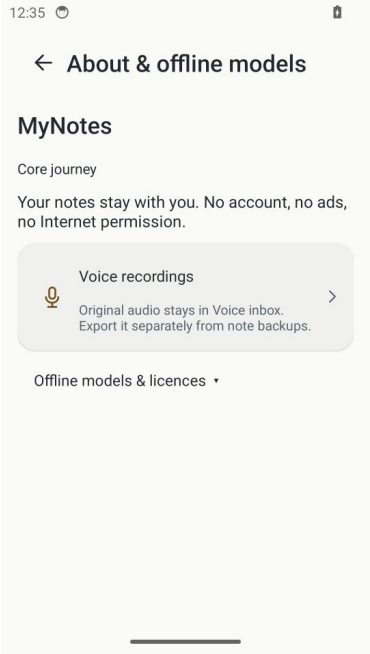

AM32 | MyNotes 0.69.0 / code 69 | about

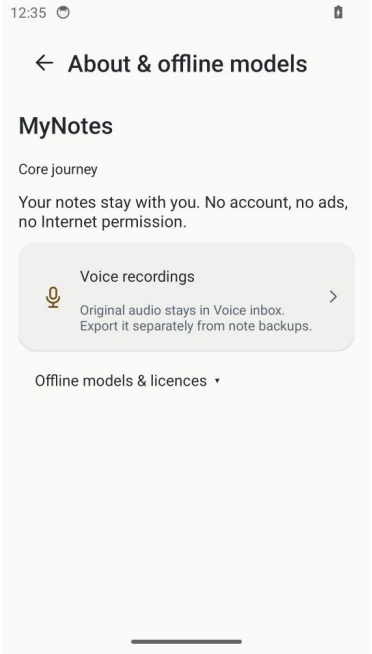

AM33 | MyNotes 0.69.0 / code 69 | e2e-about-models

Comparator / fairness: Obsidian General/settings exposes version/help/account and licences. The inspected screenshot reference pins 1.15.0/code396 rather than claiming all future versions behave alike.

Judgment: Help should answer how to do a task before presenting internal engine detail. Existing limitations must stay available, not disappear in a cosmetic simplification.

Direction, not an implemented fix: Keep concise task-first help and progressive technical/licence detail; show exact version and actionable permission/storage recovery routes.

Manual task — NOT RUN: Ask a novice to identify where notes are saved, how to protect audio and how to export useful diagnostics without sending private notes.

Acceptance / remaining evidence: Observe whether they can explain the result in their own words. Do not substitute long notices or a generated guide for successful comprehension.

Source anchors: NotesController.java:renderModelInfo; candidate69-markup-followup.md

Limit: no fresh live session or matched timing. Full source paths/hashes and historical provenance are in the manifest. Different or missing counterpart evidence is not an automatic win.

Obsidian core-module census — no missing registry entries

Exact retained registry: 29 internal definitions, 28 exposed controls. These rows route every known module to a chapter; they are not 29 functional passes. Enabled means the historical inspected audit state, not the user's settings. Publish was disabled; Sync still needs an account. Internal editor-status is not a separate exposed toggle.

Core module ID	Chapter	Audit enabled / control
file-explorer	X01	Yes / exposed
global-search	X01	Yes / exposed
switcher	X01	Yes / exposed
graph	X07	Yes / exposed
backlink	X07	Yes / exposed
canvas	X11	Yes / exposed
outgoing-link	X07	Yes / exposed
tag-pane	X08	Yes / exposed
footnotes	X08	Yes / exposed
properties	X09	Yes / exposed
page-preview	X07	Yes / exposed
daily-notes	X10	Yes / exposed
templates	X10	Yes / exposed
note-composer	X30	Yes / exposed
command-palette	X29	Yes / exposed
slash-command	X29	Yes / exposed
editor-status	X02	Yes / internal
bookmarks	X26	Yes / exposed
zk-prefixer	X10	Yes / exposed
random-note	X10	Yes / exposed
outline	X08	Yes / exposed
word-count	X08	Yes / exposed
slides	X36	Yes / exposed
audio-recorder	X19	Yes / exposed
workspaces	X28	Yes / exposed
file-recovery	X25	Yes / exposed
publish	X35	No / exposed
sync	X35	Yes / exposed
bases	X09	Yes / exposed

Settings-section coverage and additional boundaries

All 20 retained settings-section overviews are routed below. Their 377 catalogue entries include initial corpus records, section/control entries and hotkeys; they are not 377 distinct accepted workflows. Individual settings-value combinations, touch accessibility and novice discovery were not newly exercised.

Retained section	Chapter	Evidence status
General	X37	screen_inspected
Appearance	X22	screen_inspected
Interface	X28	screen_inspected
Editor	X02	screen_inspected
Files and links	X23	screen_inspected
Hotkeys	X29	screen_inspected
Keychain	X32	screen_inspected
Core plugins	X34	screen_inspected
Community plugins	X34	screen_inspected
Quick switcher	X01	screen_inspected
Sync	X35	screen_inspected
Backlinks	X07	screen_inspected
Canvas	X11	screen_inspected
Page preview	X07	screen_inspected
Daily notes	X10	screen_inspected
Templates	X10	screen_inspected
Note composer	X30	screen_inspected
Command palette	X29	screen_inspected
File recovery	X25	screen_inspected
Unique note creator	X10	screen_inspected

The pinned Android registry is the census boundary, not a claim about every desktop feature, Web Clipper, external integration, undocumented feature, future release or community extension. Those require their own authorised scope and evidence; no absent runtime module is silently declared unsupported.

Command registry routing — references, not new acceptance

All 205 retained registered commands are listed with their original evidence class and a primary functional-family route. Routing is not a fresh per-command UX review; many editor commands have cross-cutting scopes. The original audit had 27 narrow functional readbacks, 129 UI-only and 49 blocked/unverified entries. No pass percentage or usability score is derived.

Command ID / name	Chapter	Original class
editor:save-file | Save current file	X02	UI only
editor:download-attachments | Download attachments for current file	X02	UI only
editor:follow-link | Follow link under cursor	X02	blocked
editor:open-link-in-new-leaf | Open link under cursor in new tab	X02	blocked
workspace:toggle-pin | Toggle pin	X28	UI only
workspace:edit-file-title | Rename file	X28	UI only
workspace:copy-path | Copy current file path from vault folder	X28	UI only
workspace:copy-url | Copy Obsidian URL for current file	X28	UI only
workspace:undo-close-pane | Undo close tab	X28	blocked
workspace:export-pdf | Export to PDF...	X28	UI only
editor:rename-heading | Rename this heading...	X02	blocked
workspace:next-tab | Go to next tab	X28	UI only
workspace:goto-tab-1 | Go to tab #1	X28	blocked
workspace:goto-tab-2 | Go to tab #2	X28	blocked
workspace:goto-tab-3 | Go to tab #3	X28	blocked
workspace:goto-tab-4 | Go to tab #4	X28	blocked
workspace:goto-tab-5 | Go to tab #5	X28	blocked
workspace:goto-tab-6 | Go to tab #6	X28	blocked
workspace:goto-tab-7 | Go to tab #7	X28	blocked
workspace:goto-tab-8 | Go to tab #8	X28	blocked
workspace:goto-last-tab | Go to last tab	X28	UI only
workspace:previous-tab | Go to previous tab	X28	UI only
workspace:new-tab | New tab	X28	UI only
workspace:close | Close current tab	X28	UI only
workspace:close-others | Close all other tabs	X28	UI only
workspace:close-tab-group | Close this tab group	X28	blocked
workspace:close-others-tab-group | Close others in tab group	X28	blocked
mobile:quick-action | Configure mobile Quick Action	X29	UI only
app:go-back | Navigate back	X29	UI only
app:go-forward | Navigate forward	X29	UI only
app:open-vault | Manage vaults	X29	UI only
app:switch-vault | Change vault...	X29	blocked
app:show-tab-switcher | Show tab overview	X29	UI only
theme:toggle-light-dark | Toggle light/dark mode	X22	UI only

Command ID / name	Chapter	Original class
theme:switch | Change theme...	X22	UI only
app:open-settings | Open settings	X29	UI only
app:show-release-notes | Show release notes	X29	UI only
markdown:toggle-preview | Toggle reading view	X02	UI only
markdown:add-metadata-property | Add file property	X02	UI only
markdown:add-alias | Add alias	X02	UI only
markdown:clear-metadata-properties | Clear file properties	X02	UI only
app:delete-file | Delete current file	X29	UI only
app:toggle-ribbon | Toggle ribbon	X29	blocked
editor:toggle-readable-line-length | Toggle readable line length	X02	UI only
editor:toggle-line-numbers | Toggle line numbers	X02	UI only
app:toggle-left-sidebar | Toggle left sidebar	X29	UI only
app:toggle-right-sidebar | Toggle right sidebar	X29	UI only
app:toggle-default-new-pane-mode | Toggle default mode for new tabs	X29	UI only
app:open-help | Open help	X29	UI only
app:reload | Reload app without saving	X29	blocked
app:migrate-frontmatter | Format converter: Frontmatter migration	X29	blocked
app:show-debug-info | Show debug info	X29	UI only
app:increase-font-size | Increase font size	X29	UI only
app:decrease-font-size | Decrease font size	X29	UI only
file-explorer:new-file | Create new note	X01	UI only
file-explorer:new-file-in-current-tab | Create new note in current tab	X01	UI only
file-explorer:new-file-in-new-pane | Create note to the right	X01	UI only
open-with-default-app:open | Share	X17	UI only
file-explorer:move-file | Move current file to another folder	X01	UI only
file-explorer:duplicate-file | Make a copy of the current file	X01	UI only
editor:toggle-source | Toggle Live Preview/Source mode	X02	UI only
editor:open-search | Search current file	X02	UI only
editor:open-search-replace | Search & replace in current file	X02	UI only
editor:focus | Focus on last note	X02	UI only
editor:toggle-fold-properties | Toggle fold properties in current file	X02	UI only
editor:toggle-fold | Toggle fold on the current line	X02	UI only
editor:fold-all | Fold all headings and lists	X02	UI only
editor:unfold-all | Unfold all headings and lists	X02	UI only
editor:fold-less | Fold less	X02	UI only
editor:fold-more | Fold more	X02	UI only
editor:insert-wikilink | Add internal link	X02	UI only

Command ID / name	Chapter	Original class
editor:insert-embed | Add embed	X02	UI only
editor:insert-link | Insert Markdown link	X02	UI only
editor:insert-tag | Add tag	X02	UI only
editor:set-heading | Toggle heading	X02	UI only
editor:set-heading-0 | Remove heading	X02	UI only
editor:set-heading-1 | Set as heading 1	X02	readback
editor:set-heading-2 | Set as heading 2	X02	readback
editor:set-heading-3 | Set as heading 3	X02	readback
editor:set-heading-4 | Set as heading 4	X02	readback
editor:set-heading-5 | Set as heading 5	X02	readback
editor:set-heading-6 | Set as heading 6	X02	readback
editor:toggle-bold | Toggle bold	X02	readback
editor:toggle-italics | Toggle italic	X02	readback
editor:toggle-strikethrough | Toggle strikethrough	X02	readback
editor:toggle-highlight | Toggle highlight	X02	readback
editor:toggle-highlight-red | Toggle red highlight	X02	readback
editor:toggle-highlight-orange | Toggle orange highlight	X02	readback
editor:toggle-highlight-yellow | Toggle yellow highlight	X02	readback
editor:toggle-highlight-green | Toggle green highlight	X02	readback
editor:toggle-highlight-blue | Toggle blue highlight	X02	readback
editor:toggle-highlight-purple | Toggle purple highlight	X02	readback
editor:toggle-code | Toggle code	X02	readback
editor:toggle-inline-math | Toggle inline math	X02	UI only
editor:toggle-blockquote | Toggle blockquote	X02	readback
editor:toggle-comments | Toggle comment	X02	UI only
editor:clear-formatting | Clear formatting	X02	UI only
editor:toggle-bullet-list | Toggle bullet list	X02	readback
editor:toggle-numbered-list | Toggle numbered list	X02	readback
editor:toggle-checklist-status | Toggle checkbox status	X02	readback
editor:cycle-list-checklist | Cycle bullet/checkbox	X02	UI only
editor:insert-callout | Insert callout	X02	readback
editor:insert-codeblock | Insert code block	X02	readback
editor:insert-horizontal-rule | Insert horizontal rule	X02	readback
editor:insert-mathblock | Insert math block	X02	readback
editor:insert-table | Insert table	X02	readback
editor:insert-footnote | Insert footnote	X02	readback
editor:indent-list | Indent list item	X02	UI only

Command ID / name	Chapter	Original class
editor:unindent-list | Unindent list item	X02	UI only
editor:swap-line-up | Move line up	X02	UI only
editor:swap-line-down | Move line down	X02	UI only
editor:undo | Undo	X02	UI only
editor:redo | Redo	X02	UI only
editor:move-caret-up | Move caret up	X02	UI only
editor:move-caret-down | Move caret down	X02	UI only
editor:move-caret-left | Move caret left	X02	UI only
editor:move-caret-right | Move caret right	X02	UI only
editor:go-start | Go to first line	X02	UI only
editor:go-end | Go to last line	X02	UI only
editor:toggle-keyboard | Toggle keyboard	X02	UI only
editor:configure-toolbar | Configure mobile toolbar	X02	UI only
editor:attach-file | Insert attachment	X02	UI only
editor:delete-paragraph | Delete paragraph	X02	UI only
editor:add-cursor-below | Add cursor below	X02	UI only
editor:add-cursor-above | Add cursor above	X02	UI only
editor:toggle-spellcheck | Toggle spellcheck	X02	UI only
editor:table-row-before | Table: Add row above	X02	blocked
editor:table-row-after | Table: Add row below	X02	blocked
editor:table-row-up | Table: Move row up	X02	blocked
editor:table-row-down | Table: Move row down	X02	blocked
editor:table-row-copy | Table: Duplicate row	X02	blocked
editor:table-row-delete | Table: Delete row	X02	blocked
editor:table-col-before | Table: Add column to the left	X02	blocked
editor:table-col-after | Table: Add column to the right	X02	blocked
editor:table-col-left | Table: Move column left	X02	blocked
editor:table-col-right | Table: Move column right	X02	blocked
editor:table-col-copy | Table: Duplicate column	X02	blocked
editor:table-col-delete | Table: Delete column	X02	blocked
editor:table-col-align-left | Table: Align left	X02	blocked
editor:table-col-align-center | Table: Align center	X02	blocked
editor:table-col-align-right | Table: Align right	X02	blocked
editor:cut | Cut	X02	UI only
editor:copy | Copy	X02	UI only
editor:paste | Paste	X02	UI only
editor:context-menu | Show context menu under cursor	X02	UI only

Command ID / name	Chapter	Original class
file-explorer:open | Files: Show file explorer	X01	UI only
file-explorer:reveal-active-file | Files: Reveal current file in navigation	X01	UI only
file-explorer:new-folder | Files: Create new folder	X01	UI only
global-search:open | Search: Search in all files	X01	UI only
switcher:open | Quick switcher: Open quick switcher	X01	UI only
graph:open | Graph view: Open graph view	X07	UI only
graph:open-local | Graph view: Open local graph	X07	UI only
graph:animate | Graph view: Start graph timelapse animation	X07	blocked
backlink:open | Backlinks: Show backlinks	X07	UI only
backlink:open-backlinks | Backlinks: Open backlinks for the current note	X07	blocked
backlink:toggle-backlinks-in-document | Backlinks: Toggle backlinks in document	X07	UI only
canvas:new-file | Canvas: Create new canvas	X11	UI only
canvas:jump-to-group | Canvas: Jump to group	X11	UI only
canvas:convert-to-file | Canvas: Convert to file...	X11	blocked
outgoing-links:open | Outgoing links: Show outgoing links	X07	UI only
outgoing-links:open-for-current | Outgoing links: Open outgoing links for the current file	X07	blocked
tag-pane:open | Tags view: Show tags	X08	UI only
properties:open | Properties view: Show all properties	X09	UI only
properties:open-local | Properties view: Show file properties	X09	UI only
daily-notes | Daily notes: Open today's daily note	X10	UI only
daily-notes:goto-prev | Daily notes: Open previous daily note	X10	blocked
daily-notes:goto-next | Daily notes: Open next daily note	X10	blocked
insert-template | Templates: Insert template	X10	blocked
insert-current-date | Templates: Insert current date	X10	UI only
insert-current-time | Templates: Insert current time	X10	UI only
note-composer:merge-file | Note composer: Merge current file with another file...	X30	UI only
note-composer:split-file | Note composer: Extract current selection...	X30	UI only
note-composer:extract-heading | Note composer: Extract this heading...	X30	blocked
command-palette:open | Command palette: Open command palette	X29	UI only
bookmarks:open | Bookmarks: Show bookmarks	X26	UI only
bookmarks:bookmark-current-view | Bookmarks: Bookmark...	X26	UI only
bookmarks:bookmark-current-search | Bookmarks: Bookmark current search...	X26	UI only
bookmarks:unbookmark-current-view | Bookmarks: Remove bookmark for the current file	X26	blocked
bookmarks:bookmark-current-section | Bookmarks: Bookmark block under cursor...	X26	UI only
bookmarks:bookmark-current-heading | Bookmarks: Bookmark heading under cursor...	X26	UI only
bookmarks:bookmark-all-tabs | Bookmarks: Bookmark all tabs...	X26	UI only
outline:open | Outline: Show outline	X08	UI only

Command ID / name	Chapter	Original class
outline:open-for-current | Outline: Open outline of the current file	X08	UI only
file-recovery:open | File recovery: Open local history	X25	UI only
sync:setup | Sync: Set up Sync	X35	UI only
sync:view-version-history | Sync: Open version history for the current file	X35	blocked
sync:open-sync-view | Sync: Show Sync history	X35	blocked
sync:open-sync-log | Sync: Open activity log	X35	blocked
bases:new-file | Bases: Create new base	X09	UI only
bases:insert | Bases: Insert new base	X09	blocked
bases:copy-table | Bases: Copy table to clipboard	X09	UI only
bases:change-view | Bases: Switch view...	X09	blocked
bases:add-view | Bases: Add view	X09	UI only
bases:add-item | Bases: Add item	X09	UI only
footnotes:open | Footnotes view: Show footnotes	X08	UI only
zk-prefixer | Unique note creator: Create new unique note	X10	UI only
insert-unique-link | Unique note creator: Add unique internal link	X10	UI only
random-note | Random note: Open random note	X10	UI only
slides:start | Slides: Start presentation	X36	UI only
audio-recorder:start | Audio recorder: Start recording audio	X19	blocked
audio-recorder:stop | Audio recorder: Stop recording audio	X19	blocked
workspaces:load | Workspaces: Load workspace layout	X28	UI only
workspaces:save | Workspaces: Save layout	X28	UI only
workspaces:save-and-load | Workspaces: Save and load another layout	X28	UI only
workspaces:open-modal | Workspaces: Manage workspace layouts	X28	UI only

Source-frame catalogue

Frames are historical screenshots, not new captures. Whole images are proportionally embedded; no fake UI, hidden cropping, recolouring or reconstructed controls. Several chapters intentionally use two same-app context frames when a matched counterpart is unavailable; app names remain in captions. Source-only summaries/widgets are explicitly not illustrated as successful outputs.

ID	App	Captured state
M01	MyNotes	home
M02	MyNotes	library
M03	MyNotes	folders
M04	MyNotes	filters-view
M05	MyNotes	filters-labels
M06	MyNotes	search-keyboard
M07	MyNotes	editor
M08	MyNotes	editor-keyboard
M09	MyNotes	format-keyboard
M10	MyNotes	format
M11	MyNotes	editor-folder-create
M12	MyNotes	notes-workspace
M13	MyNotes	mixed-notes-selection
M14	MyNotes	document-table
M15	MyNotes	note-find-sheet
M16	MyNotes	note-find-result
M17	MyNotes	stage-aa-selection
M18	MyNotes	stage-aa-typing
M19	MyNotes	notes-native-selection-scroll
M20	MyNotes	mixed-note-header
O01	Obsidian	Quick switcher with file paths and Find or create input
O02	Obsidian	File explorer, fixture folder collapsed
O03	Obsidian	Vault search, empty query; not search-result quality evidence
O04	Obsidian	Command palette with actions
O05	Obsidian	Tags pane with usage counts
O06	Obsidian	Bold action on dedicated scratch note; keyboard visible
O07	Obsidian	Rendered reading view of fixture
O08	Obsidian	Rendered table within note prose
O09	Obsidian	Heading outline pane
O10	Obsidian	Mobile toolbar configuration
O11	Obsidian	Properties in note; metadata occupies substantial space
O12	Obsidian	Backlinks pane
O13	Obsidian	Appearance font-size setting

ID	App	Captured state
AM01	MyNotes	checklist-item-actions
AO01	Obsidian	walkthrough frame 6
AM02	MyNotes	image-text-selection
AO02	Obsidian	walkthrough frame 9
AM03	MyNotes	word-link-form
AO03	Obsidian	walkthrough frame 18
AO04	Obsidian	walkthrough frame 54
AO05	Obsidian	walkthrough frame 13
AO06	Obsidian	walkthrough frame 57
AM04	MyNotes	drawing-tools
AO07	Obsidian	walkthrough frame 12
AM05	MyNotes	diagram-options
AM06	MyNotes	shape-picker
AM07	MyNotes	pdf68-search-above-keyboard
AM08	MyNotes	pdf68-pen-and-highlighter-tools
AM09	MyNotes	word68-attached-filename-toolbar
AM10	MyNotes	word-appearance
AM11	MyNotes	e2e-large-txt-page-one
AM12	MyNotes	spreadsheet-grid-viewport
AM13	MyNotes	e2e-library-viewed-files
AO08	Obsidian	walkthrough frame 8
AM14	MyNotes	ocr-review
AM15	MyNotes	voice-inbox
AM16	MyNotes	e2e-speech-engine
AM17	MyNotes	reminder-time
AM18	MyNotes	add-reminder
AM19	MyNotes	e2e-settings
AM20	MyNotes	e2e-appearance
AO09	Obsidian	settings frame 12
AM21	MyNotes	storage
AM22	MyNotes	app-folder-copy-choices
AM23	MyNotes	backups
AM24	MyNotes	restore-preview
AM25	MyNotes	trash-confirmation
AO10	Obsidian	walkthrough frame 26
AM26	MyNotes	e2e-library-archive
AO11	Obsidian	walkthrough frame 24

ID	App	Captured state
AM27	MyNotes	document-saved-styles
AO12	Obsidian	walkthrough frame 63
AM28	MyNotes	document-pdf-options
AM29	MyNotes	diagnostics
AM30	MyNotes	e2e-diagnostic-log-viewer
AM31	MyNotes	home-notes-long-distance-drag
AO13	Obsidian	settings frame 289
AO14	Obsidian	settings frame 318
AO15	Obsidian	walkthrough frame 64
AO16	Obsidian	settings frame 326
AO17	Obsidian	walkthrough frame 59
AM32	MyNotes	about
AM33	MyNotes	e2e-about-models
AM34	MyNotes	checklist
AM35	MyNotes	document-content-options
AM36	MyNotes	image-editor
AM37	MyNotes	diagram
AM38	MyNotes	pdf68-compact-filename-toolbar
AM39	MyNotes	read-image-auto
AM40	MyNotes	trash
AO18	Obsidian	walkthrough frame 0
AO19	Obsidian	walkthrough frame 10
AO20	Obsidian	walkthrough frame 19
AO21	Obsidian	walkthrough frame 21
AO22	Obsidian	walkthrough frame 25
AO23	Obsidian	walkthrough frame 55
AO24	Obsidian	walkthrough frame 56
AO25	Obsidian	walkthrough frame 60
AO26	Obsidian	walkthrough frame 62
AO27	Obsidian	settings frame 24
AO28	Obsidian	settings frame 56
AO29	Obsidian	settings frame 70
AO30	Obsidian	settings frame 355
AO31	Obsidian	settings frame 367

Detailed first-two-module appendix follows

The following 39 pages preserve the original phase-one report and its 20 detailed N01–N10/E01–E10 findings, figures, provenance limits and T01–T08 protocol. Their original “two modules only” wording describes that earlier installment; the X01–X37 chapters above now expand the module scope.

The appendix is not a second live study. Its historical baseline and old proposed-next-module text are retained for transparency, not used to claim the remaining modules are still absent from this expanded document.

Companions: all-modules-review.json; all-modules-evidence-manifest.json; report-integrity.json; OurApp_vs_Obsidian.md. Original phase-one data and standalone PDF remain independently reproducible.

OurApp_vs_Obsidian

Phase 1 | Finding & organising notes + Editing & reading

Transparent expert UX comparison • 6 November 2026

Main conclusion: Our strongest visible problem is not a shortage of buttons. It is that navigation, editing controls and feedback do not yet form consistently simple task flows. The evidence supports targeted presentation and predictability work; it does not support declaring Obsidian faster in milliseconds.

What this document is: A manual expert review of retained real app screenshots, supported by bounded source inspection. It contains 20 prioritised findings, exact evidence references, consequences, proposed directions and hands-on acceptance checks for two modules.

What it is not: No new live touch session, participant usability study, physical-device performance trace or fresh bug-reproduction run was performed for this report. This is not an E2E pass-count comparison. Live smoothness and completion-time rankings remain unmeasured.

Baseline	Evidence used
Our app	MyNotes 0.69.0 / code 69, retained run 42021523354. Signed APK receipt: 155,195,444 bytes.
Comparator	Official Obsidian Android 1.15.0 / code 396, reviewed native captures from run 42179340885, retained in report 42182162974.
Scope	Shared note retrieval, organisation, writing and reading tasks. No feature-count contest; app-specific extras do not earn points or excuse friction.
Changes	Documentation/report tooling only. No app implementation or Calculator changes; no Android build or install in this review.

Read the evidence type on every finding. A visible issue in a retained frame is not automatically a newly reproduced current-device bug.

Executive judgment: where our app is lagging

1. Content competes with controls N01 and E01 show concrete presentation failures: a create action covers a preview, and formatting with the keyboard consumes writing context.

2. Concept boundaries are weak N03–N06 mix browsing, creating, opening, moving and storage administration. The user has to understand app structure before completing an ordinary note task.

3. Search needs a clear contract N07–N09 identify source-supported risks: a query broadens scope, body matches lack a passage, and filtered-empty can read like first-use empty. These need live verification, not dismissal because a test suite passed.

4. Reading and editing need distinct visual priorities E07–E09 show management chrome and inconsistent saved/location feedback. A feature can exist and still make users hesitate.

5. Long-note orientation needs a better established route Obsidian’s captured outline is a concrete navigation reference. Our reviewed evidence does not establish an equivalent heading-jump path; confirm this candidate gap before designing it.

First triage order — not a promise that fixes are already done

Start with N01 preview obstruction and E01 editor viewport. Then manually reproduce N07 search scope and N09 filtered-empty wording. Next simplify Library/folder roles and mixed-content control scope. Investigate live performance in parallel; do not assume visual cleanup alone removes jank.

Do not replace weak evidence with a numerical UX score

There is no defensible overall score, success percentage or speed winner here. The fixtures, Android environments, input methods and capture timings were not matched. Prior automation outcomes remain correctness receipts, not usability ratings.

Method, evidence strength and fairness rules

Evidence label	Meaning and limit
Visible defect/constraint	Personally inspected in a retained screenshot. The captured presentation can be described; recurrence on the current signed build needs reproduction.
Source-supported candidate	A specific current-checkout method establishes a branch or renderer design. It is not an observed live execution of that scenario.
Expert inference	A reasoned usability concern based on visible hierarchy, feedback or mental model. Validate with real tasks and users.
Unknown / not established	No matched live result or sufficient evidence. No assumption that a missing screenshot means a missing feature.

The 33 source frames were visually inspected for this review. Whole frames are scaled proportionally and not cropped to hide controls, recoloured or reconstructed. Image source IDs, paths, dimensions and SHA-256 hashes appear in the accompanying evidence manifest.

MyNotes and Obsidian images use different fixture content and retained JPEG sizes; apparent sharpness is not a typography-quality measurement. Their screen image aspect ratios do not establish identical physical devices, DPI, IME or OS. Portrait comparisons are the primary scope. Obsidian’s attempted landscape remained portrait in its audit; that is not a valid landscape benchmark against our app.

Source inspection baseline: bf39d35dc625a86a84f44d03a178da4569a2b594. Main MyNotes references: NotesController.renderHome, filterNow, renderUniversalResults, renderFolders, renderEditor and FormatControls. Source inspection is distinguished from screenshot evidence on each finding.

The Obsidian audit explicitly did not achieve 100% functional acceptance. Empty search and blocked action captures are not used as proof of superior search relevance, reliability or smoothness. A visual reference is useful without pretending the competitor is flawless.

Your five observations: supported, unproven and next checks

Your observation	Transparent assessment in these two modules
Existing features need polish	Supported by visible obstruction, clipped wording, panel crowding and competing content controls. Details: N01/N02/E01/E07. Not evidence every feature is defective.
Many features are missing	Candidate navigation/action-discovery gaps are noted, but no blanket absence claim. Existing global search, folders, labels, grid/list and shared formatting are acknowledged. Other modules are deferred.
Pages do not feel simple	Supported as an expert judgment: menu roles, storage-heavy folder browsing, layered move/create and mixed-object chrome increase interpretation work.
150+ MB but feels empty	The APK receipt is 155.20 decimal MB; Obsidian's verified APK was 14.51 MB, about 10.7× smaller. That is APK payload, not installed footprint/RAM/speed. Sparse test libraries do not establish a real-user empty home. The issue to investigate is time-to-first-useful-outcome and discoverability, not filling space with fake content.
Many bugs	Your report remains valid input. This inspection does not establish a current crash count or reproduce every bug. N01 is a visible frame defect; N09 is a source-supported reproduction candidate. Neither a green suite nor this report closes your field issues.

No APK contents breakdown was performed, so model/runtime packaging is not asserted as the cause of size, jank or bugs. Nor is an extra-feature list used to excuse weaknesses in common note workflows.

Comparison dimensions: what can actually be concluded

Dimension	Phase-one judgment
Presentation / UI hierarchy	Assessable in reviewed states: our home obstruction, tall formatting surface, mixed-object chrome and menu concepts need work.
Simplicity / learning	Expert inference: our action grouping is inconsistent; Obsidian provides clearer task-specific surfaces but has icon and Markdown learning costs.
Efficiency	Extra scanning and lost context are plausible. Actual taps, time, corrections and recovery costs have not been measured head-to-head.
Effectiveness	Selected states and source behaviour can be examined. Matched task completion, data correctness and real-user success still need live evaluation.
Smoothness / responsiveness	Not ranked. No matched frame-time, jank, touch-to-feedback, ANR or startup recordings were collected. Recognition timing is not editor-scroll timing.
Reliability / save confidence	Save-feedback presentation differs. No current data-loss or comparative crash-rate conclusion is justified.
Accessibility / ergonomics	Labelled controls are a useful starting point. Target sizes, TalkBack, contrast and large-text behaviour require direct validation; no invented WCAG scores.
Value / completeness	Judge complete shared tasks. APK size and automation counts do not measure how useful or finished the app feels.

Finding index and triage legend

P1 = address or validate early because it affects common task confidence, content visibility or orientation. P2 = polish/learning improvement or a hypothesis needing frequency evidence. Priority is an expert triage recommendation, not measured incidence.

Find & organise

ID / priority	Finding
N01 / P1	The floating create action covers preview text
N02 / P2	The search invitation is clipped
N03 / P1	Library mixes destinations with creation and intake
N04 / P1	Notes and Doc ask for an early classification decision
N05 / P2	Folder browsing carries storage-management weight
N06 / P2	Creating a folder adds a second sheet over Move to folder
N07 / P1	Global queries silently change the filtering contract
N08 / P1	Universal results do not explain a body-text match
N09 / P1	A filtered-empty library can look like a new empty library
N10 / P2	A broad search is not yet a clear action-discovery route


Edit & read

ID / priority	Finding
E01 / P1	Formatting plus keyboard squeezes out the writing context
E02 / P1	Selection versus future typing is not explicit enough visually
E03 / P2	Routine formatting shares space with advanced controls
E04 / P2	Text-size controls expose implementation units
E05 / P2	The persistent editor toolbar gives decoration equal weight
E06 / P1	Long notes lack an established heading-jump counterpart
E07 / P1	Mixed content looks like editable machinery even while reading
E08 / P1	Several nearby menus require users to infer their scope
E09 / P1	Save/location confidence differs between note surfaces
E10 / P2	Find-result context uses implementation-oriented wording


Module: Find & organise

Shared user goal: Find existing content, understand where it lives, organise it and return without relearning storage or workspace rules.

This module has ten scoped findings. They do not represent ten confirmed runtime bugs or a measured competitor pass/fail score.

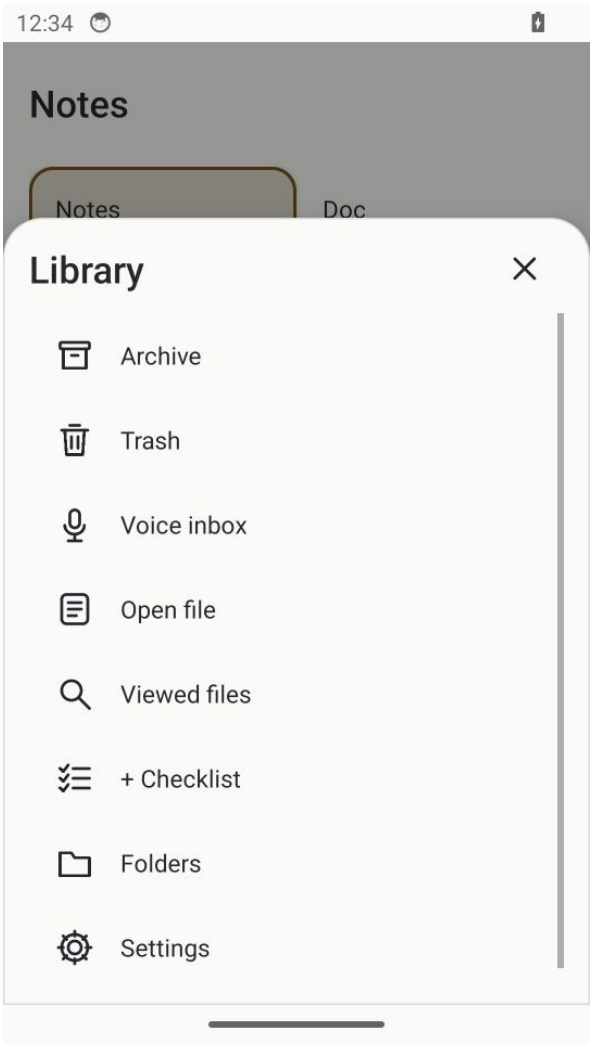

M02 | MyNotes 0.69.0 / code 69 | library

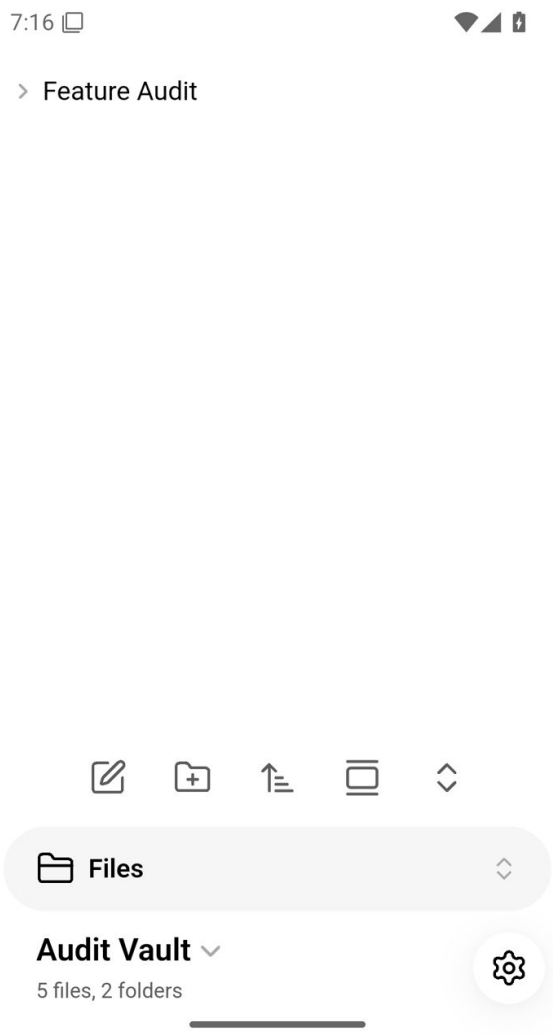

O02 | Obsidian 1.15.0 / code 396 | File explorer, fixture folder collapsed

Different navigation models, not matched record sets: Library action/destination menu versus a file-tree pane with its fixture folder collapsed. Compare conceptual grouping; do not infer directory depth or fewer taps from these pictures.


N01 | The floating create action covers preview text

P1 • Visible defect in retained frame


User task: Read the last visible note preview, then create a note.

Evidence: In M01, New note sits over words in the orange note card. This is a visible obstruction, not just an aesthetic preference.

Comparator: O01 keeps file-choice rows and its search input distinct. It is a different retrieval surface, not proof that every Obsidian overlay avoids content.

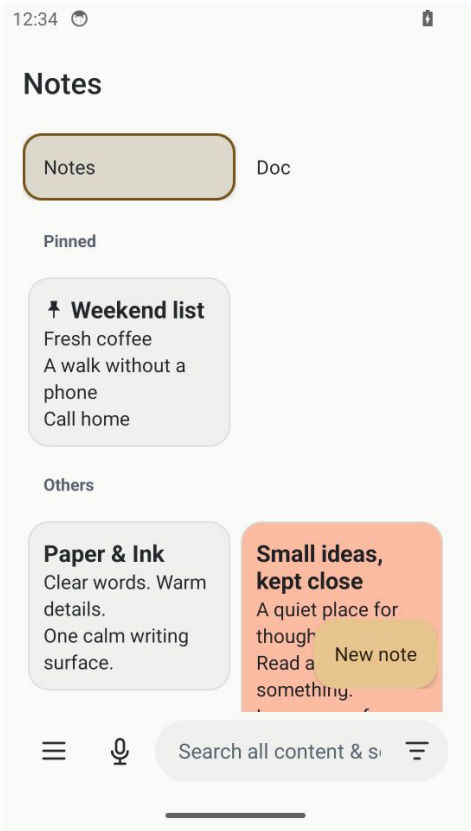

M01 | MyNotes 0.69.0 / code 69 | home

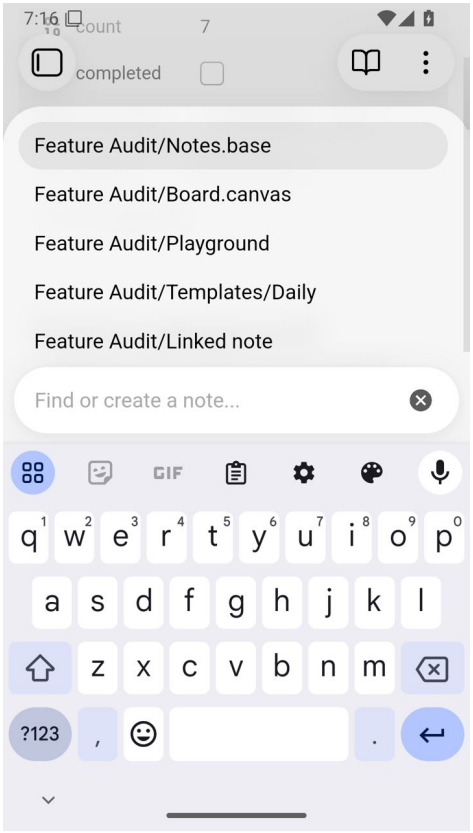

O01 | Obsidian 1.15.0 / code 396 | Quick switcher with file paths and Find or create input

Why it matters: The same small region must support reading and tapping; confidence in the card preview is reduced.

Direction to consider: Keep the requested floating New note button. Reserve a readable safe area or adapt its placement; do not restore the rejected bottom create strip.

Manual acceptance: Recreate the three-card state, then test long titles, last-row scroll, list/grid, keyboard and large text. No required preview line or row action should be covered at rest.

Source anchor: NotesController.renderHome: floating createRow; board bottom padding. Limit: Not newly reproduced on a device. This does not prove the card is impossible to open or scroll.


N02 | The search invitation is clipped

P2 • Visible presentation limitation


User task: Understand what the home search will search.

Evidence: M01 shows the hint clipped after Search all content & s.... The full source hint is Search all content & settings.

Comparator: O01 uses Find or create a note; O03 presents a separate vault-search surface. Obsidian also has icon-learning costs.

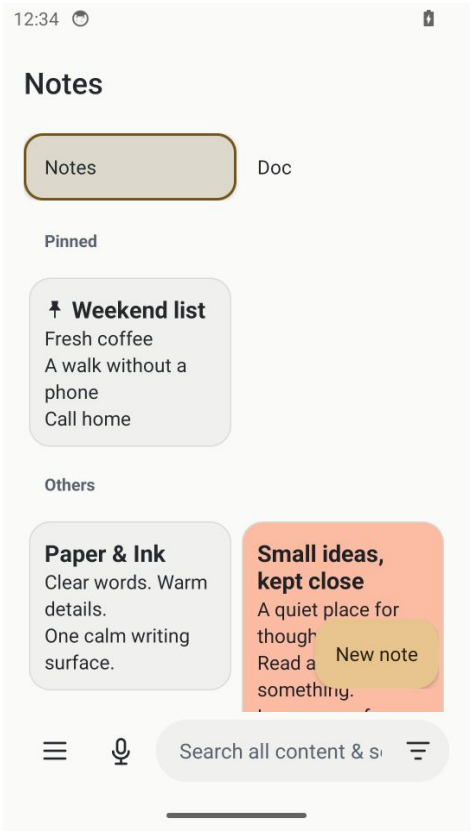

M01 | MyNotes 0.69.0 / code 69 | home

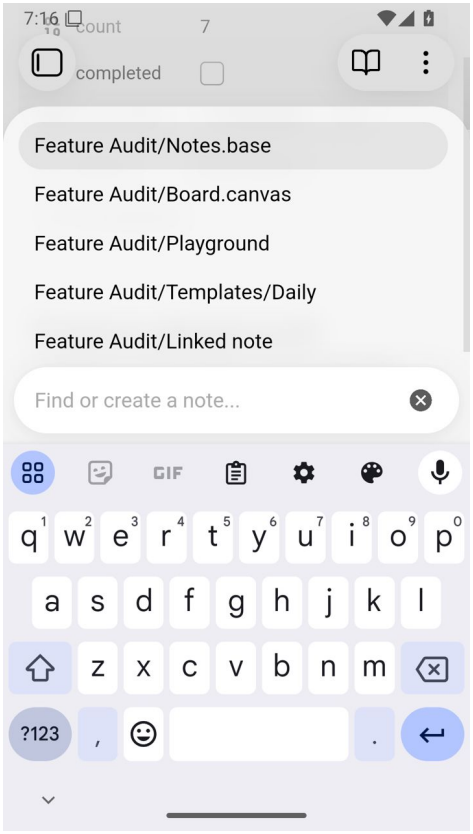

O01 | Obsidian 1.15.0 / code 396 | Quick switcher with file paths and Find or create input

Why it matters: The promise of a broad search is hidden exactly where a first-time user needs scope clarity.

Direction to consider: Use a shorter visible invitation and an explicit scope explanation in the expanded search state, within the existing single bottom search.

Manual acceptance: At small width and large text, the primary search invitation remains understandable without guessing the clipped suffix.

Source anchor: NotesController.renderHome: search.setHint and fixed filter control. Limit: Clipping is visible; comprehension impact remains an expert judgment, not a user-study result.


N03 | Library mixes destinations with creation and intake

P1 • Expert UX inference from visible UI


User task: Choose between browsing existing work, creating content and managing the app.

Evidence: M02 mixes Archive, Trash, Voice inbox, Open file, Viewed files, + Checklist, Folders and Settings in one undivided list.

Comparator: O02 is a file-browsing surface; O04 separately exposes actions. This is a concept-boundary comparison, not equivalent menu inventories.

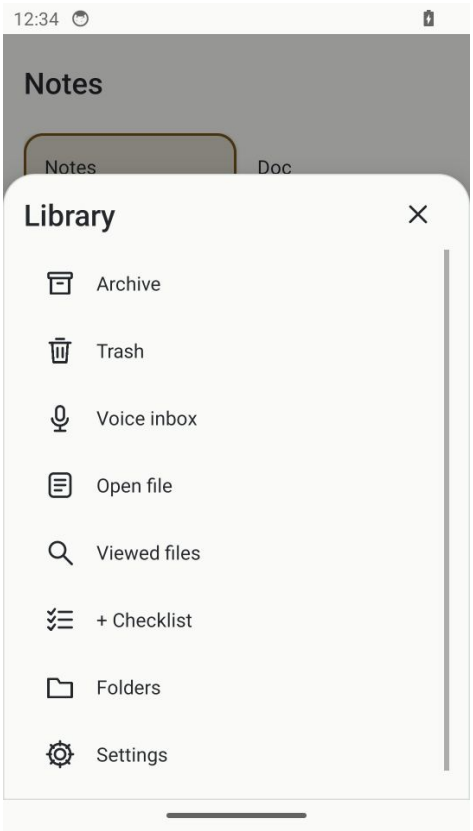

M02 | MyNotes 0.69.0 / code 69 | library

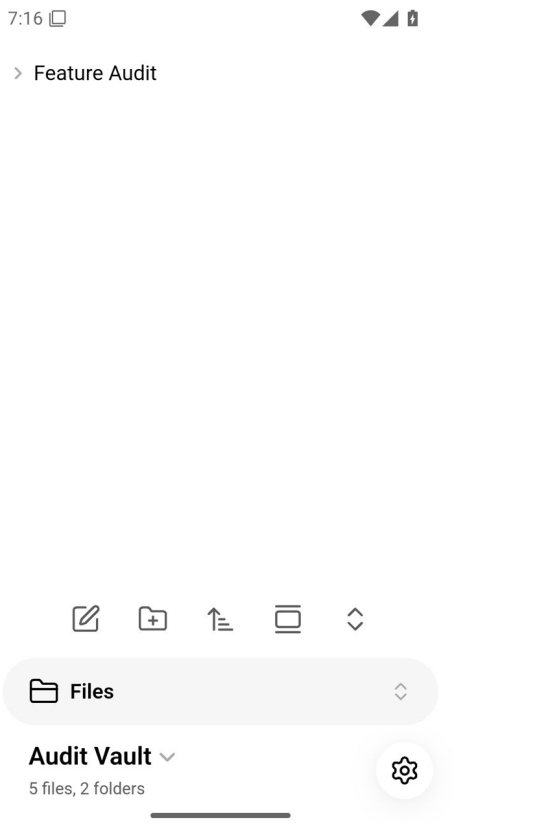

O02 | Obsidian 1.15.0 / code 396 | File explorer, fixture folder collapsed

Why it matters: Users must infer which entries open places and which start operations. The app can feel like a collection of tools rather than one workspace.

Direction to consider: Group the existing menu by purpose and make creation/intake roles consistent. Retain requested Folders/Settings ordering and do not add duplicate Notes/Doc entries.

Manual acceptance: Ask new users where to find a saved note versus create a checklist; record wrong turns before and after grouping.

Source anchor: NotesController.renderHome: navigation/menuRows. Limit: No measured wrong-turn rate is available. Obsidian also distributes actions across several surfaces.


N04 | Notes and Doc ask for an early classification decision

P1 • Navigation hypothesis requiring hands-on confirmation


User task: Retrieve yesterday's content without remembering its creation mode.

Evidence: M01 and M12 prominently separate Notes and Doc before showing content. Source implements independent workspace filtering.

Comparator: O01 presents several file kinds in one chooser. That does not mean MyNotes lacks cross-workspace search: its universal search already crosses Notes and Docs.

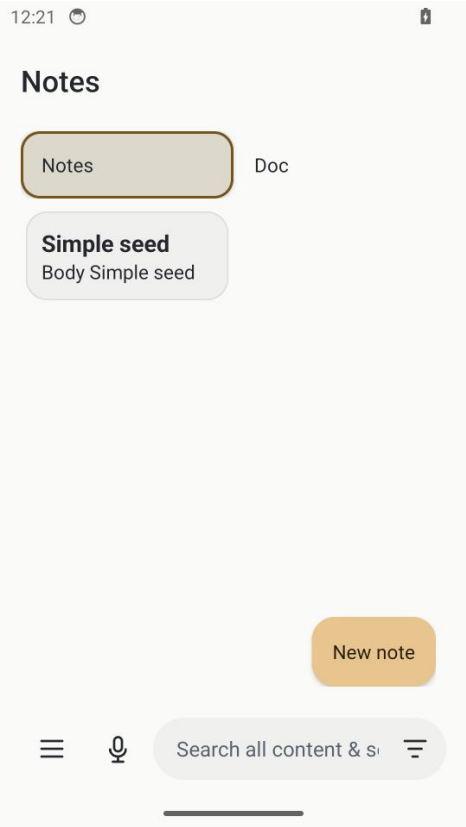

M12 | MyNotes 0.69.0 / code 69 | notes-workspace

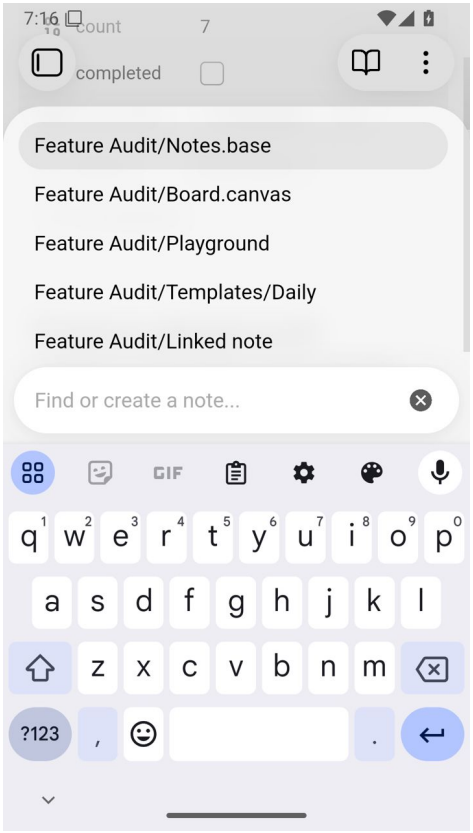

O01 | Obsidian 1.15.0 / code 396 | Quick switcher with file paths and Find or create input

Why it matters: Mode recall can become an extra burden when users remember subject matter, not whether something was a Note or Doc.

Direction to consider: Preserve both data models. Make retrieval scope and the current workspace obvious; use the existing global search as a reliable bridge rather than duplicating home controls.

Manual acceptance: Use mixed Notes/Docs with similar titles. Compare successful retrieval, workspace switches and backtracking, without instructing the creation mode.

Source anchor: NotesController.filterNow; Workspace.includes; renderUniversalResults. Limit: Not a claim that tabs are intrinsically bad or that the two models must be merged.


N05 | Folder browsing carries storage-management weight

P2 • Visible structure plus UX inference


User task: Open a folder during ordinary note organisation.

Evidence: M03 repeats Folders / Your folders, explains private storage and originals, then includes Backups; source also appends Storage settings.

Comparator: O02 focuses on a collapsed fixture-folder tree. We did not execute a matched folder-navigation task in both apps.

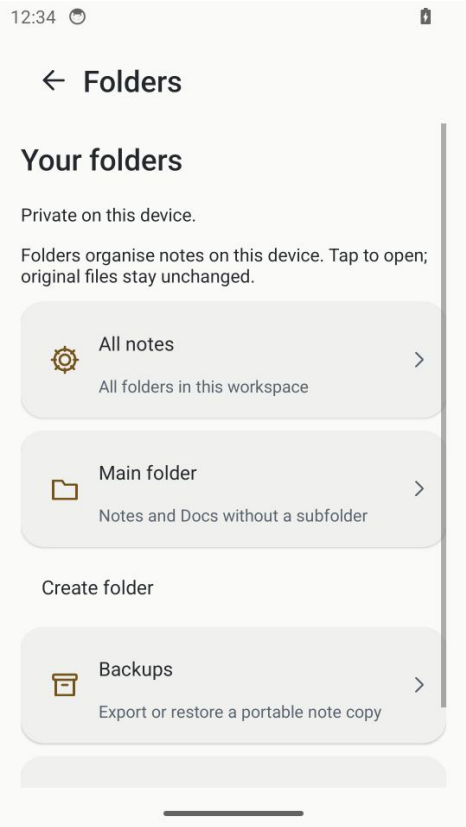

M03 | MyNotes 0.69.0 / code 69 | folders

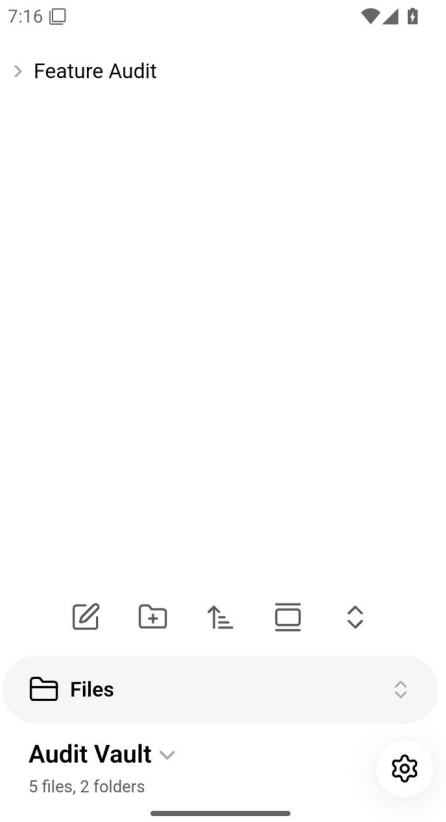

O02 | Obsidian 1.15.0 / code 396 | File explorer, fixture folder collapsed

Why it matters: Safety explanations are useful, but they compete with the everyday hierarchy and contribute to a settings-page feeling.

Direction to consider: Keep accurate storage disclosures available, but progressively disclose management details away from the main folder list. Do not remove recovery routes.

Manual acceptance: With ten folders, the main task is immediately recognisable as browsing. Users can still locate backup and storage details without ambiguity.

Source anchor: NotesController.renderFolders. Limit: The sparse fixture is not evidence that real users have no folders.


N06 | Creating a folder adds a second sheet over Move to folder

P2 • Visible layering; behaviour unmeasured

User task: Create a destination while moving the current item.

Evidence: M11 contains the dimmed editor, Move to folder and a second Create folder surface. Multiple dismiss/return levels are visible.

Comparator: No matched Obsidian create-while-moving capture is available. This is a directly observed MyNotes issue, not a claimed competitor speed win.

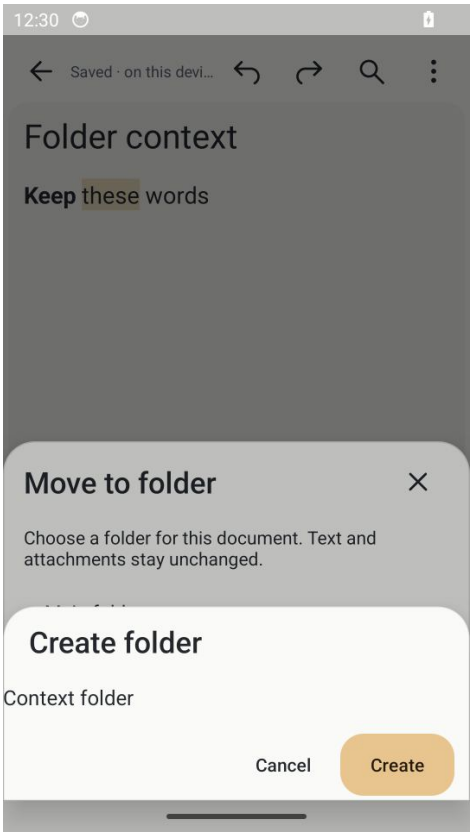

No matched Obsidian interaction capture is available for this specific flow. This is not a competitor speed or success-rate comparison.

M11 | MyNotes 0.69.0 / code 69 | editor-folder-create

Comparator: not established

Why it matters: Users have to predict whether Create also moves the item, which layer closes, and where Back returns.

Direction to consider: Use one clear staged flow inside the existing move surface, retaining the note and returning to the chosen destination. Keep the actual move outcome explicit.

Manual acceptance: Exercise Create, Cancel, system Back, invalid names and keyboard dismissal. Verify the correct destination and unchanged note contents after each branch.

Source anchor: NotesController.renderMoveFolderSheet and renderFolders. Limit: No claim of data loss or broken Back behaviour is established by this image.


N07 | Global queries silently change the filtering contract

P1 • Source-supported scope mismatch risk


User task: Search while a folder or label filter is active.

Evidence: filterNow makes every nonempty query on page Notes global: folder, workspace and label filters are bypassed; nondeleted archived notes are included. This is deliberate code behaviour, not a measured bug.

Comparator: Obsidian separates quick switching, vault search and tags in O01/O03/O05. Their combined filtering semantics were not tested.

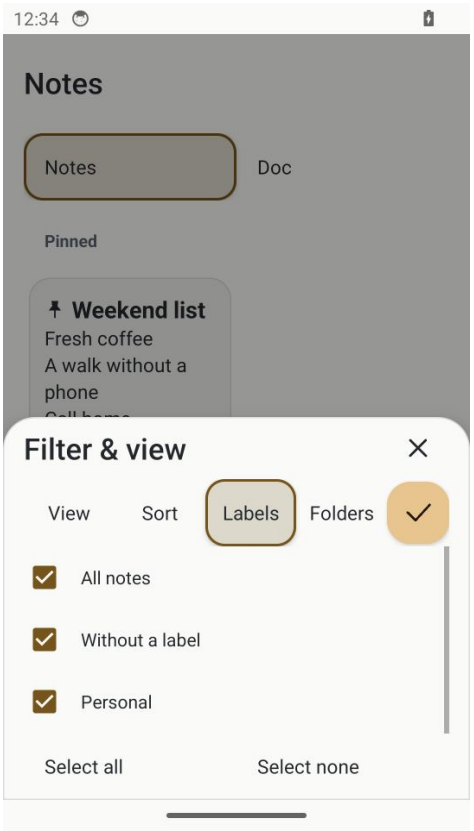

M05 | MyNotes 0.69.0 / code 69 | filters-labels

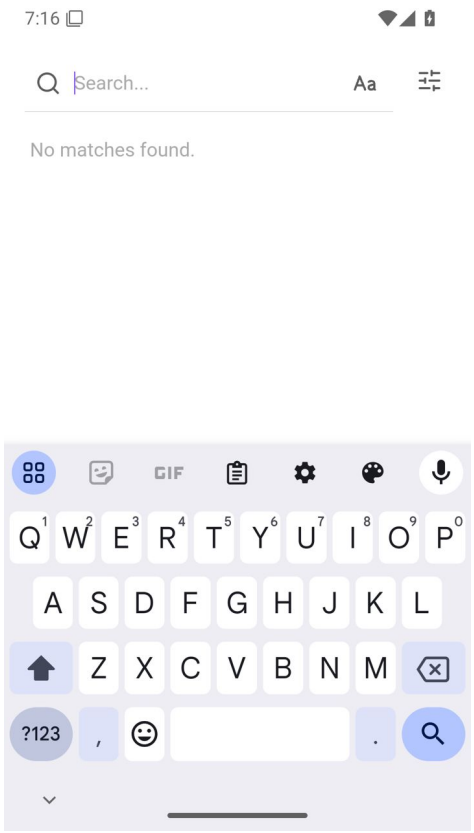

O03 | Obsidian 1.15.0 / code 396 | Vault search, empty query; not search-result quality evidence

Why it matters: A user can think the query narrows the current list while the implementation broadens it. That undermines predictability.

Direction to consider: Keep global search if intended. State All notes & Docs / includes archived explicitly and make switching to current-scope search understandable.

Manual acceptance: Populate two folders, two labels, Notes/Docs and an archive item. For each scope/query combination, verify the displayed scope and returned IDs against the stated contract.

Source anchor: NotesController.filterNow: global; included; global || filter expression; renderUniversalResults. Limit: Source establishes the branch. Its actual presentation with a populated global query needs fresh live capture.


N08 | Universal results do not explain a body-text match

P1 • Source-supported presentation gap


User task: Identify the right note when the search phrase is only in its body.

Evidence: renderUniversalResults builds title buttons plus Note/Doc, archive and folder metadata. That renderer does not add a matching body passage or query highlight.

Comparator: O03 is an empty-query capture, so no claim about superior Obsidian snippets or search accuracy is made here.

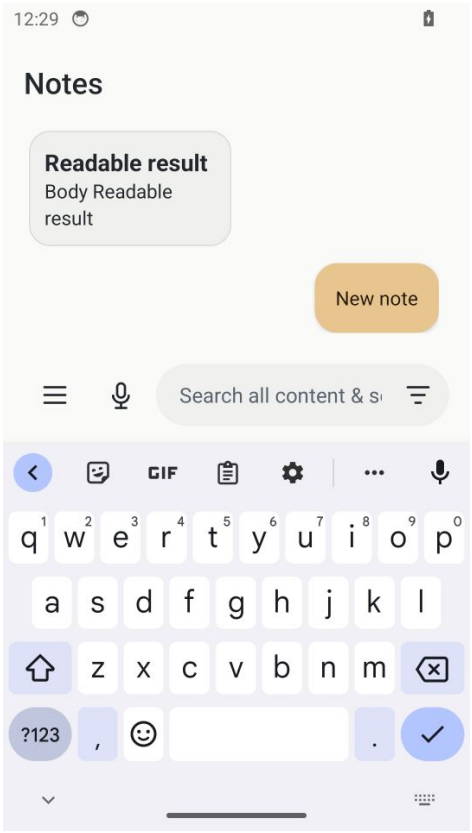

M06 | MyNotes 0.69.0 / code 69 | search-keyboard

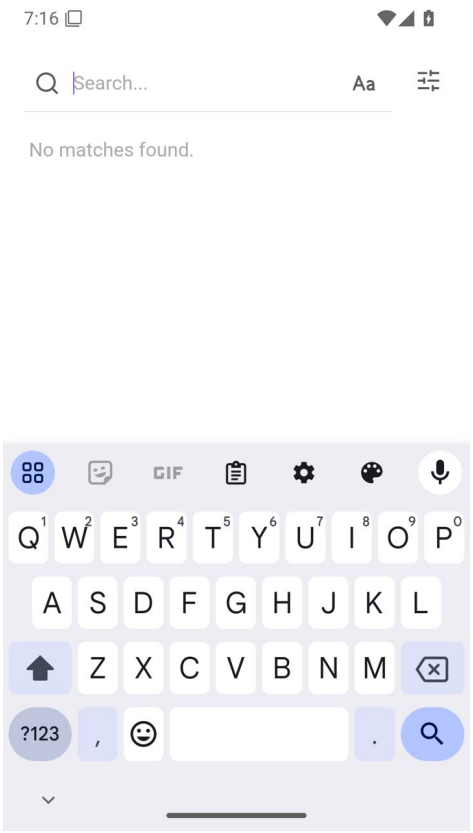

O03 | Obsidian 1.15.0 / code 396 | Vault search, empty query; not search-result quality evidence

Why it matters: Similar titles require opening candidates to discover why they matched; finding information is not the same as merely returning an item.

Direction to consider: Add a compact, safe matching passage with highlighted terms and retain the already useful type/folder metadata. Preserve original text and bound long snippets.

Manual acceptance: Create five identically titled items with different body phrases. Identify the intended item from the result context, then verify the correct open target.

Source anchor: NotesController.renderUniversalResults: title button and type/folder line. Limit: M06 shows a focused search entry, not a matched global query. Source evidence supports this finding; comparative relevance is unmeasured.


N09 | A filtered-empty library can look like a new empty library

P1 • Source-supported defect candidate; not live reproduced


User task: Understand why existing notes are not visible.

Evidence: The emptyHint expression has a special no-labels-selected branch, but an ordinary nonempty label filter with zero matches and an empty query falls through to A little space for your ideas / Create a note below.

Comparator: O05 provides a tag-specific browsing context and counts. Its empty-tag state was not captured.

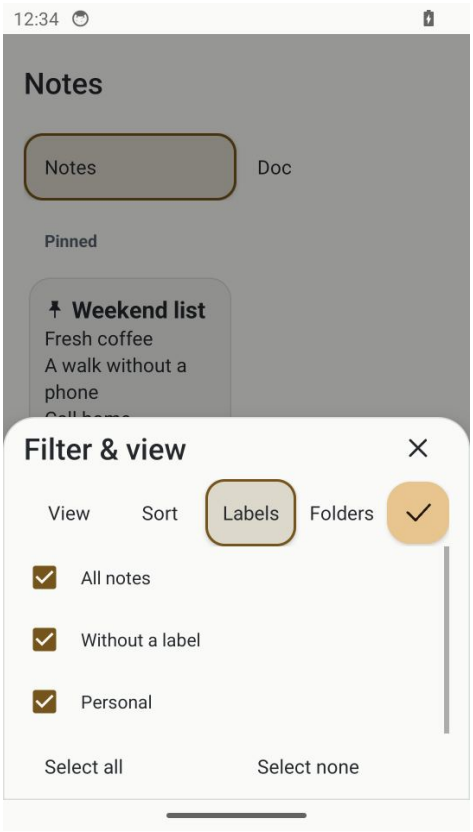

M05 | MyNotes 0.69.0 / code 69 | filters-labels

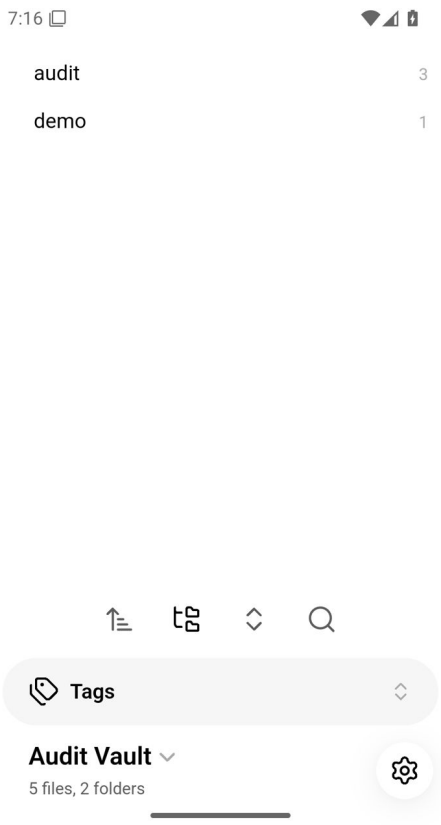

O05 | Obsidian 1.15.0 / code 396 | Tags pane with usage counts

Why it matters: Users may create duplicate content or worry that saved notes disappeared when only the current view is empty.

Direction to consider: Distinguish first-use empty, no results in this folder/filter, and loading/error states. Offer Clear filters without erasing actual content or preferences unexpectedly.

Manual acceptance: Keep a Work note, select a Personal-only filter, and clear the query. Confirm an accurate filtered-empty explanation and reversible clear action.

Source anchor: NotesController.renderHome: emptyHint ternary; filterNow. Limit: This follows a source branch. Reproduce on the signed build before assigning a confirmed runtime defect.


N10 | A broad search is not yet a clear action-discovery route

P2 • Action-discovery hypothesis


User task: Find a less-frequent action without knowing its menu location.

Evidence: Our Library and editor divide operations across menus and panels. Universal search source includes a small fixed set of settings destinations, not all editing actions.

Comparator: O04 visibly lists commands with a dedicated Select a command input. Execution of every action is not certified by that screenshot.

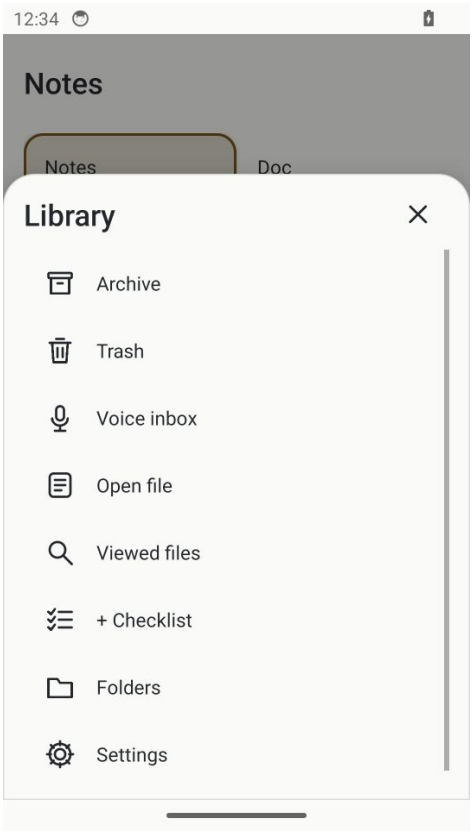

M02 | MyNotes 0.69.0 / code 69 | library

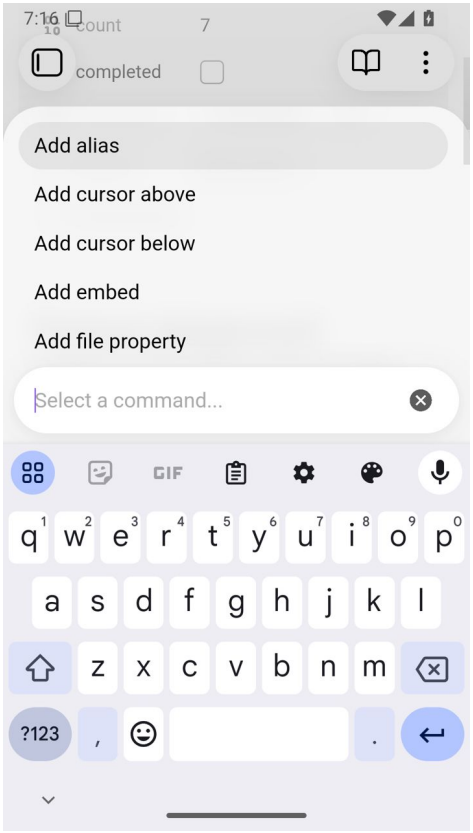

O04 | Obsidian 1.15.0 / code 396 | Command palette with actions

Why it matters: New users may know what they want to do but not the correct menu, especially after moving between Notes and Doc.

Direction to consider: First improve grouping and wording. If testing still exposes discovery failures, add lightweight action help within existing navigation; do not copy a 205-command interface wholesale.


Manual acceptance: Give unprompted tasks such as change heading, move note and find within note. Record menu detours and help requests, not just eventual completion.

Source anchor: NotesController.renderUniversalResults: fixed settings array; renderEditor menus. Limit: No measured task-time advantage or missing-basic-search claim is made.


Module: Edit & read

Shared user goal: Write and format accurately, read without distraction, find a section and leave knowing the note is safe.

This module has ten scoped findings. They do not represent ten confirmed runtime bugs or a measured competitor pass/fail score.

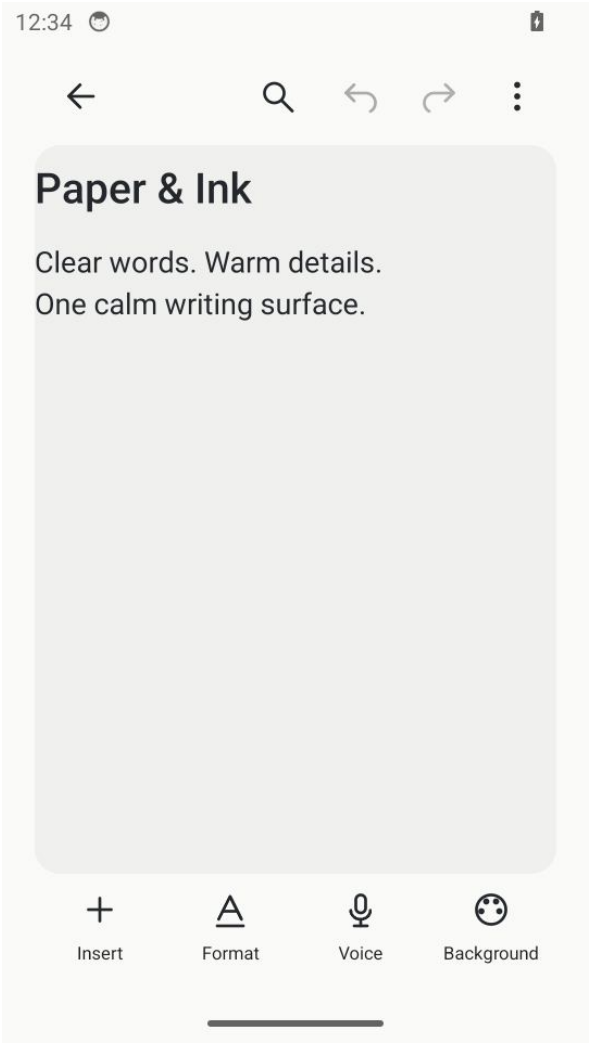

M07 | MyNotes 0.69.0 / code 69 | editor

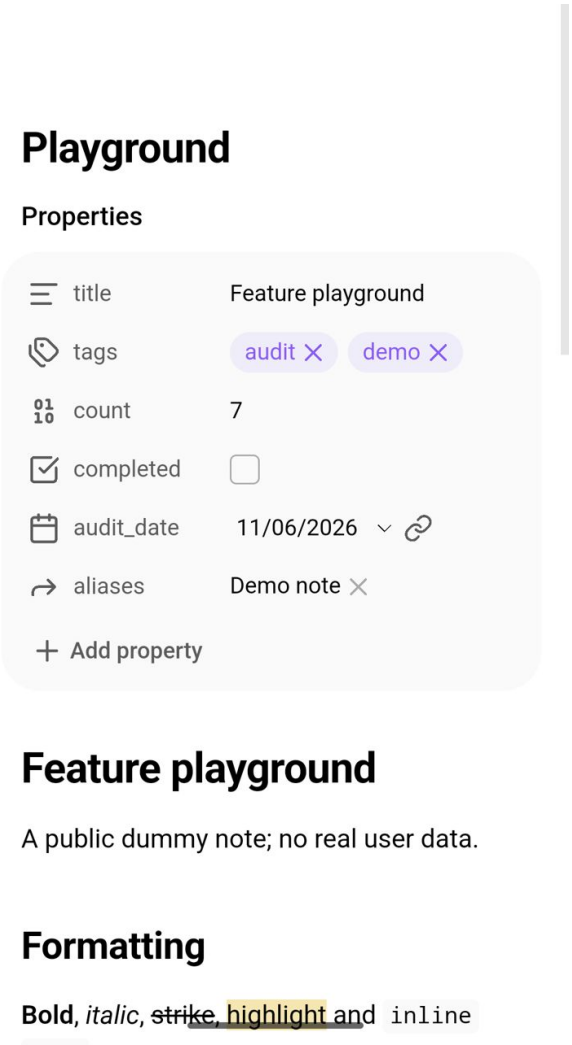

O11 | Obsidian 1.15.0 / code 396 | Properties in note; metadata occupies substantial space

Our plain editor is already calmer in this state; Obsidian's visible properties occupy substantial space before the prose. The goal is not to replace our editor with its metadata-heavy layout.


E01 | Formatting plus keyboard squeezes out the writing context

P1 • Visible viewport constraint


User task: Format a phrase while retaining the surrounding paragraph.

Evidence: M09 leaves only a short band of the note above the Format panel and keyboard. This directly shows how little prose remains visible in that captured state.

Comparator: O06 uses a compact toolbar above the keyboard while more of the note remains visible. Different fixtures prevent a precise productivity measurement.

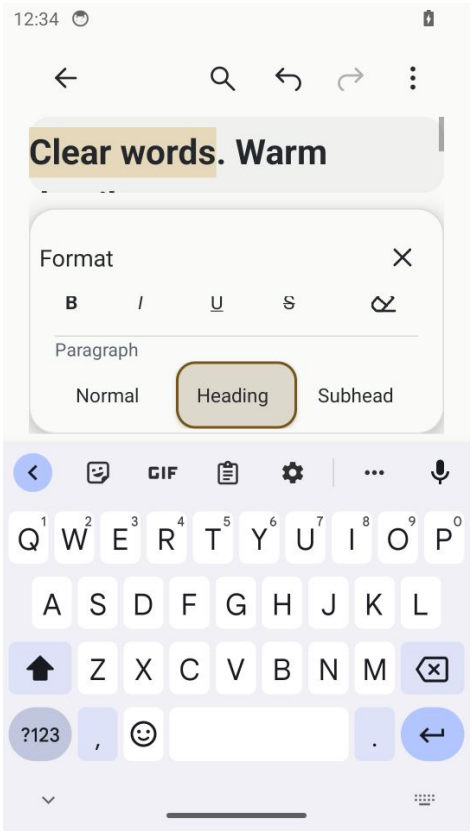

M09 | MyNotes 0.69.0 / code 69 | format-keyboard

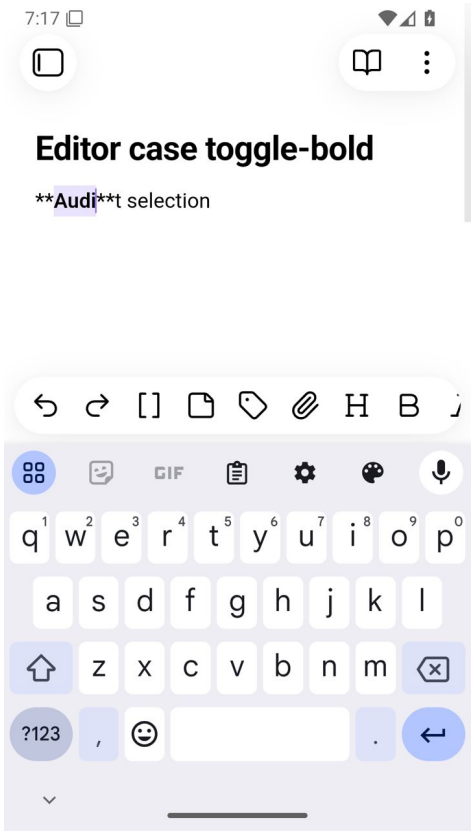

O06 | Obsidian 1.15.0 / code 396 | Bold action on dedicated scratch note; keyboard visible

Why it matters: Users may lose the sentence context, then need repeated panel closing and reopening to continue writing.

Direction to consider: Adapt the existing single Format panel to available height; keep common controls compact and advanced options reachable. Preserve readable labels and the requested single A entry.

Manual acceptance: On the same device/font/IME, format the middle of a paragraph. Target at least three readable context lines at normal font, with a sensible large-text fallback and reachable caret.

Source anchor: NotesController.installFormatting: formattingPanel; FormatControls; adaptEditorViewport. Limit: The proposed context-line target is an acceptance proposal, not a measured current value for all devices.


E02 | Selection versus future typing is not explicit enough visually

P1 • Expert UX inference; existing accessible states acknowledged


User task: Know whether Bold will affect selected words or the next typed words.

Evidence: M17 and M18 show similar Format surfaces with different selection/caret states. Source has accessibility state descriptions, but the visible panel heading is simply Format.

Comparator: O06 shows an active selection near a compact toolbar. It does not establish that Obsidian solves every mixed-style state.

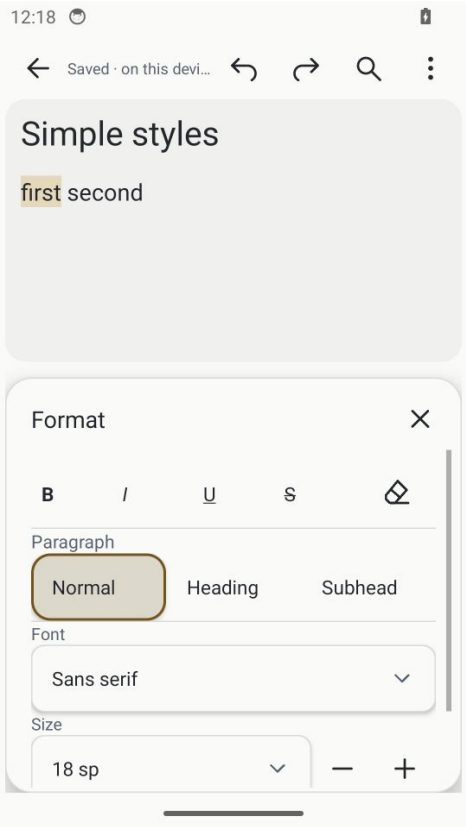

M17 | MyNotes 0.69.0 / code 69 | stage-aa-selection

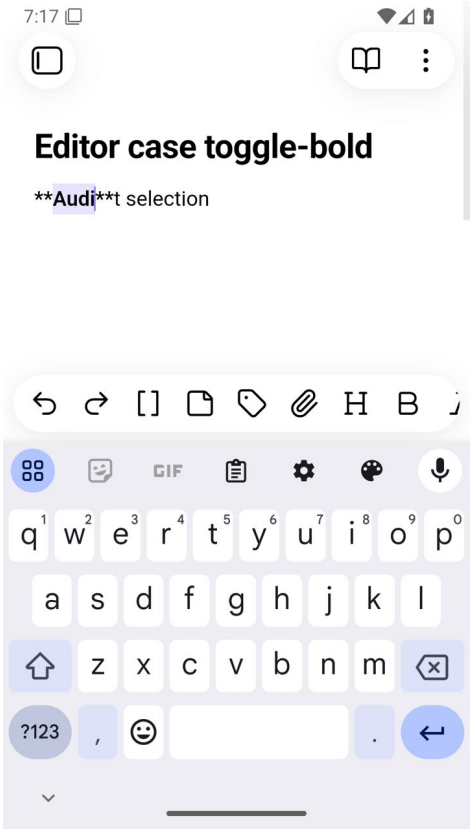

O06 | Obsidian 1.15.0 / code 396 | Bold action on dedicated scratch note; keyboard visible

Why it matters: A styling operation can feel unpredictable even when the underlying span logic is correct.

Direction to consider: Clarify the target inside the existing panel heading or concise context text. Preserve current selection, typing state, accessibility descriptions and Clear as the fifth inline action.

Manual acceptance: Alternate selected text, collapsed caret and mixed formatting. Users should predict the target before tapping and observe only the intended text change.

Source anchor: FormatControls.refresh; NotesController.noteTypingStyle and formatNoteValue. Limit: This is a comprehension risk, not a claim that formatting currently edits the wrong range.


E03 | Routine formatting shares space with advanced controls

P2 • Visible density plus source-confirmed panel contents


User task: Apply a common style without navigating typography settings.

Evidence: M10/M17 place paragraph choices, font family, Android size values and other options in a tall panel. FormatControls also provides Number paragraphs further down.

Comparator: O10 demonstrates configurable mobile toolbar actions. Customisation is not proof of a better default for novices.

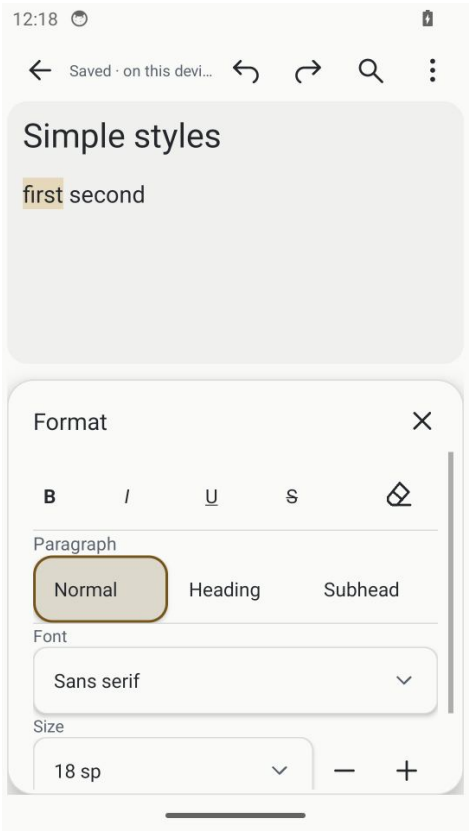

M17 | MyNotes 0.69.0 / code 69 | stage-aa-selection

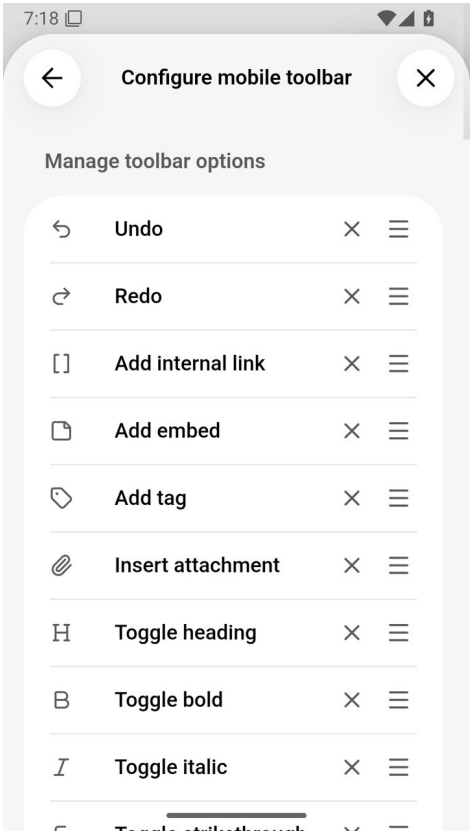

O10 | Obsidian 1.15.0 / code 396 | Mobile toolbar configuration

Why it matters: More controls do not automatically make editing more effective; frequent actions compete with less-frequent configuration.

Direction to consider: Prioritise frequent actions within the same panel and progressively disclose advanced options. Do not add another formatting strip or remove existing capabilities.

Manual acceptance: Observe five common formatting tasks and one advanced task. The common tasks should not require scanning advanced controls; the advanced task must remain discoverable.

Source anchor: FormatControls constructor and panel ordering. Limit: Action frequency is not measured yet. Validate the prioritisation with actual users.


E04 | Text-size controls expose implementation units

P2 • Visible terminology issue


User task: Choose a comfortable reading/writing size.

Evidence: M17 shows 18 sp. This is an Android implementation unit rather than a familiar task description for most note-taking users.

Comparator: O13 also exposes pixels in Appearance. Obsidian is not a plain-language ideal here; its font-size configuration is a different workflow, not numerical equivalence or a proved competitor advantage.

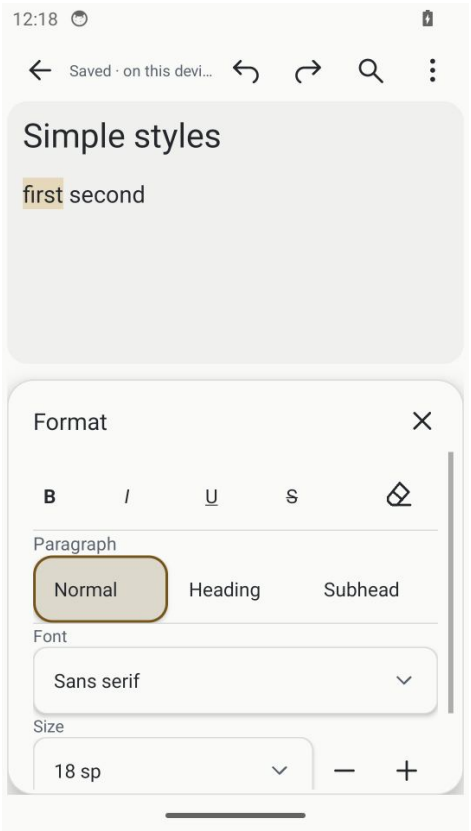

M17 | MyNotes 0.69.0 / code 69 | stage-aa-selection

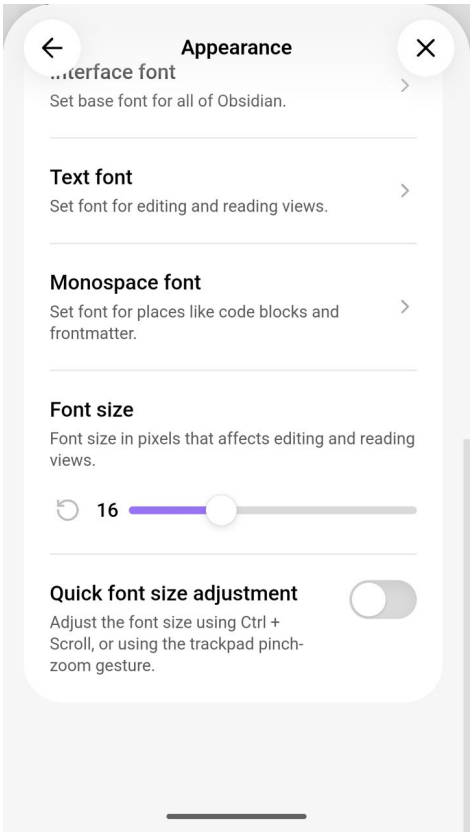

O13 | Obsidian 1.15.0 / code 396 | Appearance font-size setting

Why it matters: The control adds translation work for users who just want larger or smaller text.

Direction to consider: Use understandable size wording and preview the effect while retaining precise accessible adjustment and the existing allowed range.

Manual acceptance: Ask users to enlarge text one step and restore it without explaining sp. Verify large-text layout, mixed selections and saved sizes remain correct.

Source anchor: FormatControls: sizeChoice, Size (8–72 sp), smaller/bigger. Limit: Terminology judgment only; no unsupported contrast, physical-size or accessibility-failure claim.


E05 | The persistent editor toolbar gives decoration equal weight

P2 • Priority hypothesis from visible UI


User task: Keep the main writing actions immediately understandable.

Evidence: M07/M08 show Insert, Format, Voice and Background as equal persistent destinations. Background is always at the same hierarchy as writing operations.

Comparator: O10 allows toolbar configuration, but its icon density also increases learning effort. We should not imitate that density indiscriminately.

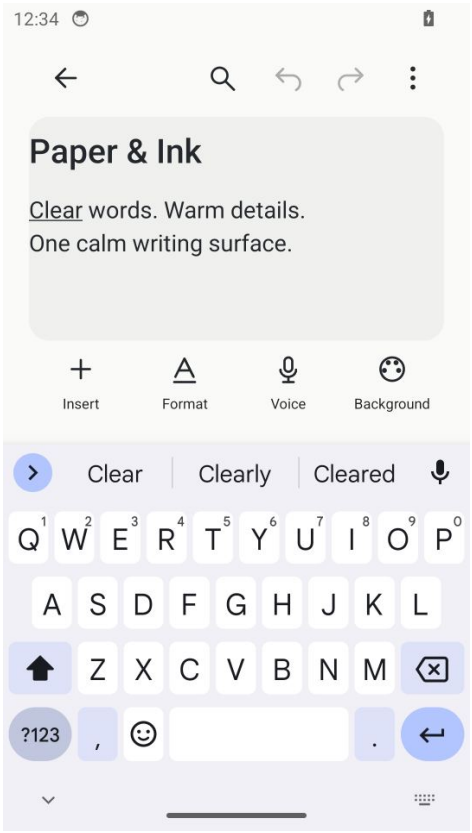

M08 | MyNotes 0.69.0 / code 69 | editor-keyboard

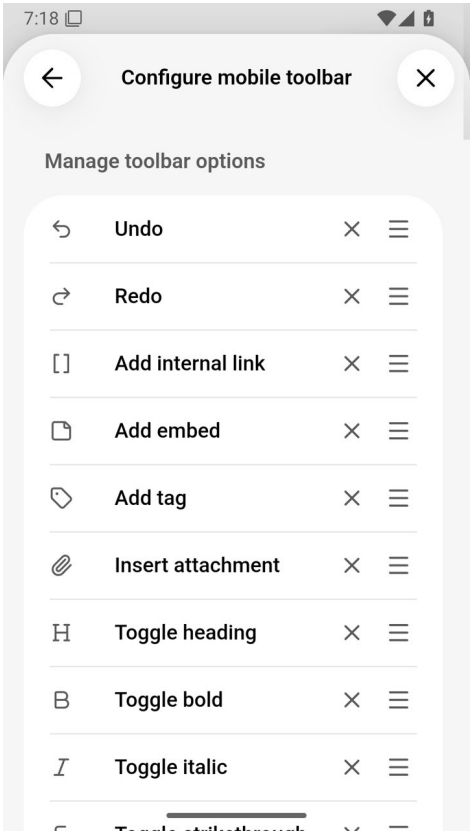

O10 | Obsidian 1.15.0 / code 396 | Mobile toolbar configuration

Why it matters: For a typing-centred workflow, attention may be spent on decoration while structural actions remain inside other menus.

Direction to consider: Keep the useful labels and required actions. Test contextual prominence or configurable order inside the existing toolbar instead of simply adding more buttons.

Manual acceptance: Run typing, checklist and reorganisation tasks. Determine whether the toolbar order matches user intent before changing defaults.

Source anchor: NotesController.renderEditor writing toolbar. Limit: Voice may be a primary workflow for some users. This is not an argument to remove or devalue it.


E06 | Long notes lack an established heading-jump counterpart

P1 • Candidate navigation gap in reviewed scope


User task: Return to a named section in a long note.

Evidence: M19 demonstrates a long scrollable note. No heading-outline surface was established in the reviewed MyNotes captures; source inspection did not establish a heading navigator.

Comparator: O09 visibly lists the note heading hierarchy in an Outline pane. Exact jump latency and every tap outcome were not measured.

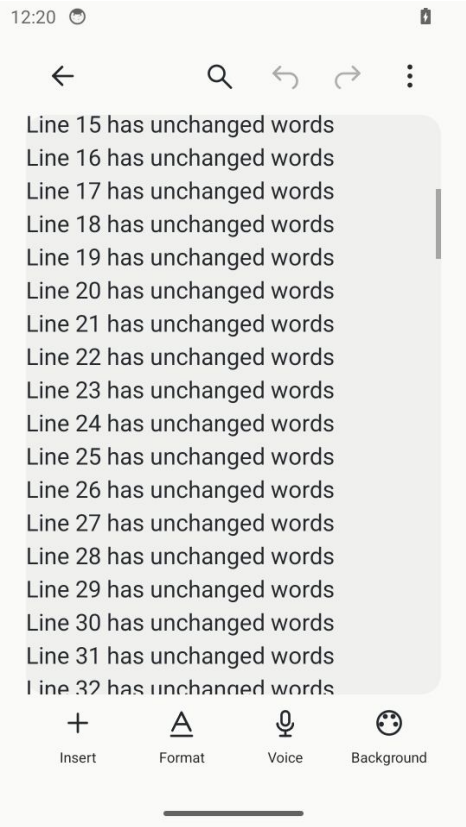

M19 | MyNotes 0.69.0 / code 69 | notes-native-selection-scroll

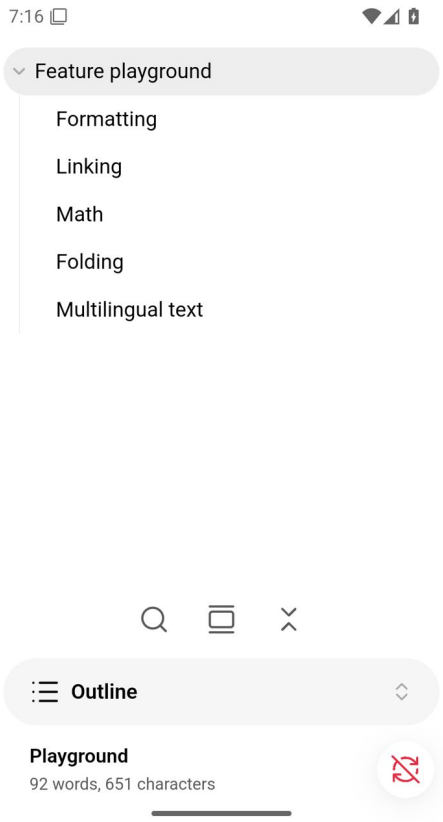

O09 | Obsidian 1.15.0 / code 396 | Heading outline pane

Why it matters: Scrolling and text search are weak substitutes when users remember document structure rather than an exact phrase.

Direction to consider: Evaluate a lightweight heading navigator that reuses existing heading formatting. Preserve scroll position and make return-to-edit straightforward; avoid introducing graph-style complexity.

Manual acceptance: Use a note with twenty headings and repeated words. Find a named section, edit it, and return to the previous location without losing selection or text.

Source anchor: Reviewed NotesController and runtime Java navigation surfaces; no absence claim beyond this scope. Limit: Potential missing interaction, not proof that all versions or hidden paths lack it.


E07 | Mixed content looks like editable machinery even while reading

P1 • Visible presentation gap


User task: Read prose and a checklist as one coherent note.

Evidence: M13 exposes block borders, a block header, grip, pencil/menu controls and per-row controls between Before and After. The fixture name Checklist01 is test data, not proven default product copy.

Comparator: O07 integrates rendered headings, lists and callouts into note content. Obsidian metadata and its own toolbar still consume space.

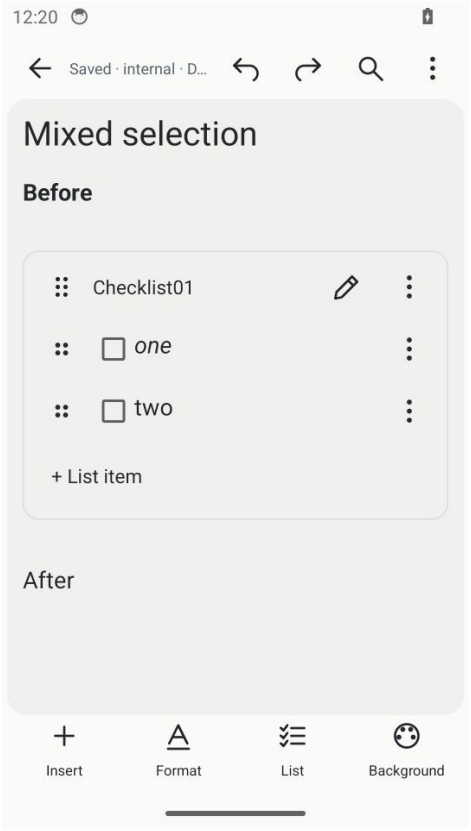

M13 | MyNotes 0.69.0 / code 69 | mixed-notes-selection

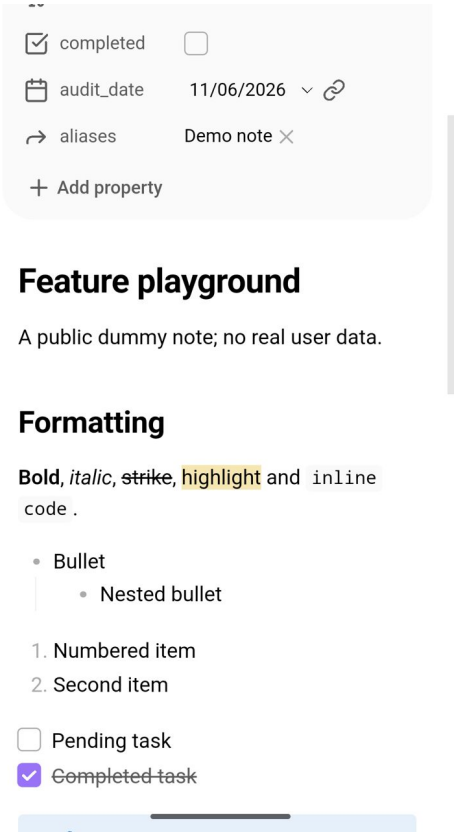

O07 | Obsidian 1.15.0 / code 396 | Rendered reading view of fixture

Why it matters: Management chrome interrupts the reading hierarchy and can make a small amount of content feel more complicated than it is.

Direction to consider: Offer calmer nonselected presentation and reveal object actions contextually without losing direct editing, grip behaviour, pen-scoped actions or accessibility.

Manual acceptance: Read a mixed note without editing, then edit one row and reorder one block. Compare comprehension and accidental edits while ensuring every existing action is still reachable.

Source anchor: NotesController.renderEditor and content block renderers. Limit: This does not justify merging all object types or removing the existing safety controls.


E08 | Several nearby menus require users to infer their scope

P1 • Control-scope comprehension risk

User task: Rename a block versus change or delete an individual list item.

Evidence: M13 has a block-level pencil/overflow and multiple row overflows. The visual relationship between each action and its object must be learned.

Comparator: O08 illustrates integrated reading, not a verified equivalent list-management menu. No competitor interaction advantage is assumed.

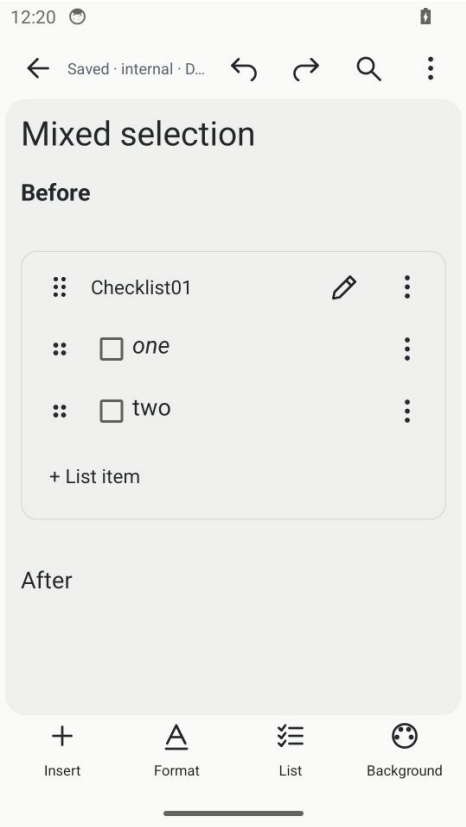

No matched Obsidian interaction capture is available for this specific flow. This is not a competitor speed or success-rate comparison.

M13 | MyNotes 0.69.0 / code 69 | mixed-notes-selection

Comparator: not established

Why it matters: Choosing the wrong scope risks unwanted structural changes and increases hesitation around editing.

Direction to consider: Make selected-object boundaries and action wording explicit while retaining per-content actions, per-cell operations and confirmation before permanent deletion.

Manual acceptance: Ask users to change one row, rename its block and remove only that row. Record wrong-menu openings and verify unaffected content remains byte/semantically unchanged.

Source anchor: NotesController content headers and item action menus. Limit: Existing content descriptions are not assumed missing; TalkBack interaction was not tested in this review.


E09 | Save/location confidence differs between note surfaces

P1 • Visible feedback inconsistency


User task: Leave the editor knowing where the work is and whether it is saved.

Evidence: M07 has no visible saved-status text in its captured top bar. M14/M11 show a status string truncated to Saved · internal · D... or Saved · on this devi....

Comparator: Obsidian exposes a file/path context on several views, but we did not inspect a comparable failure/recovery indicator. It is not a proven save-reliability winner.

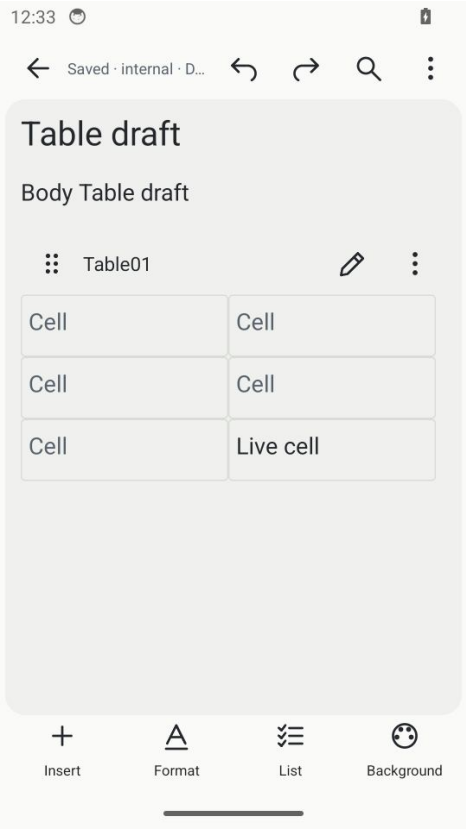

M14 | MyNotes 0.69.0 / code 69 | document-table

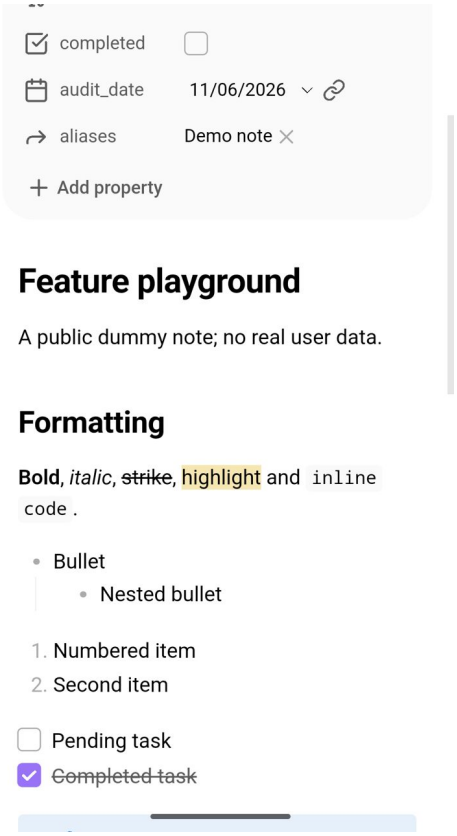

O07 | Obsidian 1.15.0 / code 396 | Rendered reading view of fixture

Why it matters: The user has to infer safety differently across surfaces; truncation removes meaning from already compact status text.

Direction to consider: Define concise shared saving/saved/error feedback and a readable location detail on demand. Keep one compact top row; do not add permanent duplicate status bars.

Manual acceptance: Edit, wait for save, leave, reopen and inject a controlled write failure on disposable data. Status must match persisted content and keep recovery/Back safe.

Source anchor: NotesController.renderEditor; document header/status surfaces. Limit: No lost save or data corruption was reproduced. This is feedback design, not a persistence-failure assertion.


E10 | Find-result context uses implementation-oriented wording

P2 • Visible copy/presentation concern


User task: Locate a phrase inside the current note and understand the hit.

Evidence: M15 displays 1 match with Writing and a short passage; M16 correctly retains a highlighted hit after returning. The useful highlight should be preserved.

Comparator: A matched Obsidian in-note-find capture is unavailable in this evidence set. O03 is vault search and is not a valid substitute.

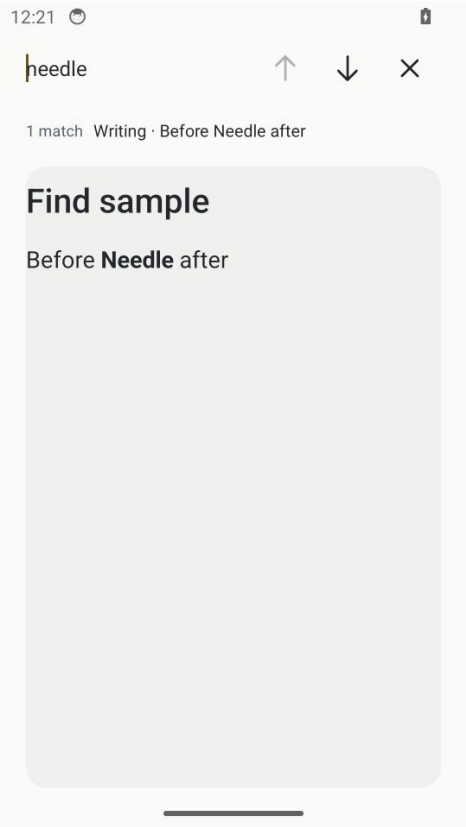

M15 | MyNotes 0.69.0 / code 69 | note-find-sheet

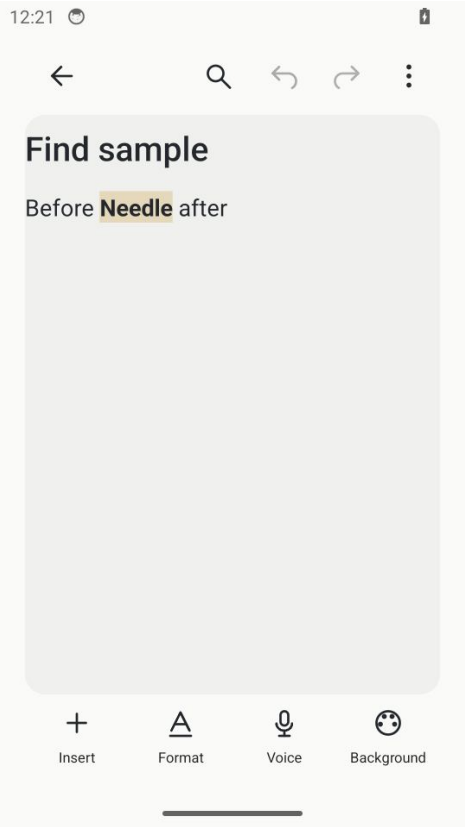

M16 | MyNotes 0.69.0 / code 69 | note-find-result

Why it matters: Writing is less precise than Body text or a user-facing content label in a mixed-content note.

Direction to consider: Use concise content labels, accurate current/total hit feedback and consistent highlight visibility. Preserve the existing keyboard-aware field and successful highlighted return.

Manual acceptance: Search repeated text across body, checklist and table. Verify labels, next/previous order, close, keyboard placement and retention without changing content.

Source anchor: NotesController.showNoteFind and content match labels. Limit: Do not relabel the existing highlighted return as broken; no comparative search speed was measured.

Bug triage: distinguish defects from design concerns

Case	Current evidence and closure requirement
N01 — preview obstruction	Visible in the retained v69 home frame. Reproduce with the signed build, preserve a full-screen recording, then verify the requested floating button no longer masks readable content.
N09 — misleading empty state	Source-supported candidate. Populate a disposable library, apply a nonempty zero-match label filter and record the actual empty-state wording.
N07 — query scope broadening	Source-supported current contract. First decide and disclose the intended global/local semantics; a deliberate global search is not itself a defect.
E01 — context squeezed	Visible usability constraint. Measure readable context with the same IME/font/device before claiming a quantitative improvement.
Remaining visual/IA findings	Triage as usability work or hypotheses, not a fabricated count of crashes. Prioritise using observed frequency and severity from real tasks.
User-reported bugs	Keep the report open pending device/build, steps, expected/actual result, screen recording and opt-in diagnostics. Do not close as cannot reproduce solely because automation passed.

Safety boundary

Any reproduction uses disposable local notes with recorded originals. Do not uninstall, clear app data, replace the signed package or overwrite a user library to simplify testing. Failure injection belongs in a separate disposable environment. Keep diagnostic collection opt-in and never upload private notes or audio.

Proper hands-on comparison: preparation and controls

This is the next testing protocol, not a list of tests claimed to have run. An operator should execute and observe the same user tasks, without following developer-only shortcuts. Capture decisions, confusion, corrections and recovery, not merely a terminal pass line.

Matched setup Use the same physical Android device where possible; otherwise match OS, resolution, density, refresh rate, font scale, IME and thermal/battery conditions. Preserve signing/data safety for our installed app. Record exact builds and source evidence versions.

Matched data Create a public dummy corpus with 50 notes, five folders, three labels/tags, mixed short/long titles and repeated body phrases. Use equivalent content and user outcomes, not identical internal file formats. Add 200-item and long-note variants only for the scale tasks.

Counterbalanced order Alternate which app is used first to reduce learning effects. Separate cold and warm runs. Record novice familiarity and avoid coaching one app more than the other.

Observation Capture screen/touch recordings where consented, operator notes and available frame traces. Ask what the user expects before revealing the result. Keep errors, abandoned attempts and backtracking.

Outcome Verify that the intended note opens, edits persist, original content is retained, and navigation returns to a comprehensible state. Record unknowns instead of assigning a zero.

Hands-on task sheet A: retrieval and organisation — NOT RUN

T01 | Retrieve a remembered title

From home, find a specified note among 50 mixed items without naming its creation workspace. Verify its ID/content. Record task time, navigation switches, wrong opens and help requests.

T02 | Body-only phrase with a filter

Apply a folder/label filter, search a phrase found only in note bodies, and explain the visible scope before opening the result. Verify the expected IDs under the app’s stated contract.

T03 | Create a folder during a move

Move one dummy item into a newly named folder. Repeat Cancel, invalid name and Back branches. Verify original content, selected destination and return context.

T04 | Recover from an apparently empty list

Use a filter that returns zero items while the library remains populated. Determine why the view is empty and restore visibility without recreating notes or clearing storage.

Status: all four tasks are planned, not executed in this report. An instruction-path count would not be a measured task outcome.

Hands-on task sheet B: editing and reading — NOT RUN

T05 | Format in context

Write 250 words, select a middle phrase, apply bold and a heading, then resume typing. Record visible context, selection errors, unintended formatting, panel reopenings and saved result.

T06 | Navigate a long note

Find a named section among twenty headings and repeated words, edit it, then return to the previous location. Use each app’s best discoverable method; do not require a feature name.

T07 | Read and modify a mixed note

Read a paragraph, a checklist and a table; change one row and move one block if that operation is supported. Separate unavailable outcomes from failures. Verify unrelated content is unchanged.

T08 | Save and interruption confidence

Save, navigate away and reopen the same dummy note. In an isolated failure-injection environment, trigger a controlled save failure and observe feedback/retry. Never apply destructive testing to a real library.

Run at standard and enlarged font scales. A screenshot of a retained selection is not proof of smooth dragging or a comfortable writing session.

Smoothness, latency and effectiveness: measurement ledger

Measure	Protocol / present result
Tap to usable response	Timestamp the input and first stable usable state in recorded evidence. Separate keyboard appearance and app rendering. Present result: NOT MEASURED.
Scroll and drag quality	Capture frame traces and user-visible recordings for list scrolling, note scrolling, selection drag and reordering. State refresh rate and trace-derived jank definition. Present result: NOT MEASURED.
Cold / warm startup	Record process/cache state and time to usable content, not just launch intent dispatch. Present result: NOT MEASURED head-to-head.
Task efficiency	Time, action count, wrong turns, corrections and abandonments on the matched tasks. Present result: NOT MEASURED.
Task effectiveness	Correct item, correct scope, intended edit and saved content verified after reopen. Present result: NOT MEASURED on a matched manual task set.
Confidence / perceived simplicity	Ask users what is happening, where they are and whether work is safe; record the explanation and uncertainty. Present result: no participant study.
Resource use	Installed storage, data/cache growth, peak working memory and battery under equivalent tasks. APK payload alone is not any of these. Present result: NOT MEASURED.

Do not substitute OCR/speech benchmark timings, native test counts, JPEG file sizes or API callback success for these metrics. No claim that a fast automated call means a smooth human interaction.

Acceptance gates before calling a module polished

Readability No primary floating action masks required text in the evaluated state; no clipped essential scope/status wording; important content remains available with keyboard and large text.

Predictability Search scope and active filters are understandable; first-use empty and filtered-empty are distinct; each action’s object and return destination are clear.

Effectiveness Users reach and modify the intended content without developer assistance. Saved content matches their intent after reopen, including mixed formatting and structured blocks.

Efficiency Measured task results show fewer unnecessary transitions or less scanning; retain negative and neutral outcomes. No improvement claim before comparable measurements exist.

Smoothness Live traces/recordings show acceptable task-specific feedback and no disruptive interaction stalls under declared conditions. Define thresholds before testing, not after seeing the result.

Safety and recovery No data loss, unsafe Back navigation or silent replacement. Preserve originals and clear failure feedback; verify install-over rather than destructive reset when needed.

What to preserve; what not to copy blindly

Our plain title/body editor and labelled Insert / Format / Voice / Background actions are already understandable in M07/M08. Existing global cross-workspace search, folder/label controls, grid/list choice, highlighted find return and shared FormatControls should be improved, not described as nonexistent.

Obsidian’s useful references here are focused retrieval/action surfaces, a visible heading outline, calmer rendered prose and compact keyboard-adjacent actions. Its unlabelled icons, Markdown concepts, substantial frontmatter and distributed navigation can themselves confuse beginners. Its font-size settings also expose pixels; it is not an automatic model of plain-language typography.

Preserve our requested floating New note, single A Format entry, fifth inline Clear action, compact editor header, safe Back behaviour, direct editing, long-selection persistence and accessible per-content actions. Proposed directions are design hypotheses, not authorisation to undo earlier requirements.

No extra-feature credit is awarded for our voice/OCR/drawing tools, nor is missing a third-party plugin counted as a failure in this shared-task review. A simple app should not become a complicated clone of the comparator.

Next modules and work boundary

Stage	Scope and evidence needed
This installment	Two modules only: find/organise and edit/read. Twenty scoped findings and a proposed matched manual task set. No fixes or new Android builds.
Next: file viewers	Compare opening, navigation, selection, search, zoom, copy/export and return paths for shared file types. Use original documents and actual interactions, not only viewer launch captures.
Next: tables / lists / rich content depth	Evaluate cell/row edits, context actions, ordering and data retention as user workflows. Avoid a feature-count table that treats presence as usability.
Next: navigation / settings / recovery	Review onboarding, storage explanations, archive/trash, saving failures and recovery with disposable data. Retain signing/data safety.
Separate specialised modules	OCR, speech, drawings and other non-equivalent capabilities need their own effectiveness tests or suitable comparators, not invented Obsidian counterparts.
Implementation later	Convert validated findings into small changes, retain regression safeguards, then repeat the same manual acceptance tasks. User approval of this review is not evidence that a fix is complete.

Evidence catalogue and reproduction references

Source frames are retained in the repository; the evidence manifest stores exact paths, SHA-256 digests and dimensions. These are historical captures, not new screenshots from this review. Source images are not duplicated into this report folder.

MyNotes frames

ID	Recorded state
M01	home
M02	library
M03	folders
M04	filters-view
M05	filters-labels
M06	search-keyboard
M07	editor
M08	editor-keyboard
M09	format-keyboard
M10	format
M11	editor-folder-create
M12	notes-workspace
M13	mixed-notes-selection
M14	document-table
M15	note-find-sheet
M16	note-find-result
M17	stage-aa-selection
M18	stage-aa-typing
M19	notes-native-selection-scroll
M20	mixed-note-header

Obsidian frames

ID	Recorded state
O01	Quick switcher with file paths and Find or create input
O02	File explorer, fixture folder collapsed
O03	Vault search, empty query; not search-result quality evidence
O04	Command palette with actions
O05	Tags pane with usage counts
O06	Bold action on dedicated scratch note; keyboard visible
O07	Rendered reading view of fixture

ID	Recorded state
O08	Rendered table within note prose
O09	Heading outline pane
O10	Mobile toolbar configuration
O11	Properties in note; metadata occupies substantial space
O12	Backlinks pane
O13	Appearance font-size setting

Source/provenance references

MyNotes release qualification mynotes/docs/candidate69-markup-followup.md

MyNotes native-image provenance mynotes/docs/module-e2e/42021523354/provenance.json

MyNotes environment example
mynotes/docs/module-e2e/42021523354/light-portrait-ordered-refinement-environment-configured.json

Obsidian audit limitations mynotes/docs/comparisons/obsidian/audit/42182162974/README.md

Obsidian capture receipts mynotes/docs/comparisons/obsidian/audit/42182162974/coverage-summary.json

Obsidian source release https://github.com/obsidianmd/obsidian-releases/releases/tag/v1.15.0

Primary UI/source review mynotes/runtime/src/main/java/app/space/notes/runtime/NotesController.java

Shared formatting implementation mynotes/runtime/src/main/java/app/space/notes/runtime/FormatControls.java

Read source paths at baseline bf39d35dc625a86a84f44d03a178da4569a2b594. The current report’s findings do not silently reclassify previous app tests as manual usability evidence. No E2E success count is used as proof of polish.

Companion files: review-data.json provides structured findings; evidence-manifest.json provides source integrity; OurApp_vs_Obsidian.md provides a searchable text edition. No personal data or credentials are used.