# Jenkins: replace compute, retain its home

A persistent mount is necessary; independent backup is still required.

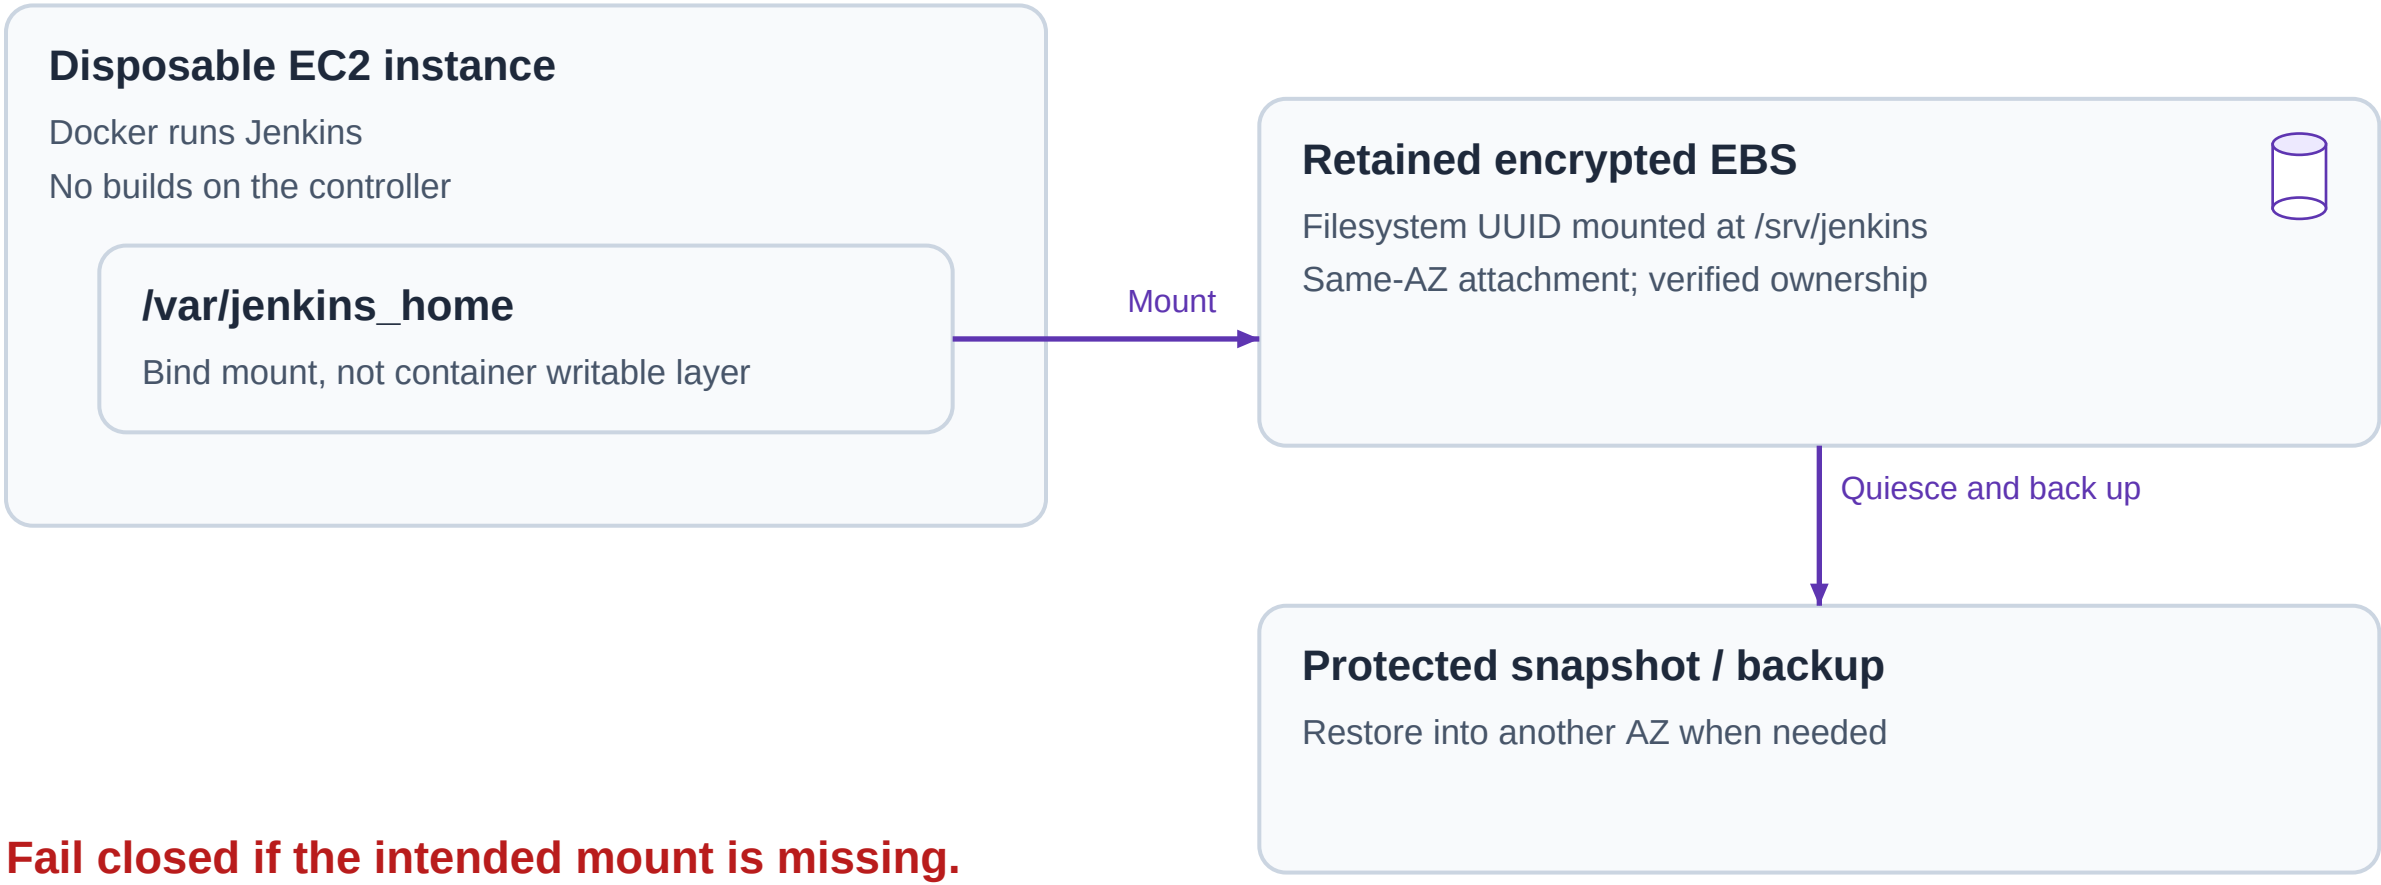


**Fail closed if the intended mount is missing.**