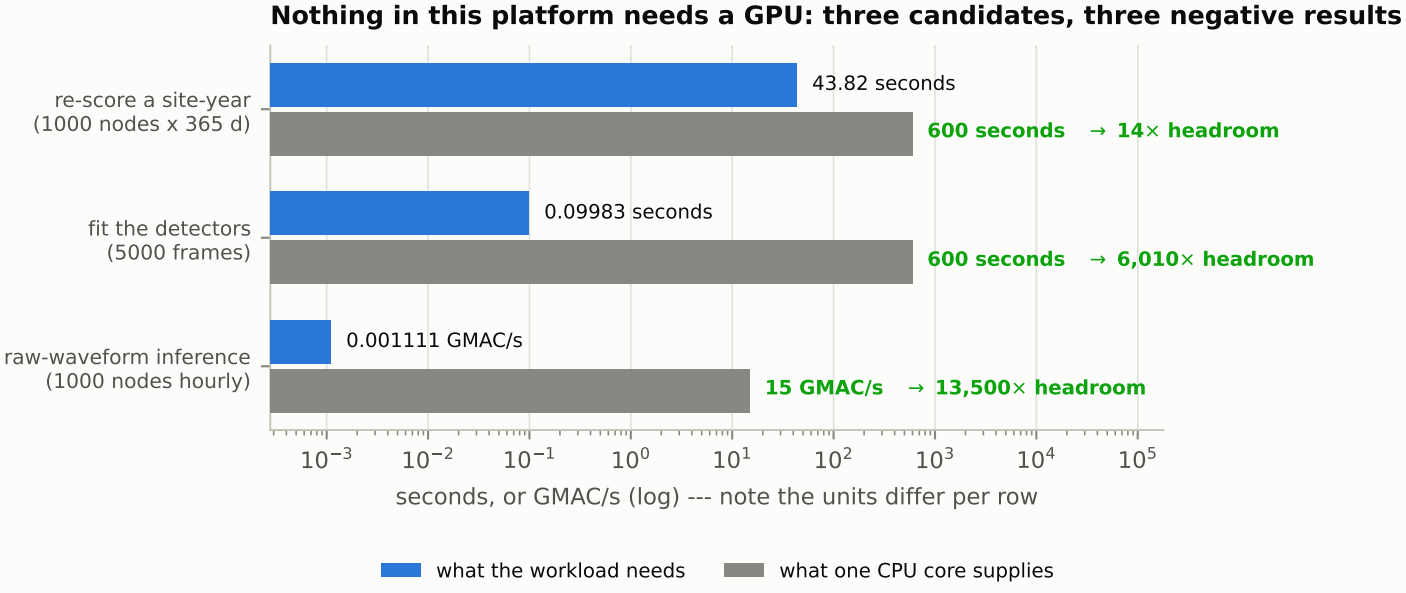
Nothing in this platform needs a GPU: three candidates, three negative results
re-score a site-year
(1000 nodes x 365 d)
43.82 seconds
600 seconds → 14× headroom
fit the detectors
(5000 frames)
0.09983 seconds
600 seconds → 6,010× headroom
raw-waveform inference
(1000 nodes hourly)
0.001111 GMAC/s
15 GMAC/s → 13,500× headroom
10^{-3} 10^{-2} 10^{-1} 10^{0} 10^{1} 10^{2} 10^{3} 10^{4} 10^{5}
seconds, or GMAC/s (log) --- note the units differ per row
what the workload needs
what one CPU core supplies