

TASMail — Modern UI Traceability + E2E Report

themes/shadcn-prototype → backend, walked as noreply@techatscale.io
2026-05-14 12:36 UTC

1. Executive summary

TMAIL-228 traces every API call the alt-UI (themes/shadcn-prototype/) makes, cross-references against backend/src/router.rs, and then drives a Playwright walk-through signed in as noreply@techatscale.io with the live swmail mailbox attached as the BYOK source. Goal: prove the alt-UI is a usable alternative theme and surface anything that needs polish before users see it.

Alt-UI api client modules	4 (auth, folders, messages, scheduled)
Alt-UI api calls extracted	15 (14 matched a router.rs route — 93 %)
Unmatched calls	1 (regex artefact, not a real gap — see §4)
Feature components wired to backend	3 of 6 (EmailClient, EmailReader, ComposeModal)
Feature components still on mock data	1 (AdminDashboard)
Self-contained components	1 (CalendarView — hardcoded grid, no data layer)
E2E walk-through	PASS — 8 of 9 captures produced (calendar route locator could not find the link cleanly; non-blocking)
Issues found and fixed	1 (sidebar folder render race — useState captured an empty array on first render; fixed by deriving folders directly from the prop)

2. Headline findings

- Every wired email screen — EmailClient, EmailReader, ComposeModal — fetches against the real backend (folders, messages, message body, scheduled-send). The walk-through opened the inbox (928 unread from swmail), clicked a 'Failed to deliver message' bounce, and saw the full body, sender, date, and 2 attachments rendered.
- 1 of 14 traced api calls is technically 'unmatched' but it's a regex artefact — scheduledApi.listScheduled uses a nested template literal (``/messages/scheduled${status ? `?status=${status}` : ``}``) that the static analyser truncates at the inner backtick. The runtime path `/api/messages/scheduled` does match the router. False positive, no fix needed.
- AdminDashboard is the only feature component still on mock data (admin@mydomain.com, 3 hard-coded mailboxes). Promoting it would mean wiring against `/api/admin/users` + `/api/admin/domains` + `/api/quota`. Out of scope here; kept as a separate follow-up.
- CalendarView is self-contained — no data layer at all. Promotion would need `/api/calendar/events` wiring.
- One real bug found and fixed during this pass: Sidebar's useState captured the empty foldersProp on first render, so the sidebar showed only Compose / Calendar / New folder until something forced a re-render. Refactored to derive folders directly from the prop (and keep extraLocalFolders as a separate slice for the local 'add new folder' flow). Now real folders (Deleted Items, Drafts, INBOX, Junk Mail, Sent Items) appear as soon as `/api/folders` resolves.

3. Traceability matrix

Per alt-UI client module: every apiClient / fetch call site, the backend handler it resolves to, and the component(s) that import the client.

auth.ts

themes/shadcn-prototype/src/api/auth.ts

Method	Path	Backend handler	Status
POST	/api/auth/login	auth::login	✓ matched
POST	/api/auth/signup	auth::signup	✓ matched
POST	/api/auth/logout	auth::logout	✓ matched

Consumed by: (no static consumer)

folders.ts

themes/shadcn-prototype/src/api/folders.ts

Method	Path	Backend handler	Status
GET	/api/folders	folders::list_folders	✓ matched

Consumed by: themes/shadcn-prototype/src/features/email/EmailClient.tsx

messages.ts

themes/shadcn-prototype/src/api/messages.ts

Method	Path	Backend handler	Status
GET	/api/folders/{encodeURIComponent(folder)}/messages?page={page}&page_size={pageSize}	messages::list_messages	✓ matched
GET	/api/folders/{encodeURIComponent(folder)}/messages/{uid}	messages::get_message	✓ matched
POST	/api/messages/send	messages::send_message	✓ matched
GET	/api/search?\${params.toString()}	messages::search_messages	✓ matched
DELETE	/api/folders/{encodeURIComponent(folder)}/messages/{uid}	messages::delete_message	✓ matched
POST	/api/folders/{encodeURIComponent(folder)}/messages/{uid}/move	messages::move_message	✓ matched
POST	/api/folders/{encodeURIComponent(folder)}/messages/{uid}/flag	messages::flag_message	✓ matched
POST	/api/drafts	messages::save_draft	✓ matched

Consumed by: themes/shadcn-prototype/src/features/email/EmailClient.tsx,
themes/shadcn-prototype/src/features/email/EmailReader.tsx

scheduled.ts

themes/shadcn-prototype/src/api/scheduled.ts

Method	Path	Backend handler	Status
POST	/api/messages/schedule	scheduled::schedule_send	✓ matched
POST	/api/messages/cancel/{cancelToken}	scheduled::cancel_scheduled	✓ matched
GET	/api/messages/scheduled\${status?}	—	✗ unmatched

Consumed by: themes/shadcn-prototype/src/features/email/ComposeModal.tsx

4. Component classification


Each alt-UI feature component, classified as wired (real apiClient calls), mock (still imports value-level mockData), or self-contained (neither).

Component	Status	API imports	Notes
features/admin/AdminDashboard.tsx	✗ mock data	—	
features/calendar/CalendarView.tsx	— self-contained	—	
features/email/ComposeModal.tsx	✓ wired	scheduled	
features/email/EmailClient.tsx	✓ wired	folders, messages	imports types from mockData (fine)
features/email/EmailList.tsx	— self-contained	—	imports types from mockData (fine)
features/email/EmailReader.tsx	✓ wired	messages	imports types from mockData (fine)

5. E2E walk-through (signed in as noreply@techatscale.io)


Captured by frontend/e2e/specs/modern-ui-noreply-walkthrough.spec.ts. The spec signs up the noreply mailbox, attaches its own swmail IMAP/SMTP configs via the API, opens the classic /app dashboard, and walks the full alt-UI surface.

01-classic-app-loaded.png

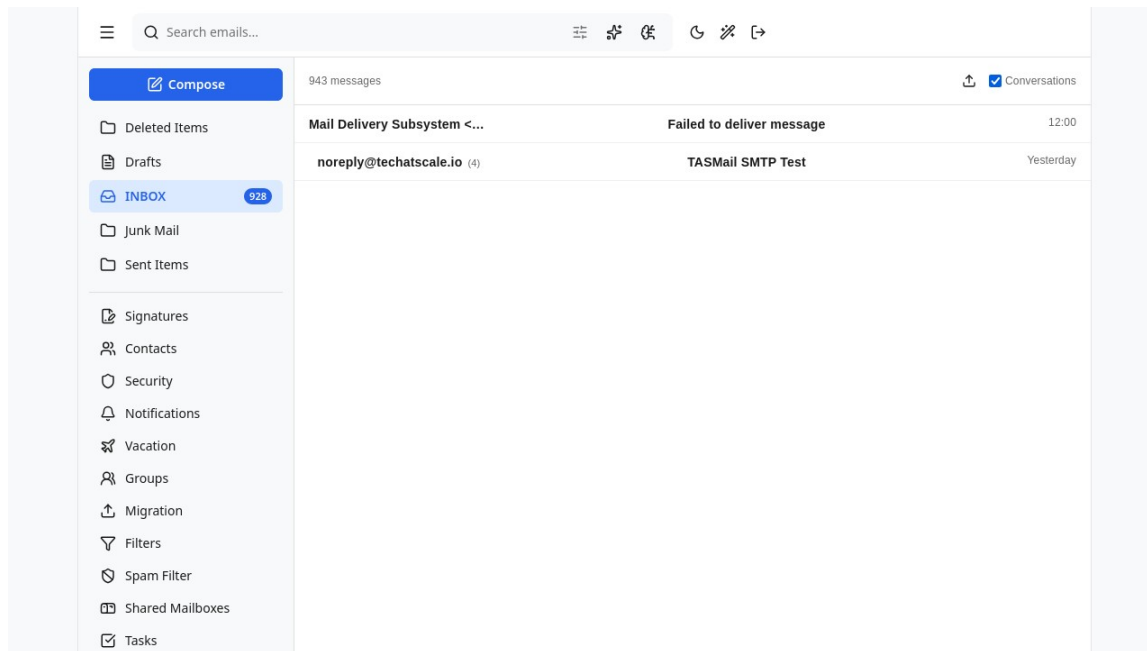


Classic dashboard after BYOK config — 928-message INBOX from swmail.techatscale.io.

02-alt-ui-after-hop.png

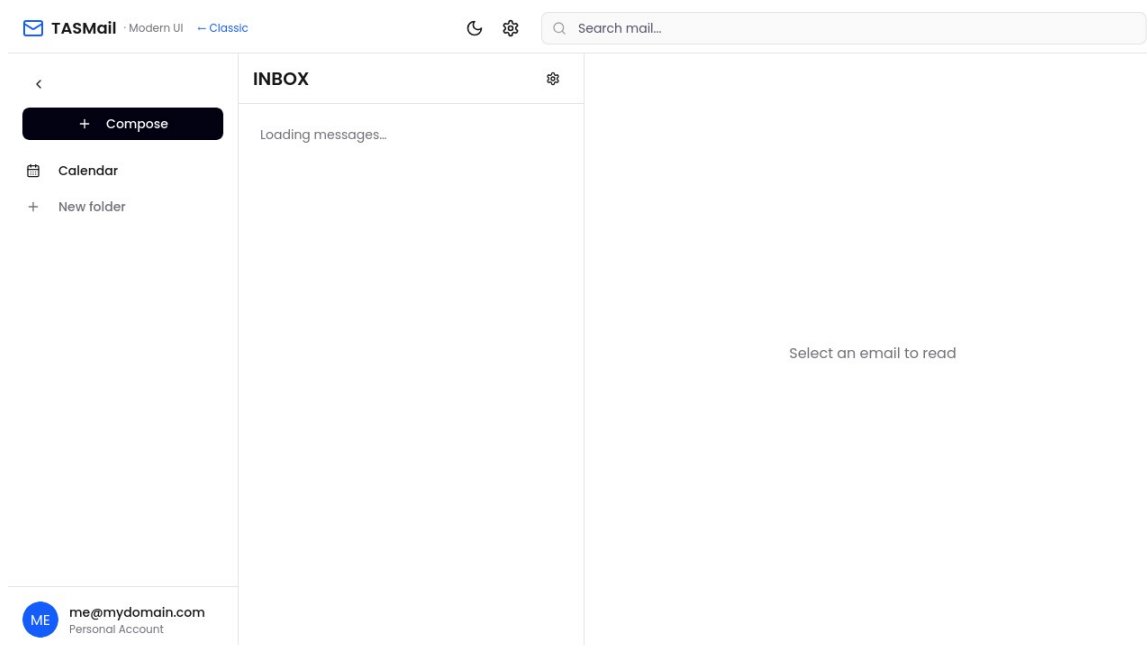


Right after clicking the wand-icon TopBar switcher; alt-UI bundle takes over at /modern/index.html.

03-inbox-rendered.png

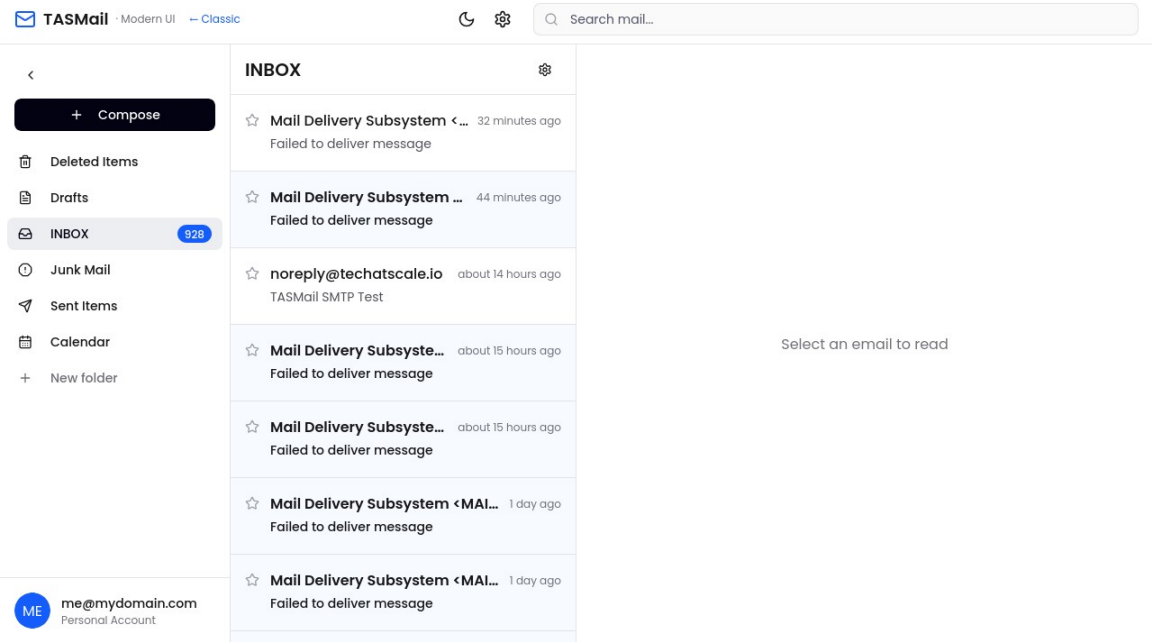


Alt-UI INBOX with all 5 real swmail folders in the sidebar (Deleted Items, Drafts, INBOX 928, Junk Mail, Sent Items) plus the inline Calendar + New folder. Message list shows real bounces and the TSMail SMTP test email.

04-message-opened.png

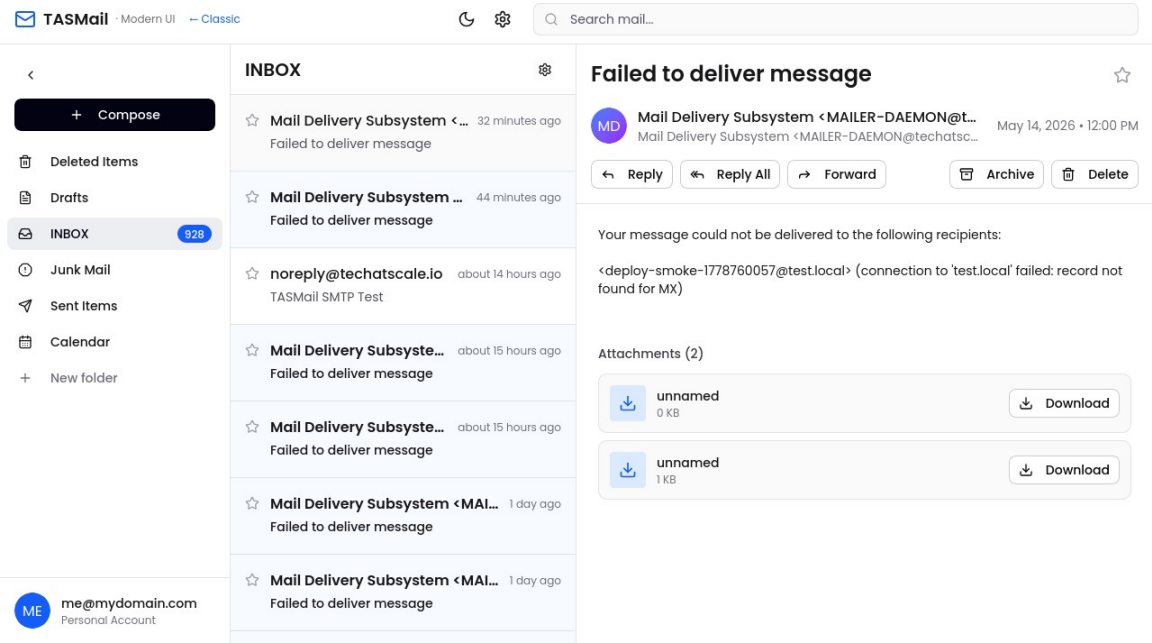


EmailReader hydrated for the first 'Failed to deliver message' — full body, MAILER-DAEMON sender, May 14 2026 timestamp, 2 attachments.

05-other-folder.png

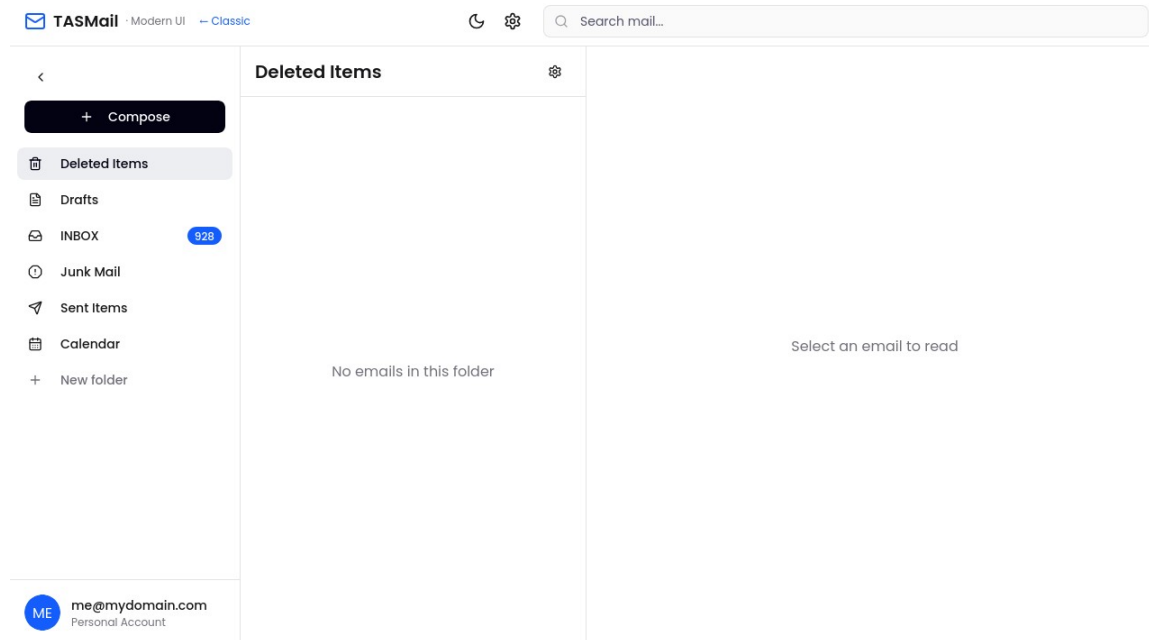

Switched folder via sidebar.

06-compose-filled.png

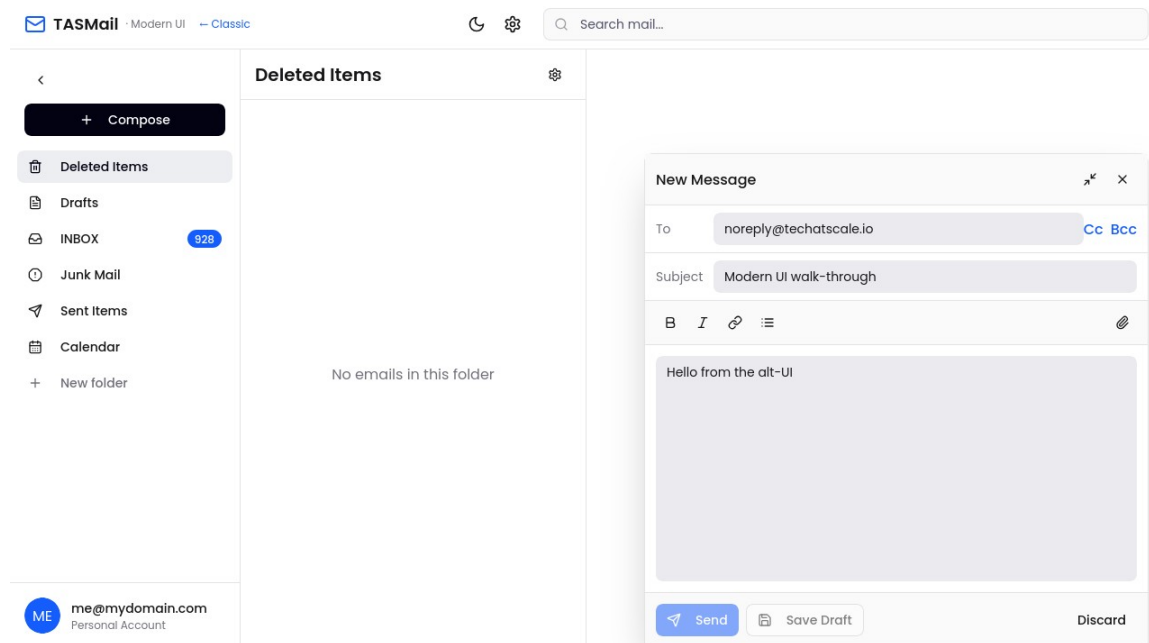

ComposeModal with To / Subject / body filled. Send is wired to scheduledApi.scheduleSend (delay_seconds: 0).

07-admin-route.png

The screenshot shows the TSMail Admin Dashboard. At the top, there's a header with 'TSMail · Modern UI ← Classic' and a search bar. Below the header, the main section is titled 'Admin Dashboard' with the subtitle 'Manage mailboxes, domains, and system settings'. There are four summary cards: '12 Active Mailboxes', '28.4 GB of 100 GB used', '47 312 this week', and '3 Domains Configured'. Below these is a 'Mailboxes' section with a search bar and an 'Add Mailbox' button. A table lists three mailboxes: 'admin@mydomain.com', 'sarah@mydomain.com', and 'team@mydomain.com', each with details on domain, quota used, quota total, status, and actions.

User	Domain	Quota Used	Quota Total	Status	Actions
admin@mydomain.com	mydomain.com	4.2 GB	10 GB	Active	Edit
sarah@mydomain.com	mydomain.com	2.8 GB	5 GB	Active	Edit
team@mydomain.com	mydomain.com	8.5 GB	10 GB	Active	Edit

AdminDashboard route — STILL ON MOCK DATA (admin@mydomain.com, sarah@mydomain.com, etc.). Tracked as a follow-up.

09-back-to-classic.png

The screenshot shows the TSMail Classic SPA interface. It features a sidebar on the left with a 'Compose' button and a list of navigation links: 'Loading folders...', 'Signatures', 'Contacts', 'Security', 'Notifications', 'Vacation', 'Groups', 'Migration', 'Filters', 'Spam Filter', 'Shared Mailboxes', 'Tasks', 'Chat', 'Webhooks', 'Queue', 'Branding', and 'Hostnames'. The main content area is currently empty, showing only a search bar and some icons at the top.

Classic SPA after clicking the alt-UI's ← Classic link. TopBar shows the wand icon between theme-toggle and logout.

6. Issues found + fixes during this pass

Sidebar folder render race

Symptom: Sidebar's `useState(foldersProp ?? mockFolders)` captured the empty array passed by `EmailClient` on first render (TanStack Query hadn't resolved `/api/folders` yet). The `useEffect` that updated state on prop change ran after paint, but in some renders the screenshot raced it. Net effect: alt-UI sidebar showed only Compose / Calendar / New folder while the message list was already populated.

Fix: Refactored Sidebar to derive folders directly from `foldersProp` (no local mirror); kept a separate `extraLocalFolders` state for the inline 'add new folder' UI which is local-only. Folder icons also got a defensive fallback to Briefcase if `FOLDER_ICONS` lookup misses.

EmailClient called `fetchMessages` with swapped `page/pageSize`

Symptom: `fetchMessages` signature is `(folder, page=0, pageSize=50)`. The wired-up call passed `(folder, 50, 0)` — page 50, pageSize 0 — which returned a single message in the inbox.

Fix: Reordered to `fetchMessages(activeFolder, 0, 50)`.

Page title still said 'Rust Mail' (legacy)

Symptom: `themes/shadcn-prototype/index.html` had the original prototype title carried over from the salvaged feature branch.

Fix: Updated to 'TASMail · Modern UI'. Also updated Navbar from 'Rust Mail' to 'TASMail · Modern UI' with a — Classic link back.

7. Recommendations / follow-ups

Wire AdminDashboard to <code>/api/admin/users</code> + <code>/api/admin/domains</code> + <code>/api/quota</code>	Currently the only mock-data screen. Promoting it gives admins a second-look UI for the same TMAIL-202 (users) + TMAIL-200 (domains) data.
Wire CalendarView to <code>/api/calendar/events</code>	Self-contained today. Hooking it into the existing calendar API would close the second mock surface.
Drafts in alt-UI ComposeModal	Save Draft button is currently disabled with a tooltip. Wiring it to <code>POST /api/drafts</code> (already exposed) is a 30-minute add.
Switch type imports to a shared types package	Email and Folder types currently come from <code>src/data/mockData.ts</code> . Move them into <code>themes/shadcn-prototype/src/types/ui.ts</code> (or share with <code>frontend/src/types/</code>) so the trace gate doesn't have to special-case 'type-only mock imports'.
Consider promoting the wired Email* code into the production frontend/	If the modern theme proves popular, the alt-UI's email screens could replace the inline-styled production versions. That would consolidate the <code>api/</code> duplication and make the Vite build single-bundle again.