Προγραμματισμός και Συστήματα στον Παγκόσμιο Ιστό Project 2018-2019

Αναστάσιος Χανδρινός ΑΜ:1047171 Δημήτριος Χαραλαμπόπουλος ΑΜ:1047138 Δημήτριος Τάγκαλος ΑΜ: 1047077

Contents

Σχεδιασμός βάσης	3
Κώδικας	3
ER	6
Σχέσεις πινάκων	7

Σχεδιασμός βάσης

Κώδικας

```
-- phpMyAdmin SQL Dump
 - version 4.9.0.1
-- https://www.phpmyadmin.net/
-- Host: 127.0.0.1
-- Generation Time: Sep 28, 2019 at 03:26 PM
-- Server version: 10.4.6-MariaDB
-- PHP Version: 7.3.9
SET SQL MODE = "NO AUTO VALUE ON ZERO";
SET AUTOCOMMIT = 0;
START TRANSACTION;
SET time_zone = "+00:00";
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD COLLATION CONNECTION=@@COLLATION CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;
-- Database: `login`
-- Table structure for table `kampilizitisis`
CREATE TABLE `kampilizitisis` (
  `polygon_name` text CHARACTER SET utf8 NOT NULL,
  `timezone` int(11) NOT NULL,
 `timi` double(20,10) NOT NULL
) ENGINE=MyISAM DEFAULT CHARSET=utf8 COLLATE=utf8_unicode_ci;


    Table structure for table `polygons`
```

```
CREATE TABLE `polygons` (
  `name` text CHARACTER SET utf8 NOT NULL,
  `coords` text CHARACTER SET utf8 NOT NULL,
 `parking_places` int(11) NOT NULL,
 `center` varchar(1000) CHARACTER SET utf8 NOT NULL,
 `population` int(11) NOT NULL
) ENGINE=MyISAM DEFAULT CHARSET=utf8 COLLATE=utf8_unicode_ci;
-- Table structure for table `users`
CREATE TABLE `users` (
  `user_id` int(11) NOT NULL,
  `username` varchar(50) CHARACTER SET utf8 NOT NULL,
 `password` varchar(50) CHARACTER SET utf8 NOT NULL,
 `name` varchar(50) CHARACTER SET utf8 NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8 unicode ci;
-- Dumping data for table `users`
INSERT INTO `users` (`user_id`, `username`, `password`, `name`) VALUES
(2, 'admin', 'admin'),
(3, 'user', 'user', 'user'),
(4, 'sss', 'sss', 'sss'),
(5, 'Διαχειριστης', 'καλημερα', 'Διαχειριστης'),
(6, '123', '123', '123'),
(7, 'ααα', 'ααα', 'ααα');
-- Indexes for dumped tables
-- Indexes for table `users`
ALTER TABLE `users`
 ADD PRIMARY KEY (`user id`);
```

```
-- AUTO_INCREMENT for dumped tables
--
-- AUTO_INCREMENT for table `users`
-- ALTER TABLE `users`
    MODIFY `user_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=8;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

ER

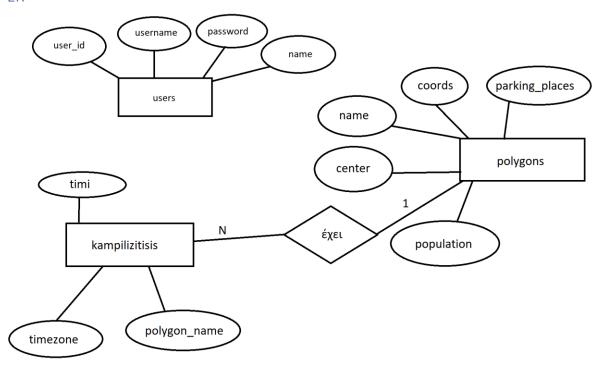

Σχέσεις πινάκων

users user_id INT(11) username VARCHAR(50) password VARCHAR(50) name VARCHAR(50)

