

# **LAPORAN EKSEKUSI BUBBLE SORT MENGUNAKAN OPEN MPI PADA LINUX MINT**



Disusun Oleh:

Tasya Harwani Barus (09011282227048)

Kelas : SK3C

Mata Kuliah : Pemrosesan Paralel

DosenPengampu:

Adi Hermansyah, S.Kom., M.T.

Ahmad Heryanto, S.Kom, M.T.

**JURUSAN SISTEM KOMPUTER**

**FAKULTAS ILMU KOMPUTER**


**UNIVERSITAS SRIWIJAYA**

**TAHUN AJARAN 2023**

## Device Dan Tools Yang di gunakan dalam mengeksekusi :

1. Linux Mint
  - Linux mint master
  - Linux mint slave1
  - Linux mint slave2
  - Linux mint slave3
2. MPI (Master dan Slave)
3. SSH (Master dan Slave)
4. Codingan Bubble Sort python

## Topology :

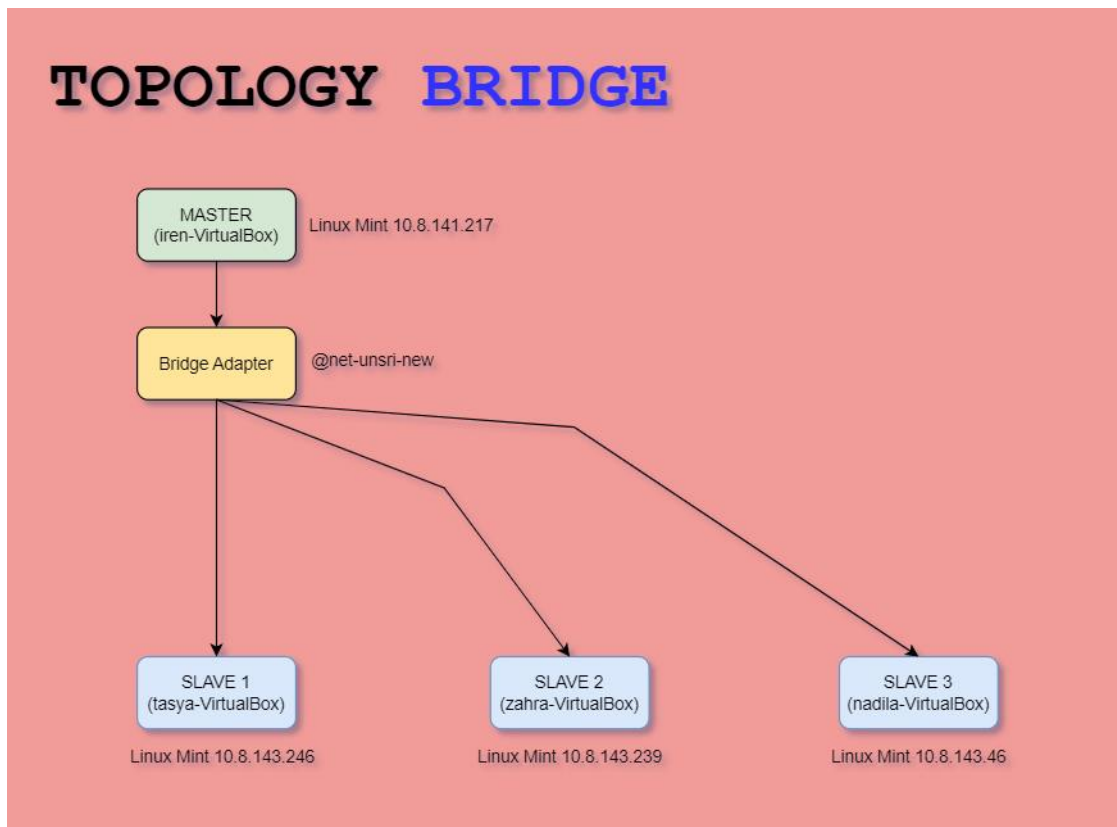

Pada percobaan kali ini digunakan empat komputer, dimana satu komputer sebagai master, dan tiga komputer lainnya sebagai slave. Pastikan sudah berada dalam satu jaringan yang sama.

Kemudian pada pengeksekusian ini terdapat komputer master yang menggunakan linux mint (iren-VirtualBox), dan 3 komputer lainnya yaitu (tasyaVirtual box) sebagai slave1, (Zahra-VirtualBox) sebagai slave2, (nadila-VirtualBox) sebagai slave3.

Dan pengeksekusian ini bertujuan untuk mengurutkan angka [10, 6 8, 3 , 2, 7, 5, 4, 1, 9] menggunakan algoritma Bubble Sort ini, serta menjalankannya menggunakan MPI pada linux mint dan kemudian angka tersebut diurutkan secara descending, agar dapat tersusun , dari hasil tertinggi ke hasil terendah.

## □ Konfigurasi file /etc/hosts

Lakukan pada master dan slave:

Edit file `/etc/hosts` melalui nano. Tambahkan isinya dengan beberapa IP dan aliasnya. Di bawah ini sebagai contoh. sesuaikan IP nya dengan komputer masing-masing. Untuk mengecek IP gunakan perintah `ifconfig`.

Tambahkan baris berikut dengan format : [10.8.141.217]

[iren-VirtualBox]


[10.8.143.246] [tasya-VirtualBox]

[10.8.143.239] [zahra-VirtualBox]

[10.8.143.46] [nadila-VirtualBox] Lakukan

disetiap komputer.

Master:

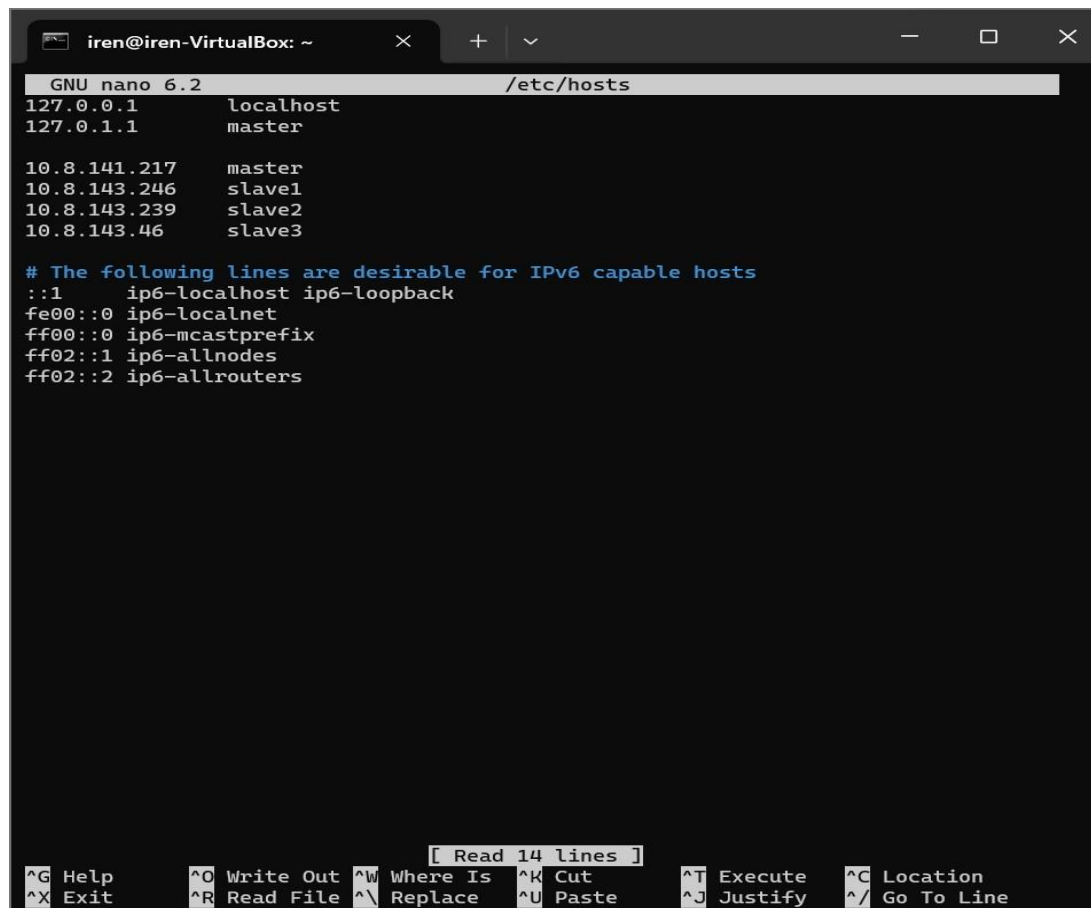

The screenshot shows a terminal window titled 'iren@iren-VirtualBox: ~'. The terminal is running the GNU nano 6.2 editor, editing the file /etc/hosts. The content of the file is as follows:

```
GNU nano 6.2 /etc/hosts
127.0.0.1    localhost
127.0.1.1    master

10.8.141.217 master
10.8.143.246 slave1
10.8.143.239 slave2
10.8.143.46  slave3

# The following lines are desirable for IPv6 capable hosts
::1          ip6-localhost ip6-loopback
fe00::0      ip6-localnet
ff00::0      ip6-mcastprefix
ff02::1      ip6-allnodes
ff02::2      ip6-allrouters
```

At the bottom of the terminal, there is a status bar with the text '[ Read 14 lines ]' and a list of keyboard shortcuts: ^G Help, ^O Write Out, ^W Where Is, ^K Cut, ^T Execute, ^C Location, ^X Exit, ^R Read File, ^\ Replace, ^U Paste, ^J Justify, ^\_ Go To Line.

Slave1 :

```
10.8.141.217    master
10.8.143.246    slave1
10.8.143.239    slave2
10.8.143.46     slave3

# The following lines are desirable for IPv6 capable hosts
::1            ip6-localhost ip6-loopback
fe00::0        ip6-localnet
ff00::0        ip6-mcastprefix
ff02::1        ip6-allnodes
ff02::2        ip6-allrouters
```

Slave2 :

```
mpiusr@zahra-VirtualBox: ~/fix
File Edit View Search Terminal Help
GNU nano 6.2 /etc/hosts
127.0.0.1    localhost
127.0.1.1    zahra-VirtualBox

10.8.141.217    master
10.8.143.246    slave1
10.8.143.239    slave2
10.8.143.46     slave3

# The following lines are desirable for IPv6 capable hosts
::1            ip6-localhost ip6-loopback
fe00::0        ip6-localnet
ff00::0        ip6-mcastprefix
ff02::1        ip6-allnodes
ff02::2        ip6-allrouters
```

Slave3 :

```
mpiusr@nadila-VirtualBox: ~/fix
Berkas Sunting Tampilan Cari Terminal Bantuan
GNU nano 6.2 /etc/hosts
127.0.0.1    localhost
127.0.1.1    nadila-VirtualBox

10.8.141.217    Master
10.8.143.246    slave1
10.8.143.239    slave2
10.8.143.46     slave3

# The following lines are desirable for IPv6 capable hosts
::1            ip6-localhost ip6-loopback
fe00::0        ip6-localnet
ff00::0        ip6-mcastprefix
ff02::1        ip6-allnodes
ff02::2        ip6-allrouters
```

## □ Buat User Baru

### 1. Buat user

Buat user baru di master dan slave dengan perintah berikut:

```
Sudo adduser <nama user>
```

Pada percobaan ini digunakan nama user mpiusr. Nama user harus sama pada komputer master dan slave.

Master:

```
iren@iren-VirtualBox:~$ sudo adduser mpiusr
[sudo] password for iren:
Adding user `mpiusr' ...
Adding new group `mpiusr' (1008) ...
Adding new user `mpiusr' (1008) with group `mpiusr' ...
Creating home directory `/home/mpiusr' ...
Copying files from `/etc/skel' ...
New password:
Retype new password:
passwd: password updated successfully
Changing the user information for mpiusr
Enter the new value, or press ENTER for the default
  Full Name []:
  Room Number []:
  Work Phone []:
  Home Phone []:
  Other []:
Is the information correct? [Y/n]
```

Slave1:

```
tasya@tasya-VirtualBox:~$ sudo adduser mpiusr
Adding user `mpiusr' ...
Adding new group `mpiusr' (1013) ...
Adding new user `mpiusr' (1010) with group `mpiusr' ...
Creating home directory `/home/mpiusr' ...
Copying files from `/etc/skel' ...
New password:
```

Slave2:

```
zahra@zahra-VirtualBox:~$ sudo adduser mpiusr
Adding user `mpiusr' ...
Adding new group `mpiusr' (1013) ...
Adding new user `mpiusr' (1011) with group `mpiusr' ...
Creating home directory `/home/mpiusr' ...
Copying files from `/etc/skel' ...
New password:
Retype new password:
passwd: password updated successfully
Changing the user information for mpiusr
Enter the new value, or press ENTER for the default
  Full Name []:
  Room Number []:
  Work Phone []:
  Home Phone []:
  Other []:
Is the information correct? [Y/n] y
```

Slave3:

```
nadila@nadila-VirtualBox:~$ sudo adduser mpiusr
Menambahkan pengguna 'mpiusr' ...
Menambah grup baru 'mpiusr' (1009) ...
Menambahkan pengguna baru 'mpiusr' (1009) dengan grup 'mpiusr' ...
Membuat direktori home '/home/mpiusr' ...
Menyalin berkas dari '/etc/skel' ...
Kata sandi baru:
Ketik ulang kata sandi baru:
passwd: kata sandi diperbaharui dengan sukses
Mengubah informasi pengguna dari mpiusr
Masukkan nilai baru atau tekan ENTER untuk nilai bawaan
    Nama Lengkap []:
    Nomor Ruangan []:
    Telepon Kantor []:
    Telepon Rumah []:
    Lain-lain []:
Apakah informasi ini benar? [y/N] y
```

## 2. Memberi akses root ke user

Lakukan di master dan slave dengan perintah berikut:

```
Sudo usermod -aG sudo mpiusr
```

Perintah ini akan menjadikan user *mpiusr* akan memiliki hak akses superuser.

Master:

```
iren@iren-VirtualBox:~$ sudo usermod -aG sudo mpiusr
```

Slave1:

```
tasya@tasya-VirtualBox:~$ sudo usermod -aG sudo mpiusr
```

Slave2:

```
zahra@zahra-VirtualBox:~$ sudo usermod -aG sudo mpiusr
```

Slave3:

```
nadila@nadila-VirtualBox:~$ sudo usermod -aG sudo mpiusr
```

## 3. Masuk ke user

Lakukan di master dan slave dengan perintah berikut:

```
su - mpiusr
```

Master:

```
iren@iren-VirtualBox:~$ su - mpiusr
Password:
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.
```

Slave1:

```
tasya@tasya-VirtualBox:~$ su - mpiusr
Password:
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.
```

Slave2:

```
zahra@zahra-VirtualBox:~$ su - mpiusr
Password:
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.
```

Slave3:

```
nadila@nadila-VirtualBox:~$ su - mpiusr
Sandi:
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.
```

## □ Konfigurasi SSH

Setelah masuk ke user, lakukan konfigurasi SSH.

### 1. Install SSH

Lakukan di master dan slave:

```
sudo apt install openssh-server
```

Perintah tersebut akan menginstal perangkat lunak OpenSSH Server pada sistem jika belum terinstal, sehingga Anda dapat menggunakan layanan SSH untuk mengakses dan mengelola sistem secara remote dengan aman.

### 2. Generate Keygen Lakukan di master:

```
ssh-keygen -t rsa
```

Perintah ini akan membuat kunci SSH baru.



master:

```
mpiusr@iren-VirtualBox:~$ ssh-keygen -t rsa
Generating public/private rsa key pair.
Enter file in which to save the key (/home/mpiusr/.ssh/id_rsa):
Created directory '/home/mpiusr/.ssh'.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /home/mpiusr/.ssh/id_rsa
Your public key has been saved in /home/mpiusr/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:p5KmhkhQHnzBXm6cIvB2dqn540bPg5M9emaACVHnprk mpiusr@iren-VirtualBox
The key's randomart image is:
+---[RSA 3072]-----+
| . oo.. |
| . = oo. |
| = = +oo |
| . * =+B |
| .. =oO S . |
| . =.o. o |
| .. .Eo+B. |
| . . .oB.X |
| . .ooB o |
+---[SHA256]-----+
```

Lewatkan seluruh input. Setelah melalui tahap tersebut akan ada folder .ssh. dan di dalamnya terdapat file id\_rsa dan id\_rsa.pub. file id\_rsa adalah kunci privat yang digunakan untuk mengautentikasi diri saat terhubung ke server jarak jauh. File id\_rsa.pub adalah kunci publik yang diberikan kepada server jarak jauh yang ingin diakses.

### 3. Copy key publik ke slave Lakukan

di master:

Salin isi dari file id\_rsa.pub ke file authorized\_keys di semua slave menggunakan perintah berikut:

```
cd .ssh cat id_rsa.pub | ssh <nama user>@<host> "mkdir
.ssh; cat >> .ssh/authorized_keys"
```

Lakukan penyalinan perintah berulang-ulang dari master ke slave dengan mengubah <host> menjadi nama host masing-masing slave.



master:

```
mpiusr@iren-VirtualBox:~$ cd .ssh
mpiusr@iren-VirtualBox:~/.ssh$ cat id_rsa.pub | ssh mpiusr@slave1 "mkdir .ssh; cat
>> .ssh/authorized_keys"
The authenticity of host 'slave1 (10.8.143.246)' can't be established.
ED25519 key fingerprint is SHA256:i3W9XltXakgQMvuygRIJCq1pJvp4fbNV5xb5tRjxx30.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'slave1' (ED25519) to the list of known hosts.
mpiusr@slave1's password:
mpiusr@iren-VirtualBox:~/.ssh$ cat id_rsa.pub | ssh mpiusr@slave2 "mkdir .ssh; cat
>> .ssh/authorized_keys"
The authenticity of host 'slave2 (10.8.143.239)' can't be established.
ED25519 key fingerprint is SHA256:iQoC++ukX96//9w25AGLTFJPUpE0YvW74zvCCmunfk.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'slave2' (ED25519) to the list of known hosts.
mpiusr@slave2's password:
mpiusr@iren-VirtualBox:~/.ssh$ cat id_rsa.pub | ssh mpiusr@slave3 "mkdir .ssh; cat
>> .ssh/authorized_keys"
The authenticity of host 'slave3 (10.8.143.46)' can't be established.
ED25519 key fingerprint is SHA256:RHIMsW7Y5zi01fGepVdFwgKOp7qoNRaSpr14U25LvRI.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'slave3' (ED25519) to the list of known hosts.
mpiusr@slave3's password:
```

Dengan membagikan kunci SSH, master akan dapat mengakses server slave jarak jauh dengan aman tanpa perlu memasukkan kata sandi setiap kali.

## □ Konfigurasi NFS

### 1. Buat shared folder

Lakukan di master dan slave dengan perintah mkdir :

*Mkdir fix*

master:

```
mpiusr@iren-VirtualBox:~$ mkdir fix
```

Slave1:

```
mpiusr@tasya-VirtualBox:~$ mkdir fix
```

Slave2:

```
mpiusr@zahra-VirtualBox:~$ mkdir fix
```

Slave3:

```
mpiusr@nadila-VirtualBox:~$ mkdir fix
```

### 2. Install NFS Server Lakukan di

master:

```
sudo apt install nfs-kernel-server
```

Perintah ini akan menginstall paket nfs-kernel-server pada master agar dapat berbagi direktori atau sistem berkas dengan slave.

### 3. Konfigurasi file /etc/exports

Lakukan di master:


Edit file `/etc/exports` dengan editornano  $\Rightarrow$  `sudo nano /etc/exports` tambahkan baris berikut.

<lokasi shared folder> \*(rw, sync, no\_root\_squash, no\_subtree\_check)

Sesuaikan <lokasi shared folder> dengan lokasi folder yg telah dibuat:

```
/home/mpiusr/fix  
*(rw, sync, no_root_squash, no_subtree_check)
```

Master:

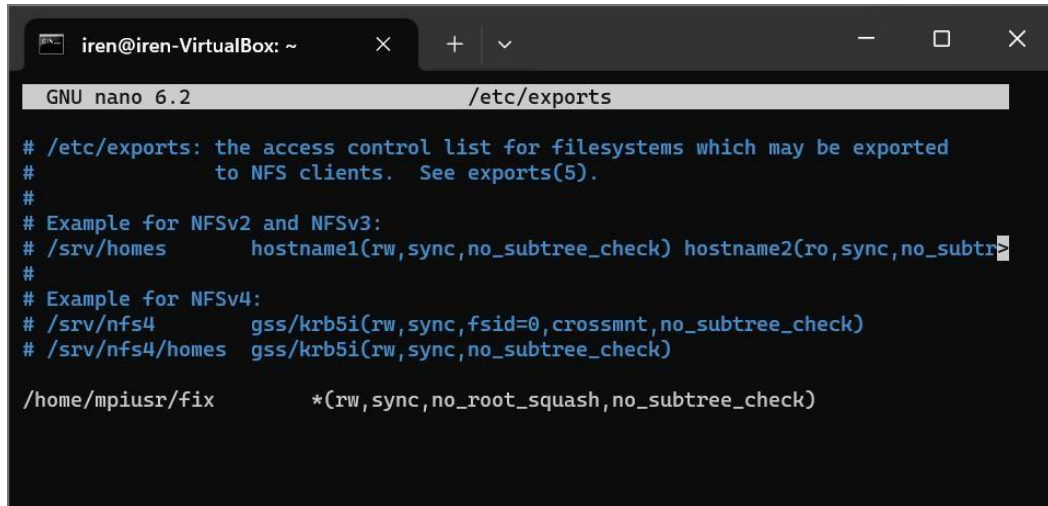A screenshot of a terminal window titled 'iren@iren-VirtualBox: ~'. The terminal shows the GNU nano 6.2 editor editing the file /etc/exports. The file content includes comments about NFS export access control, examples for NFSv2, NFSv3, and NFSv4, and a custom entry at the bottom: '/home/mpiusr/fix \*(rw, sync, no\_root\_squash, no\_subtree\_check)'.

```
GNU nano 6.2 /etc/exports  
  
# /etc/exports: the access control list for filesystems which may be exported  
# to NFS clients. See exports(5).  
#  
# Example for NFSv2 and NFSv3:  
# /srv/homes hostname1(rw, sync, no_subtree_check) hostname2(ro, sync, no_subtree_check)  
#  
# Example for NFSv4:  
# /srv/nfs4 gss/krb5i(rw, sync, fsid=0, crossmnt, no_subtree_check)  
# /srv/nfs4/homes gss/krb5i(rw, sync, no_subtree_check)  
  
/home/mpiusr/fix *(rw, sync, no_root_squash, no_subtree_check)
```

Lakukan perintah berikut untuk memastikan bahwa perubahan konfigurasi yang dilakukan dalam file /etc/exports diterapkan tanpa harus memulai ulang layanan NFS.

```
Sudo exportfs -a
```

Jalankan perintah ini untuk memuat ulang layanan server NFS dan menerapkan perubahan konfigurasi terbaru dalam file konfigurasi /etc/exports.

```
Sudo systemctl restart nfs-kernel-server
```

#### 4. Install NFS

Lakukan di slave dengan perintah berikut:

```
sudo apt install nfs-common
```

Paket nfs-common akan di install, memungkinkan untuk mengakses dan menggunakan berkas yang dibagikan oleh master NFS yang telah dikonfigurasi dengan benar.

#### 5. Mounting

Lakukan di slave dengan perintah berikut:

```
sudo mount <server host>:<lokasi shared folder di  
master><lokasi shared folder di slave>
```

sesuaikan <server host>, <lokasi shared folder di master> dan <lokasi shared folder di slave>

```
sudo mount master:/home/mpiusr/fix /home/mpiusr/fix
```

Slave1:

```
mpiusr@tasya-VirtualBox:~$ sudo mount master:/home/mpiusr/fix /home/mpiusr/fix
[sudo] password for mpiusr:
```

Slave2:

```
mpiusr@zahra-VirtualBox:~$ sudo mount master:/home/mpiusr/fix /home/mpiusr/fix
[sudo] password for mpiusr:
```

Slave3:

```
mpiusr@nadila-VirtualBox:~$ sudo mount master:/home/mpiusr/fix /home/mpiusr/fix
[sudo] katasandi untuk mpiusr:
mpiusr@nadila-VirtualBox:~$ df -h
```

Sistem Berkas	Besar	Isi	Sisa	Isi%	Dipasang di
tmpfs	197M	1,2M	196M	1%	/run
/dev/sda3	15G	11G	3,4G	77%	/
tmpfs	983M	0	983M	0%	/dev/shm
tmpfs	5,0M	4,0K	5,0M	1%	/run/lock
/dev/sda2	512M	6,1M	506M	2%	/boot/efi
tmpfs	197M	108K	197M	1%	/run/user/1000
master:/home/mpiusr/fix	24G	12G	11G	52%	/home/mpiusr/fix

Lakukan testing pembuatan file di folder fix di komputer master, kemudian lakukan pengecekan apakah file tersebut sudah ada di semua komputer slave:

Master:

Membuat file test.py

```
mpiusr@iren-VirtualBox:~/fix$ touch test.py
```

Server1:

```
mpiusr@tasya-VirtualBox:~/fix$ ls -l
total 0
-rw-rw-r-- 1 a zero 0 Nov  4 13:12 test.py
```

Server2:

```
mpiusr@zahra-VirtualBox:~/fix$ ls -l
total 0
-rw-rw-r-- 1 mpiuser zero 0 Nov  4 13:12 test.py
```

Server3:

```
mpiusr@nadila-VirtualBox:~/fix$ ls -l
total 0
-rw-rw-r-- 1 b b 0 Nov  4 13:12 test.py
```

## □ MPI

### 1. Install MPI

Lakukan di master dan slave dengan perintah berikut:

```
sudo apt install openmpi-bin libopenmpi-dev
```

Perintah ini akan menginstal OpenMPI dan komponen yang diperlukan untuk menjalankan program MPI.

## 2. Testing

Lakukan di master:


Buat file python di folder fix. Misal test.py

```
touch test.py
```

Kemudian edit file menggunakan perintah nano dengan mengisi file tersebut dengan perogram python sederhana, misalnya:

```
Print("Selamat Datang Linux Lover <3")
```

Master:

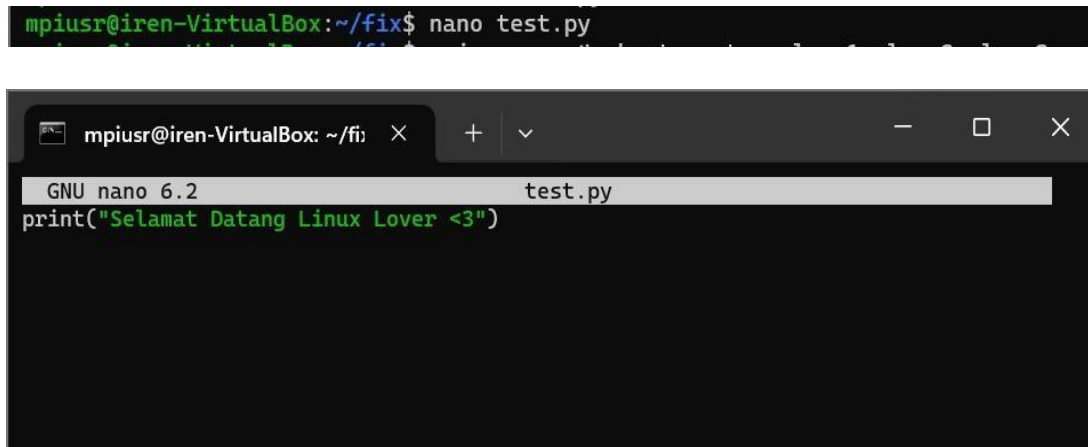

Gunakan perintah berikut untuk mengeksekusi program tersebut:

```
mpirun -np <jumlahprosesor> -host <daftar host> python3  
test.py
```

Sesuaikan dengan progm yang akan dijalankan

```
mpirun -np 3 -host master,slave1,slave2,slave3 python3  
test.py
```

```

mpiusr@iren-VirtualBox:~/fix$ mpirun -np 4 -host master,slave1,slave2,slave3 python3 test.py
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Selamat Datang Linux Lover <3
Selamat Datang Linux Lover <3
Selamat Datang Linux Lover <3
Selamat Datang Linux Lover <3

```

Output dari program tersebut menandakan bahwa program telah berhasil dieksekusi dan dapat berjalan di setiap komputer.

### 3. Eksekusi program MPI Lakukan

di master:

Agar bisa memanfaatkan MPI dengan python, install library mpi4py melalui pip menggunakan perintah berikut:

```

sudo apt install python3-pip
pip install mpi4py

```

Kemudian gunakan `from mpi4py import MPI` untuk mengimport mpi pada program python.

Buat program mpibubble sort menggunakan bahasa pemrograman python.

```

nano bubble4.py

```

```

mpiusr@iren-VirtualBox:~/fix$ nano bubble4.py

```

Berikut adalah program yang akan digunakan dan akan disimpan dengan nama bubble4.py:

```
mpiusr@iren-VirtualBox: ~/fi  × + v
GNU nano 6.2 bubble4.py
def bubble_sort(arr):
    arr_len = len(arr)
    for i in range(arr_len - 1):
        flag = 0
        for j in range(0, arr_len - i - 1):
            if arr[j] > arr[j + 1]:
                arr[j], arr[j + 1] = arr[j + 1], arr[j]
                flag = 1
        if flag == 0:
            break
    return arr

arr = [10, 6, 8, 3, 2, 7, 5, 4, 1, 9]
sorted_arr = bubble_sort(arr)
print("List sorted with bubble sort in ascending order:", sorted_arr)
```

Gunakan perintah berikut untuk mengeksekusi program tersebut:

```
mpirun -np <jumlahprosesor> -host <daftar host> python3
test.py
```

Sesuaikan dengan program yang akan dijalankan :

```
mpirun -np 3 -host master, slave1,slave2,slave3 python3
bubble4.py
```

Output:

```
mpiusr@iren-VirtualBox:~/fix$ mpirun -np 4 -host master,slave1,slave2,slave3 pytho
n3 bubble4.py
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
Authorization required, but no authorization protocol specified
List sorted with bubble sort in ascending order: [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
List sorted with bubble sort in ascending order: [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
List sorted with bubble sort in ascending order: [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
List sorted with bubble sort in ascending order: [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
```

bubble4.py telah berhasil dieksekusi, dan menghasilkan tampilan output seperti di atas.