

Contents

Overview	2
The API User and Customer	2
Card Configuration Data	3
Walkthrough (API) – retrieving customer information.....	3
Walkthrough (API) – retrieving card configuration information	5
FAQs	7



Quick Start Guide – Working with customer data

Overview

The Shell Card Transaction Data API allows for complete management of fuel card resources in the Shell Card Platform. This guide explains the customer endpoints and should be used in conjunction with the detailed API specification found online in the Shell Developer Hub.

The following are the available customer focussed endpoints. The key endpoints will be discussed in further detail in this guide.

API Endpoint	Description
/user/LoggedInUser	Get the payer and collecting company details for the authenticated API user
/customer/accounts	Get customer accounts
/customer/payers	Get a list of payers
/customer/customer	Get customer details
/customer/cardtype	Get card types
/customer/cardgroups	Get card groups for payer
/customer/createcardgroup	Create new card group
/customer/updaterecardgroup	Update existing card group
/customer/auditreport	Check status of card operations
/master/purchasecategory	Get available purchase categories

The API User and Customer

The API user is identified by the client's API key. The user has permissions to execute API calls on behalf of one more Payer depending on the setup in the Shell Card Platform.

The Shell Card Transaction Data API endpoints require input parameters as part of the request body to identify a customer, their cards and associated card configuration settings. The parameters include information about the payer, account and collecting company and can be identified by the following fields.

Customer Data	Shell API Field	Field description
Payer	PayerNumber	Payer Number of the selected payer. Optional if Payer Id is passed, else mandatory.
	PayerId	Payer Id (i.e. Customer Id of the Payment Customer in Cards Platform) of the selected payer. Optional if Payer Id is passed, else mandatory.
Account	AccountNumber	Account Number of the customer. Optional if Account Id is passed, else mandatory.
	AccountId	Account Id (i.e. Customer Id of the Customer in Cards Platform) of the customer. Optional if Account Number is passed, else mandatory.
Collecting Company	ColCoCode	Collecting Company Code (Shell Code). Optional if ColCo Id is passed, else mandatory.
	ColCold	Collecting Company Id (in Shell Card Platform). Optional if ColCo Code is passed, else mandatory.
	ColCoCountryCode	The 2 character ISO Code for the customer and card owning country.

A customer should already be aware of their payer number, account number and collecting company code. The values can be stored in a static configuration file and referenced by the customers client integration.

Alternatively, this information can be programmatically retrieved at run-time using the endpoints in this guide.



Quick Start Guide – Working with customer data

Card Configuration Data


The Shell Card Platform stores card configuration information, which can be used to search, order and update cards.

A *Card Type* stores card specific settings. This may include whether a card requires a PIN, the length of a PAN, available purchase categories and various other settings. A customer's account can have one or more card types. A card will always be assigned to one card type.

Card Groups allow customers to group one or more cards under group names relevant to the customer. The card group name can also be embossed on cards as an optional setting.

Purchase Categories group the products that can be purchased by a card. The purchase categories are classified as either fuel-set or non-fuel set. The list of available purchase categories is defined at the collecting company level. A card type can have one or more purchase categories from this list and will also have a default purchase category.

Walkthrough (API) – retrieving customer information

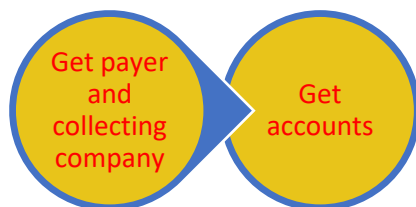

The following endpoints can be used to get the customer information required as input parameters for most API endpoints. The relevant fields are **highlighted** below, and some response fields have been removed for simplicity.

1. **Get payer and collecting company** – this endpoint allows the querying of data of the authenticated API user. The endpoint does not require any input parameters.

POST	/fleetmanagement/v1/user/LoggedInUser
Request Body	{
Response Body	{ "DisplayName": "3rdParty-TestApp-UK2", "Payers": [{ "IsDefault": false, "PayerGroup": null, "PayerGroupId": null, "ColCoCode": 5, "ColCoCountryCode": "GB", "ColCoId": 5, "PayerId": 4, "PayerName": "GBPAYER NEW NAME TeST", "PayerNumber": "GB00000003" }], "PreferredLanguage": "en-GB", "Roles": [{ "IsCustomerAdmin": true, "IsCustomerUser": false, "IsServiceAccount": false, "IsShellAdmin": false,



Quick Start Guide – Working with customer data

	<pre> "IsUserAdmin": true, "RoleName": "FleetManager" }], "Error": { "Code": "0000", "Description": "Success" }, "RequestId": "62a6f32d-9a17-4c9c-ee9c-f8a9366757b4" } </pre>
Developer Notes	- There can be more than one payer depending on the customer setup in the Shell Card Platform. - It is recommended to use the <i>PayerId</i> and <i>ColCold</i> as API request input parameters where possible. The identifiers allow quicker querying of data in the Shell Card Platform. - If the <i>RoleName</i> is "FleetManager" then the API user has access to all the accounts of a payer. If the value is "FleetUser" then the user has access to all the accounts of the payer (sub account access).

2. **Get accounts** - the payer information (*PayerId* or *PayerNumber*) and collecting company information (*ColCoCode*, *ColCold* or *ColCoCountryCode*) are used to retrieve the account details of a payer.

POST	/fleetmanagement/v1/customer/accounts
Request Body	<pre> { "PayerNumber": " GB00000003", "ColCoCode": 5, "Status": "ACTIVE" } </pre>
Response Body	<pre> { "Accounts": [</pre>

	<pre> { "AccountFullName": "GBPAYER Account1", "AccountId": 4, "AccountNumber": "GB00000003", "AccountShortName": "GBCUSTOMER_170", "Status": "Active", "StatusReason": "", "TotalActiveCardGroups": 2198, "TotalActiveCards": 106, "TotalBlockedCards": 19, "TotalCancelledCards": 48, "TotalCards": 13570, "TotalExpiredCards": 13361, "TotalFraudCards": 1, "TotalNewCards": 1, "TotalRenewalPendingCards": 30, "TotalReplacedCards": 3, "TotalTemporaryBlockCardsByCustomer": 1, "TotalTemporaryBlockCardsByShell": 0 }, "CurrentPage": 1, "RowCount": 1, "TotalPages": 1, "Error": { "Code": "0000", "Description": "Success" }, "RequestId": "94aef0d4-fc18-4bbf-a923-c0e2b423b30e" } </pre>
Developer Notes	There can be more than one account per payer depending on the customer setup in the Shell Card Platform

Quick Start Guide – Working with customer data

- The request body parameter Status can be used to return 'All' accounts or only 'Active' accounts.
- It is recommended to use the *AccountId* as API request input parameters where possible. The identifier allows quicker querying of data in the Shell Card Platform.

Walkthrough (API) – retrieving card configuration information

Get purchase categories - the following endpoint can be used to get purchase categories at the collecting company level. Only one purchase category is shown for simplicity.

POST	/fleetmanagement/v1/master/purchasecategory
Request Body	<pre>{ "ColCoCode": 5 }</pre>
Response Body	<pre>{ "PurchaseCategories": [{ "Code": "1", "Id": 105, "Name": "1 - All Fuel Products TMF", "IsVisible": true, "Products": [], "ProductSets": [{ "ColCoPurchaseCategoryId": 1 05, "IsDefault": false, "Products": [{ "Code": "5", "Id": 5, "Name": "Set up Fee" }] }] }] }</pre>

```

    },
    {
      "Code": "10",
      "Id": 10,
      "Name": "TMF Charges"
    }
  ],
  "ReferenceId": 105,
  "Type": "N",
  "Description": "01 Hydra NF"
,
  "ProductRestrictionId": 158
}

],
"Error": {
  "Code": "0000",
  "Description": "Success"
},
"RequestId": "76b9087b-8a39-495c-8ee4-
d2520fcd8938"
}
```

Developer Notes

- The purchase categories do not change often. It is recommended to retrieve this list once and store the purchase category, fuel set and non-fuel set Ids as part of the client integration.
- The fuel set and non-fuel set Ids are stored in the *ProductRestrictionId* field. If the *Type* value is "N", then this indicates a non-fuel set and if the value is "F", then this indicates a fuel set.



Quick Start Guide – Working with customer data

Get card types – the card types are required when ordering new cards. Some response fields have been removed for simplicity.

POST	/fleetmanagement/v1/customer/cardtype
Request Body	<pre>{ "PayerNumber": " GB000000003", "AccountNumber": " GB000000003", "ColCoCode": 5, "IncludePurchaseCategories": true }</pre>
Response Body	<pre>{ "CustomerCardTypes": [{ "CanHavePIN": false, "CardTypeId": 503, "CardTypeName": "GB STD FLT NAT MULT I R6", "DefaultPurchaseCategoryId": 107, "IsVirtual": false, "IsVisibleToCustomers": true, "PANLength": 19, "PurchaseCategories": [{ "Id": 104, "Code": "0", "Name": "0 - Diesel Products and TMF", "IsVisible": true }, { "Id": 105, "Code": "1", "Name": "1 - All Fuel Produc ts and TMF", "IsVisible": true }] }] }</pre>

	<pre> }, { "Id": 106, "Code": "2", "Name": "2 - All Fuels Products, Car related items and TMF", "IsVisible": true }, { "Id": 107, "Code": "3", "Name": "3 - No Restriction" }, { "Id": 108, "Code": "4", "Name": "4 - No Restriction", "IsVisible": true }], "TokenTypeId": 500, "TokenTypeName": "GB STD FLT NAT MULTI - CHIP TEST", "UsageRestrictions": null } { "Error": { "Code": "0000", "Description": "Success" }, "RequestId": "76b9087b-8a39-495c-8ee4-d2520fcd8938" } </pre>
Developer Notes	The <i>PurchaseCategories</i> array lists all the available purchase categories for the card type. The default is in <i>DefaultPurchaseCategoryId</i>. This information is important when ordering new cards using the <i>/card/ordercard</i> endpoint.

Quick Start Guide – Working with customer data

FAQs

Are the total card status counts returned in /customer/accounts the same as the counts in the /search/cardssummary API call?

Yes, the counts are taken from the same underlying data source in the Shell Card Platform. The /customer/accounts endpoint in addition returns the count of total active card groups.

What is the difference between a payer number and account number?

A payer number is the main number of a paying customer. Account numbers are sub accounts linked to a payer number. You will always have a payer number and depending on your account structure you will also have one or more account numbers.

You can call the endpoint /user/LoggedInUser to get your PayerNumber. To get a list of sub accounts (AccountNumber), call the /customer/accounts endpoint and provide the PayerNumber as an input parameter.

Is the payer number in test the same as our payer number in Production?

The value in the Test environment is different from Production. The payer number provided with the test credentials is only valid in our test environment. In production you can use your own Shell Payer/Account numbers.

Are Colcold, PayerId, AccountId required if ColCoCode, PayerNumber and AccountNumber are already provided as input parameters?

No, the Shell Card Platform will identify the resource using the ColCoCode, PayerNaumber and AccountNumber input parameters.

However, it should be noted that providing the Id values is better for performance and may reduce the response times for an API call.

