

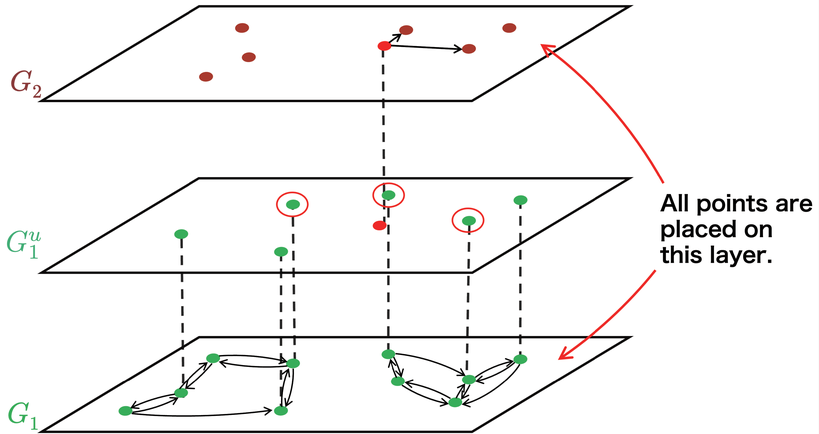


Phase 1: Sample points for each upper layer and find the k_0 points nearest to v on the upper layer.

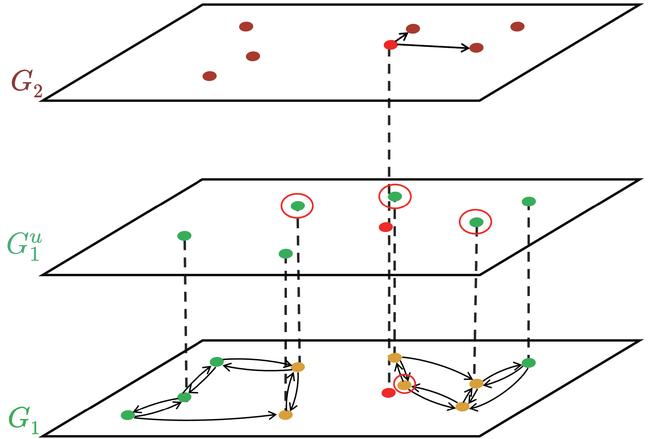

Phase 2: Update neighbor by using their top-k_{m0} neighbors.

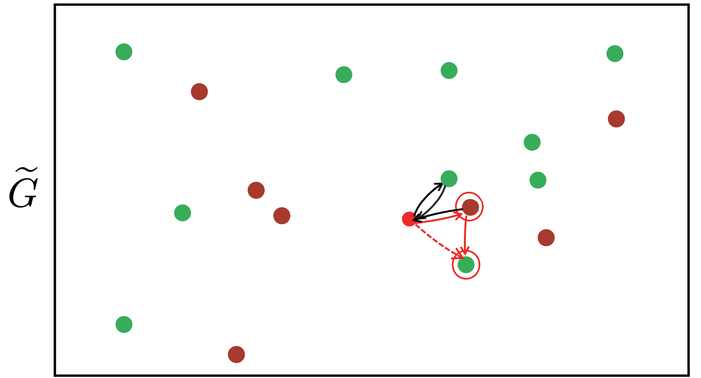

Phase 3: Examine the neighbor of the existing neighbor; if there is a closer point, update the neighbor. Repeat until convergence.