


C. Morphology-conditioned primitive-readout atlas

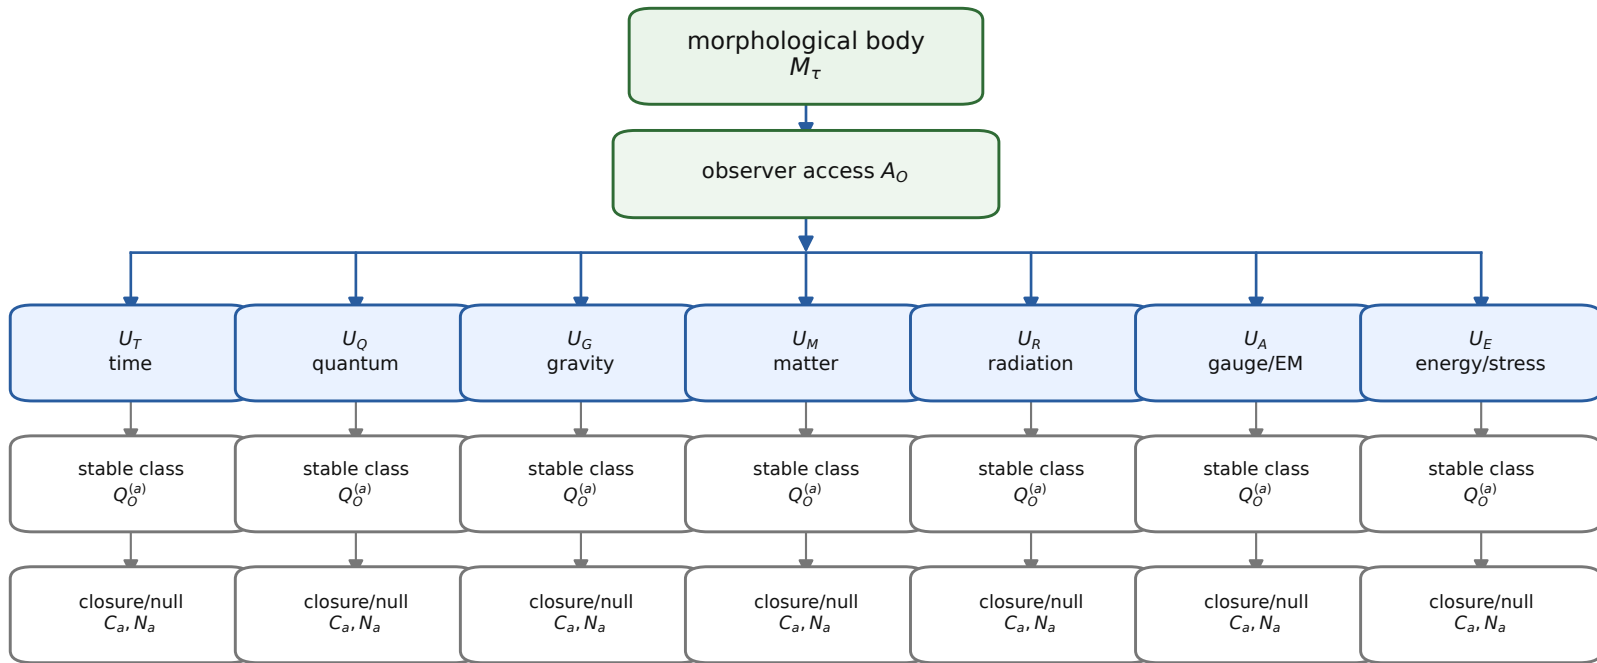

Each typed precursor needs stable classes, nulls, closure tests, and validation boundaries.
Stacked terminal rank cannot exceed the information exposed by the common access map.