

Finite Source Signatures, Joint Incidence, and Representation Uniqueness

Tau Core Technical Paper I (Series Paper II)

Jozsef Olcsak

Independent researcher

Draft v0.2 — Last revised: 29 August 2026

Abstract

We study a finite source-selection problem that precedes terminal physical readouts. A complete typed source signature consists of a finite-dimensional unital C^* -algebra, a faithful source state, multiplication and involution data, and distinguished role elements or completely positive maps. The GNS construction then gives a unique minimal cyclic realization up to the typed unitary equivalences already declared in the source packet.

This positive theorem does not make terminal marginals sufficient. Two faithful bipartite states can share both marginals and differ in a joint moment. More strongly, four-qubit states can share every proper marginal while differing along the 81-dimensional weight-four Pauli subspace; proper marginals span only 174 of 255 traceless directions. A single source-owned onto joint incidence with positive stiffness is sufficient to generate a faithful joint Gram state and hence all finite mixed moments. Equivalently, one coherent source homomorphism Π_{phys} selects the physical relation ideal and its faithful quotient representation.

We extend the four-qubit count to arbitrary n -partite qudit systems and give singular-value bounds that quantify how an onto incidence becomes ill-conditioned before rank is lost. The results characterize sufficient finite source information and exact non-identifiability boundaries. They do not prove that a physical base-seed parent creates, selects, or occupies the required joint incidence or Π_{phys} , and they do not derive terminal physics, the Standard Model, or empirical validation. Later source-selection results sharpen this boundary: cyclic generated support is sufficient to reach every typed source block, and occupied stable records select the complete packet inside the declared source-irredundant MVP class. Neither statement identifies that class with the unrestricted physical parent. The common readout architecture further requires one source-owned observer access map before terminal branching; separate terminal marginals do not establish that shared morphology-conditioned origin. This is the second stage of a seven-stage foundation programme: Paper I freezes the architecture and conditional completion, Paper III analyzes record transport, Paper IV isolates physical parent-law realization, Paper V develops temporal descent and Paper VI the quantum terminal. Paper VII is issued as the focused VII-A–VII-C triptych. These downstream papers do not alter the source-signature theorems proved here or select their physical occupation.

Inherited morphology terminology. Following Foundation Paper I, B_τ^{base} is the pre-readout carrier/support context, the seed is its base-readable relational/loading pattern, and $M_\tau^\star$ is the complete *stabilized morphological response configuration*; “morphological body” is shorthand. Atemporal selection of that configuration is distinct from literal traversal and from observer time. This paper reconstructs a declared source representation and does not alter that ontology. Under MRC-DEF2, parent-side “objects” are typed pregeometric relational candidates, not ordinary bodies already embedded in recovered spacetime; their Nature occupation remains open and ordinary objects occur downstream.

Source-characteristic refinement inherited by this paper. A complete finite source signature must retain both the decoded seed and all nonredundant base moduli:

$$\mathfrak{c}_{B,s} = (q_B, \beta_B).$$

Only the connected fibers of this complete map are presentation redundancy. Consequently a fixed-seed direction with $D\beta_B \neq 0$ is physical source information and may not be removed by the finite GNS or marginal quotient. The representation theorems below apply to the resulting complete quotient; they do not prove that the listed β_B is exhaustive in Nature.

Dependency and ownership box.

Inputs from earlier papers: Paper I supplies the types $s, M_\tau, A_O, T^{(a)}, Q_O^{(a)}$, the body-first/source-freeze discipline and the requirement of one common source before terminal branching.

Results owned here: complete finite typed source signatures; minimal cyclic GNS uniqueness; exact marginal non-identifiability; onto-incidence faithful occupation; representation/occupation separation; and the cyclic generated-support criterion. Physical parent-class selection and record transport are not proved here. A downstream scalar-15/type-II application uses this reconstruction language to identify one class-relative minimal base-seed preimage; that specialization does not enlarge the theorem set of this paper.

Atemporal parent-realization terminology. Because the Tau parent is atemporal, phrases such as *Nature selects* do not denote an external agent or a later choice. Their precise meaning is the internal physical implication

$$(B_\tau^{\text{phys}}, s_U, \mathcal{L}_{\text{parent}}) \implies \mathfrak{P},$$

together with occupation of the support of the resulting packet $\mathfrak{P}$. A theorem inside a declared completion proves only class-relative realization. It does not prove this unrestricted base-seed arrow, and agreement of finitely many terminal readouts cannot by itself establish ambient-source exhaustivity. Current-facing statements therefore use *parent-law realization* and *physical occupation*; any retained legacy selection language is shorthand for this same distinction.

Contents

1	Problem and claim boundary	4
1.1	Joint representation–state compression of the separator data	4
2	Finite typed source signatures	6
2.1	Four logically distinct questions	7
3	GNS representation uniqueness	8
4	Marginals do not select a joint source	8
5	All proper marginals remain incomplete	9
5.1	General n -partite qudit count	10
5.2	Descriptor rank criterion	10
6	One onto joint incidence is sufficient	11
6.1	Quantitative stability before rank loss	11
7	The coherent physical source map	12
7.1	What Π_{phys} does and does not select	12

8	Countermodels separating the logical levels	13
9	Worked end-to-end finite packet	13
9.1	Failure matrix for the worked packet	14
10	Operational source-completeness audit	15
10.1	A reproducible finite audit matrix	15
11	Relation to established finite-dimensional results	16
12	What a physical source theorem must add	17
12.1	Later source-completion status	17
12.2	Generated-support occupation handoff	17
12.3	Occupied-representation corollary	18
13	What remains open	18
14	Finite irreducible support handoff	19
15	Finite Gram characterization of a supplied readout packet	20
16	Observer realization: inherited results and physical boundary	20
17	Finite source-to-readout implementation and its scope	21
18	Source identification and recovery	21
19	Conclusion	22
A	Finite verification protocol	22
B	Proof-dependency ledger	23

1 Problem and claim boundary

Inherited observer co-descent convention. The symbol O initially labels an occupied body-side carrier candidate, not a detached or already operational observer. Operational observerhood requires a regular local rank-four Lorentzian descent, a stable observer–source resolution map, and a nontrivial record/effect. The observer and its accessible four-dimensional world are therefore co-readouts of one body-conditioned solution. Neither a four-dimensional chart nor carrier support alone is sufficient, and the readout relation is not an independent physical layer. This paper inherits that architecture from Paper I and addresses only the finite source signature that can support it.

This finite signature does not by itself determine the upstream four-dimensional reconstruction packet. In particular, Paper II neither selects a universal body-side derivation family $\mathfrak{d}_\tau$ nor its source-owned observer restriction $R_{OS}^{\mathfrak{d}}$, and it does not prove

$$\text{rank}\left(\tilde{\Phi}_{OS,x} \circ R_{OS}^{\mathfrak{d}}\right) = 4.$$

The same separator/representation data admit completions with different visible restrictions, so rank four, Frobenius integrability, Lorentz-conformal realizability and DA–ROOT/M4TR same-carrier agreement are downstream physical gates. Representation uniqueness in the declared finite packet may constrain a candidate restriction only after that restriction is source-owned; it cannot infer it from the desired terminal geometry.

Inherited minimal formation basis. Paper I defines the base as the protected zero-source response structure of a frozen source-indexed body law, the universal seed as a response-distinct base-relative source class, and the body as a stable selected nonneutral response. This split is canonical only after a physical zero source is fixed; without it a common body-dependent refactorization makes base and seed nonidentifiable. Paper II takes this upstream formation datum as typed input. Its finite-source uniqueness theorems do not construct the datum or select its physical occupation.

The same scope boundary applies to temporal actuality. A complete finite signature may contain an occurrence-order covector, a positive response form and the incidence data needed by a temporal completion. Representation uniqueness then says how that declared typed packet is realized; it does not prove that the unrestricted base–seed source physically owns EOCC actuality, that the body is literally traversed, or that observer time has been recovered. The finite acyclic simultaneous-factor representation established downstream also prevents interventional agreement from being used backward as a source- signature selector.

1.1 Joint representation–state compression of the separator data

The common-source audit sharpens the finite-signature handoff. Let

$$\mathfrak{J}_* = (\Pi_*, \varphi_*), \quad \Pi_* : \mathcal{A}_{\text{prim}}^{\text{curr}} \longrightarrow \mathcal{A}_{\text{post}}(M_*) \quad (1)$$

be a source-owned unital $*$ -representation together with a state on its retained central blocks. Assume that the complete relation-defect functional vanishes on Π_* , that the typed realization has one orbit after the declared presentation/gauge quotient, that every retained central block is irreducible up to its center, and that φ_* is faithful on every such block. Then the apparently separate data are descendants of one object:

$$\begin{aligned} \mathcal{J}_{\text{phys}} &= \ker \Pi_*, & \mathcal{J}_{\text{mix}}^{\text{phys}} &= \ker \Pi_* \cap \mathcal{A}_{\text{mix}}, \\ \text{Rep}_S^{\text{phys}} &= \text{Res}_S \Pi_*, & \text{Glue}_{34}^{\text{phys}} &= (\text{Res}_{P_3} \Pi_*, \text{Res}_{P_4} \Pi_*), \\ p_{\text{occ}} &= s(\varphi_*) = 1 & & \text{on every retained block.} \end{aligned} \quad (2)$$

Foundation sequence and dependency direction

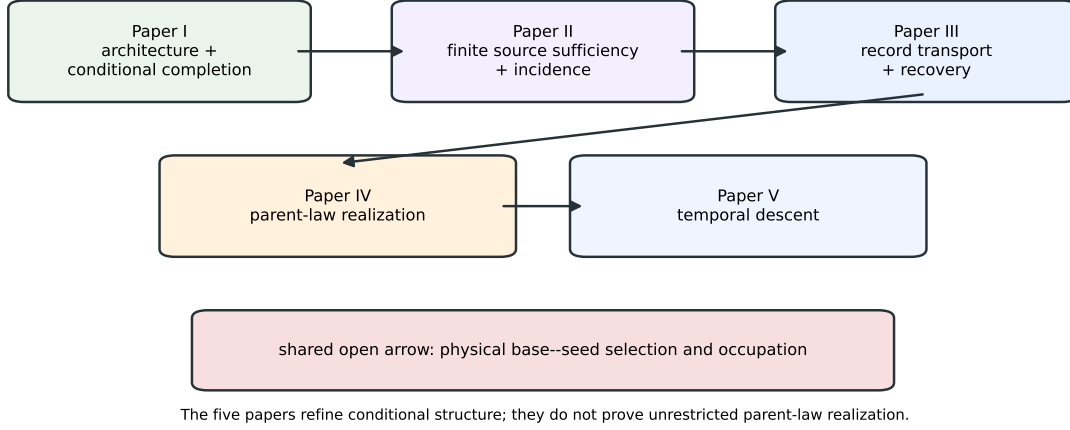


Figure 1: Dependency direction of the foundation sequence. Paper II accepts the architectural types from Paper I and determines finite source sufficiency; it does not assume the transport conclusions of Paper III.

Thus the mixed ideal, separator multiplicity matching, relative $P3$ – $P4$ gluing and faithful occupation are not four independently adjustable source switches. They are jointly fixed, up to the declared typed gauge, once $\mathfrak{J}_*$ is supplied. In the minimum working completion the paired separator-sign presentations are quotiented as one $\mathbb{Z}_2$ orbit; this status must be reopened if a future source-frozen physical terminal is not invariant under that action.

This is a compression theorem, not an unrestricted source theorem. Equal proper restrictions can carry different cross moments, and the current narrow source admits equal-two-jet completions with different mixed words. Consequently it does not entail $\mathfrak{J}_*$. The enriched MVP adopts Eq. (1) as one working completion, thereby closing the subsidiary separator choices internally while leaving parent-law realization, physical occupation and global terminal completeness open.

Suppose several terminal sectors have internally consistent local source packets. Their co-existence does not answer whether one physical source owns a joint state, fixes all cross-sector relations, or selects one representation. The finite question is

Which source data determine one minimal joint realization, and which apparently complete data remain non-identifying?

This paper proves conditional finite-algebra results. It may claim representation uniqueness after a complete source signature, exact marginal no-go theorems, and an onto-incidence sufficient criterion. It may not infer physical occupation from these implications. In particular, the notation Π_{phys} names a physical realization target; it does not assert that the target has been derived.

Series notation ledger.

Symbol	Series-wide meaning	Primary treatment
s	source/seed packet prior to observer descent	Paper I
M_τ	stabilized morphological response configuration (morphological body)	Paper I
Desc_O	observer-indexed physical descent/readout	Paper I
Π_{phys}	selected coherent source representation	Paper II
x_A	normalized finite source/body action separation	Papers I, III
x_Q	observer-carrier Uhlmann chord separation	Papers I, III
$\mathcal{C}, \mathcal{R}$	record map and recovery map	Paper III

Morphology-conditioned readout interface

Paper I writes every working primitive readout as

$$\Xi_{OS}^{\text{cont}} = \Phi_{OS}[M_\tau], \quad D_{OS}^{\text{op}} = Q_{OS,\delta}(\Xi_{OS}^{\text{cont}}), \quad Y_O^{(a)} = Q_O^{(a)} \circ T^{(a)} \circ A_O[M_\tau]. \quad (3)$$

For this paper, Eq. (3) is a source-signature requirement. A complete joint packet must determine the common observer access A_O , the typed terminal precursors $T^{(a)}$, the stable resolution maps $Q_O^{(a)}$, and the overlap/null relations needed to compare observers. Supplying separate terminal states without this common factor does not prove common source ownership.

Before the finite quantizers act, the stacked terminal differential satisfies

$$\text{rank} \begin{bmatrix} D(T^{(1)} \circ A_O) \\ \vdots \\ D(T^{(n)} \circ A_O) \end{bmatrix} \leq \text{rank } A_O. \quad (4)$$

Consequently named time, quantum, gravity, matter, radiation or gauge marginals can double count one accessible source direction. The GNS and joint incidence results below decide representation only after the complete typed signature is supplied; they do not derive A_O , the terminal family or its physical occupation.

Paper I's exact migration criterion also fixes how a legacy source descriptor may be imported here. A historical map (L) is a descendant of the common continuous descriptor precisely when

$$L = U \circ \Xi_{OS}^{\text{cont}}, \quad \Xi_{OS}^{\text{cont}}(x) = \Xi_{OS}^{\text{cont}}(x') \implies L(x) = L(x'). \quad (5)$$

On a regular smooth branch this requires $\ker D\Xi_{OS}^{\text{cont}} \subseteq \ker DL$; equality gives the same local quotient. Equal rank is insufficient, as shown by $\Xi(x, y) = x$, $L(x, y) = x + y$. This paper may therefore reconstruct a legacy finite packet only after this fibre test. It does not derive the physical $Q_{OS,\delta}$, its cells, terminal calibration, $q_R(R)$, or Nature occupation.

2 Finite typed source signatures

Let $\mathcal{A}_s$ be a finite-dimensional unital C^* -algebra. After the declared source-null quotient, assume a positive stiffness $K_* > 0$ and a deduplicated source incidence R_s^{dedup} . On its occupied ideal, define

$$G_s = R_s^{\text{dedup}} K_*^{-1} (R_s^{\text{dedup}})^\dagger, \quad \rho_s = \frac{G_s}{\text{Tr } G_s}, \quad \omega_s(a) = \text{Tr}(\rho_s a). \quad (6)$$

If the incidence is onto the ideal, $G_s > 0$ and ω_s is faithful there.

Choose a source-orthonormal basis $e_1, \dots, e_d$. Let $\mathbf{z}_s$ be the finite list of distinguished typed role elements and CP maps retained by the claim.

Definition 1 (Complete finite typed signature). *The source signature is*

$$\Sigma_s = \left(c_{ab}^c, j_a^b, \omega_s(e_a), [z_\alpha]_a, [\mathcal{I}_\beta]_{ab} \right), \quad e_a e_b = c_{ab}^c e_c, \quad e_a^* = j_a^b e_b. \quad (7)$$

Finite source-signature logic

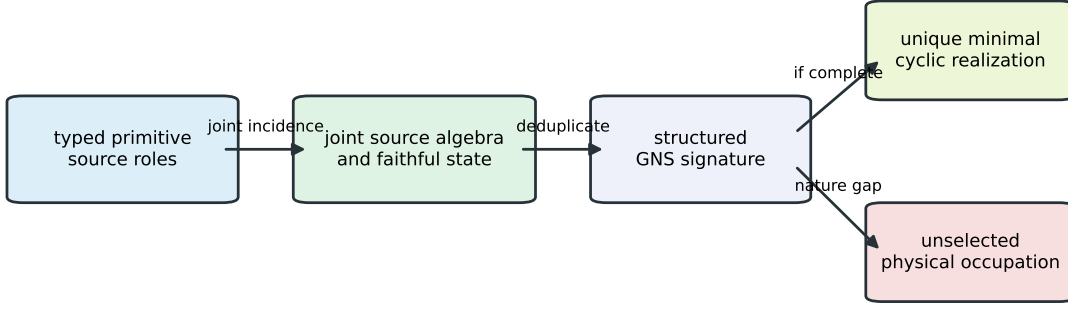


Figure 2: The finite logic. Complete source data determine a minimal cyclic realization, but the physical base–seed law has not yet been shown to create or occupy those data.

It is complete relative to a claim when it contains the full abstract algebra, faithful state and every typed element or map used by that claim. Simultaneous source-basis changes are quotiented only when declared typed source isometries. Undeclared algebra automorphisms are not automatically physical equivalences.

This is finite information: multiplication, involution, state and role arrays. Completeness is claim-relative, not a statement that all parent information is accessible.

Every finite-dimensional unital C^* -algebra has a decomposition

$$\mathcal{A}_s \cong \bigoplus_{\alpha=1}^r M_{n_\alpha}(\mathbb{C}). \quad (8)$$

The signature must therefore record not only dimensions but the multiplication and involution that distinguish the blocks and their typed roles. A faithful state has strictly positive density on every occupied central block. Dropping a zero-weight block is an occupation decision; it is not a consequence of GNS uniqueness on the remaining support.

2.1 Four logically distinct questions

The following distinctions are used throughout.

Question	Mathematical content	What can answer it here?
Existence	Does at least one realization of the typed packet exist?	An explicit representation or incidence construction.
Uniqueness	Are all minimal cyclic realizations of the same complete packet typed-unitarily equivalent?	The finite GNS theorem below.
Identifiability	Do the retained observables determine the complete packet?	A separating-rank test, or a countermodel in the kernel of the retained descriptor.
Physical realization	Why does the base–seed parent law realize and occupy one admissible packet?	A base–seed source law or independent experiment; neither follows from the other three rows.

In particular, uniqueness conditional on Σ_s cannot repair an incomplete descriptor. Conversely, an informationally complete descriptor does not prove physical occupation of its reconstructed point.

Definition 2 (Typed equivalence). *Two realizations are equivalent only if a unitary intertwines the represented algebra, maps the cyclic source vector, preserves the declared central blocks, and intertwines every distinguished role element and source map. Automorphisms not included in this equivalence group remain physically distinguishable data.*

3 GNS representation uniqueness

Proposition 1 (Finite source-signature representation uniqueness). *Fix $(\mathcal{A}_s, \omega_s, \mathbf{z}_s)$ through one complete signature Σ_s , with ω_s faithful. Any two minimal cyclic finite realizations of these data are related by a unique unitary that maps one cyclic vector to the other, implements the fixed algebra identification, and intertwines every distinguished element and the represented action of every distinguished linear or completely positive source map.*

Proof. Faithfulness gives $\mathcal{N}_{\omega_s} = \{a : \omega_s(a^*a) = 0\} = \{0\}$. The GNS Hilbert space is the completion of $\mathcal{A}_s$ under $\langle a, b \rangle_s = \omega_s(a^*b)$, with cyclic vector $[1]$ and left representation $\pi_s(a)[b] = [ab]$. For two minimal cyclic realizations set

$$U\pi_1(a)\Omega_1 = \pi_2(a)\Omega_2. \quad (9)$$

Equality of ω_s makes U isometric; cyclic minimality makes its range dense, hence unitary. For a distinguished source map $\mathcal{I}_\beta : \mathcal{A}_s \rightarrow \mathcal{A}_s$, define on the cyclic domain

$$\widehat{\mathcal{I}}_{\beta,i} \pi_i(a)\Omega_i = \pi_i(\mathcal{I}_\beta(a))\Omega_i. \quad (10)$$

In finite dimension this is a bounded linear operator whenever the displayed rule is well defined on the GNS quotient; faithfulness makes that quotient trivial here. The definition of U gives $U\widehat{\mathcal{I}}_{\beta,1} = \widehat{\mathcal{I}}_{\beta,2}U$ on the cyclic span. The same calculation handles represented role elements. The cyclic span fixes U uniquely. This is the finite GNS uniqueness mechanism [1]. $\square$

Complete positivity is not used to prove unitary uniqueness; it records the physical type of an admissible source operation. Stinespring dilation gives a standard representation of such maps, but the dilation environment is not unique without its own minimality condition [2]. The present theorem therefore claims uniqueness of the typed minimal cyclic realization, not uniqueness of every implementation of its CP operations.

The theorem begins *after* the source signature has been supplied. It does not show that the unrestricted physical parent law realizes and occupies Σ_s . If a signature map Φ_s is faithful modulo typed source isometry and the post-quotient metric is positive, then

$$\mathcal{D}_s(C) = \|\Phi_s(C) - \Sigma_s\|^2 \quad (11)$$

has at most one zero completion class. Existence of an occupied zero remains an independent physical requirement.

4 Marginals do not select a joint source

Proposition 2 (Two-sector marginal no-go). *Complete faithful source states on separate sectors do not generally determine their joint source state.*

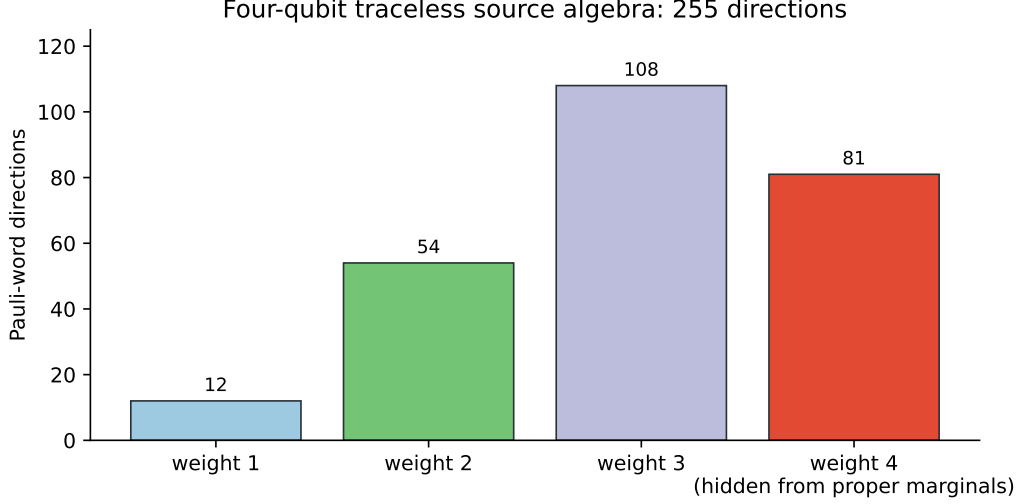


Figure 3: Exact Pauli-word dimension audit. Every proper marginal can access weights at most three; the 81 weight-four directions remain invisible.

Proof. For two qubits, compare

$$\rho_0 = \frac{I_4}{4}, \quad \rho_\epsilon = \frac{1}{4} (I_4 + \epsilon \sigma_z \otimes \sigma_z), \quad 0 < |\epsilon| < 1. \quad (12)$$

Both states are faithful and both marginals equal $I_2/2$. Their joint $\sigma_z \otimes \sigma_z$ moments are respectively zero and ϵ . $\square$

Thus compatible gravity, clock, radiation, quantum, matter or gauge marginals cannot be promoted to one joint physical source merely by being placed side by side. Cross-sector moments spanning the missing self-adjoint source directions are required.

5 All proper marginals remain incomplete

For four qubits the traceless Pauli words have total dimension $4^4 - 1 = 255$. Words of weights one, two and three contribute

$$\binom{4}{1}3 + \binom{4}{2}3^2 + \binom{4}{3}3^3 = 12 + 54 + 108 = 174. \quad (13)$$

The remaining weight-four subspace has dimension $3^4 = 81$.

Proposition 3 (Four-sector all-proper-marginal no-go). *There are faithful four-qubit states with identical marginals on every proper subsystem and different genuine four-sector moments.*

Proof. Let

$$\rho_\epsilon = \frac{1}{16} (I_{16} + \epsilon \sigma_z^{\otimes 4}), \quad 0 < |\epsilon| < 1. \quad (14)$$

Its eigenvalues are $(1 \pm \epsilon)/16 > 0$. Tracing out any nonempty factor annihilates the Pauli product because $\text{Tr} \sigma_z = 0$, so every proper marginal is maximally mixed and independent of ϵ . Yet $\text{Tr}(\rho_\epsilon \sigma_z^{\otimes 4}) = \epsilon$. $\square$

The number 81 belongs specifically to this four-qubit Pauli decomposition. It is not a representation-independent count for every four-sector model. The invariant lesson is that all proper marginals may leave genuine joint directions unresolved.

5.1 General n -partite qudit count

The preceding example is the smallest calculation used by the Tau packet, but the obstruction is general. Fix a Hilbert–Schmidt orthogonal Hermitian basis $\{I, T_1, \dots, T_{d^2-1}\}$ on one qudit, with every T_a traceless. The tensor words of weight w have dimension

$$N_w = \binom{n}{w} (d^2 - 1)^w. \quad (15)$$

Proposition 4 (All-proper-marginal kernel for n qudits). *For $n \geq 2$, the linear descriptor consisting of every proper marginal annihilates the full-weight tensor subspace of dimension $(d^2 - 1)^n$. Hence the descriptor rank on traceless Hermitian operators is at most*

$$\sum_{w=1}^{n-1} \binom{n}{w} (d^2 - 1)^w = d^{2n} - 1 - (d^2 - 1)^n. \quad (16)$$

There are faithful density operators with identical proper marginals and different full-weight moments.

Proof. Tracing out any factor of a full-weight word $T_{a_1} \otimes \dots \otimes T_{a_n}$ gives zero because each local factor is traceless. Linear independence of the tensor-product basis gives the kernel dimension. For any nonzero Hermitian full-weight word X , set

$$\rho_\epsilon = \frac{I}{d^n} + \epsilon X, \quad |\epsilon| < \frac{1}{d^n \|X\|_{\text{op}}}. \quad (17)$$

Then $\rho_\epsilon > 0$, has unit trace, and every proper marginal is independent of ϵ , while $\text{Tr}(\rho_\epsilon X)$ varies linearly. $\square$

For $n = 4, d = 2$, Eq. (16) returns $255 - 81 = 174$. The theorem is an identifiability statement, not a claim that physical source sectors are qudits. It formalizes why assembling all lower order readouts need not determine their common parent relation, a familiar form of the quantum marginal problem [3, 4, 5].

5.2 Descriptor rank criterion

Let V_J be the real vector space of traceless self-adjoint operators on a declared joint carrier, and let $D : V_J \rightarrow \mathbb{R}^m$ collect all retained expectation values. The joint state is locally identifiable from those linear data exactly when

$$\ker D = \{0\}. \quad (18)$$

If $\ker D \neq \{0\}$, any sufficiently small Hermitian perturbation along a kernel direction preserves positivity around a faithful state and produces a locally indistinguishable state. This turns “descriptor completeness” into a finite rank test rather than a verbal completeness claim.

Proposition 5 (Noise-stable linear identifiability). *Equip V_J and $\mathbb{R}^m$ with fixed Euclidean norms and let $\sigma_D > 0$ be the smallest singular value of an injective descriptor D . If two states satisfy*

$$\|D(\rho - \sigma)\| \leq \delta, \quad (19)$$

then

$$\|\rho - \sigma\| \leq \frac{\delta}{\sigma_D}. \quad (20)$$

If D is not injective, no finite bound of this form can control components in $\ker D$.

Proof. By the singular-value variational definition, $\|DX\| \geq \sigma_D \|X\|$ for all $X \in V_J$. Apply this to $X = \rho - \sigma$. If $X \in \ker D \setminus \{0\}$, the descriptor difference vanishes while $\|X\|$ does not. $\square$

The bound depends on the declared normalization of observables and noise. It is not invariant under arbitrary rescaling of descriptor rows, so a physical audit must freeze those units before reporting σ_D . Statistical confidence regions may then be propagated through the same singular-value decomposition; they do not change the exact kernel.

For orientation, three qubits have $4^3 - 1 = 63$ traceless Pauli directions. All one- and two-body words span

$$\binom{3}{1}3 + \binom{3}{2}3^2 = 9 + 27 = 36, \quad (21)$$

leaving 27 weight-three directions invisible to every proper marginal. Four qubits enlarge these numbers to 174 visible and 81 invisible directions. The growth is structural: adding more lower-order precision does not reveal an exact full-weight kernel direction.

6 One onto joint incidence is sufficient

The positive replacement is not an independently fitted coefficient for every missing word.

Proposition 6 (Onto-incidence faithful-state theorem). *Let $\mathcal{H}_J$ be an occupied finite joint carrier, let $\mathcal{E}_J$ be the source-leg Hilbert space, let $K_s \in \text{End}(\mathcal{E}_J)$ be positive definite, and let $R_J : \mathcal{E}_J \rightarrow \mathcal{H}_J$ be a source-owned onto incidence. Then*

$$G_J = R_J K_s^{-1} R_J^\dagger, \quad \rho_J = \frac{G_J}{\text{Tr } G_J} \quad (22)$$

defines a faithful density operator on $\mathcal{H}_J$. Once the typed joint role algebra is represented on $\mathcal{H}_J$, it fixes every finite mixed moment of that representation.

Proof. Surjectivity of R_J makes $R_J^\dagger$ injective. For nonzero $v \in \mathcal{H}_J$,

$$\langle v, G_J v \rangle = \langle R_J^\dagger v, K_s^{-1} R_J^\dagger v \rangle > 0. \quad (23)$$

Hence $G_J > 0$, the normalized state is faithful, and linearity assigns all mixed-word expectations. $\square$

Onto incidence is sufficient, not necessary in every possible presentation. It is also not selected by the separate sector marginals.

6.1 Quantitative stability before rank loss

Surjectivity is a sharp condition, but experiments and numerical source reconstructions require a condition number. Write $k_{\min} = \lambda_{\min}(K_s)$, $k_{\max} = \lambda_{\max}(K_s)$, and let $\sigma_{\min}(R_J)$, $\sigma_{\max}(R_J)$ be the extremal singular values on the non-null source quotient.

Proposition 7 (Joint-Gram eigenvalue bounds). *If R_J is onto, then*

$$\frac{\sigma_{\min}(R_J)^2}{k_{\max}} \leq \lambda_{\min}(G_J) \leq \lambda_{\max}(G_J) \leq \frac{\sigma_{\max}(R_J)^2}{k_{\min}}. \quad (24)$$

Consequently,

$$\kappa(G_J) \leq \kappa(K_s) \left(\frac{\sigma_{\max}(R_J)}{\sigma_{\min}(R_J)} \right)^2. \quad (25)$$

Proof. For unit $v \in \mathcal{H}_J$,

$$\frac{\|R_J^\dagger v\|^2}{k_{\max}} \leq \langle v, G_J v \rangle \leq \frac{\|R_J^\dagger v\|^2}{k_{\min}}. \quad (26)$$

The min-max principle and the singular values of $R_J^\dagger$ give Eq. (24); division gives Eq. (25). $\square$

Thus the exact theorem has an observable precursor: as $\sigma_{\min}(R_J) \rightarrow 0$, the reconstructed joint state becomes poorly conditioned before faithfulness is lost. A small singular value is not new physics by itself; it may also signal an incomplete descriptor, calibration degeneracy, or insufficient data. If R_J is not onto, then

$$\ker G_J = \ker R_J^\dagger = (\text{ran } R_J)^\perp. \quad (27)$$

The unresolved directions are therefore explicit rather than absorbed into a fitted terminal correction.

7 The coherent physical source map

Let the once-owned primitive roles generate a universal typed unital $*$ -algebra $\mathcal{A}_{\text{prim}}$ modulo relations already fixed source-side. One source-owned unital $*$ -homomorphism

$$\Pi_{\text{phys}} : \mathcal{A}_{\text{prim}} \longrightarrow \mathcal{B}(\mathcal{H}_{\text{post}}) \quad (28)$$

selects the physical relation ideal $\ker \Pi_{\text{phys}}$ and a faithful representation of the quotient $\mathcal{A}_{\text{prim}} / \ker \Pi_{\text{phys}}$.

Proposition 8 (Compression of finite joint selection). *Once the primitive typed presentation is fixed, selection of the joint ideal, quotient representation and distinguished role images can be compressed to one coherent Π_{phys} , rather than a table of independently fitted cross-terminal gains.*

Proof. The kernel of a unital $*$ -homomorphism is a two-sided $*$ -ideal. The first isomorphism theorem identifies the quotient with its image. The images of the typed generators then determine the represented role packet and all algebraically generated mixed relations. $\square$

The proposition does not construct or occupy Π_{phys} . Distinct homomorphisms can preserve all currently fixed marginal and overlap data while changing mixed moments. A complete seed-owned relation presentation and a unique typed-unitary zero orbit would be sufficient, but are not derived here.

7.1 What Π_{phys} does and does not select

The homomorphism fixes algebraic relations and a represented quotient. It does not by itself fix a faithful state on that quotient. Conversely, the incidence/stiffness pair in Eq. (22) fixes a density operator only after the carrier and represented role algebra are known. The two data are complementary:

$$\Pi_{\text{phys}} : \text{relations and representation}, \quad (R_J, K_s) : \text{occupation and joint state}. \quad (29)$$

Calling them “equivalent” would require an additional common-source theorem that reconstructs each from the other. No such theorem is assumed here.

Proposition 9 (Faithful quotient representation). *If $\Pi_{\text{phys}} : \mathcal{A}_{\text{prim}} \rightarrow \mathcal{B}(\mathcal{H}_{\text{post}})$ is a unital $*$ -homomorphism, then the induced map*

$$\tilde{\Pi}_{\text{phys}} : \mathcal{A}_{\text{prim}} / \ker \Pi_{\text{phys}} \longrightarrow \text{im } \Pi_{\text{phys}} \quad (30)$$

is a faithful unital $$ -isomorphism.*

Proof. The kernel is a two-sided closed $*$ -ideal. The first isomorphism theorem makes the induced map bijective and $*$ -preserving; injectivity is precisely faithfulness on the quotient. $\square$

The choice of $\ker \Pi_{\text{phys}}$ remains physical information. The same primitive generator list can admit inequivalent ideals and hence inequivalent joint physics. Marginal agreement cannot select among them when the distinguishing relation lies in the marginal descriptor kernel.

8 Countermodels separating the logical levels

The preceding results are easiest to audit through finite controls.

Same marginals, different state. Equation (12) keeps both reduced density matrices fixed while changing one joint moment. Identifiability fails even though both joint states exist.

Same presentation, different quotient. Let $\mathcal{A}_{\text{prim}} = \mathbb{C}[x]/(x^2 - x)$, viewed as a unital $*$ -algebra with $x = x^*$. The characters $\Pi_0(x) = 0$ and $\Pi_1(x) = 1$ are both unital $*$ -homomorphisms but have different kernels. A generator name and its typing therefore do not select one physical relation ideal.

Same carrier dimension, different incidence rank. Take $K_s = I_2$, $R_{\text{onto}} = I_2$, and

$$R_{\text{deficient}} = \begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix}. \quad (31)$$

The first produces $G_J = I_2$; the second produces a rank-one Gram operator. Carrier dimension alone therefore does not imply faithful occupation.

Near-singular but onto incidence. For $R_\delta = \text{diag}(1, \delta)$, $0 < \delta \ll 1$, the joint state is faithful but $\kappa(G_J) = \delta^{-2}$. Exact identifiability can coexist with severe practical instability, which is why the singular-value ledger is part of the operational audit.

9 Worked end-to-end finite packet

We now run one packet from typed source data to represented mixed moments. It is deliberately elementary: its purpose is to expose every domain, rank and normalization used by the abstract theorems, not to model a physical Tau carrier.

Let the joint carrier and source-leg spaces both be $\mathbb{C}^2$, and set

$$K_s = \begin{pmatrix} k_0 & 0 \\ 0 & k_1 \end{pmatrix}, \quad R_\delta = \begin{pmatrix} 1 & 0 \\ 0 & \delta \end{pmatrix}, \quad k_0, k_1 > 0, \quad \delta > 0. \quad (32)$$

The represented role algebra is $\mathcal{A}_s = M_2(\mathbb{C})$, with typed Hermitian generators I, X, Y, Z and Hilbert–Schmidt reference pairing $\langle a, b \rangle_{\text{HS}} = \text{Tr}(a^\dagger b)$. The occupied faithful state will be generated by the incidence. Its Gram operator is

$$G_\delta = R_\delta K_s^{-1} R_\delta^\dagger = \begin{pmatrix} k_0^{-1} & 0 \\ 0 & \delta^2 k_1^{-1} \end{pmatrix}, \quad (33)$$

and therefore

$$\rho_\delta = \frac{1}{k_0^{-1} + \delta^2 k_1^{-1}} \begin{pmatrix} k_0^{-1} & 0 \\ 0 & \delta^2 k_1^{-1} \end{pmatrix}. \quad (34)$$

For every $\delta > 0$, R_δ is onto and ρ_δ is faithful. At $\delta = 0$, the second carrier direction lies in $\ker R_0^\dagger$, G_0 has rank one, and the full-carrier faithful-state claim fails exactly as Eq. (27) predicts. With $k_0 = k_1 = 1$,

$$\lambda_{\min}(G_\delta) = \delta^2, \quad \lambda_{\max}(G_\delta) = 1, \quad \kappa(G_\delta) = \delta^{-2} \quad (0 < \delta \leq 1). \quad (35)$$

The full Bloch descriptor

$$D_{XYZ}(\rho) = (\text{Tr } \rho X, \text{Tr } \rho Y, \text{Tr } \rho Z) \quad (36)$$

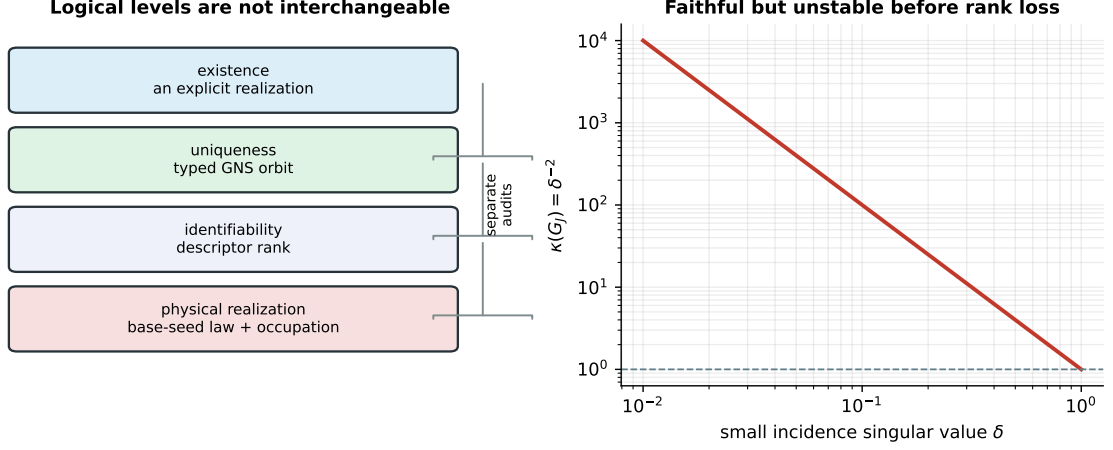


Figure 4: Left: existence, uniqueness, identifiability and physical realization require separate audits. Right: the worked packet stays faithful for every $\delta > 0$ while its Gram condition number diverges as rank loss is approached.

is injective on trace-one Hermitian matrices and reconstructs

$$\rho = \frac{1}{2}(I + D_X X + D_Y Y + D_Z Z). \quad (37)$$

For Eq. (34), $D_X = D_Y = 0$ and

$$D_Z = \frac{k_0^{-1} - \delta^2 k_1^{-1}}{k_0^{-1} + \delta^2 k_1^{-1}}. \quad (38)$$

Keeping only D_Z would identify this diagonal family after that family was frozen, but would not identify an arbitrary qubit state: the X and Y directions would remain in the descriptor kernel.

Finally take $\mathcal{A}_{\text{prim}} = M_2(\mathbb{C})$ with its Pauli presentation and choose

$$\Pi_{\text{phys}} = \text{id}_{M_2} : \mathcal{A}_{\text{prim}} \rightarrow \mathcal{B}(\mathbb{C}^2). \quad (39)$$

This is a unital $*$ -homomorphism with zero kernel, so it supplies the faithful quotient representation. The dephasing map $a \mapsto P_0 a P_0 + P_1 a P_1$ is unital and completely positive but not multiplicative on M_2 ; it cannot replace Π_{phys} in the quotient theorem even though it preserves the diagonal family.

The complete finite certificate for this toy is therefore

$$\mathfrak{C}_\delta = (M_2, \omega_\delta, K_s, R_\delta, D_{XYZ}, \Pi_{\text{phys}} = \text{id}, \mathcal{G}_{\text{eq}} = \{I\}, \text{occupation} = \rho_\delta). \quad (40)$$

where $\omega_\delta(a) = \text{Tr}(\rho_\delta a)$. It proves internal existence, typed GNS uniqueness, descriptor identifiability, onto-incidence faithfulness and representation consistency. It does *not* prove that a base-seed parent selects any member of this family, any value of k_0, k_1, δ , or the identity representation as a physical law.

9.1 Failure matrix for the worked packet

The same example separates failures that would otherwise look alike in an endpoint fit.

Modification	Mathematical result	Scientific diagnosis
$k_0 = k_1, \delta = 1$	$G = I, \rho = I/2, \kappa(G) = 1$	Symmetric, well-conditioned occupied packet; still no proof of physical realization.
$0 < \delta \ll 1$	$G > 0$ but $\kappa(G) = \delta^{-2} \gg 1$	Exact faithfulness survives, while finite precision makes the weak direction difficult to reconstruct.
$\delta = 0$	R is not onto and G has rank one	The claimed full-carrier faithful occupation is false; support reduction must be declared.
Retain D_Z only	Diagonal states are separated, arbitrary qubit states are not	The descriptor is complete only relative to a frozen commuting family; off-diagonal completion is unidentifiable.
Replace Π_{phys} by dephasing	The map is unital CPTP but not a *-homomorphism	It may define an irreversible record process, not the relation-ideal quotient used in Proposition 8.
Fit k_0, k_1, δ from the same terminal outcome	Many packets can reproduce one diagonal state	Endpoint agreement cannot establish upstream source ownership or select the physical parameter triple.

The rows give mutually different remedies. Rank loss requires a smaller support theorem; descriptor failure requires additional predeclared observables; nonmultiplicative dynamics require a CP/recovery analysis; and failure of unrestricted parent-law realization requires an upstream source law or independent overdetermination. None is repaired by merely improving the fit of Eq. (34) to one measured density matrix.

10 Operational source-completeness audit

A finite source-signature claim should declare:

- (S1) the source algebra and true-null quotient;
- (S2) the faithful state or the incidence/stiffness pair generating it;
- (S3) all typed primitive roles and ownership multiplicities;
- (S4) the cross-sector observables required by the claim;
- (S5) the equivalence group and every non-quotiented automorphism;
- (S6) the rank test showing that retained observables separate the joint self-adjoint algebra; and
- (S7) whether existence, uniqueness and physical occupation are each proved, assumed or open.

Passing this audit proves informational completeness relative to the declared finite claim. It does not prove unrestricted parent-law realization or physical occupation of the audited source.

10.1 A reproducible finite audit matrix

For a concrete model the declarations above reduce to finite linear algebra. The following matrix separates calculations from physical assumptions.

Object	Reproducible check	Failure meaning
Algebra packet	Verify associativity, unit and involution arrays in Eq. (7).	The proposed typed source is not a C^* -algebra presentation.
State packet	Diagonalize ρ_s on every declared occupied block.	A zero eigenvalue requires support reduction or a non-faithful theorem.
Descriptor	Compute rank D on the declared self-adjoint joint space.	Kernel directions are not identified by the retained data.
Incidence	Compute rank and singular values of R_J after true-null quotient.	Rank loss forbids faithful Gram occupation; small singular values signal instability.
Representation	Verify multiplicativity, unit and dagger preservation of Π_{phys} .	A merely unital linear or CP map does not define the claimed relation ideal by the first isomorphism theorem.
Equivalence	Test whether candidate solutions lie in the declared typed unitary orbit.	An undeclared automorphism is a second physical completion, not gauge by default.
Ownership	Trace every retained parameter to one source ledger entry.	A terminally inserted cross-gain violates source freeze.

The audit is deliberately compatible with negative results. A rank-deficient descriptor is not repaired by fitting its kernel directions to terminal data; it is reported as non-identifying. A non-onto incidence is not promoted by renaming its support the full carrier. A second zero orbit is not quotient gauge unless the equivalence group was declared before inspecting it.

11 Relation to established finite-dimensional results

The mathematical ingredients are standard; the contribution is their typed source-selection arrangement and explicit claim boundary. GNS gives a canonical cyclic representation after an algebra and state are fixed [1]. Stinespring characterizes completely positive maps through dilations, but does not select a physical source state or a unique nonminimal environment [2]. Quantum marginal theory asks whether reduced states are compatible with a common global state and when they determine it [3, 4, 5]. The present all-proper-marginal count is a direct tensor-basis kernel calculation within that broader problem.

What is specific to this program is the division of labor:

$$\text{typed source signature} \longrightarrow \begin{cases} \text{minimal cyclic representation,} \\ \text{descriptor-rank audit,} \\ \text{incidence-generated occupation,} \\ \text{explicit parent-realization blocker.} \end{cases} \quad (41)$$

No novelty is claimed for GNS, Stinespring theory, or the marginal problem themselves. Nor does the finite analysis establish quantum gravity or the Standard Model. Its use is to prevent several terminal reconstructions from being mistaken for one physically selected common source.

12 What a physical source theorem must add

The remaining theorem cannot be another representation theorem conditional on the desired packet. It must provide a parent law whose occupied solutions jointly determine:

- (P1) the primitive typed algebra and its relation ideal;
- (P2) the carrier and the physical homomorphism Π_{phys} ;
- (P3) the source-leg stiffness K_s and incidence R_J ;
- (P4) a faithful occupied state or a declared support reduction;
- (P5) the equivalence group, including which automorphisms are gauge; and
- (P6) the terminally relevant descriptors, their common observer-access factor, stable resolution maps and overlap laws without endpoint-dependent tuning.

An action principle could supply such data only if its variables and symmetry group are specified before variation and if its stationary orbit is unique up to the declared equivalence. A reconstruction from public terminal data can support or reject the rank, positivity and shared-parameter consequences of a candidate packet, but cannot by itself prove that the base-seed parent is its ontological source.

This distinction gives a finite reopening rule. The physical-realization branch is promoted only by either (i) a source theorem deriving (P1)–(P6), or (ii) a source-frozen experiment whose independent observables overdetermine the same packet and reject its allowed alternatives. Additional terminal fits without such overdetermination do not close the arrow.

12.1 Later source-completion status

The primary source-irredundant enriched completion now conditionally supplies one joint algebra/state/incidence packet of the required type, together with the typed quotient representation and the once-counted structural ledger. This closes internal nonemptiness for the adopted regular branch, not unrestricted physical realization. An inequivalent completion with an independent base causal-work/energy-sharing carrier has the same current narrow source reduct. No selector using only that reduct can therefore establish parent-law realization and physical occupation of the primary packet.

The later scalar-15/type-II packet supplies a useful finite application of this distinction. After the recovery-complete, source-generated and source-irredundant branch class is frozen, its represented source signature reconstructs a pointed exterior V_5 grammar, a positive Hermitian/Hodge base realization and the typed edge

$$e_{HH\Delta} : \text{Sym}^2 V_5 \longrightarrow S_{15}, \quad \dim \text{Sym}^2 V_5 = 15. \quad (42)$$

This is class-relative source reconstruction in exactly the sense separated here from ambient realization. It neither proves that the unrestricted physical parent occupies the type-II branch nor allows terminal data to choose the source signature retroactively.

12.2 Generated-support occupation handoff

The eight ownership blocks used by the physical-realization audit are typed dependency blocks. They need not be independent central summands of the finite algebra, and a compressed universal seed need not carry one primitive component in every block. Let

$$E_{\text{src}} = \bigoplus_{i=0}^7 E_i, \quad p_i : E_{\text{src}} \rightarrow E_i, \quad (43)$$

and let $\mathcal{A}_{\text{src}}$ be the source-operation algebra generated by the frozen dependency ledger.

Proposition 10 (Cyclic generated-support criterion). *If the realized seed response Ω_s is cyclic for a faithful representation of $\mathcal{A}_{\text{src}}$,*

$$\overline{\mathcal{A}_{\text{src}}\Omega_s} = E_{\text{src}}, \quad (44)$$

then every typed block is reached:

$$p_i \overline{\mathcal{A}_{\text{src}}\Omega_s} = E_i \neq 0, \quad i = 0, \dots, 7. \quad (45)$$

If the declared operation closure generates every owned role within each reached block, the complete typed packet is occupied.

Proof. Apply the continuous projection p_i to Eq. (44). This gives $p_i \overline{\mathcal{A}_{\text{src}}\Omega_s} = p_i E_{\text{src}} = E_i$. Faithfulness prevents a generated nonzero direction from being annihilated; the final occupation statement is exactly the declared operation-closure condition. Notice that the proof does not require $p_i \Omega_s \neq 0$. $\square$

In a local positive stationary-response chart,

$$K_{\text{src}} \delta z = j_s, \quad (46)$$

the corresponding finite block-reachability check is

$$p_i K_{\text{src}}^{-1} j_s \neq 0, \quad i = 0, \dots, 7. \quad (47)$$

This is a criterion for the frozen quadratic response, not a general equivalence to cyclicity for nonlinear parent laws.

The current general base-seed reduct does not force Eq. (44): an occupied model and a model with one omitted typed block can share that reduct, and a terminally invisible positive direct summand cannot be excluded by finitely many terminal descriptors. Paper IV adds the physical branch statement. Within the declared source-irredundant MVP carrier class, its cyclic faithful working parent, nonzero dagger-Frobenius record unfolding and observed existence of a redundant stable record propagate through the frozen dependency ledger and select complete packet occupation. This is conditional physical realization inside that carrier class, not a proof that the ambient parent has no rank-novel completion.

12.3 Occupied-representation corollary

Paper IV's operational source-generated-completeness result supplies the physical reading of the finite representation theorem without strengthening its hypotheses. After true physical nulls are quotiented, a complete source signature identifies the occupied physical representation class provided the enriched one-source premise holds. A terminally inert direct summand cannot be excluded by the signature, but it is only another presentation of the same physical quotient. Conversely, a stable non-null representation difference at fixed complete source key is an independent source or an incomplete signature and falsifies the one-source completion.

This corollary does not prove ambient representation exhaustivity and does not derive the one-source premise. The cyclicity and finite Schur criteria proved here test the declared generated support; Paper IV owns the source-ontology dichotomy.

13 What remains open

The internal alternatives are now finite:

$$\begin{aligned} \text{complete typed signature} &\Rightarrow \text{unique minimal cyclic representation,} \\ \text{proper marginals only} &\Rightarrow \text{joint source non-identifiable,} \\ \text{onto joint incidence} &\Rightarrow \text{faithful joint Gram state,} \\ \text{unital *-homomorphism} &\Rightarrow \text{faithful quotient representation.} \end{aligned} \quad (48)$$

The Tau-specific blocker is now split. Generated-support occupation is settled by Eqs. (44)–(47), and the source-irredundant MVP supplies a conditional occupied realization. What remains open is whether the unrestricted physical parent selects that MVP carrier class and excludes rank-novel alternatives. Neither GNS uniqueness nor the dimension audit can settle this larger ontology question, and terminal fits cannot fill it without violating source freeze.

In particular, this paper does not prove:

- that the universal morphology seed exists or contains all primitive ordering information;
- that the physical base creates the declared finite algebra, faithful source state, onto incidence, or Π_{phys} as a uniquely physically realized packet; one enriched packet constructs them conditionally;
- that the incidence-generated state and the representation map descend from one microscopic once-counted functional;
- that terminal gravity, time, quantum, matter, gauge, or cosmological readouts occupy the finite roles used here;
- that the physical observer–source quantizer, its calibration or a galactic radial transfer law follows from descriptor migration;
- that the Standard Model spectrum, constants, generations, or a quantized spacetime geometry follow from the packet; or
- that any current data set empirically validates the Tau ontology.

The proper conclusion from a failed rank or occupation test is demotion of the candidate packet. It is not permission to add an independently fitted joint coefficient.

14 Finite irreducible support handoff

For an irreducible finite extension E_λ , define

$$S_{E,\lambda} = C_\lambda - B_\lambda^\dagger A^{-1} B_\lambda, \quad k_{\text{eff},\lambda} = k_\lambda - B_\lambda^\dagger A^{-1} j.$$

When $S_{E,\lambda} > 0$, its occupied component is $e_{*,\lambda} = S_{E,\lambda}^{-1} k_{\text{eff},\lambda}$. Positive seed-unloaded split irreps therefore have zero occupation; stable loaded or cross-coupled irreps belong to generated support. The current CHDF [22] complement is the explicit zero-load, zero-mixed-block control. This is finite-local support completeness, not ambient representation exhaustivity.

Inherited global-law obligation

The finite source-signature results determine representation and local occupation only inside their declared source class. A later global source-fidelity/Hodge theorem shows that every positive-Schur noncontractible extension has $k_{\text{eff}} = 0$ and hence $e_* = 0$, provided that this once-counted law is physically owned. The present paper does not establish that ownership. A componentwise zero-jet is invisible to the common local reduct and can reverse global selection, so Nature-level use of the finite packet requires independent source or empirical evidence.

Handoff to unified source selection

The later PD-USS1 theorem does not replace the finite source datum studied here. It uses a complete represented state/relations packet as one premise and additionally requires a source-owned

spectral grading identification, a unique reversible transport law and global-minimum actualization. Under those added assumptions it conditionally selects one common state–transport carrier. Those assumptions are not consequences of GNS uniqueness or joint incidence. The current 0/31 public two-role census therefore leaves the physical source occupation of this paper’s packet open and changes none of its representation or marginal-kernel theorems.

15 Finite Gram characterization of a supplied readout packet

The overlap formulation admits one exact finite theorem, provided its input is kept source-owned. Let $\mathcal{A}_{OS}$ be an already supplied observer–source algebra, ω_{OS} a positive state, and x_a non-null probes. Define

$$G_{ab} = \frac{\omega_{OS}(x_a^* x_b)}{\sqrt{\omega_{OS}(x_a^* x_a) \omega_{OS}(x_b^* x_b)}}. \quad (49)$$

Then

$$G = G^\dagger, \quad G \succeq 0, \quad G_{aa} = 1. \quad (50)$$

Conversely, every finite matrix satisfying Eq. (50) is the Gram matrix of unit vectors, and its minimal realizing Hilbert dimension is $\text{rank } G$. The proof is the finite Gram factorization $G = X^\dagger X$; the forward direction is positivity of $z^\dagger G z = \|Xz\|^2$.

This characterization closes a representation question, not the source question studied by this paper. The finite converse recovers a ray family only up to unitary equivalence. It does not recover the physical algebra, state, probe semantics, seed grading, relation grammar or occupied source sector. The explicit controls

$$G_1 = I_n, \quad G_2 = \mathbf{1}\mathbf{1}^* \quad (51)$$

both satisfy Eq. (50), while $\text{rank } G_1 = n$ and $\text{rank } G_2 = 1$. Therefore Gram closure cannot certify the completeness of the language from which the Gram matrix was built. In Tau Core it may audit an independently frozen source/readout family, but it cannot replace the source-completeness and Nature-occupation obligations of this paper.

16 Observer realization: inherited results and physical boundary

The current observer programme distinguishes a conditional mathematical construction from an occupied physical measuring system. The source order remains base plus one universal seed, stabilized morphological response, observer–source restriction, shared descriptor, and resolved terminal readouts. Neither a detector nor an empirical residual constructs the parent body backwards. Dynamics below concern downstream subsystems only.

The canonical observer-origin derivation, Sections 22–26, owns the following results. The existing joint source action fixes static and frequency-dependent response together. Variation of the BRAC potential couples to the field square; a linear field coupling is a distinct comparator unless derived by expansion about an occupied background. Fixed canonical means select a unique coherent state in a finite positive harmonic packet only if there is no excess fluctuation energy. This is a free/asymptotic preparation statement, not the ground state of an interacting detector. For the existing coupled harmonic pair, the joint ground is pure but either local subsystem is mixed, with its covariance fixed by the complete joint Hamiltonian.

These are conditional derivations and internal numerical checks. The actual observer–source context, physical preparation process, kinetic/energy calibration and stable operational resolution remain unproved. The existing ORA-T1 selector conditionally chooses stable quantizers when the occupied context, admissible partition family and positive closure barrier are supplied;

it does not establish those physical premises. A computed ground state is not a preparation mechanism, and a covariance or optimal abstract measurement is not an implemented stable quantizer Q_{OS} .

Ownership and use. The central observer-origin note owns the new contact, state and covariance derivations; the body-readout technical companion carries the consolidated mathematics. Foundation Papers IV, V and VI retain physical-selection, clock-descent and quantum-readout ownership, respectively. This paper imports only the consequences within its scope. No observational dataset, baseline, frozen coefficient, score or empirical conclusion is revised by this update. The reproducibility supplement records the source hashes and the exact conditional/physical distinction.

Consequence for this paper. The occupied observer-source context is relational instance data, not a uniquely selected observer identity inferred from the universal seed alone. Physical source realization and record preparation remain separate from conditional closure.

17 Finite source-to-readout implementation and its scope

The current finite laboratory is a reproducible implementation, not a new Nature-selection theorem. The finite quartic instance has an explicit real two-point minimum set or complex phase-circle orbit, and a computed retained Hessian spectrum. A low-mode or large-gap ranking does not select an occupied state. Larger supports and coherent cycles broaden the computational prior, not this paper's physical selection theorem.

Ownership and reproducibility. The seed-body companion owns the finite minimum/Hessian example, the body-readout companion its ordered access and contact reduction, and the terminal companion its conditional propagation boundary. The physical-source papers retain the source-selection obligation. Code, declared priors, adverse controls and provenance are available at https://github.com/tau-core-research/tau-core-theory/tree/main/experiments/seed_evolution_lab. Numerical tests are internal evidence only; no published empirical score is changed.

18 Source identification and recovery

The current observer audit separates a conditional forward construction from physical source selection. A frozen body, occupied observer incidence, preparation, complete instrument and stable resolution can determine records without selecting those inputs from Nature. Equal effects do not fix postmeasurement states, and symmetry within a chosen interaction family does not exclude other symmetric couplings. The occupied observer-source context is relational instance data, not a uniquely selected observer identity inferred from the universal seed alone. Physical source realization and record preparation remain separate from conditional closure.

Dependency and claim ownership. Foundation VI and the body-readout technical companion own the finite instrument/access proof; Foundation IV and TD-0 retain physical source selection; Foundation V, the temporal synthesis and seed-body companion own the gradient/inertial distinction. This paper inherits only the stated specialization. Canonical assumptions, countermodels and calibration audits are in https://github.com/tau-core-research/tau-core-theory/blob/main/docs/tau_rqm_instrument_to_record_bridge_001.md. No physical seed, Nature occupation or Tau-exclusive observation is established by this update. Existing empirical endpoint definitions and scores are unchanged.

19 Conclusion

Finite source signatures separate four questions often conflated in foundation models: existence, representation uniqueness, identifiability and physical realization. Complete source data determine a unique minimal cyclic realization, but terminal marginals need not determine those source data. For n qudits, all proper marginals miss a full-weight subspace of dimension $(d^2 - 1)^n$; the four-qubit value is 81.

One onto source incidence with positive stiffness is sufficient to generate a faithful joint state, with conditioning controlled by the extremal singular values of the incidence. A coherent unital $*$ -homomorphism Π_{phys} separately compresses the ideal and representation choice. Together with a faithful retained-block state it also fixes the mixed ideal, separator multiplicities, relative gluing and occupation as descendants of one joint datum. These are constructive finite targets, not unrestricted parent-realization theorems. Same-reduct cross-moment countermodels prove that the present narrow source does not select that datum. The primary enriched branch conditionally realizes the finite target listed in (P1)–(P6). Cyclic generated support supplies an exact occupation criterion, and stable record existence selects the occupied complete packet inside the declared source-irredundant MVP class. Ambient parent-class selection remains open. The current-reduct counterpart proves that this larger gap is not removable by another representation theorem on the same narrow data.

The scalar-15 application confirms the intended use of the formalism: once a physical branch class is declared, a complete signature can reconstruct its minimal preimage and expose every remaining occupation assumption. It is not an additional proof that Nature realizes that branch.

The series handoff is therefore finite: Paper I supplies the architectural types, this paper supplies tests for source sufficiency and representation uniqueness, and Paper III begins only after such a packet and its occupied support have been frozen. Transport success cannot be used retroactively to infer the source packet, and source identifiability does not imply transport. Likewise, identifying a finite order/response signature does not identify ontic temporal traversal: actuality and observer-clock descent are separately typed downstream obligations.

A later cross-terminal lifting theorem makes the same distinction at parent level. Faithfulness of a state or GNS representation on an already selected finite algebra is not yet faithfulness of the stacked physical readout on every typed cross-component parent-action defect. If that stronger joint faithfulness holds, exact operational composition forces the parent disjoint-source valuation. Without it, two positive parent Hessians can have identical terminal reducts while only one is component-additive. Thus the finite source certificates proved here are necessary inputs to that lift, but do not close it by themselves.

A Finite verification protocol

This appendix gives a model-independent calculation order for a proposed finite packet. It is intentionally mechanical so that a negative result can be reproduced.

Step 1: construct the algebra tables. Choose a basis containing the unit and store the arrays c_{ab}^c and j_a^b . Verify

$$c_{ab}^d c_{dc}^e = c_{bc}^d c_{ad}^e, \quad c_{1a}^b = c_{a1}^b = \delta_a^b, \quad (52)$$

$$(e_a e_b)^* = e_b^* e_a^*, \quad (e_a^*)^* = e_a. \quad (53)$$

A numerical tolerance is not an algebraic proof; exact or certified arithmetic is preferable when the entries permit it.

Step 2: freeze support and state. Construct G_s , diagonalize it on each central block, and declare whether zero eigenvalues are true nulls or failed occupation. Normalize only after this decision. Replacing a small eigenvalue by zero changes the claimed carrier and must be recorded as a model decision.

Step 3: assemble the descriptor. Vectorize a basis of traceless self-adjoint operators and write every retained expectation value as one row of D . Compute its exact rank when possible, then report σ_D in frozen physical units. A basis for $\ker D$ provides explicit countermodel directions.

Step 4: audit incidence. After removing only declared source nulls, compute the rank and singular values of R_J , then construct G_J . Check Eq. (27) directly and compare its eigenvalues with Eq. (24). This catches domain mistakes in $R_J K_s^{-1} R_J^\dagger$.

Step 5: verify the representation map. On primitive generators test unit, multiplication and dagger preservation. Compute the generated ideal and verify that the induced quotient map in Eq. (30) is injective. A CPTP or unital CP map may be physically useful, but it is not substituted for a $*$ -homomorphism in this particular quotient theorem.

Step 6: separate conclusions. Report existence, uniqueness, identifiability, conditioning and physical selection on separate lines. A pass in one line must not be copied into another. The minimal machine-readable certificate is therefore

$$\mathfrak{C}_s = (\Sigma_s, \text{rank } D, \sigma_D, \text{rank } R_J, \sigma_{\min}(R_J), \ker \Pi_{\text{phys}}, \mathcal{G}_{\text{eq}}, \text{occupation}). \quad (54)$$

B Proof-dependency ledger

The dependency graph is short enough to state without hiding assumptions:

- (D1) A finite unital C^* -algebra and faithful state imply a minimal GNS realization unique up to the declared typed unitary.
- (D2) Descriptor injectivity, not GNS uniqueness, determines whether retained data identify the joint state.
- (D3) Proper marginals fail this test whenever a full-weight tensor direction remains in the descriptor kernel.
- (D4) Positive stiffness and onto incidence produce a faithful joint Gram state; the singular values quantify stability.
- (D5) A unital $*$ -homomorphism selects a relation ideal and faithful quotient representation, but not its physical occupation.
- (D6) A base-seed source theorem must jointly own the data in (D1)–(D5) to close the Tau-specific parent-realization arrow.

No implication runs backward without extra hypotheses. In particular, faithful occupation does not imply onto incidence in every presentation, identifiability does not imply physical realization, and a faithful quotient representation does not determine a unique state.

References

- [1] Irving E. Segal. Irreducible representations of operator algebras. *Bulletin of the American Mathematical Society*, 53:73–88, 1947.
- [2] W. Forrest Stinespring. Positive functions on C^* -algebras. *Proceedings of the American Mathematical Society*, 6(2):211–216, 1955.
- [3] Alexander A. Klyachko. Quantum marginal problem and N -representability. *Journal of Physics: Conference Series*, 36:72–86, 2006.
- [4] Sergey Bravyi. Requirements for compatibility between local and multipartite quantum states. *Quantum Information and Computation*, 4(1):12–26, 2004.
- [5] Noah Linden, Sandu Popescu, and William K. Wootters. Almost every pure state of three qubits is completely determined by its two-particle reduced density matrices. *Physical Review Letters*, 89:207901, 2002.