

Project: eBook Selling Landing Page

Build-along · HTML · CSS · Tailwind CSS · responsive · deploy



Md Tausif Hossain

Your React Instructor

Tech Lead @ DevTechGuru · Founder, **TechnicalBind**

9+ years shipping production software

Instructor @ **Ostad**: ostad.app/instructor/73688

 tausif.bd · [GitHub](#) · [LinkedIn](#)

What we'll cover

The **anatomy** of a page that actually sells

Setup: Tailwind CLI, folders, `index.html` boilerplate

A **design system first:** `@theme` tokens, fonts, button utility

Build all **nine sections**, top to bottom

Responsive pass: mobile-first, then `md:` / `lg:`

Polish: hover, FAQ with zero JS, ally, images, then **deploy**

The Project

What we're building

A one-page site that sells a single eBook — the classic freelance deliverable.

- 🧭 Sticky **navbar** with a working mobile menu
- 🎯 **Hero**: headline, promise, two CTAs, book cover
- ★ **Trust bar**, 📖 **chapters**, 👤 **author**, 💬 **testimonials**
- 💳 **Pricing** with a highlighted tier
- ? **FAQ** using `<details>` — no JavaScript
- 📱 Looks right at **375px** and at **1920px**

The nine sections

Nine sections — each one has a job

dark = the two that decide the sale

1 Navbar

Orient the reader.
Keep one CTA always visible.

2 Hero

One promise, in five seconds.
Headline · sub · CTA · cover

3 Trust bar

Lower the risk fast.
Readers · rating · logos

4 What's inside

Show the value.
Chapter cards in a grid

5 Author

Why trust the source?
Photo · credentials · story

6 Testimonials

Proof it worked for others.
Quote · face · name

7 Pricing

Make the ask, plainly.
Tiers · guarantee · one button

8 FAQ

Kill the last objection.
details + summary, no JS

9 Final CTA

Ask once more, then footer.
Repeat the button

If a section can't answer "what job does this do?", cut it. Long pages don't convert — clear ones do.

What makes a landing page sell

- **One** promise. One product. One primary action.
- The reader decides in **5 seconds** — put the promise above the fold.
- Repeat the **same** CTA text everywhere: Get the eBook — ₹499.
- Every claim needs proof next to it: number, quote, or face.
- Objections don't disappear when ignored. Answer them in the FAQ.

You're not writing a brochure. You're removing reasons to leave.

Project structure

```
ebook-landing/  
├─ index.html      the whole page (one file is fine here)  
├─ src/  
│   └─ input.css   @import "tailwindcss"; + @theme + @utility  
├─ dist/  
│   └─ output.css  generated – never edit by hand  
├─ assets/  
│   ├── cover.webp  
│   └─ author.webp  
└─ package.json
```

One HTML file, one CSS input, one build output. That's the whole project.

Setup

Install the Tailwind CLI

```
mkdir ebook-landing && cd ebook-landing  
npm init -y  
npm install tailwindcss @tailwindcss/cli
```

```
// package.json  
"scripts": {  
  "dev": "npx @tailwindcss/cli -i ./src/input.css -o ./dist/output.css --watch",  
  "build": "npx @tailwindcss/cli -i ./src/input.css -o ./dist/output.css --minify"  
}
```

No React, no Vite, no bundler. Tailwind v4 scans your HTML and writes one CSS file.

The CDN option (prototyping only)

```
<script src="https://cdn.jsdelivr.net/npm/@tailwindcss/browser@4"></script>
```

- Zero setup — good for a CodePen or a 10-minute demo.
- ❌ Ships the **whole engine** to the browser and compiles on every load.
- Never hand a client a page built this way. Use the CLI for anything real.

index.html boilerplate

```
<!doctype html>
<html lang="en" class="scroll-smooth">
<head>
  <meta charset="utf-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1" />
  <title>The Freelance Playbook – eBook by Md Tausif Hossain</title>
  <link rel="stylesheet" href="../dist/output.css" />
</head>
<body class="bg-white font-sans text-slate-700 antialiased">
  <!-- sections go here -->
</body>
</html>
```

Forget the **viewport** meta and every `md:` class behaves as if the phone were a desktop.

Meta tags that matter

```
<meta name="description"
      content="Go from zero clients to a full pipeline in 90 days. 180 pages, 12 templates." />

<meta property="og:title"          content="The Freelance Playbook" />
<meta property="og:description"    content="180 pages. 12 templates. One system." />
<meta property="og:image"          content="https://yoursite.com/assets/og.png" />
<meta property="og:type"           content="website" />
<meta name="twitter:card"          content="summary_large_image" />
```

This is what shows up when someone pastes your link in WhatsApp. It sells before the page loads.

Run it

```
npm run dev           # terminal 1 – Tailwind watches and rebuilds
```

Open `index.html` with **Live Server** (VS Code) – or:

```
npx serve .           # terminal 2
```

- Save HTML → Tailwind regenerates only the classes you used.
- `dist/output.css` starts near **empty** and grows with your markup.

Design System First

Tokens before markup

```
/* src/input.css */
@import "tailwindcss";

@theme {
  --color-brand:      #c96442;    /* buttons, accents */
  --color-brand-600:  #ad5234;    /* brand as small text – AA contrast */
  --color-ink:        #141413;    /* headings */
  --color-parchment:  #faf8f3;    /* alternating section backgrounds */

  --font-display: "Poppins", ui-sans-serif, system-ui, sans-serif;
  --radius-card: 1rem;
}
```

Decide the palette **once**. Five minutes here saves an hour of find-and-replace later.

Wire up the font

```
<link rel="preconnect" href="https://fonts.googleapis.com" />
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin />
<link href="https://fonts.googleapis.com/css2?family=Poppins:wght@600;700;800&display=swap"
      rel="stylesheet" />
```

```
<h1 class="font-display">The Freelance Playbook</h1>
```

- `display=swap` shows fallback text immediately instead of a blank gap.
- Load **only** the weights you use — here `font-semibold 600`, `font-bold 700`, `font-extrabold 800`.
- Body text stays on the system stack, so **no 400** and no wasted download.

Use a weight you didn't load and the browser fakes it by smearing the nearest one. It looks wrong and you won't know why.

Base defaults

```
@layer base {  
  h1, h2, h3 { font-family: var(--font-display); color: var(--color-ink); }  
  section    { scroll-margin-top: 5rem; }    /* sticky nav won't cover anchors */  
}
```

- `@layer base` is for element-level defaults, not for component styles.
- `scroll-margin-top` is the fix for "the heading hides behind the navbar".

Two utilities you'll reuse all day

```
@utility wrap {  
  margin-inline: auto;  
  max-width: 72rem;  
  padding-inline: 1rem;  
}  
  
@utility btn {  
  display: inline-flex;  
  align-items: center;  
  gap: 0.5rem;  
  border-radius: 0.5rem;  
  padding: 0.75rem 1.5rem;  
  font-weight: 600;  
}
```

```
<div class="wrap"> ... </div>  
<a class="btn bg-brand text-white hover:bg-brand-600">Get the eBook</a>
```

Section 1 — Navbar

Sticky, blurred, one CTA

```
<header class="sticky top-0 z-50 border-b border-slate-200 bg-white/80 backdrop-blur">
  <nav class="wrap flex h-16 items-center justify-between">
    <a href="#" class="font-display text-lg font-extrabold text-ink">PLAYBOOK</a>

    <div class="hidden items-center gap-8 md:flex">
      <a href="#inside" class="hover:text-brand-600">What's inside</a>
      <a href="#pricing" class="hover:text-brand-600">Pricing</a>
      <a href="#pricing" class="btn bg-ink text-white">Get the eBook</a>
    </div>

    <button id="menuBtn" class="md:hidden" aria-label="Menu" aria-expanded="false">≡</button>
  </nav>
</header>
```

The mobile menu (the only JS)


```
<div id="menu" class="hidden border-t border-slate-200 bg-white md:hidden">
  <div class="wrap flex flex-col gap-4 py-4">
    <a href="#inside">What's inside</a>
    <a href="#pricing">Pricing</a>
  </div>
</div>

<script>
  const btn = document.getElementById('menuBtn')
  const menu = document.getElementById('menu')
  btn.addEventListener('click', () => {
    const open = menu.classList.toggle('hidden') === false
    btn.setAttribute('aria-expanded', String(open))
  })
</script>
```

Section 2 — Hero

One markup, two layouts

One hero, two layouts — same markup

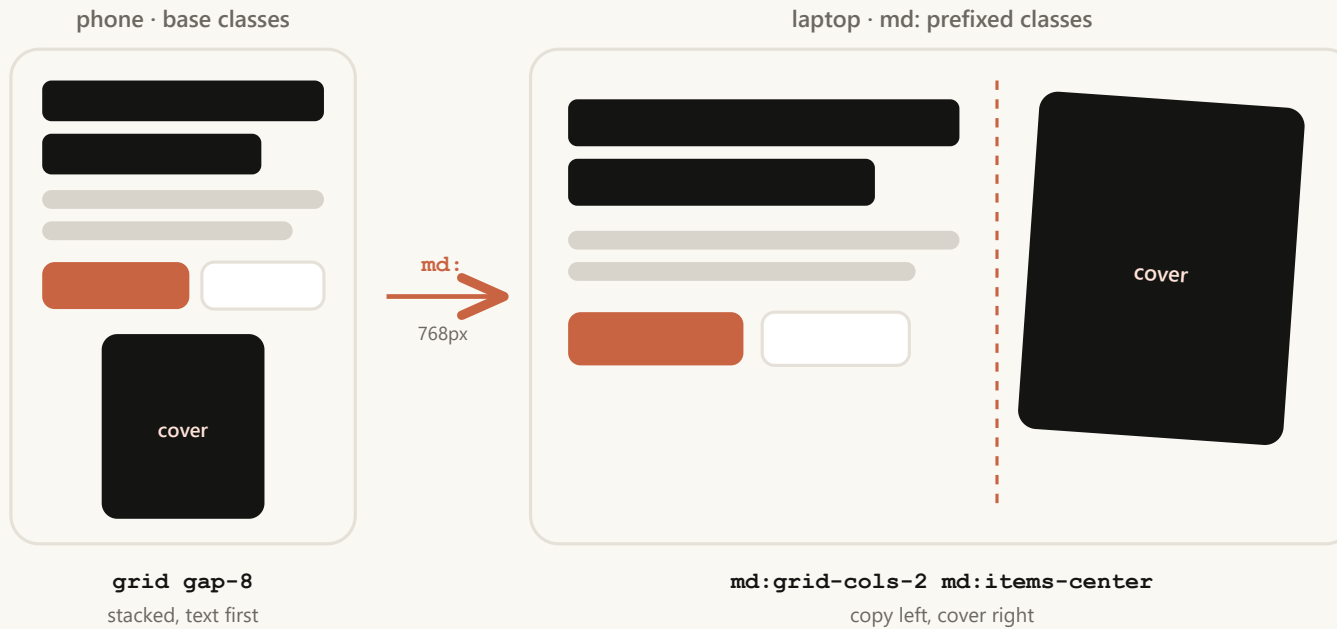

Write the phone layout first. The `md:` classes are the only thing you add for desktop.

Hero markup

```
<section class="bg-parchment py-16 md:py-24">
  <div class="wrap grid items-center gap-10 md:grid-cols-2">

    <div>
      <span class="rounded-full bg-brand/10 px-3 py-1 text-sm font-semibold text-brand-600">
        New · 2nd edition
      </span>
      <h1 class="mt-4 text-4xl font-extrabold leading-tight md:text-5xl lg:text-6xl">
        From zero clients to a <span class="text-brand-600">full pipeline</span> in 90 days.
      </h1>
      <p class="mt-4 max-w-prose text-lg">180 pages, 12 templates, one repeatable system.</p>
    </div>

    <!-- cover goes here -->
  </div>
</section>
```

The two CTAs

```
<div class="mt-8 flex flex-col gap-3 sm:flex-row">
  <a href="#pricing"
    class="btn justify-center bg-brand text-white shadow-lg shadow-brand/30
      transition hover:bg-brand-600 hover:-translate-y-0.5">
    Get the eBook — ₹499
  </a>
  <a href="#inside"
    class="btn justify-center border border-slate-300 hover:border-ink">
    Read a free chapter
  </a>
</div>
```

- Full-width stacked on a phone (`flex-col`), side by side from `sm:` .
- `-translate-y-0.5` on hover: the button physically lifts. Cheap, effective.

The book cover

```
<div class="relative mx-auto w-64 md:w-full md:max-w-sm">
  <div class="absolute -inset-6 rounded-full bg-brand/20 blur-3xl"></div>

  
</div>
```

- `-inset-6 + blur-3xl` = a soft glow behind the cover. Negative values doing real work.
- `aspect-[3/4]` locks the book ratio at every width, so nothing jumps while loading.

Section 3 — Trust Bar

Numbers beat adjectives

```
<section class="border-y border-slate-200 py-10">
  <div class="wrap grid grid-cols-2 gap-8 text-center md:grid-cols-4">
    <div>
      <p class="font-display text-3xl font-extrabold text-ink">4,200+</p>
      <p class="mt-1 text-sm text-slate-500">Readers</p>
    </div>
    <!-- 12 templates · 4.9★ rating · 30-day refund -->
  </div>
</section>
```

- **2 columns** on a phone, **4** from `md:` — never four cramped columns at 375px.
- Number big and dark, label small and grey. The eye reads the number first.

Section 4 — What's Inside

Chapter cards, 1 → 2 → 3

```
<section id="inside" class="py-16 md:py-24">
  <div class="wrap">
    <h2 class="text-center text-3xl font-extrabold md:text-4xl">What's inside</h2>
    <p class="mx-auto mt-3 max-w-2xl text-center">Twelve chapters. Every one ends with a template.</p>

    <div class="mt-12 grid gap-6 sm:grid-cols-2 lg:grid-cols-3">
      <!-- cards -->
    </div>
  </div>
</section>
```

`mx-auto max-w-2xl text-center` is the standard section intro. Copy that line everywhere.

One card

```
<article class="group rounded-card border border-slate-200 p-6
      transition hover:-translate-y-1 hover:border-brand hover:shadow-lg">
  <div class="flex size-11 items-center justify-center rounded-lg bg-brand/10 text-xl">✂</div>

  <h3 class="mt-4 text-lg font-bold">Positioning</h3>
  <p class="mt-2 text-sm leading-relaxed">
    Pick the niche that pays, and say no to the rest without losing sleep.
  </p>

  <span class="mt-4 inline-block text-sm font-semibold text-brand-600
    opacity-0 transition group-hover:opacity-100">Chapter 01 →</span>
</article>
```

`group` + `group-hover:opacity-100` : the label appears when the **card** is hovered, not the label.

Section 5 — Author

Two columns, and the mobile order

```
<section class="bg-parchment py-16 md:py-24">
  <div class="wrap grid items-center gap-10 md:grid-cols-[280px_1fr]">

    <div>
      <h2 class="text-3xl font-extrabold">Written by someone who did it</h2>
      <p class="mt-4">9+ years shipping production software...</p>
    </div>
  </div>
</section>
```

- `md:grid-cols-[280px_1fr]` — arbitrary track sizes when `grid-cols-2` is the wrong split.
- Need the photo below the text on mobile? Add `order-last md:order-first`.

Section 6 — Testimonials

Quote, face, name

```
<figure class="rounded-card border border-slate-200 p-6">
  <div class="text-brand" aria-label="5 out of 5 stars">★★★★★</div>

  <blockquote class="mt-3 leading-relaxed">
    "Chapter 3 alone paid for the book twice over in the first week."
  </blockquote>

  <figcaption class="mt-5 flex items-center gap-3 border-t border-slate-100 pt-4">
    
    <div>
      <p class="text-sm font-semibold text-ink">Nusrat J.</p>
      <p class="text-xs text-slate-500">Product Designer</p>
    </div>
  </figcaption>
</figure>
```

`<figure>` + `<blockquote>` + `<figcaption>` — real semantics cost nothing and help screen readers.

Section 7 — Pricing

Two tiers, one obvious winner

```
<div class="wrap grid max-w-4xl gap-8 md:grid-cols-2 md:items-center">

  <div class="rounded-card border border-slate-200 p-8">
    <h3 class="font-bold">eBook only</h3>
    <p class="mt-4 font-display text-4xl font-extrabold text-ink">₹499</p>
    <ul class="mt-6 space-y-3 text-sm"> ... </ul>
    <a href="#" class="btn mt-8 w-full justify-center border border-slate-300">Buy the eBook</a>
  </div>

  <!-- highlighted tier -->
</div>
```

- `space-y-3` puts the gap **between** list items, not around them.
- `w-full justify-center` makes both buttons the same size — no visual bias by accident.

The highlighted tier

```
<div class="relative rounded-card bg-ink p-8 text-white ring-2 ring-brand md:scale-105">

  <span class="absolute -top-3 left-1/2 -translate-x-1/2 rounded-full
    bg-brand px-3 py-1 text-xs font-bold uppercase">
    Most popular
  </span>

  <h3 class="font-bold">eBook + templates</h3>
  <p class="mt-4 font-display text-4xl font-extrabold">£899</p>
  <a href="#" class="btn mt-8 w-full justify-center bg-brand hover:bg-brand-600">Get everything</a>
</div>
```

`-top-3` lifts the badge onto the card edge, `-translate-x-1/2` centres it. Negative values, exactly as designed.

Guarantee line

```
<p class="mt-8 text-center text-sm text-slate-500">  
   Secure checkout · 30-day refund, no questions asked · Instant PDF + EPUB download  
</p>
```

- Put risk-reversal **directly under** the buttons — it's read while the finger hovers.
- Three short claims, separated by  · . Nobody reads a paragraph here.

Section 8 — FAQ

Accordion with zero JavaScript

```
<details class="group border-b border-slate-200 py-4">
  <summary class="flex cursor-pointer list-none items-center justify-between
    font-semibold text-ink [&::-webkit-details-marker]:hidden">
    Is this for complete beginners?
    <span class="transition group-open:rotate-180">_</span>
  </summary>

  <p class="mt-3 leading-relaxed">
    Yes. Chapter 1 assumes you have never sent a proposal.
  </p>
</details>
```

- `<details>` / `<summary>` is native HTML: keyboard accessible, works with JS disabled.
- `group-open:rotate-180` flips the chevron when the parent `<details>` is open.
- `list-none` kills the default triangle; the arbitrary variant covers Safari's own marker.

Section 9 — Final CTA & Footer

Ask one last time

```
<section class="bg-ink py-16 text-center text-white md:py-24">
  <div class="wrap">
    <h2 class="text-3xl font-extrabold md:text-4xl">Start this week, not next quarter.</h2>
    <p class="mx-auto mt-4 max-w-xl text-slate-300">4,200 readers already did.</p>
    <a href="#pricing" class="btn mt-8 bg-brand text-white hover:bg-brand-600">
      Get the eBook — ₳499
    </a>
  </div>
</section>

<footer class="border-t border-slate-200 py-8 text-center text-sm text-slate-500">
  © 2026 Md Tausif Hossain · <a href="#" class="hover:text-brand-600">Terms</a>
</footer>
```

Responsive & Polish

The responsive pass

Build the whole page at **375px** first. Then widen and fix.

Widen to	Usually add
sm: 640	buttons side by side, 2-col stat grid
md: 768	hero splits in two, nav links replace burger
lg: 1024	3-col card grids, bigger headings
xl: 1280	more whitespace, nothing new

Drag the browser edge slowly from 320px to 1920px. Every ugly moment is a missing prefix.

Responsive type & spacing

```
<h1 class="text-4xl md:text-5xl lg:text-6xl">  
<section class="py-16 md:py-24">  
<div class="gap-6 md:gap-10">
```

- Headings, section padding, and gaps are the three things that always need scaling.
- Body copy usually doesn't — `text-base` reads fine at every width.
- Cap line length with `max-w-prose`. Full-width paragraphs on a 27" monitor are unreadable.

Interaction polish

```
<a class="transition duration-200 hover:-translate-y-0.5 hover:shadow-lg  
      focus-visible:outline-none focus-visible:ring-2 focus-visible:ring-brand  
      motion-reduce:transition-none motion-reduce:hover:translate-y-0">
```

- One `transition` class covers every animated property on the element.
- `focus-visible:ring` — keyboard users need to see where they are.
- `motion-reduce:` respects the OS "reduce motion" setting. Two classes, real inclusion.

Accessibility checklist

- One `<h1>` per page; `h2` → `h3` in order, never skipped.
- Every `<img>` has `alt` — decorative ones get `alt=""` .
- Buttons that aren't links are `<button>` ; links that aren't buttons are `<a>` .
- Colour contrast **4.5:1** for body text — `#c96442` on white fails; `#ad5234` passes.
- Tab through the whole page. If you lose the focus ring, fix it.

Images & performance

```

```

- `width + height` reserve the space → no layout shift while loading.
- `loading="lazy"` on everything **below** the fold; `eager` on the hero image only.
- Export **WebP**, sized to what it actually renders at. A 4000px cover in a 320px slot is wasted bandwidth.

Ship It

Build & deploy

```
npm run build          # minified dist/output.css
```

```
npx vercel             # or: drag the folder onto netlify.com/drop
```

- Static HTML + one CSS file — every host takes it, most for free.
- GitHub Pages: push, then Settings → Pages → deploy from `main`.
- Check `dist/output.css` is **committed or built in CI**. "Works locally, unstyled in prod" = you shipped without it.

Before you send the link

- [] Test at 375px, 768px, 1440px — real device if you can
- [] Every CTA scrolls to `#pricing`
- [] OG image renders (paste the link into WhatsApp)
- [] Lighthouse ≥ 90 on Performance and Accessibility
- [] `<title>` and `meta description` are written, not `Document`
- [] favicon exists



Build it (live, 25 min)

Ship your own eBook landing page:

1. Tailwind CLI setup + `index.html` with the viewport meta.
2. `@theme` : your brand colour, display font, `wrap` and `btn` utilities.
3. Sticky navbar with a working mobile menu.
4. Hero: `grid md:grid-cols-2` , headline, two CTAs, rotated cover.
5. Chapters grid `1 → 2 → 3` , cards with `group-hover` .
6. Pricing: two tiers, badge positioned with `-top-3 -translate-x-1/2` .
7. FAQ with `<details>` + `group-open:rotate-180` .
8. Deploy it and post the URL in the group.

Recap

A landing page is **one promise, one action** — nine sections, each with a job

Tailwind CLI for static sites; the browser CDN is for prototypes only

Tokens first: `@theme` colours + font, `@utility wrap` + `btn`

Build at **375px**, then add `sm:` `md:` `lg:` where the layout breaks

`group` / `group-open` / `-top-3` — hover states and badges without a line of CSS

`<details>` gives you a free, accessible accordion

Ship: `--minify`, real `alt` text, OG tags, Lighthouse ≥ 90

Let's connect

Questions after class? Reach out any time.

 Portfolio: tausif.bd

 LinkedIn: linkedin.com/in/tausif1337

 GitHub: github.com/tausif1337

 WhatsApp: wa.me/8801748181448

Keep building. See you next session.