Project: eBook Selling Landing Page

Build-along · HTML · CSS · Tailwind CSS · responsive · deploy



Md Tausif Hossain

Your React Instructor

Tech Lead @ DevTechGuru · Founder, **TechnicalBind**

9+ years shipping production software

Instructor @ **Ostad**: ostad.app/instructor/73688

🌐 tausif.bd · GitHub · LinkedIn

What we'll cover

- The **anatomy** of a page that actually sells
- **Setup**: Tailwind CLI, folders, `index.html` boilerplate
- **Two colours, one font**: `@theme` brand tokens + Poppins
- Build all **eight sections + footer**, top to bottom
- **Responsive pass**: mobile-first, then `sm:` / `md:` / `lg:`
- **Polish**: hover states, `<details>` menu + FAQ, a11y, then **deploy**

The Project

What we're building

A one-page site that sells a single eBook — the classic freelance deliverable.

- 🧭 Sticky **menu bar** with a ≡ phone menu — no `<script>` tag
- 🎯 **Hero**: headline, two CTAs, a book cover drawn in **pure HTML**
- ⭐ **Numbers**, 📚 **chapters**, 👤 **author**, 💬 **reviews**
- 💳 **Price** with a highlighted plan
- ❓ **Questions** using `<details>` — no JavaScript
- 📱 Looks right at **375px** and at **1920px**

The sections

Eight sections and a footer — each one has a job

dark = the two that decide the sale

1 Menu bar
Orient the reader.
Links · one CTA · ≡ menu

2 Hero
One promise, in five seconds.
Headline · 2 CTAs · cover

3 Numbers
Lower the risk fast.
4,200+ · 12 · 4.9★ · 30-day

4 What you learn
Show the value.
Six chapter cards in a grid

5 Author
Why trust the source?
Photo · story · links

6 Reviews
Proof it worked for others.
Quote · initials · name

7 Price
Make the ask, plainly.
Two plans · guarantee line

8 Questions
Kill the last objection.
details + summary, no JS

Footer
Close the page quietly.
© · Terms · Privacy · Questions

> If a section can't answer "what job does this do?", cut it. Long pages don't convert — clear ones do.

What makes a landing page sell

- **One** promise. One product. One primary action.
- The reader decides in **5 seconds** — put the promise above the fold.
- Repeat the **same** CTA text everywhere: Get the eBook.
- Every claim needs proof next to it: number, quote, or face.
- Objections don't disappear when ignored. Answer them in the FAQ.

> You're not writing a brochure. You're removing reasons to leave.

Project structure

```
ebook-landing/
├── index.html        the whole page (one file is fine here)
├── src/
│   └── input.css     @import "tailwindcss";  + @theme (two colours)
├── dist/
│   └── output.css    generated, gitignored — never edit by hand
├── images/
│   └── tausif.jpg    the only image: the author photo
├── .gitignore        node_modules/ · dist/ · .env
└── package.json
```

> One HTML file, one CSS input, one image. That's the whole project.

Setup

Install the Tailwind CLI

```
mkdir ebook-landing && cd ebook-landing
npm init -y
npm install tailwindcss @tailwindcss/cli
```

```
// package.json
"scripts": {
  "dev":   "npx @tailwindcss/cli -i ./src/input.css -o ./dist/output.css --watch",
  "build": "npx @tailwindcss/cli -i ./src/input.css -o ./dist/output.css --minify"
}
```

> No React, no Vite, no bundler. Tailwind v4 scans your HTML and writes one CSS file.

The CDN option (prototyping only)

```
<script src="https://cdn.jsdelivr.net/npm/@tailwindcss/browser@4"></script>
```

- Zero setup — good for a CodePen or a 10-minute demo.
- 🚫 Ships the **whole engine** to the browser and compiles on every load.
- Never hand a client a page built this way. Use the CLI for anything real.

`index.html` boilerplate

```
<!doctype html>
<html lang="en" class="scroll-smooth">
  <head>
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1" />
    <title>The Freelance Playbook | eBook by Md Tausif Hossain</title>
    <link rel="stylesheet" href="./dist/output.css" />
  </head>
  <body class="bg-white font-[Poppins] text-slate-700">
    <!-- sections go here -->
  </body>
</html>
```

- `scroll-smooth` on `<html>`: every `#pricing` link glides instead of jumping.

> Forget the **viewport** meta and every `md:` class behaves as if the phone were a desktop.

Title and description

```
<title>The Freelance Playbook | eBook by Md Tausif Hossain</title>
<meta name="description"
      content="Learn how to find freelance clients in 90 days. 180 pages and 12 ready-to-use templates." />
```

- `<title>` is the browser tab **and** the blue link on Google.
- `description` is the grey text under it. Write it like ad copy: the promise, then the proof.

> Want a rich preview when someone pastes your link in WhatsApp? That's `og:title` + `og:image` — the next tags to add.

Run it

```
npm run dev          # terminal 1 — Tailwind watches and rebuilds
```

Open `index.html` with **Live Server** (VS Code) — or:

```
npx serve .          # terminal 2
```

- Save HTML → Tailwind regenerates only the classes you used.
- `dist/output.css` starts near **empty** and grows with your markup.

Colours & Font

Two colours in `@theme`

```
/* src/input.css — the whole file */
@import "tailwindcss";

@theme {
  --color-brand: #c96442;
  --color-brand-dark: #ad5234;
}
```

- Tailwind reads every `--color-*` name and builds the normal utilities from it: `bg-brand` · `text-brand` · `border-brand` · `bg-brand/10` · `hover:bg-brand-dark`
- Change the hex here and the whole page changes.

The whole palette: four colours

Colour	Used for	Comes from
`brand`	buttons, badges, stars, the book spine	ours — `@theme`
`brand-dark`	orange **text** on white, button hover	ours — `@theme`
`slate-900`	headings, the dark plan card, the cover	Tailwind
`orange-50`	cream background: hero, author, price	Tailwind

Body text is `text-slate-700`, set once on `<body>`.

> Only make a token when Tailwind doesn't already have the colour. Two custom, two free.

Wire up the font

```
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Poppins:ital,wght@0,100;…;1,900&display=swap"
      rel="stylesheet">
```

```
<body class="bg-white font-[Poppins] text-slate-700">
```

- `font-[Poppins]` is an **arbitrary value**. Set once on `<body>`, every element inherits it.
- `display=swap` shows fallback text immediately instead of a blank gap.
- This link pulls **all 18** Poppins styles. Before shipping, trim it to what the page uses: 400, 600, 700, 800.

Scroll room for the sticky menu

```
<section id="inside"  class="scroll-mt-20 py-16 md:py-24">
<section id="author"  class="scroll-mt-20 bg-orange-50 py-16 md:py-24">
<section id="reviews" class="scroll-mt-20 py-16 md:py-24">
<section id="pricing" class="scroll-mt-20 bg-orange-50 py-16 md:py-24">
<section id="faq"     class="scroll-mt-20 py-16 md:py-24">
```

- The menu bar is `h-16` (64px). `scroll-mt-20` (80px) stops the jump **below** it.
- Only sections with an `id` need it — they are the ones links jump to.
- `bg-orange-50` on hero, author and price breaks the long page into chapters.

Two class lists you'll repeat

```
<!-- container: the same three classes in every section -->
<div class="mx-auto max-w-6xl px-4"> … </div>

<!-- buttons: same shape, different colour (hero · hero · menu bar) -->
<a class="rounded-lg bg-brand px-6 py-3 … text-white hover:bg-brand-dark">
<a class="rounded-lg border border-slate-300 px-6 py-3 … hover:border-slate-900">
<a class="rounded-lg bg-slate-900 px-4 py-2 … text-white hover:bg-slate-700">
```

- No `@utility`, no `@apply`, no custom CSS: the class list **is** the component.
- `rounded-lg` + padding + `font-semibold` = the shape. Swap the colour pair per variant.
- `max-w-6xl` = 72rem. The FAQ narrows to `max-w-3xl` — long lines are hard to read.

Section 1 — Menu Bar

Sticky, blurred, one CTA

```
<header class="sticky top-0 z-50 border-b border-slate-200 bg-white/90 backdrop-blur">
  <nav class="mx-auto flex h-16 max-w-6xl items-center justify-between px-4">
    <a href="#" class="text-lg font-extrabold text-slate-900">PLAYBOOK</a>

    <div class="flex items-center gap-4 md:gap-8">
      <a href="#inside"  class="hidden hover:text-brand-dark md:block">What you learn</a>
      <a href="#author"  class="hidden hover:text-brand-dark md:block">Author</a>
      <a href="#reviews" class="hidden hover:text-brand-dark md:block">Reviews</a>
      <a href="#pricing" class="rounded-lg bg-slate-900 px-4 py-2 font-semibold text-white
                                hover:bg-slate-700 md:px-5">Get the eBook</a>
      <!-- ≡ menu goes here -->
    </div>
  </nav>
</header>
```

- `hidden md:block` : hide on a phone, show from 768px up. The CTA has no `hidden` — it's always there.

The phone menu (no script tag)


```
<details class="md:hidden">
  <summary class="cursor-pointer list-none p-1 text-2xl">≡</summary>

  <!-- onclick closes the menu after you tap a link. -->
  <div onclick="this.parentElement.open = false"
       class="absolute top-16 left-0 flex w-full flex-col gap-4
              border-b border-slate-200 bg-white p-4 shadow-lg">
    <a href="#inside"  class="hover:text-brand-dark">What you learn</a>
    <a href="#author"  class="hover:text-brand-dark">Author</a>
    <a href="#reviews" class="hover:text-brand-dark">Reviews</a>
    <a href="#pricing" class="hover:text-brand-dark">Price</a>
  </div>
</details>
```

- Same `<details>` tag as the FAQ — open and close are built into the browser.
- `absolute top-16` : the box hangs under the 64px bar instead of pushing the page down.

Section 2 — Hero

One markup, two layouts

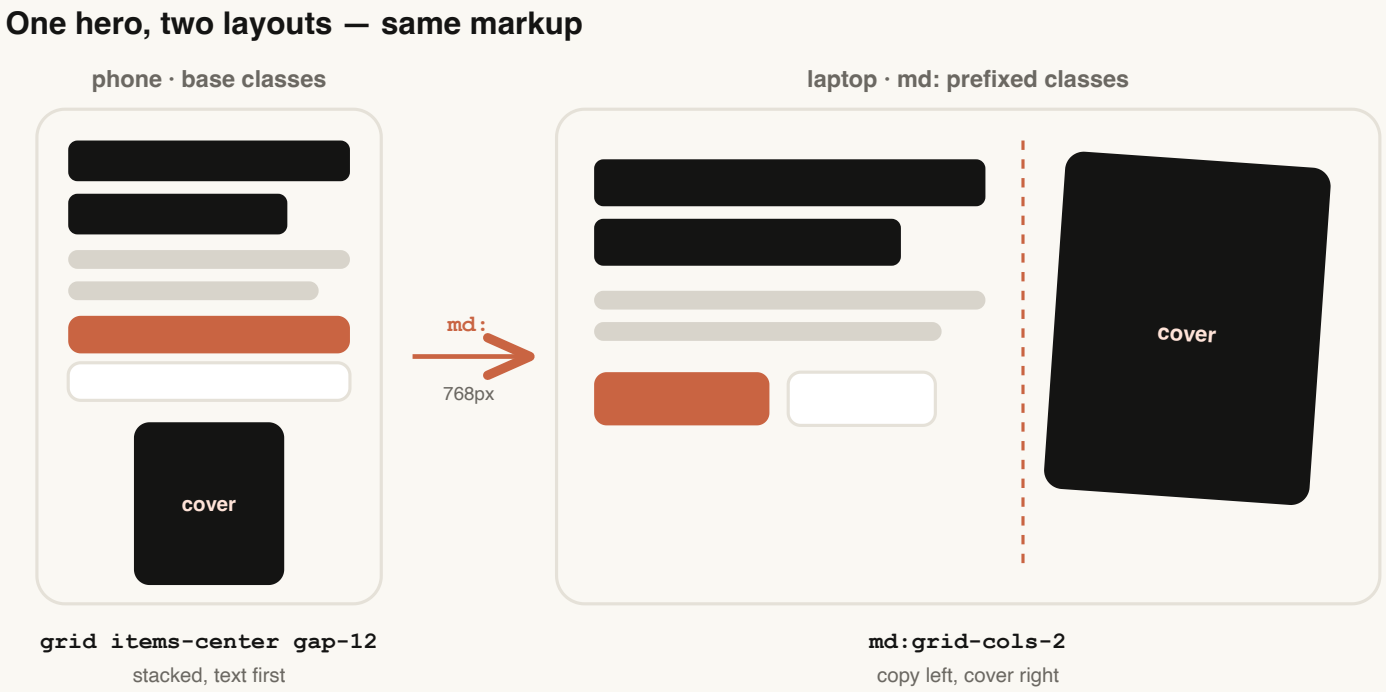

> Write the phone layout first. The `md:` classes are the only thing you add for desktop.

Hero markup

```
<section class="bg-orange-50 py-16 md:py-24">
  <div class="mx-auto grid max-w-6xl items-center gap-12 px-4 md:grid-cols-2">
    <div>
      <span class="rounded-full bg-brand/10 px-3 py-1 text-sm font-semibold text-brand-dark">
        New · 2nd edition
      </span>
      <h1 class="mt-4 text-4xl font-extrabold text-slate-900 md:text-5xl lg:text-6xl">
        Get your <span class="text-brand-dark">first clients</span> in 90 days.
      </h1>
      <p class="mt-4 text-lg">180 pages. 12 ready-to-use templates. One simple plan…</p>
      <!-- two CTAs go here -->
    </div>
    <!-- cover goes here -->
  </div>
</section>
```

- `bg-brand/10` : the brand colour at 10% opacity — a tinted pill from one token.
- The heading grows with the screen: 36px phone, 48px tablet, 60px desktop.

The two CTAs

```
<div class="mt-8 flex flex-col gap-3 sm:flex-row sm:flex-wrap">
  <a href="#pricing" class="rounded-lg bg-brand px-6 py-3 text-center font-semibold
                            whitespace-nowrap text-white hover:bg-brand-dark">
    Get the eBook ৳499
  </a>
  <a href="#inside" class="rounded-lg border border-slate-300 px-6 py-3 text-center
                           font-semibold whitespace-nowrap hover:border-slate-900">
    Read one chapter free
  </a>
</div>
```

- Full-width stacked on a phone (`flex-col`), side by side from `sm:` .
- `sm:flex-wrap` + `whitespace-nowrap` : if both don't fit, the second button drops a line instead of squashing.

The book cover — no image file

```
<div class="mx-auto flex aspect-[3/4] w-64 rotate-3 overflow-hidden
            rounded-lg bg-slate-900 shadow-2xl">
  <div class="w-3 bg-brand"></div>
  <div class="flex flex-1 flex-col p-6">
    <p class="text-xs font-bold tracking-widest text-brand">2ND EDITION</p>
    <p class="mt-8 text-3xl leading-none font-extrabold text-white">
      THE<br />FREELANCE<br /><span class="text-brand">PLAYBOOK</span>
    </p>
    <div class="mt-4 h-1 w-12 bg-brand"></div>
    <p class="mt-5 text-sm text-slate-400">Get your first clients in 90 days.</p>
    <p class="mt-auto text-xs font-bold text-white">MD TAUSIF HOSSAIN</p>
  </div>
</div>
```

- A dark box, a `w-3` orange spine, and text. `aspect-[3/4]` locks the book shape; `rotate-3` tilts it.
- `flex-col` + `mt-auto` pushes the author name to the bottom edge.

Section 3 — Numbers

Numbers beat adjectives

```
<section class="border-y border-slate-200 py-10">
  <div class="mx-auto grid max-w-6xl grid-cols-2 gap-8 px-4 text-center md:grid-cols-4">
    <div>
      <p class="text-3xl font-extrabold text-slate-900">4,200+</p>
      <p class="mt-1 text-sm text-slate-500">Readers</p>
    </div>
    <!-- 12 Templates · 4.9★ Reader rating · 30-day Money back -->
  </div>
</section>
```

- **2 columns** on a phone, **4** from `md:` — never four cramped columns at 375px.
- Number big and dark, label small and grey. The eye reads the number first.

Section 4 — What You Learn

Chapter cards, 1 → 2 → 3

```
<section id="inside" class="scroll-mt-20 py-16 md:py-24">
  <div class="mx-auto max-w-6xl px-4">
    <h2 class="text-center text-3xl font-extrabold text-slate-900 md:text-4xl">
      What you will learn
    </h2>
    <p class="mx-auto mt-3 max-w-2xl text-center">
      12 chapters. Each chapter ends with a template you can use the same day.
    </p>

    <!-- 1 column on phone, 2 on small, 3 on large. -->
    <div class="mt-12 grid gap-6 sm:grid-cols-2 lg:grid-cols-3"> … six cards … </div>
  </div>
</section>
```

`mx-auto max-w-2xl text-center` is the standard section intro. Reviews and Price reuse it.

One card

```
<article class="rounded-2xl border border-slate-200 p-6 hover:border-brand hover:shadow-lg">
  <p class="text-3xl">🎯</p>
  <h3 class="mt-4 text-lg font-bold text-slate-900">Choose your work</h3>
  <p class="mt-2 text-sm">
    Pick the kind of work that pays well. Learn how to say no to the rest.
  </p>
  <p class="mt-4 text-sm font-semibold text-brand-dark">Chapter 01 →</p>
</article>
```

- An emoji is the icon — zero image files, zero icon library.
- `hover:border-brand hover:shadow-lg` : the card lights up and lifts. Two classes.
- Copy it six times: chapters 01 · 03 · 05 · 07 · 09 · 12.

Section 5 — Author

Two columns: photo + story

```
<section id="author" class="scroll-mt-20 bg-orange-50 py-16 md:py-24">
  <div class="mx-auto grid max-w-6xl items-center gap-10 px-4 md:grid-cols-[280px_1fr]">
    <img src="./images/tausif.jpg" alt="Md Tausif Hossain" width="600" height="600"
         class="mx-auto size-48 rounded-full object-cover shadow-lg md:size-64" />
    <div>
      <h2 class="text-3xl font-extrabold text-slate-900 md:text-4xl">
        Written by someone who has done it
      </h2>
      <p class="mt-4">I am Md Tausif Hossain. I am a Tech Lead at DevTechGuru…</p>
      <p class="mt-4">I wrote this book because junior developers kept asking me…</p>
    </div>
  </div>
</section>
```

- `md:grid-cols-[280px_1fr]` — arbitrary track sizes when `grid-cols-2` is the wrong split.
- `object-cover` fills the circle without squashing, even if you swap in a non-square photo.

Links that open a new tab

```
<!-- flex-wrap = the links drop to the next line when they run out of room -->
<p class="mt-6 flex flex-wrap gap-x-5 gap-y-1 text-sm text-slate-500">
  <a href="https://www.tausif.bd" target="_blank" rel="noopener"
     class="hover:text-brand-dark hover:underline">tausif.bd</a>
  <a href="https://github.com/tausif1337" target="_blank" rel="noopener"
     class="hover:text-brand-dark hover:underline">github.com/tausif1337</a>
  <a href="https://linkedin.com/in/tausif1337" target="_blank" rel="noopener"
     class="hover:text-brand-dark hover:underline">linkedin.com/in/tausif1337</a>
</p>
```

- `target="_blank"` opens a new tab. `rel="noopener"` stops that tab from touching this page. Always use the two together.
- `gap-x-5 gap-y-1` : wide gaps across, tight gaps when the links wrap.

Section 6 — Reviews

Quote, face, name

```
<figure class="rounded-2xl border border-slate-200 p-6">
  <p class="text-brand">★★★★★</p>
  <blockquote class="mt-3">"Chapter 3 helped me get a client in my first week…"</blockquote>
  <figcaption class="mt-5 flex items-center gap-3 border-t border-slate-100 pt-4">
    <div class="flex size-10 items-center justify-center rounded-full
                bg-brand text-xs font-bold text-white">NJ</div>
    <div>
      <p class="text-sm font-semibold text-slate-900">Nusrat J.</p>
      <p class="text-xs text-slate-500">Product Designer</p>
    </div>
  </figcaption>
</figure>
```

- `<figure>` + `<blockquote>` + `<figcaption>` : real semantics, free help for screen readers.
- No photos: initials in a circle — `bg-brand` , `bg-slate-700` , `bg-slate-400` .

Section 7 — Price

Two plans, one obvious winner

```
<div class="mx-auto mt-12 grid max-w-4xl items-center gap-8 md:grid-cols-2">
  <div class="rounded-2xl border border-slate-200 bg-white p-8">
    <h3 class="font-bold text-slate-900">eBook only</h3>
    <p class="mt-4 text-4xl font-extrabold text-slate-900">৳499</p>
    <ul class="mt-6 space-y-3 text-sm">
      <li>✓ 180 pages, 12 chapters</li> …
      <li class="text-slate-400">✗ Templates</li>
    </ul>
    <a href="#" class="mt-8 block rounded-lg border border-slate-300 px-6 py-3
                       text-center font-semibold hover:border-slate-900">Buy the eBook</a>
  </div>
  <!-- Plan 2: highlighted -->
</div>
```

- `max-w-4xl`, not `6xl`: two cards don't need the full width.
- `space-y-3` spaces the list; grey `✗` rows show what's missing.
- `block` + `text-center`: the button fills the card.

The highlighted plan

```
<div class="relative rounded-2xl bg-slate-900 p-8 text-white lg:scale-105">
  <span class="absolute -top-3 left-1/2 -translate-x-1/2 rounded-full
               bg-brand px-3 py-1 text-xs font-bold uppercase">
    Most popular
  </span>
  <h3 class="font-bold">eBook + templates</h3>
  <p class="mt-4 text-4xl font-extrabold">৳899</p>
  <ul class="mt-6 space-y-3 text-sm text-slate-300"> … </ul>
  <a href="#" class="mt-8 block rounded-lg bg-brand px-6 py-3 text-center
                     font-semibold hover:bg-brand-dark">Get everything</a>
</div>
```

- `-top-3` lifts the badge onto the edge; `-translate-x-1/2` centres it.
- `lg:scale-105` grows the card on desktop only — tablets are already tight.
- No colour on `h3` or price: they inherit `text-white`.

Guarantee line

```
<p class="mt-8 text-center text-sm text-slate-500">
  🔒 Safe payment · Money back in 30 days · Download right after you pay
</p>
```

- Put risk-reversal **directly under** the buttons — it's read while the finger hovers.
- Three short claims, separated by `·`. Nobody reads a paragraph here.
- Both buy buttons are `href="#"` for now. Put your real payment link there.

Section 8 — Questions

Accordion with zero JavaScript

```
<details class="group border-b border-slate-200 py-4">
  <summary class="flex cursor-pointer list-none items-center justify-between gap-4
                  font-semibold text-slate-900">
    Is this book for beginners?
    <span class="shrink-0 group-open:rotate-180">⌄</span>
  </summary>
  <p class="mt-3">
    Yes. Chapter 1 starts from zero. If you already have clients, you can start at Chapter 7.
  </p>
</details>
```

- `<details>` / `<summary>` is native HTML: keyboard accessible, works with JS disabled.
- `group-open:rotate-180` flips the chevron when the parent `<details>` is open.
- `flex` + `list-none` remove the default triangle; `shrink-0` keeps the ⌄ from squashing.

Footer

Close the page quietly

```
<footer class="border-t border-slate-200 py-8 text-center text-sm text-slate-500">
  © 2026 Md Tausif Hossain ·
  <a href="#" class="hover:text-brand-dark">Terms</a> ·
  <a href="#" class="hover:text-brand-dark">Privacy</a> ·
  <a href="#faq" class="hover:text-brand-dark">Questions</a>
</footer>
```

- Small and grey (`text-sm text-slate-500`) — the footer never competes with the buy buttons.
- `#faq` sends a last-minute doubter back to the answers.
- Every "Get the eBook" button points at `#pricing` . The page has one destination.

Responsive & Polish

The responsive pass

Build the whole page at **375px** first. Then widen and fix.

Widen to	What changes on this page
`sm:` 640	hero buttons side by side, cards + reviews go 2-col
`md:` 768	hero + author split in two, links replace ≡, numbers go 4-col
`lg:` 1024	cards + reviews go 3-col, `h1` hits 60px, top plan scales up
`xl:` 1280	nothing — `max-w-6xl` already caps the width

> Drag the browser edge slowly from 320px to 1920px. Every ugly moment is a missing prefix.

Responsive type & spacing

```
<h1 class="text-4xl md:text-5xl lg:text-6xl">
<h2 class="text-3xl md:text-4xl">
<section class="py-16 md:py-24">
<div class="flex items-center gap-4 md:gap-8">
```

- Headings, section padding, and gaps are the three things that always need scaling.
- Body copy usually doesn't — `text-lg` and the base size read fine at every width.
- Cap line length: `max-w-2xl` on section intros, `max-w-3xl` on the FAQ.

Hover states — the whole polish layer

Element	Hover
Primary button	`bg-brand` → `hover:bg-brand-dark`
Outline button	`border-slate-300` → `hover:border-slate-900`
Menu bar CTA	`bg-slate-900` → `hover:bg-slate-700`
Text links	`hover:text-brand-dark` (author links add `hover:underline`)
Chapter cards	`hover:border-brand hover:shadow-lg`
FAQ chevron	`group-open:rotate-180`

> Every clickable thing reacts. Next step: `transition` for smooth changes, `focus-visible:ring-2` for keyboard users.

Accessibility checklist

- One `<h1>` per page; `h2` → `h3` in order, never skipped.
- Every `<img>` has `alt` — decorative ones get `alt=""`.
- `<details>` / `<summary>` for the menu and the FAQ: keyboard support for free.
- Colour contrast **4.5:1** for body text — `#c96442` on white fails; `#ad5234` passes. That's why orange **text** uses `brand-dark`.
- Tab through the whole page. If you lose the focus ring, fix it.

Images & performance

```
<img src="./images/tausif.jpg" alt="Md Tausif Hossain"
     width="600" height="600"
     class="mx-auto size-48 rounded-full object-cover shadow-lg md:size-64" />
```

- **One** image on the whole page. Cover = HTML, avatars = initials, icons = emoji.
- `width` + `height` reserve the space → no layout shift while loading.
- 600px for a slot that is at most 256px: about 2× — sharp on retina, nothing wasted.
- It sits below the fold, so `loading="lazy"` is a free win.

Ship It

Build & deploy

```
npm run build        # minified dist/output.css
```

```
npx vercel           # or: drag the folder onto netlify.com/drop
```

- Static HTML + one CSS file — every host takes it, most for free.
- `dist/` is in `.gitignore`: on Vercel or Netlify, set the build command to `npm run build`.
- GitHub Pages has no build step — delete the `dist/` line from `.gitignore` and commit the CSS.

Before you send the link

- [ ] Test at 375px, 768px, 1440px — real device if you can
- [ ] Every "Get the eBook" lands on `#pricing`; every menu link on its section
- [ ] Both `href="#"` buy buttons point to your real payment link
- [ ] Lighthouse ≥ 90 on Performance and Accessibility
- [ ] `<title>` and `meta description` are written, not `Document`
- [ ] favicon exists

🧪 Build it (live, 25 min)

Ship your own eBook landing page:

1. Tailwind CLI setup + `index.html` with the viewport meta.
2. `@theme` : `brand` + `brand-dark` ; Poppins on `<body>` with `font-[Poppins]` .
3. Sticky menu bar, with a ≡ `<details>` menu for phones.
4. Hero: `grid md:grid-cols-2` , headline, two CTAs, a CSS-only book cover.
5. Chapters grid `1 → 2 → 3` , cards with `hover:border-brand` .
6. Price: two plans, badge positioned with `-top-3 -translate-x-1/2` .
7. FAQ with `<details>` + `group-open:rotate-180` .
8. Deploy it and post the URL in the group.

Recap

- A landing page is **one promise, one action** — eight sections + a footer, each with a job
- **Tailwind CLI** for static sites; the browser CDN is for prototypes only
- **Two tokens** in `@theme` (`brand`, `brand-dark`); the rest is Tailwind's palette
- Build at **375px**, then add `sm:` `md:` `lg:` where the layout breaks
- `<details>` twice: a ≡ menu and an accordion, almost zero JavaScript
- `aspect-[3/4]` / `-top-3` / `group-open` — a cover, a badge, a chevron, no custom CSS
- Ship: `--minify`, real `alt` text, real payment links, Lighthouse ≥ 90

Let's connect

Questions after class? Reach out any time.

🌐 Portfolio: **tausif.bd**

💼 LinkedIn: linkedin.com/in/tausif1337

💻 GitHub: github.com/tausif1337

💬 WhatsApp: wa.me/8801748181448

Keep building. See you next session.