


New Architectural Accessories

New architectural accessories provide a clean, consistent aesthetic by allowing accessories to be added to the Palladiom product line.


Features

- Able to be ganged with Palladiom keypads.
- Faceplates available in a variety of colors and finishes.
- Plastic receptacles used with all colors and finishes.
- Tamper resistant.
- Side or back wire installation capable.
- 125 V~ only (U.S. style wallbox).
- Compatible with Lutron's new architectural faceplates only.


**Note:** For applications requiring GFCI receptacles with Palladiom devices, refer to the [Using Ground Fault Circuit Interrupters with New Architectural Controls and Accessories](#) Application Note #681 (P/N 048681) at [www.lutron.com](http://www.lutron.com)




15 A  
Duplex  
Receptacle



20 A  
Duplex  
Receptacle



15 A  
USB Type A + C  
Receptacles



15 A  
USB Type C + C  
Receptacles

|                      |                      |                      |
|----------------------|----------------------|----------------------|
| Job Name:            | Model Numbers:       |                      |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number:          | <input type="text"/> | <input type="text"/> |

## Specifications

### Regulatory Approvals

- Lutron Quality Systems registered to ISO 9001:2015
- cULus® listed devices
- NOM Certified
- All receptacles comply with UL498
- USB receptacle complies with UL1310

### Ratings

- Duplex receptacle
  - 15 A 125 V~ 60 Hz
  - 20 A 125 V~ 60 Hz
  - Capable of being wired in a split feed installation
  - Fork terminal capable
- USB receptacles (Type A + C, Type C + C)
  - 15 A 125 V~ 60 Hz
  - Can be wired to a 20 A, 125 V circuit
  - ACTR: One Type A and one Type C port - See Table 1
  - CCTR: Two Type C ports - See Table 1
  - PD - Power Delivery port: The C port of Type A + C and Type C + C are designated as a PD - Power Delivery port capable of providing up to 20 V and 55 W. The remaining port is designated as a convenience port 7.5 W. See Table 1
  - Dielectric withstand: 1500 V~ for 1 minute
  - Off state power consumption: 0.1 W
  - USB ports: Rated for minimum 10,000 insertions and removals
  - Complies with battery charging specification BC1.2
  - Compatible with USB 1.1/2.0/3.0/PD 3.0 devices

### Terminals

- Each terminal accepts up to two 14 AWG to 10 AWG (1.5 mm<sup>2</sup> to 6.0 mm<sup>2</sup>) wires
- Side or back wire installation capable
- Solid or stranded wires
- Copper wires only

### Environment

- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C)
- Maximum 90% non-condensing relative humidity
- Indoor use only

### Mounting

- Typical U.S. style wallbox dimensions: 3.0 in (76 mm) H x 2.0 in (51 mm) W x 2.5 in (64 mm) D
- See **Mounting Diagrams** on page 10 for more details
- When ganging receptacles with low-voltage keypads, the installation should be in accordance with all local and national codes. Separation from low-voltage wiring must be maintained

Table 1

| Single Port in Use |                                |    |             | Two Ports in Use |                                |     |             |
|--------------------|--------------------------------|----|-------------|------------------|--------------------------------|-----|-------------|
| Type               | Port C (PD <sup>1</sup> ) Only |    | Port A Only | Type             | Port C (PD <sup>1</sup> ) Only |     | Port A Only |
| USB-AC             | PD <sup>1</sup> up to 55 W     | OR | 5 V 1.5 A   | USB-AC           | PD <sup>1</sup> up to 45 W     | AND | 5 V 1.5 A   |
|                    | 20 V 2.75 A                    |    |             |                  | 20 V 2.25 A                    |     |             |
|                    | 15 V 3 A                       |    |             |                  | 15 V 3 A                       |     |             |
|                    | 12 V 3 A                       |    |             |                  | 12 V 3 A                       |     |             |
|                    | 9 V 3 A                        |    |             |                  | 9 V 3 A                        |     |             |
|                    | 5 V 3 A                        |    |             |                  | 5 V 3 A                        |     |             |
| Type               | Port C (PD <sup>1</sup> ) Only |    | Port C Only | Type             | Port C (PD <sup>1</sup> ) Only |     | Port C Only |
| USB-CC             | PD <sup>1</sup> up to 55 W     | OR | 5 V 1.5 A   | USB-CC           | PD <sup>1</sup> up to 45 W     | AND | 5 V 1.5 A   |
|                    | 20 V 2.75 A                    |    |             |                  | 20 V 2.25 A                    |     |             |
|                    | 15 V 3 A                       |    |             |                  | 15 V 3 A                       |     |             |
|                    | 12 V 3 A                       |    |             |                  | 12 V 3 A                       |     |             |
|                    | 9 V 3 A                        |    |             |                  | 9 V 3 A                        |     |             |
|                    | 5 V 3 A                        |    |             |                  | 5 V 3 A                        |     |             |

<sup>1</sup> PD = Power Delivery. This is the fast charge port.


|                                                               |                                                                                                            |
|---------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Job Name:</b><br><input style="width: 90%;" type="text"/>  | <b>Model Numbers:</b><br><input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/> |
| <b>Job Number:</b> <input style="width: 150px;" type="text"/> | <input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/>                          |

Dimensions

U.S. Style

Measurements shown as: in (mm)

1-Gang

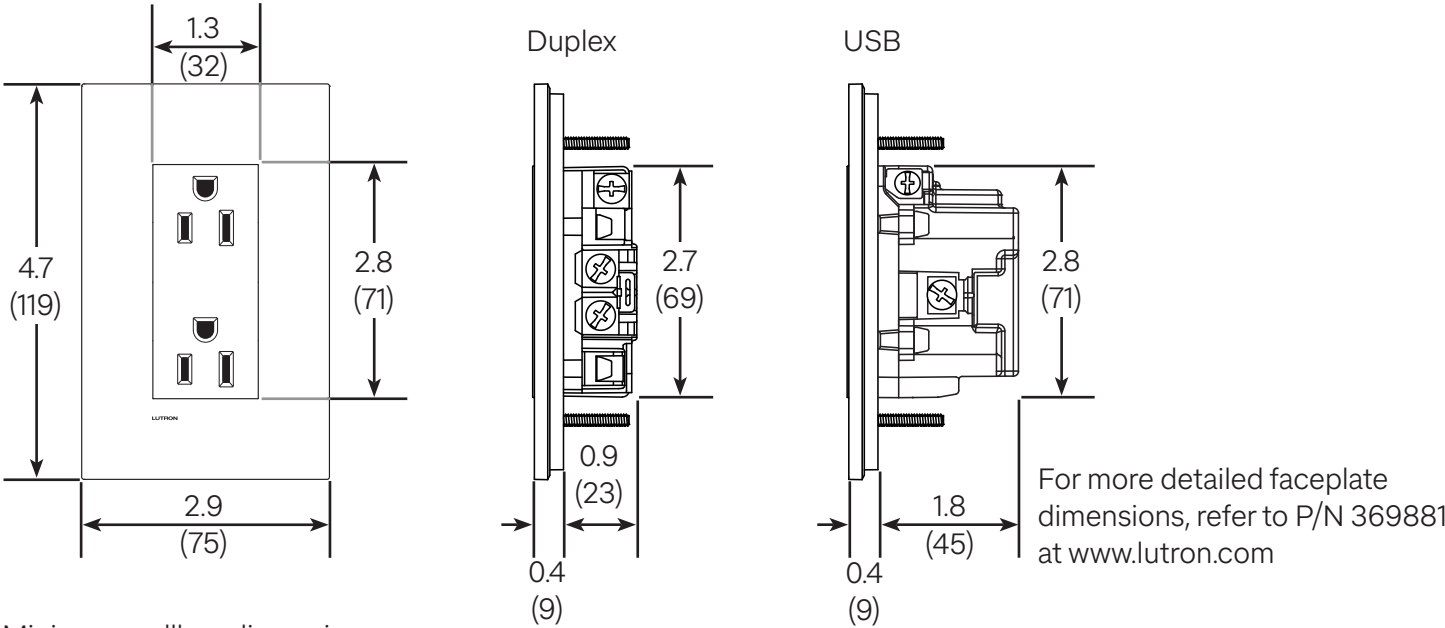


Minimum wallbox dimensions:  
3.0 in (76 mm) H x 2.0 in (51 mm) W x 2.5 in (64 mm) D

Multi-Gang


2-Gang

4.8 (122) W x 4.7 (119) H




3-Gang

6.6 (167) W x 4.7 (119) H

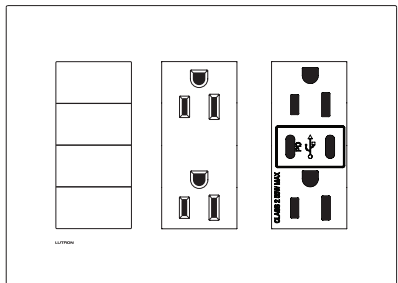


4-Gang

8.4 (213) W x 4.7 (119) H

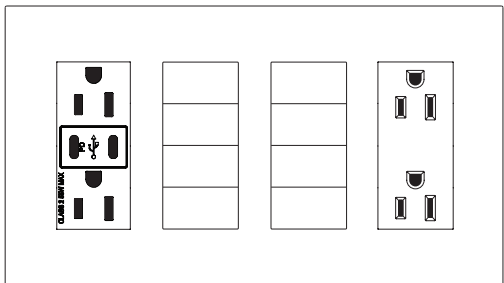

|                      |                      |                      |
|----------------------|----------------------|----------------------|
| Job Name:            | Model Numbers:       |                      |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number:          | <input type="text"/> | <input type="text"/> |

How to Build an Accessory Model Number - *TR model only*

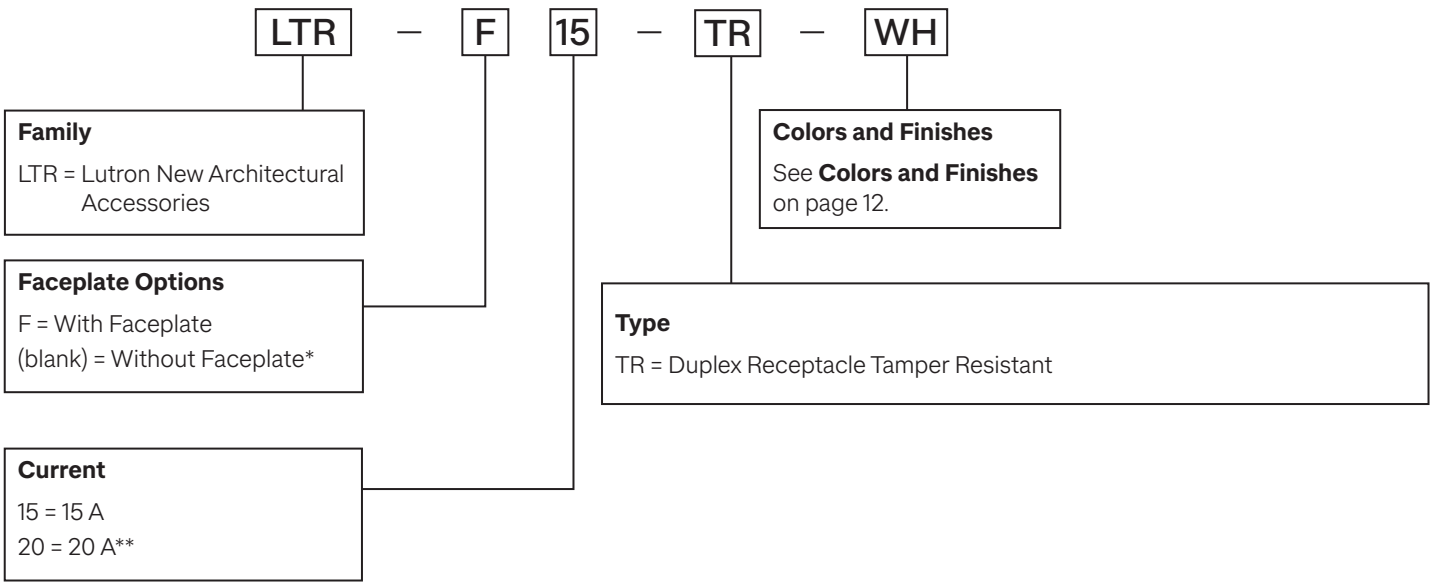

Notes:

- Matte finishes are available with or without a faceplate. Receptacle and faceplate will be the same color / finish.
- Glass finishes are available with or without a faceplate. When glass finish is ordered, the receptacle will be gloss and coordinate with the faceplate color.
- Metal finishes are only available with a faceplate. When metal finish is ordered, the receptacle will be matte black.

\*For use in multi-gang installations. For multi-gang metal applications, receptacles must be ordered without a faceplate and in one of the architectural matte finishes (see **Colors and Finishes** on page 12). Receptacles are compatible with Lutron's new architectural faceplates only.


\*\*Only available for duplex receptacles. Not available for USB receptacles.

 SPECIFICATION SUBMITTAL

Page: 4

|             |                |  |
|-------------|----------------|--|
| Job Name:   | Model Numbers: |  |
|             |                |  |
| Job Number: |                |  |

How to Build an Accessory Model Number - *ACTR and CCTR models only*

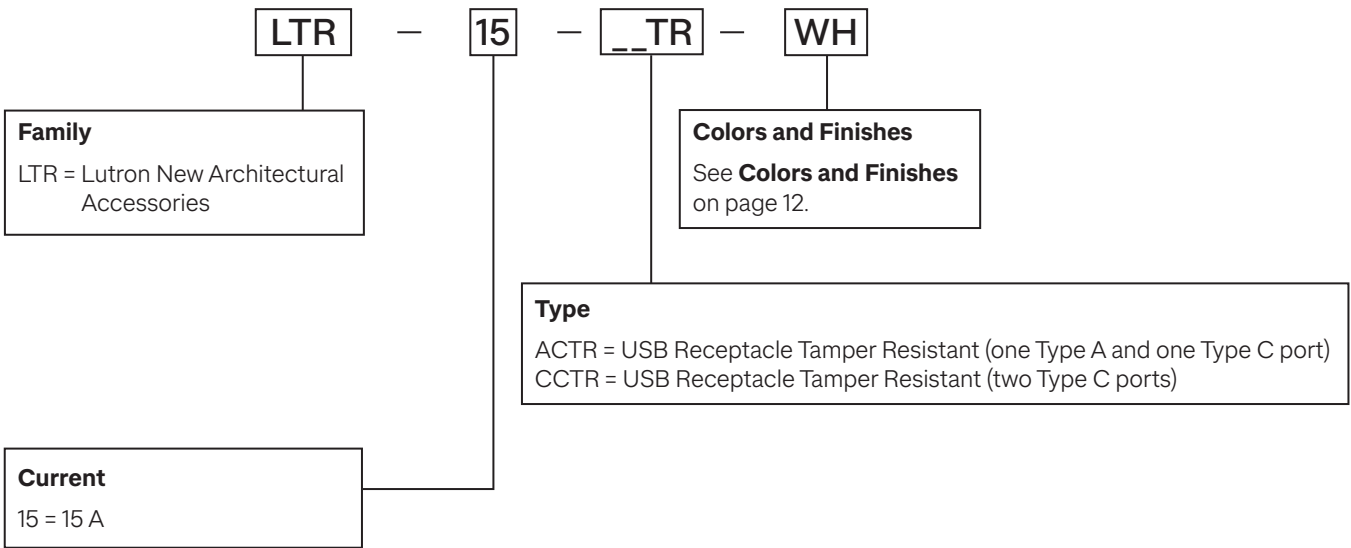


Notes:

- Coordinating matte finish faceplates are available to purchase separately. Receptacle and faceplate will be the same color/finish.
- Coordinating glass finish faceplates are available to purchase separately. Receptacle and faceplate will be the same color in gloss finish.
- Metal finish faceplates are available to purchase separately. Metal finishes are designed to coordinate with matte black receptacles.

# How to Build a Multi-Gang Faceplate Kit Model Number

Build appropriate faceplate model number (when ganging with Palladiom keypads or receptacle-only applications)

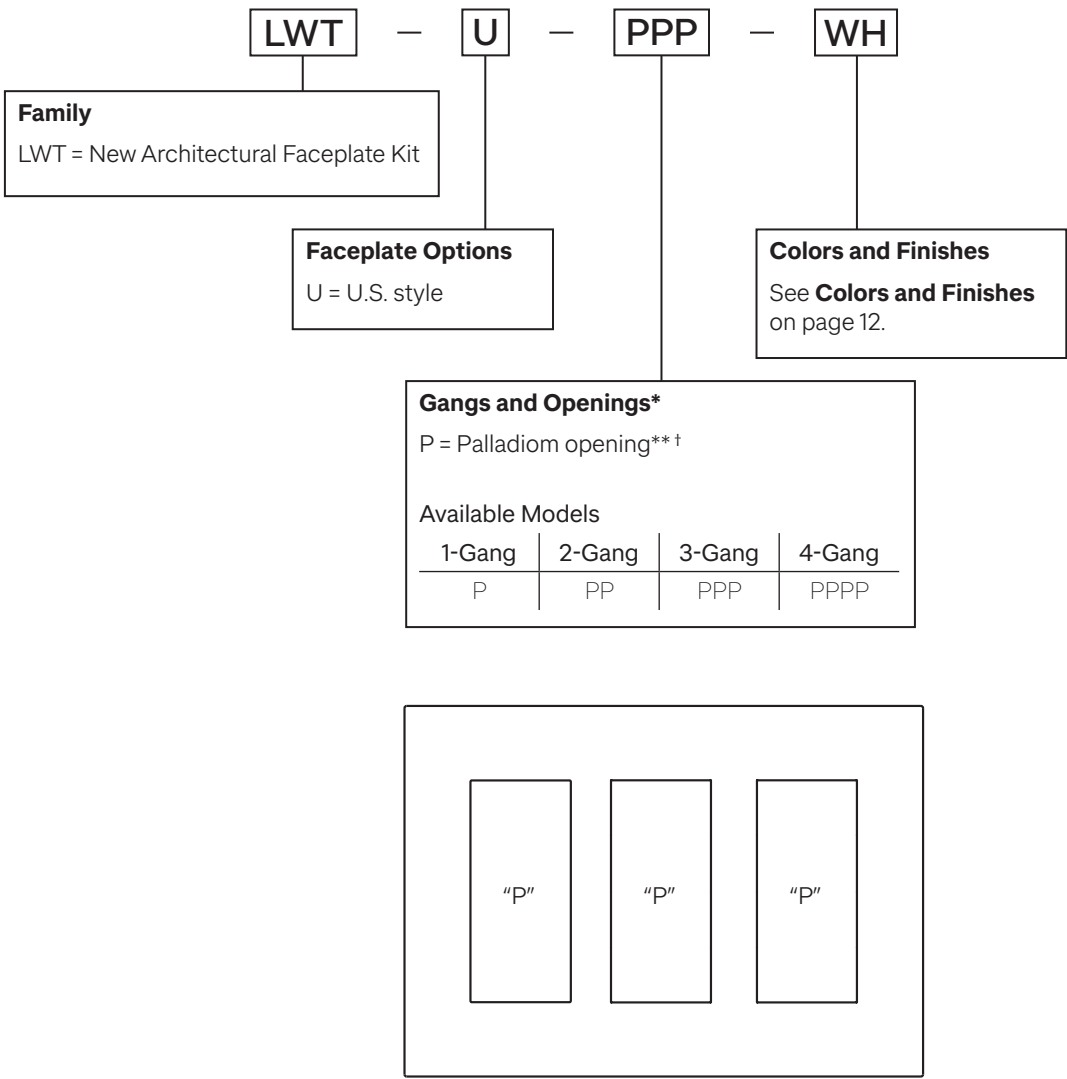


\*Repeat letter designation for each number of openings (4 maximum).  
\*\*New architectural accessories will fit into "P" openings when ganging with Palladiom keypads.  
†Palladiom keypads will only fit into "P" openings.

Examples of How to Select a New Architectural Accessory


Example 1:

| 15 A Duplex Receptacle with Faceplate in Matte White |          |                                                      |         |
|------------------------------------------------------|----------|------------------------------------------------------|---------|
| Order:                                               |          |                                                      |         |
| Model Number                                         | Quantity | Description                                          | Mount   |
| LTR-F15-TR-WH                                        | 1        | 15 A Duplex Receptacle with Faceplate in Matte White | Wallbox |




Example 2:

| 15 A USB Receptacle in Matte Black with Satin Nickel Faceplate |          |                                    |         |
|----------------------------------------------------------------|----------|------------------------------------|---------|
| Order:                                                         |          |                                    |         |
| Model Number                                                   | Quantity | Description                        | Mount   |
| LTR-15-CCTR-BL                                                 | 1        | 15 A USB Receptacle in Matte Black | Wallbox |
| LWT-U-P-SN                                                     | 1        | 1-Gang Faceplate in Satin Nickel   | Wallbox |



Example 3:


| 15 A USB Receptacle and 15 A Duplex Receptacle with Satin Nickel Faceplate |          |                                                    |         |
|----------------------------------------------------------------------------|----------|----------------------------------------------------|---------|
| Order:                                                                     |          |                                                    |         |
| Model Number                                                               | Quantity | Description                                        | Mount   |
| LTR-15-ACCTR-BL*                                                           | 1        | 15 A USB Receptacle Type A + Type C in Matte Black | Wallbox |
| LTR-15-TR-BL*                                                              | 1        | 15 A Duplex Receptacle in Matte Black              |         |
| LWT-U-PP-SN                                                                | 1        | 2-Gang Faceplate in Satin Nickel                   |         |




\*Accessories are ordered in Black (BL) when used with metal faceplates.

Examples of How to Select a New Architectural Accessory *(continued)*

| Example 4:                                                                             |          |                                                   |         |
|----------------------------------------------------------------------------------------|----------|---------------------------------------------------|---------|
| 4-Button Quantum Palladiom Keypad and 15 A Duplex Receptacle in Satin Nickel Faceplate |          |                                                   |         |
| Order:                                                                                 |          |                                                   |         |
| Model Number                                                                           | Quantity | Description                                       | Mount   |
| QWP-B-4W-SN                                                                            | 1        | 4-Button Quantum Palladiom Keypad in Satin Nickel | Wallbox |
| LTR-15-TR-BL*                                                                          | 1        | 15 A Duplex Receptacle in Matte Black             |         |
| LWT-U-PP-SN                                                                            | 1        | 2-Gang Faceplate in Satin Nickel                  |         |



| Example 5:                                        |          |                                                      |         |
|---------------------------------------------------|----------|------------------------------------------------------|---------|
| 15 A USB Receptacle with Faceplate in Matte Taupe |          |                                                      |         |
| Order:                                            |          |                                                      |         |
| Model Number                                      | Quantity | Description                                          | Mount   |
| LTR-15-ACR-TP                                     | 1        | 15 A Duplex Receptacle with Faceplate in Matte Taupe | Wallbox |
| LWT-U-P-TP                                        | 1        | 15 A Duplex Receptacle with Faceplate in Matte Taupe |         |




\* Accessories are ordered in Black (BL) when used with metal faceplates.




Wiring Diagrams

Duplex Receptacles (15 A shown)

Basic Wiring

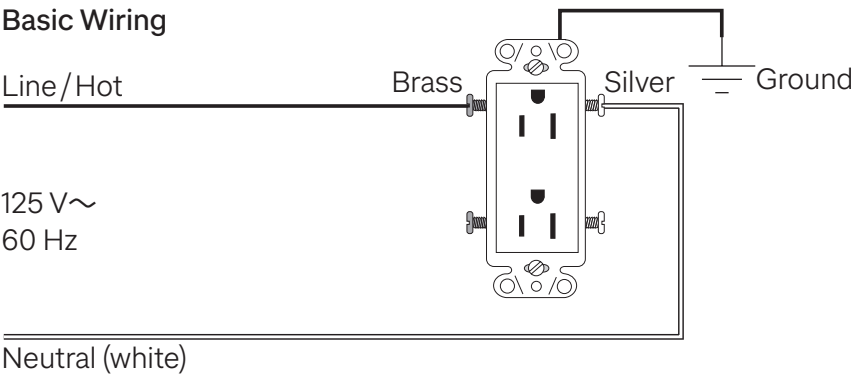


Advanced Wiring

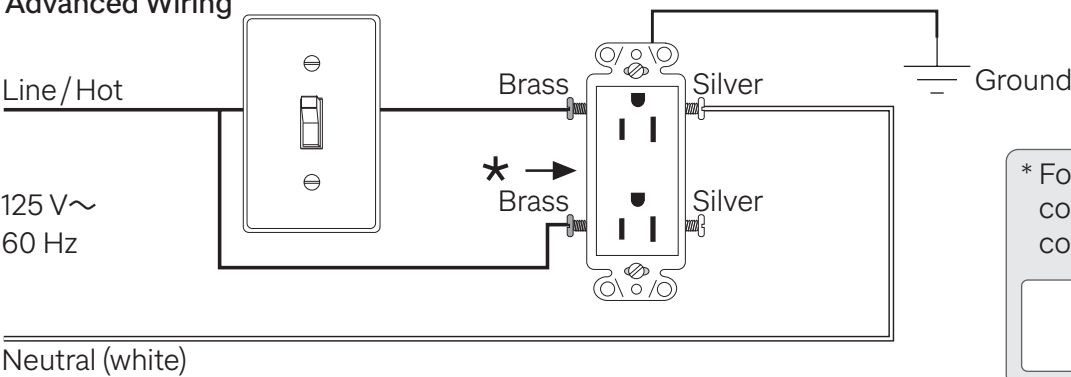

**Note:** Switch controls upper receptacle.

USB Receptacles

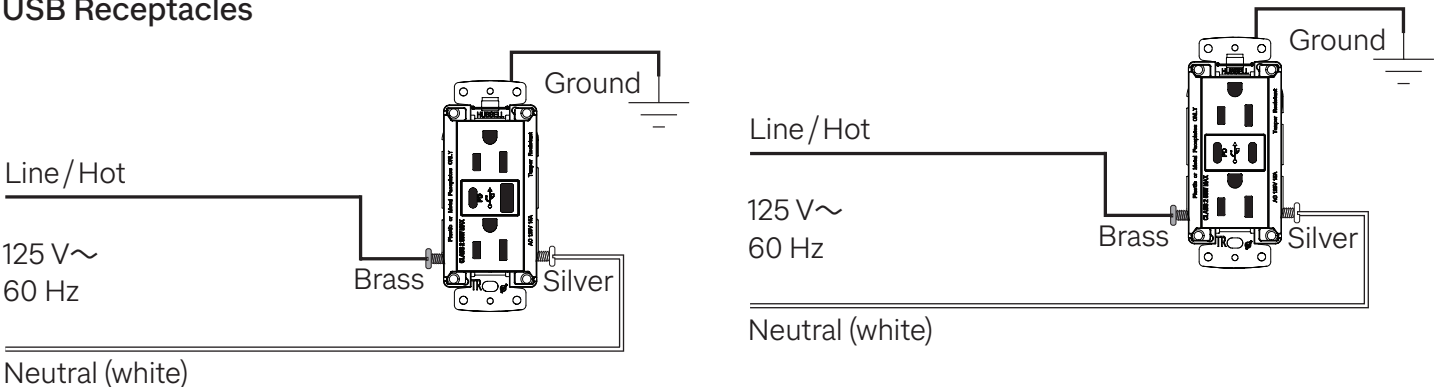


**Note:** Top and bottom receptacles cannot be split apart into independent Line/Hot and Switched Hot connections.


|             |                |  |
|-------------|----------------|--|
| Job Name:   | Model Numbers: |  |
|             |                |  |
| Job Number: |                |  |

Mounting Diagrams

1-Gang

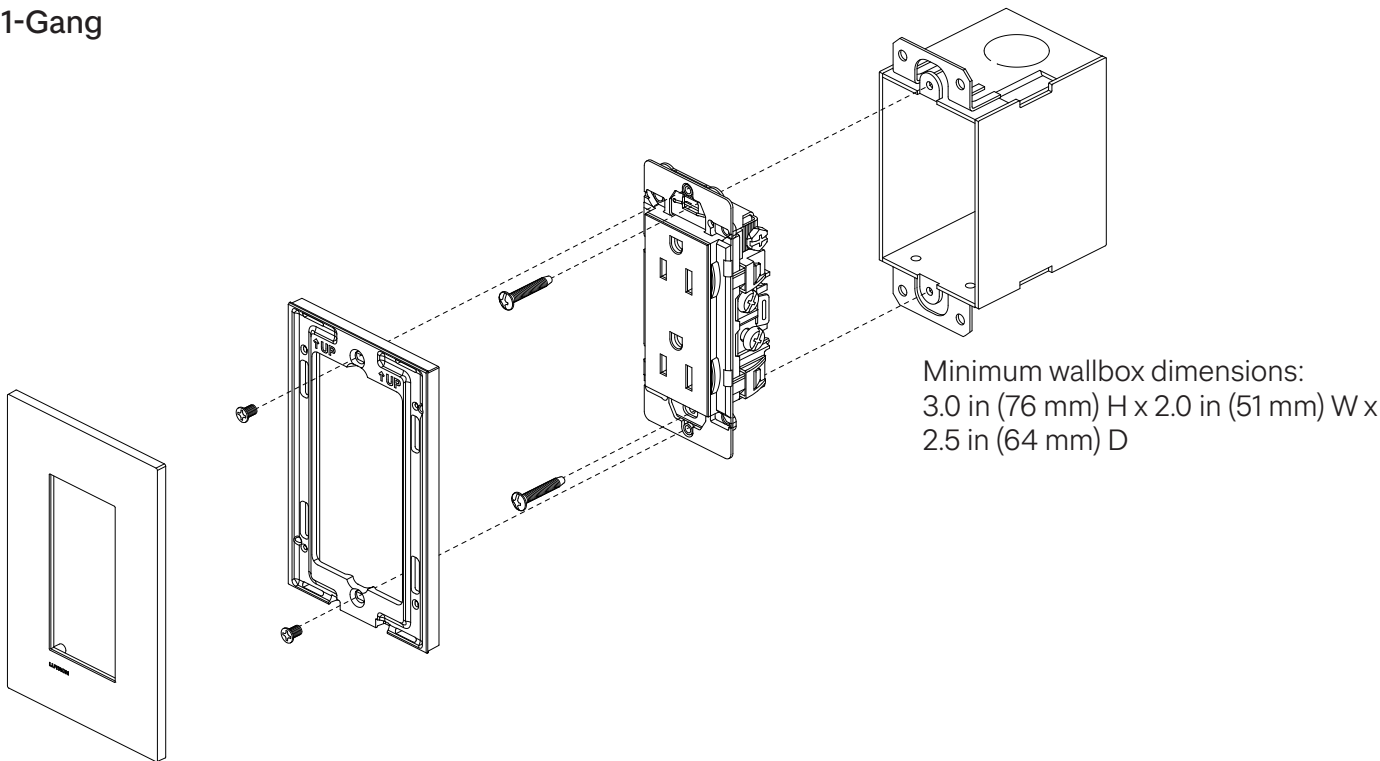

2-Gang

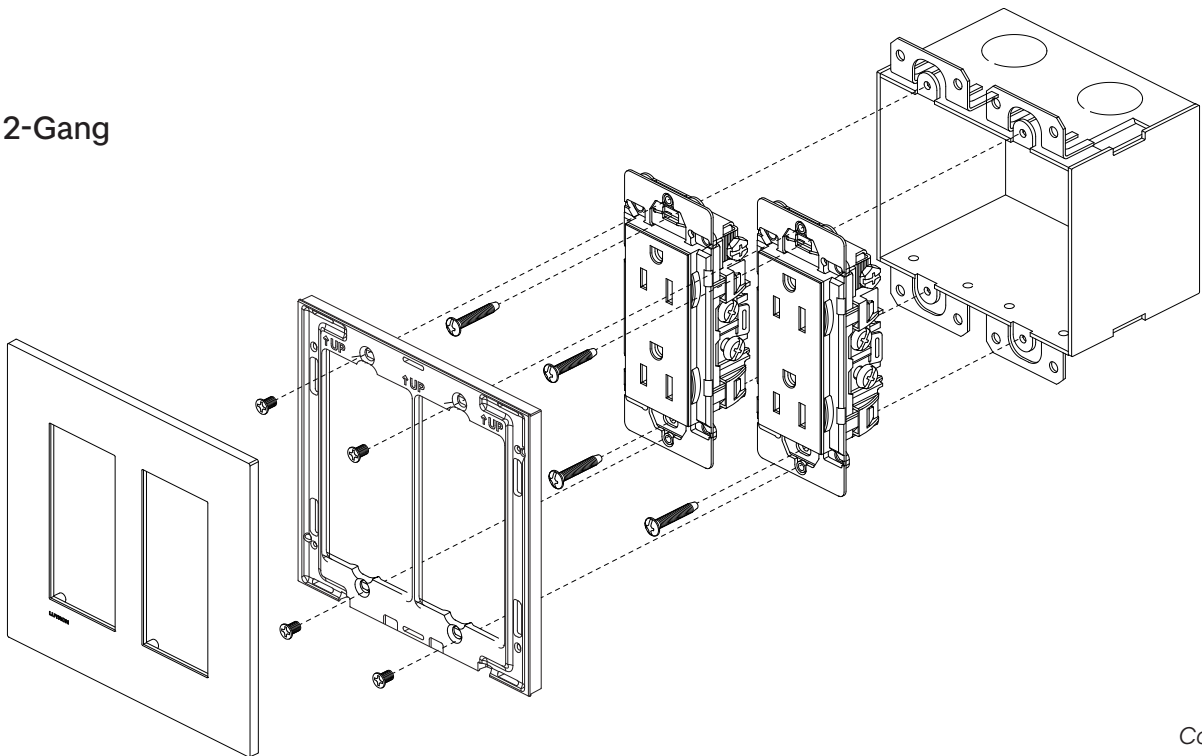

Continued on next page...


 SPECIFICATION SUBMITTAL

Page: 10

|             |                |  |
|-------------|----------------|--|
| Job Name:   | Model Numbers: |  |
|             |                |  |
| Job Number: |                |  |

Mounting Diagrams *(continued)*

2-Gang with Palladiom Keypad

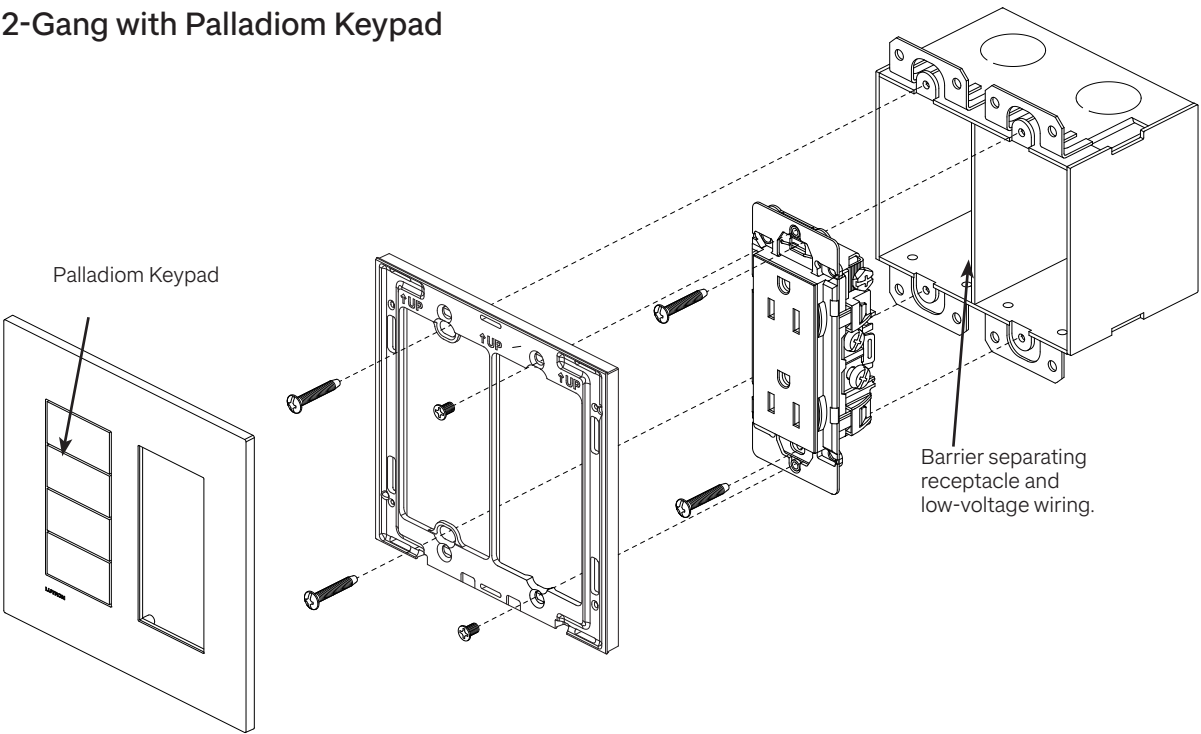

|             |                |  |
|-------------|----------------|--|
| Job Name:   | Model Numbers: |  |
|             |                |  |
| Job Number: |                |  |

Colors and Finishes

Architectural  
Matte Finishes

|                                                                                   |                    |
|-----------------------------------------------------------------------------------|--------------------|
|  | Almond<br>AL       |
|  | Beige<br>BE        |
|  | Black<br>BL        |
|  | Brown<br>BR        |
|  | Gray<br>GR         |
|  | Ivory<br>IV        |
|  | Light Almond<br>LA |
|  | Sienna<br>SI       |
|  | Taupe<br>TP        |
|  | White<br>WH        |

Architectural Metal  
Finishes (faceplate only)

|                                                                                   |                                      |
|-----------------------------------------------------------------------------------|--------------------------------------|
|  | Bright Nickel<br>BN <sup>1</sup>     |
|  | Satin Chrome<br>SC <sup>1</sup>      |
|  | Satin Nickel<br>SN <sup>1</sup>      |
|  | Bright Brass<br>BB <sup>1</sup>      |
|  | Bright Chrome<br>BC <sup>1</sup>     |
|  | Satin Brass<br>SB <sup>1</sup>       |
|  | Polished Graphite<br>PG <sup>1</sup> |
|  | Antique Brass<br>QB <sup>1,4</sup>   |

Architectural Glass  
Finishes (faceplate only)

|                                                                                   |                                       |
|-----------------------------------------------------------------------------------|---------------------------------------|
|  | Clear White Glass<br>CWH <sup>2</sup> |
|  | Clear Black Glass<br>CBL <sup>3</sup> |

Signature Metal  
Finishes (faceplate only)

|                                                                                   |                              |
|-----------------------------------------------------------------------------------|------------------------------|
|  | Champagne<br>CP <sup>1</sup> |
|  | Graphite<br>GP <sup>1</sup>  |

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Architectural finishes chip sample set (PD-CK-1) is available to represent the full range of colors and finishes. Individual chip samples (PD-CHIP-xx) may also be ordered. Chips should not be used for exact matching of the color or finish.

<sup>1</sup> Receptacle will be matte black when purchased with metal faceplate. Faceplates sold separately for ACTR and CCTR models.  
<sup>2</sup> Receptacle will be gloss white when purchased with white glass faceplate. Faceplates sold separately for ACTR and CCTR models.  
<sup>3</sup> Receptacle will be gloss black when purchased with black glass faceplate. Faceplates sold separately for ACTR and CCTR models.  
<sup>4</sup> Antique Brass is a handcrafted finish that is created using a manual relief process. This artisanal process can result in variations in luster, hue and appearance.

Lutron, Palladiom, Quantum, and any related trade dress and logos are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

|                      |                      |                      |
|----------------------|----------------------|----------------------|
| Job Name:            | Model Numbers:       |                      |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number:          | <input type="text"/> | <input type="text"/> |