

Timer / Aquastat - Taco 00 Series Recirculation Control

Models	265-1 (24 h analog timer), 265-DT (7-day digital), 563-2 (aquastat)
Aquastat	Snap-action; ON 95 F / OFF 115 F; clips to 3/4 in pipe
Timer (analog)	115 V, 16 A switch, 15-min intervals
Timer (digital)	120 V, 28 events, battery backup
Application	Controls Taco circulator on DHW recirculation for comfort/efficiency

Notes

Timer / aquastat for the recirculation pump (item J2).



Submittal Data Information

101-036

00® Timers/Aquastat

Effective: 12/06/24

Supersedes: 09/04/19

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	

24 Hour Analog Clock Timer

Performance Data — #265-1

Electrical Characteristics: 115/60/1
Timer Switch: 16A @115V
Timer Interval: 15 Minutes
Clock face: Hour and Minute Hands
Manual Switch: **I** Permanently ON
 ⌚ Automatic Operation
 O Permanently OFF

Application

The Taco Clock Timers and Temperature Aquastat are designed to control the operation of Taco circulators on Domestic Hot Water Recirculation Systems for maximum comfort and energy efficiency. They are adaptable to any 00® Series circulator by attaching the enclosure or wiring to the electrical box.

24 Hour Analog Timer

Operates the circulator at the same pre-set times every day. Time intervals are in 15 minute increments. This user friendly clock has a raised minute hand for easy adjustments, quick-set trippers and an operation switch for Manual ON/OFF or Automatic modes.

7 Day Digital Timer

Performance Data — #265-DT

Input Voltage: 120 VAC, 60 Hz
Resistive (Heater): 15 A, 120 VAC
Tungsten (Incandescent): 1000 W, 120 VAC
Inductive (Fluorescent): 12 A, 120 VAC
Motor: 1/2 HP, 120 VAC

7-Day Digital Plug-in Timer

Twenty-eight programmable events allow you to customize the hot water run times to meet the household demand. Its intuitive logic can automatically adjust to daylight savings time, and the convenient dial simplifies programming. A battery backup will retain your settings for up to three months with no power.

Temperature Aquastat — Snap Action

Temperature Switch — #563-2

Electrical Characteristics: 115/60/1
Connections: 1/2" (Snap on circ. body)
 3/4" Copper pipe
Temperature Setting: ON @ 95°F
 OFF @ 115°F
Contacts: 7 amp SPDT Switch
Wire Leads: 18" – Type 18-2,
 Round Premium Cable

Temperature Aquastat


Controls pump operation to maintain system temperature between 95°F and 115°F. Easy clip-on Aquastat attaches directly to 3/4" pipe or a 1/2" sweat pump casing.

Shipping Weight


Model	Item	Lbs.	Kg
265-1	Analog Timer	.75	.35
265-DT	Digital Timer	.5	.23
563-2	Aquastat	.25	.11



FOR INDOOR USE ONLY

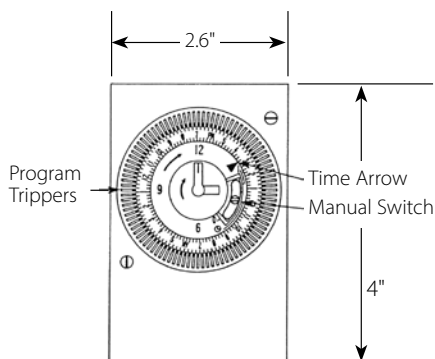

Analog Timer

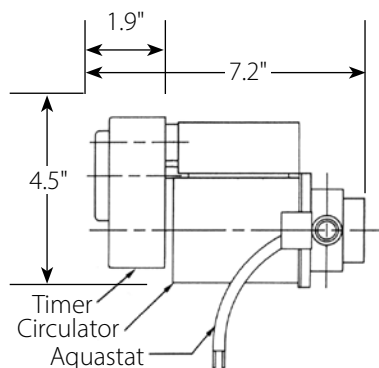

Assembled Timer/Aquastat



Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422

Visit our web site: www.TacoComfort.com | Printed in USA | ©2024 Taco, Inc.