

The PI Coding Agent

The Magic Behind OpenClaw

matthias@tavon.ai — 18. Feb 2026



Agenda

1

Coding Agents

2

Concepts

3


PI

4

PI & OpenClaw

About Me


20+ years: Developer > Manager > Product > AI Tüftler

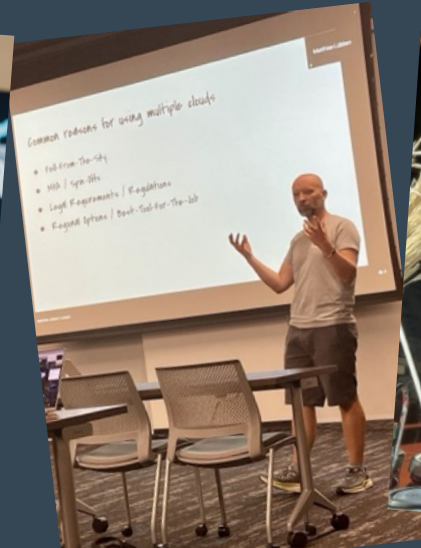

TAVON.ai is a Platform for
AI-Powered Knowledge
Management.

Semi-Autonomous Agents
to Capture and Provide
Knowledge

Adaptive, Personal,
Intuitive.

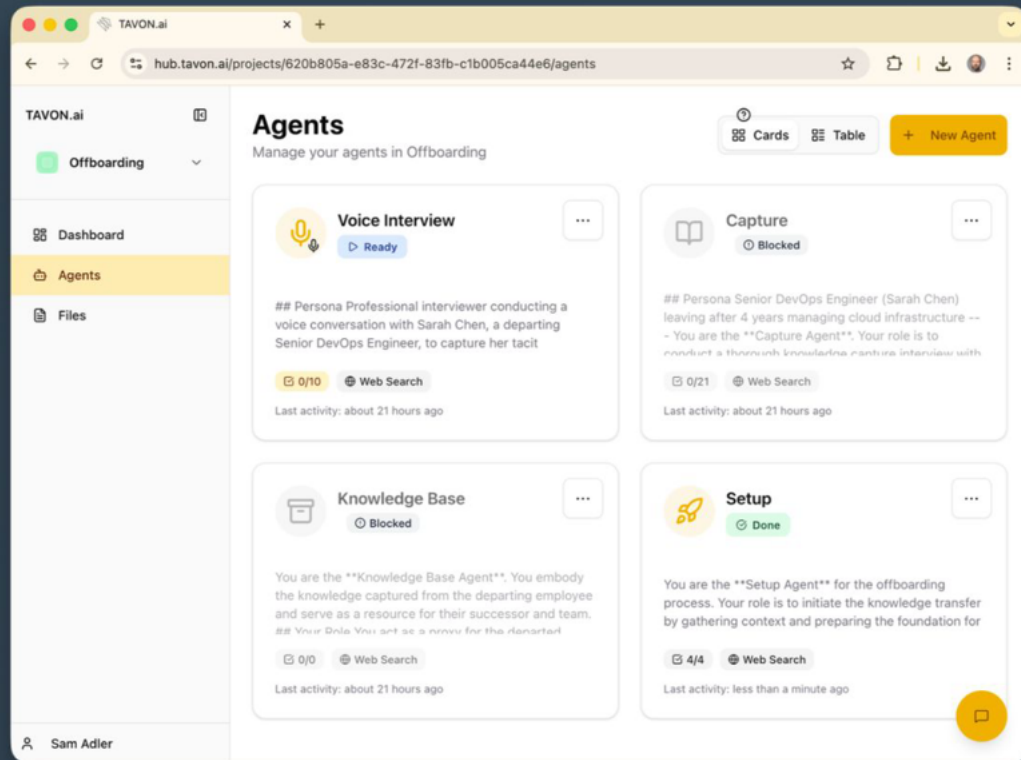

The PI Coding Agent – The Magic Behind OpenClaw

When people use OpenClaw, they're amazed. It auto-discovers new capabilities, explores available data sources, stitches components together, and dynamically builds solutions. It feels like the system is learning. It feels magical.

But it's not magic. At its core, OpenClaw is powered by the PI Coding Agent: a simple coding agent built on simple primitives like the ability to generate and execute its own scripts.

1

Coding Agents

EXPLORER

HUB

> .claude

> .vscode

> app

> [auth]

> [locale]

> api

> activities

> admin

> feedback

> [feedbackId]/archive

TS route.ts

TS route.ts

> health

> organizations

> projects

> agent-types

> auth

> debug

> feedback

> files

> health

> organizations

> project-templates

> projects

> users

★ favicon.ico

🔗 global-error.tsx

🔗 globals.css

> components

> coverage

> docs

> html

> lib

> messages

> playwright-report

> remote

OUTLINE

TIMELINE

TS route.ts

```
app > api > admin > feedback > [feedbackId] > archive > TS route.ts > PATCH
12 import { requireSystemAdmin } from '@lib/permissions/permissions.server';
13 import { z } from 'zod';
14
15 const uuidSchema = z.string().uuid();
16
17 // PATCH /api/admin/feedback/[feedbackId]/archive - Archive feedback (system admin only)
18 export async function PATCH(
19   request: Request,
20   { params }: { params: Promise<{ feedbackId: string }> }
21 ) {
22   try {
23     // Await params as per Next.js 15 requirements
24     const { feedbackId } = await params;
25
26     // Validate feedbackId format
27     const validationResult = uuidSchema.safeParse(feedbackId);
```

Comment 1 of 1

Code Review

The variable name validationResult could be more descriptive, such as feedbackIdValidationResult, to clarify what is being validated.

No change found to suggest.

28

```
if (!validationResult.success) {
  console.info('[VALIDATION] Invalid feedback ID format');
  return NextResponse.json(
    {
      success: false,
      error: 'Invalid feedback ID format',
    },
    { status: 400 }
  );
}
```

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

```
// Authenticate user
const user = await requireAuth();

// Check permissions - only system admins can archive feedback
requireSystemAdmin(user);
```

CHAT

← UNDERSTANDING THE REQUIREAUTH FUNCTION IN CODE...

supabase.auth.getUser() to get the supabase-authenticated user.

◦ If no user (or an error), it throws new AuthenticationError('Authentication required').

2. Queries the app database (db.query.users.findFirst) for a user with users.id === authUser.id .

◦ If the DB row is not found, it throws new AuthenticationError('User not found in database').

3. Returns the DB User (includes fields like organizationId) on success.

Return type

• Promise<User> — the database User type (not the raw Supabase user).

Related helpers

• verifyAuth() — returns a success/failure result object (doesn't throw).

• requireAuthWithRedirect() — same as requireAuth but redirects to /login when missing (for pages).

• getUserOrNull() — returns DB user or null (non-throwing).

Common usage & testing tip

• Used across API routes to authenticate and get the DB user (e.g., const user = await requireAuth();).

• In tests, mock requireAuth to return a fake user or to throw to simulate unauthenticated requests.

If you want, I can show the exact lines from server.ts or an example of how to mock requireAuth in tests.

TS route.ts:27-28

Describe what to build next

Agent Auto

Matthias Lübken (1 month ago)

Ln 28, Col 1 (63 selected)

Spaces: 2

UTF-8

LF

TypeScript

claude .

```
*  * Claude Code v2.0.76
*                               * Sonnet 4.5 · Claude Max
*                               * ~/workspace/tavon/hub
```

> .

● I'm ready to help you with your Next.js project! I can see this is a comprehensive application scaffold for managing AI agents and files within projects, built with Next.js 15, TypeScript, Tailwind CSS v4, and following a clean layered architecture.


What would you like me to help you with today? I can assist with:



- Adding new features or functionality
- Debugging issues
- Refactoring code
- Writing tests
- Database migrations
- UI improvements
- Or anything else related to this codebase

Just let me know what you need!

> |

? for shortcuts

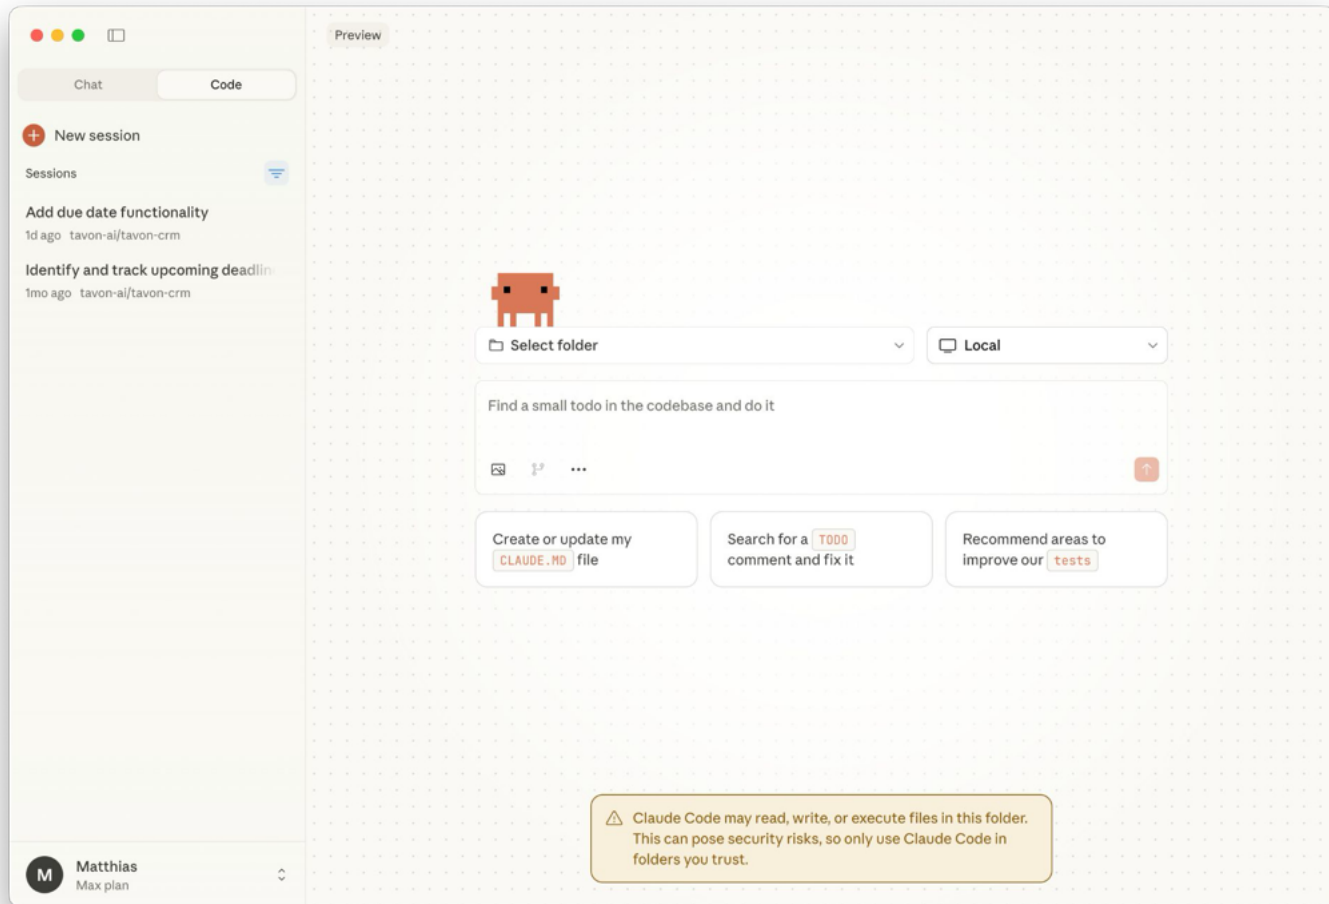

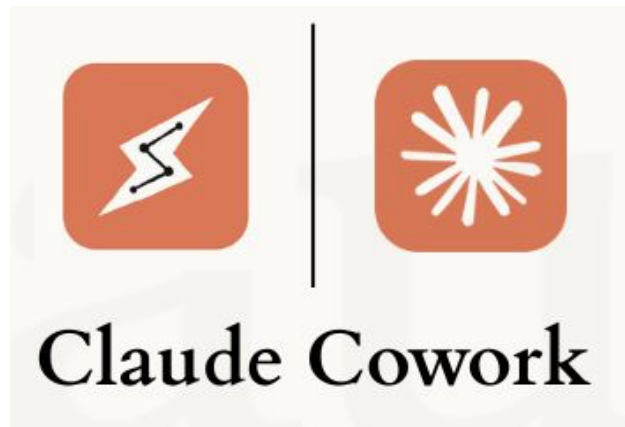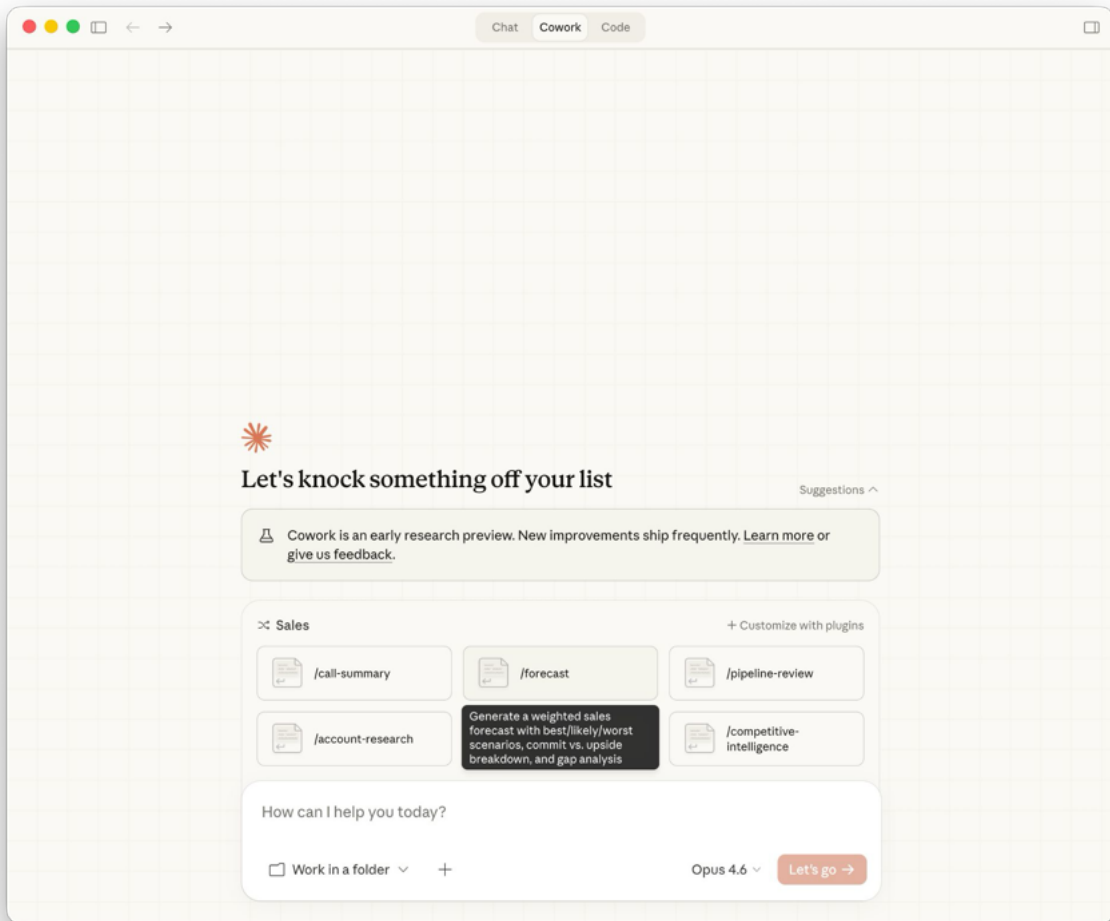

Coding Agents



2

Coding Agents Concepts

Bash Is All You Need

Bash is all you Need

Bash is what makes Claude Code so good.


Bash is a generic version for “code mode” or programmatic tool calling.

The bash tool allows you to:


- Store the results of tool calls to files, so you can search them.
- Store memory in files.
- Dynamically generate scripts and call them.
- Compose functionality, use unix primitives like tail, grep, cat, etc.
- Use existing powerful software like ffmpeg, libreoffice, etc.

ANTHROPIC


CONFIDENTIAL

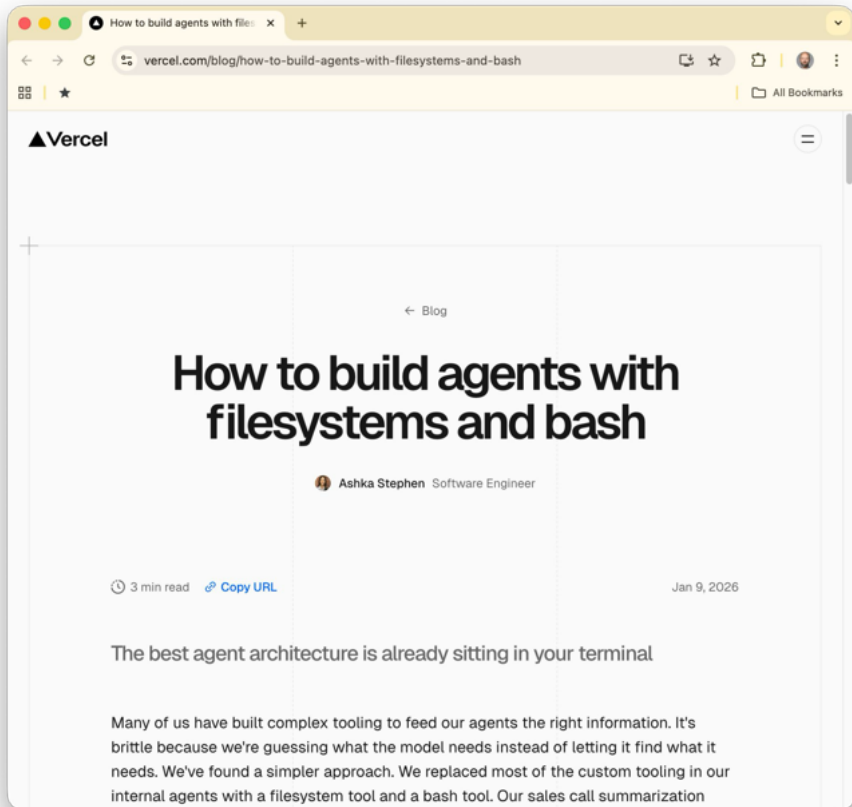

<https://vercel.com/blog/how-to-build-agents-with-filesystems-and-bash>

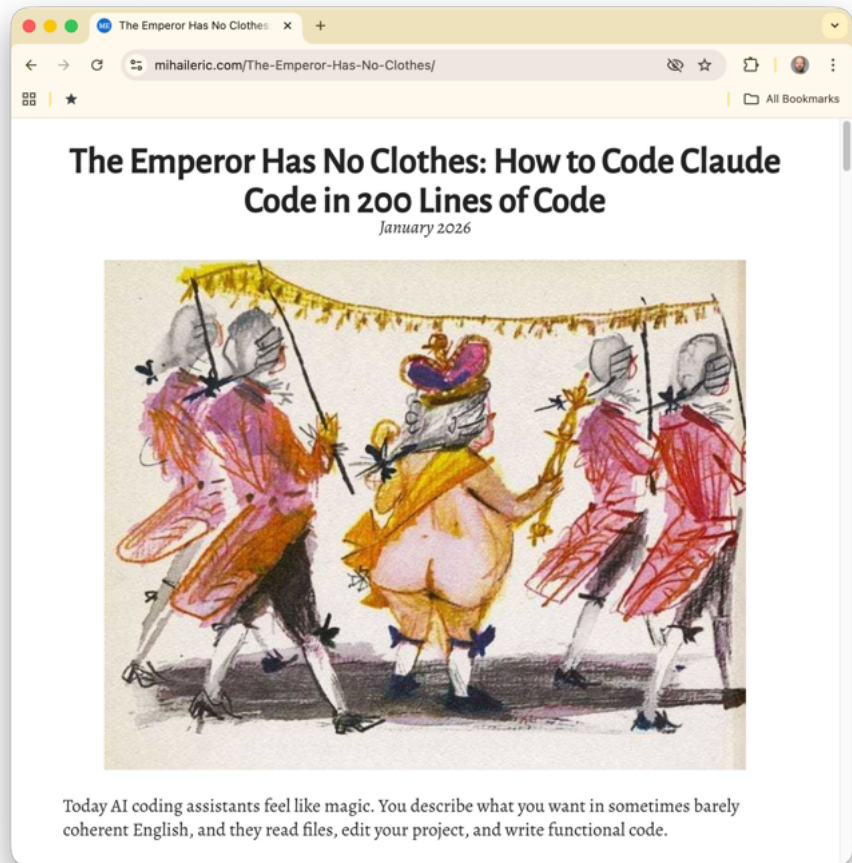

<https://www.mihailer.com/The-Emperor-Has-No-Clothes/>

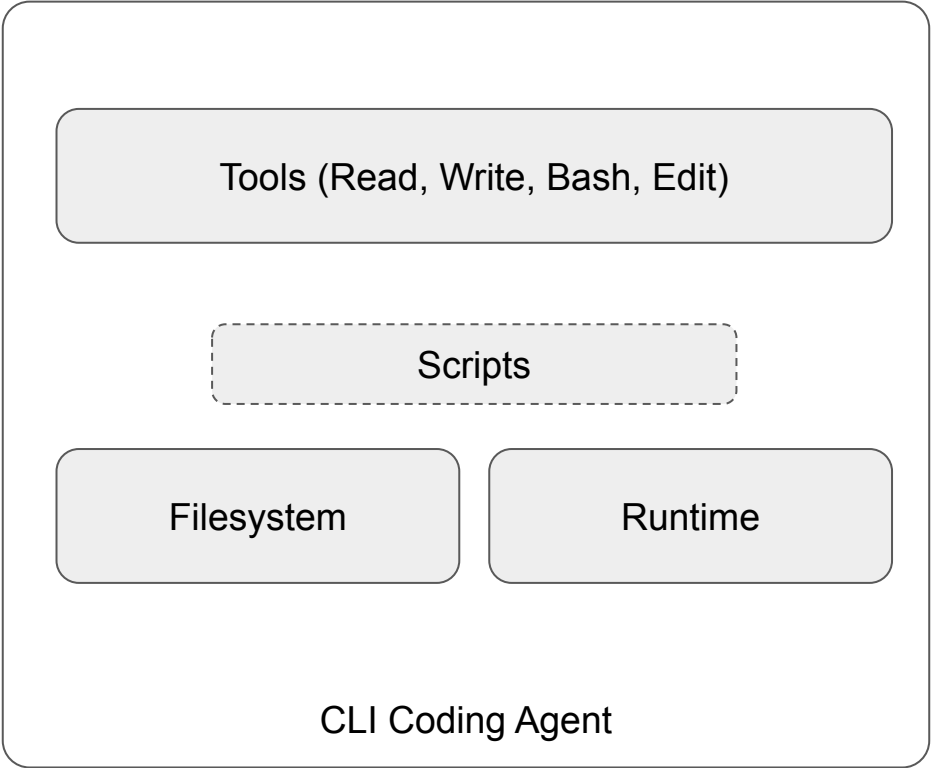

The diagram illustrates the components of a CLI Coding Agent. It features a large outer container with rounded corners. Inside, at the top, is a solid light-gray rounded rectangle labeled 'Tools (Read, Write, Bash, Edit)'. Below this is a dashed light-gray rounded rectangle labeled 'Scripts'. At the bottom of the container are two solid light-gray rounded rectangles side-by-side, labeled 'Filesystem' and 'Runtime'. The text 'CLI Coding Agent' is centered at the very bottom of the container.

Tools (Read, Write, Bash, Edit)


Scripts

Filesystem


Runtime

CLI Coding Agent

Claude Agent SDK Loop

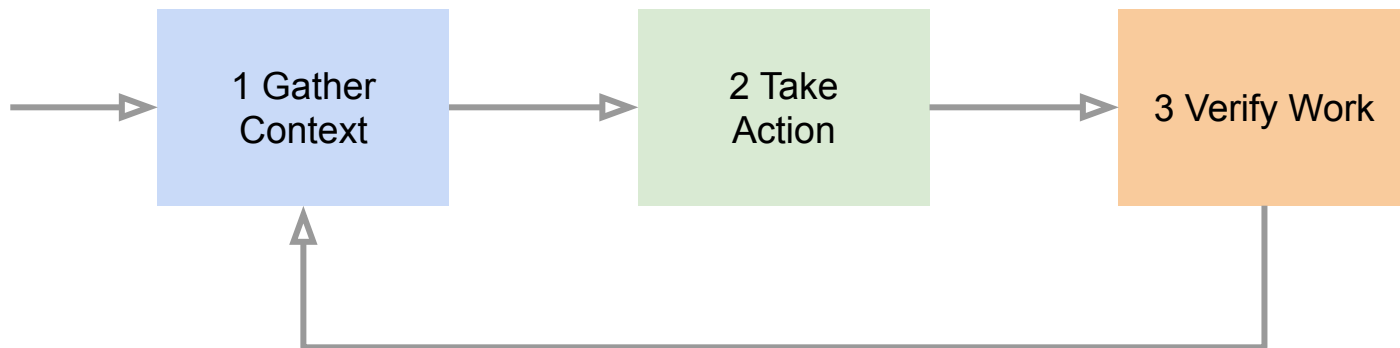

Context Engineering

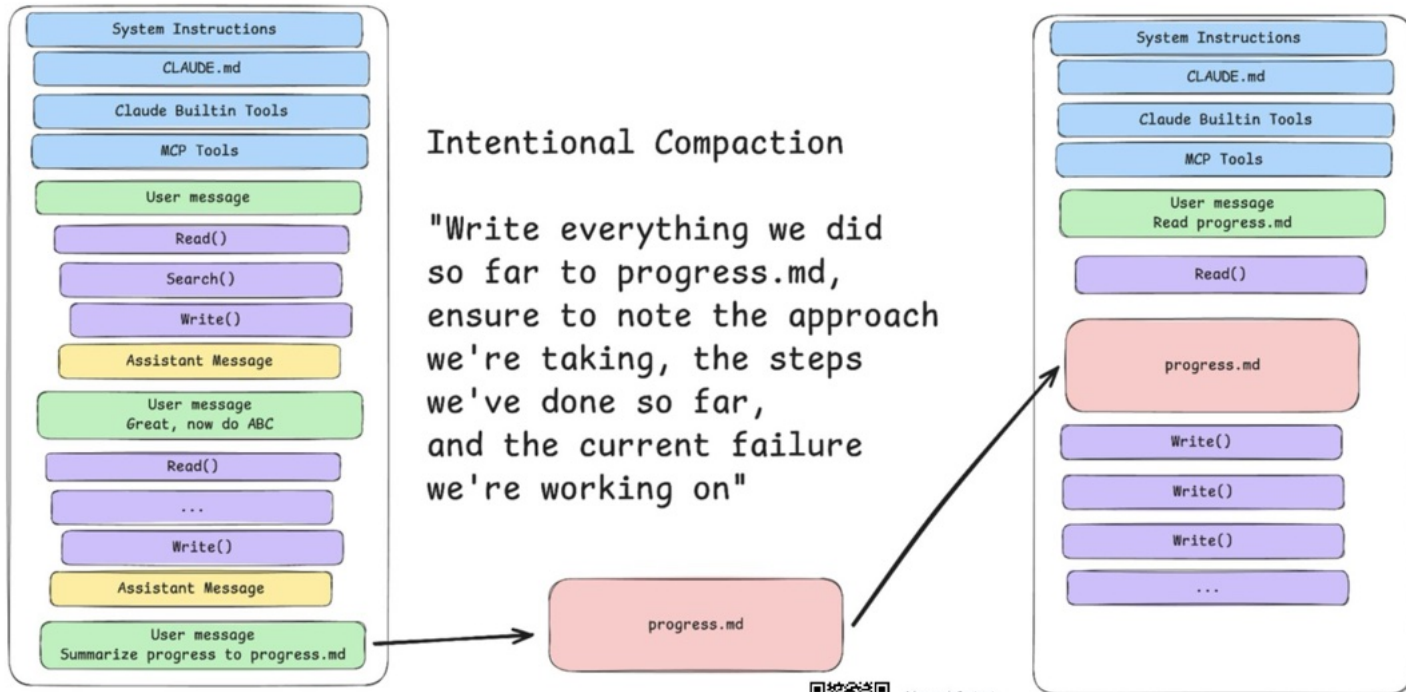

Advanced Context
Engineering for
Coding Agents

@dexhorty

1 Gather Context

- file system search
 - with tools like ls, find, grep
- semantic search (aka RAG)
- Context-Engineering
 - Subagents: Fresh Context Window
 - Compaction: Implicit & explicit
 - Skills

```
/email-agent/  
└─ conversations/  
   └─ 2025-09-project-alpha-discussion.md  
   └─ 2025-09-customer-support-thread.md  
   └─ 2025-08-vendor-negotiations.md
```

2 Take Action

- Tools
- Code Generation
- Bash & Scripts
- MCP

Shell

```
pdftotext document.pdf - | grep -n "invoice" | tail -10
```

JavaScript

```
async function onEmailReceived(email) {
  const isFromCustomer = email.from.includes('@customer.com') ||
    contacts.clients.some(client =>
      client.email === email.from);
  if (!isFromCustomer) return;
  const isEmailUrgent = await askLLM(`Does this email seem urgent:
  ${renderEmail(email)}, return TRUE OR FALSE`);
  if (isUrgent === "TRUE" && isFromCustomer) {
    forwardEmail(email, {
      to: 'teamLead@company.com',
      addNote: 'Auto-forwarded: Urgent customer email requiring immediate attention',
      preserveAttachments: true
    });
    createTask({
      title: `Urgent: Respond to ${email.from}`,
      priority: 'high',
      dueDate: new Date(Date.now() + 2 * 60 * 60 * 1000) // 2 hours
    });
  }
}
```

3 Verify Work

\$ pnpm lint


\$ javac

\$ pytest

\$ lint_markdown.sh

3

PI

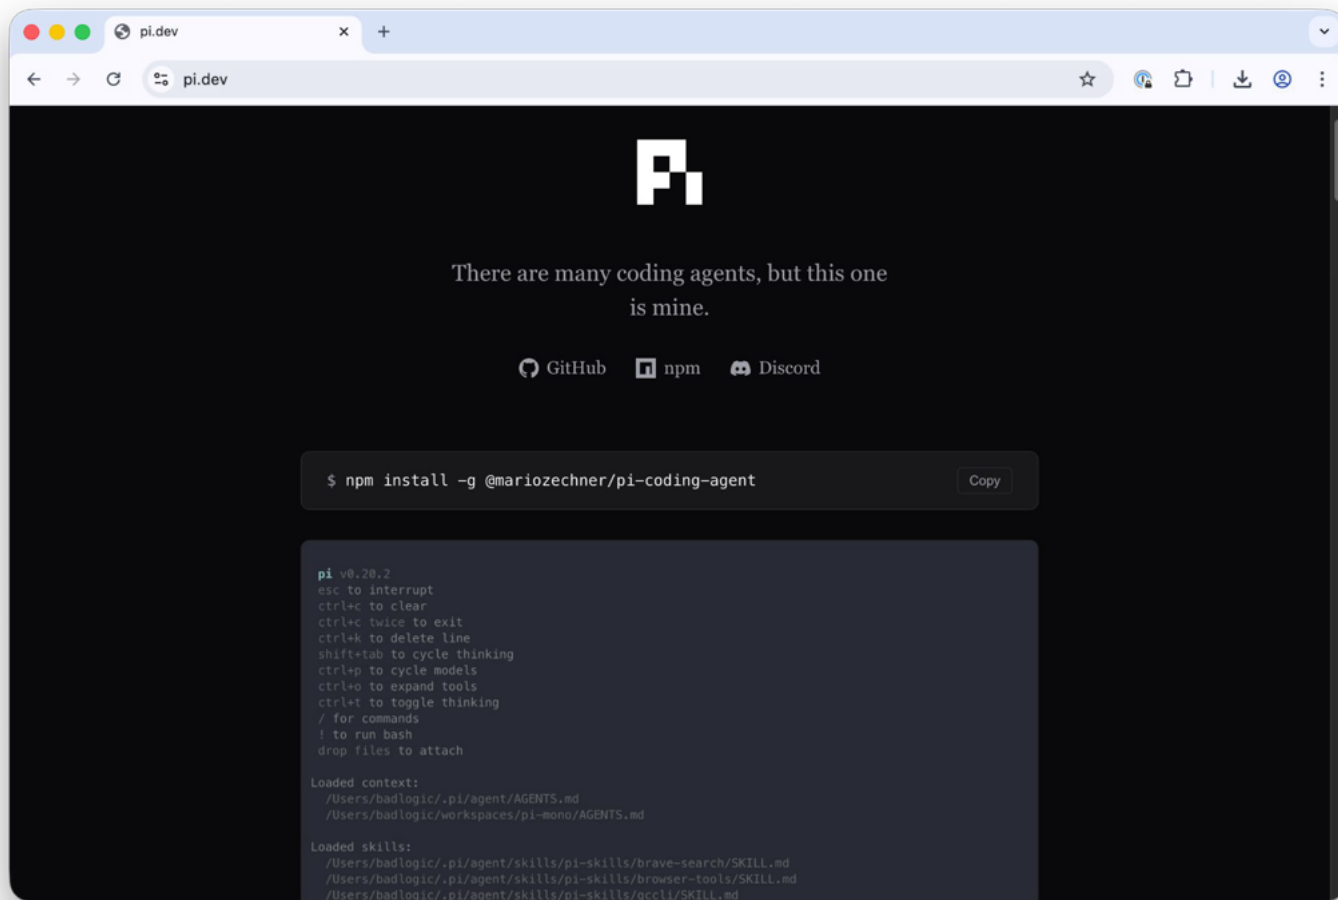

```
$ npm install -g @mariozechner/pi-coding-agent
```

Copy

```
pi v0.20.2
esc to interrupt
ctrl+c to clear
ctrl+c twice to exit
ctrl+k to delete line
shift+tab to cycle thinking
ctrl+p to cycle models
ctrl+o to expand tools
ctrl+t to toggle thinking
/ for commands
! to run bash
drop files to attach

Loaded context:
/Users/badlogic/.pi/agent/AGENTS.md
/Users/badlogic/workspaces/pi-mono/AGENTS.md

Loaded skills:
/Users/badlogic/.pi/agent/skills/pi-skills/brave-search/SKILL.md
/Users/badlogic/.pi/agent/skills/pi-skills/browser-tools/SKILL.md
/Users/badlogic/.pi/agent/skills/pi-skills/gcc11/SKILL.md
```

pi.dev

- A minimal extendable Coding Agent
- Open Source (MIT)
- <https://github.com/badlogic/pi-mono>
 - **pi-ai**: Unified multi-provider LLM API (OpenAI, Anthropic, Google, etc.)
 - **pi-agent-core**: Agent runtime with tool calling and state management
 - **pi-coding-agent**: Interactive coding agent CLI
 - **pi-tui**: Terminal UI library with differential rendering
 - **pi-web-ui**: Web components for AI chat interfaces
- Build by [MarioZechner.at](https://mariozechner.at) friends of Peter

Why pi?

Pi is a minimal terminal coding harness. Adapt pi to your workflows, not the other way around. Pi is **aggressively extensible**. Extend it with TypeScript extensions, skills, prompt templates, and themes. Bundle them as pi packages and share via npm or git.

Pi ships with powerful defaults but skips features like sub-agents and plan mode. **Ask pi to build what you want**, or install a package that does it your way.

Four modes: interactive, print/JSON, RPC, and SDK.

keywords:pi-package - npm

npmjs.com/search?q=keywords%3Api-package

☆🔒📄🔍⋮

♥ Pro Teams Pricing Documentation

npm

🔍 keywords:pi-package x

Search

Sign Up

Sign In

268 packages found

Sort by: Default ▾

oh-pi

One-click setup for pi-coding-agent. Like oh-my-zsh for pi.

pi-package pi-coding-agent configuration setup tui

📄 7,040

👤 telagod

• 0.1.70 • 9 minutes ago • 0 dependents • MIT

@tmustier/pi-nes

NES emulator extension for pi

pi-package pi nes emulator

📄 3,883

👤 tmustier

• 0.2.38 • 16 days ago • 0 dependents • MIT

pi-screenshots-picker

Screenshot picker extension for pi coding agent - quickly select and attach screenshots to your prompts

pi-package pi pi-coding-agent extension screenshots macos linux image attachment picker tui claude

📄 3,015

👤 graffioh

• 1.2.1 • 11 days ago • 0 dependents • MIT

pi-interactive-shell

Run AI coding agents as foreground subagents in pi TUI overlays with hands-free monitoring

pi-package pi pi-coding-agent extension interactive shell terminal tui subagent claude gemini codex

📄 3,756

What it's not

- **No MCP** ⇒ Build CLI tools with READMEs (see Skills)
- **No sub-agents.** ⇒ Spawn pi instances via tmux
- **No permission popups** ⇒ Run in a container, or build your own confirmation flow
- **No plan mode** ⇒ Write plans to files
- **No built-in to-dos** ⇒ Use a TODO.md file,.
- **No background bash** ⇒ Use tmux. Full observability, direct interaction.

... or build your own extension.

Providers & Models

Anthropic, OpenAI, Google, Azure, Bedrock, Mistral, Groq, Cerebras, xAI, Hugging Face, Kimi For Coding, MiniMax, OpenRouter, Ollama, and more. Authenticate via API keys or OAuth.

Switch models mid-session with `/model` or `Ctrl+L`.

Add custom providers and models via `models.json` or extensions.

Sessions: Tree-structured, shareable history

Sessions are stored as trees. Use `/tree` to navigate to any previous point and continue from there. All branches live in a single file. Filter by message type, label entries as bookmarks.

Export to HTML with `/export`, or upload to a GitHub gist with `/share` and get a shareable URL that renders it.

```
assistant: Done.
user: ok, check the dosbox files
[bash: cd /Users/badlogic/workspaces/pi-mono && git diff ...]
[bash: cd /Users/badlogic/workspaces/pi-mono && ls -la pa...]
assistant: The entire 'pi-dosbox' extension directory was **deleted** in this diff. Tha...
user: ok we need to rebase the extension refactor branch on main, can you try please?
[bash: git status]
[bash: git branch]
[bash: git checkout ext-reload]
[bash: git rebase main]
[read: packages/coding-agent/CHANGELOG.md]
[read: packages/coding-agent/src/core/sdk.ts]
[read: packages/coding-agent/src/modes/interactive/interactive-mode.ts]
[read: packages/coding-agent/src/utls/shell.ts]
[bash: rg "updateTerminalTitle" -n packages/coding-agent/...]
[bash: rg "sessionInfo|session_name|appendSessionInfo" -n ...]
assistant: (aborted)
user: i resolved all conflicts manually and staged the resolved files
assistant: Got it. Next step is to continue the rebase: ``bash git rebase --continue `` I ...
user: you continue
[bash: git rebase --continue]
assistant: Rebase complete. Branch 'ext-reload' is updated and clean.
user: before we do that, could we make package manager add a .gitignore to ~/.pi/agent/npm/git and ...
[read: packages/coding-agent/src/core/package-manager.ts]
[edit: packages/coding-agent/src/core/package-manager.ts]
[edit: packages/coding-agent/src/core/package-manager.ts]
[bash: npm run check 2>&1]
[bash: git add packages/coding-agent/src/core/package-man...]
assistant: Done. Package manager now creates '.gitignore' files at: - '~/.pi/agent/git/.gitigno...
(2759/2759)
```

Context engineering

Pi's **minimal system prompt** and extensibility let you do actual context engineering. Control what goes into the context window and how it's managed.

AGENTS.md: Project instructions loaded at startup from ~/.pi/agent/, parent directories, and the current directory.

SYSTEM.md: Replace or append to the default system prompt per-project.

Compaction: Auto-summarizes older messages when approaching the context limit. Fully customizable via extensions: implement topic-based compaction, code-aware summaries, or use different summarization models.

Skills: Capability packages with instructions and tools, loaded on-demand. Progressive disclosure without busting the prompt cache. See skills.

Prompt templates: Reusable prompts as Markdown files. Type /name to expand. See prompt templates.

Dynamic context: Extensions can inject messages before each turn, filter the message history, implement RAG, or build long-term memory.

Malleable Software 1/2

- Users reshape the tool itself, rather than adapting their workflow
- Pi is aggressively extensible.

Malleable Software 2/2

- Exposing hooks at every stage of the agent loop
- Replace core behaviours (eg. core tools, compaction logic, context mgmt)
- Session is programmable data structure
- Extensions can persist state, reconstruct it on reload, and inject context into the model's view. All without touching the core message thread. No other tool in this category exposes session internals at this level.
- Full TUI Control
- SDK

π - tavon-crm

π - openclaw⌵1π - tavon-crm⌵2+

██████████	██████████	Schedule a call – he expressed interest (overdue 2/10)
██████████	██████████	Follow up on knowledge transfer concept
██████████	██████████	Send governance model, enterprise architecture & pricing
██████████	██████████	Follow up via WhatsApp (overdue 1/21)
██████████	██████████	No next action defined – decide what to do

Upcoming This Week (due Feb 18-24)

Contact	Priority	Action
██████████	██████████	Meeting scheduled 2/24 – prep
██████████	██████████	Follow up if no response by 2/24
██████████	██████████	Waiting for response to coffee invite (due 2/19)
██████████	██████████	Follow up on knowledge management scope (2/24)

Top 3 to do right now:

1.  ██████████ and the IDG concept draft (overdue)
2.  ██████████ send pitch deck (they already replied)
3.  ██████████ status after your 2/6 meeting

CRM new:56 wait:92 repl:7 int:13 pilot:5 active:4 paused:39 arch:22 [A:33]

~/workspace/tavon/tavon-crm (main)
↑34 45.2k R48k W24k \$0.182 (sub) 12.7%/200k (auto) claude-sonnet-4-6 • medium

4

PI & OpenClaw

PI in OpenClaw

- Embedded as an SDK
 - pi-agent-core, pi-ai, pi-coding-agent, pi-tui
- Replace Compaction
- Replace Context Assembly
- Hooks
 - Agent lifecycle: before_model_resolve, before_prompt_build, before_agent_start, llm_input, llm_output, agent_end, before_compaction, after_compaction, before_reset
 - Message pipeline: message_received, message_sending (can cancel/modify), message_sent
 - Tool pipeline: before_tool_call (can block/modify params), after_tool_call, tool_result_persist (sync, rewrites what gets written to JSONL), before_message_write (sync, can block session writes)
 - Session/gateway: session_start, session_end, gateway_start, gateway_stop
- Session Manager

E.g. VoiceCall

```
``typescript
register(api: OpenClawPluginApi) {
  // 1. Agent tool - LLM can initiate/continue/end calls
  api.registerTool({
    name: "voice_call",
    parameters: VoiceCallToolSchema, // union of action types
    async execute(_id, params) {
      const rt = await ensureRuntime();
      switch (params.action) {
        case "initiate_call": return json(await rt.manager.initiateCall(to, ...));
        case "speak_to_user": return json(await rt.manager.speak(callId, message));
        case "end_call":      return json(await rt.manager.endCall(callId));
      }
    },
  });

  // 2. Gateway methods - Mac app / control UI can trigger calls directly
  api.registerGatewayMethod("voicecall.initiate", async ({ params, respond }) => { ... });
  api.registerGatewayMethod("voicecall.status",   async ({ params, respond }) => { ... });

  // 3. Service - starts/stops the Twilio/Telnyx webhook listener + call manager
  api.registerService({
    id: "voicecall",
    start: async () => { await ensureRuntime(); },
    stop:  async () => { await rt.stop(); },
  });

  // 4. CLI - adds `openclaw voicecall call +15551234567 "Hello"`
  api.registerCli(
    ({ program }) => registerVoiceCallCli({ program, config, ensureRuntime }),
    { commands: ["voicecall"] },
  );
}
```

Sources

<https://lucumr.pocoo.org/2026/1/31/pi/>

<https://mariozechner.at/posts/2025-11-30-pi-coding-agent/>

<https://x.com/dabit3/status/2023986942300627132>

Thanks for listening

- Hire me for AI agent related engineering work: matthias@tavon.ai
- Check out <https://tavon.ai/>




3

Beyond
Coding

Agent SDK overview - Claude

platform.claude.com/docs/en/agent-sdk/overview

☆👤📄Work⋮



Developer GuideAPI ReferenceMCPResourcesRelease Notes

🗨️EnglishLog in

Search...⌕

Web fetch tool

Web search tool

Memory tool

Tool search tool

Agent Skills

Overview

Quickstart

Best practices

Using Skills with the API

Agent SDK

Overview

Quickstart

TypeScript SDK

TypeScript V2 (preview)

Python SDK

Migration Guide

Guides

MCP in the API

Console

Agent SDK

Agent SDK overview

Copy page

Build production AI agents with Claude Code as a library

1

The Claude Code SDK has been renamed to the Claude Agent SDK. If you're migrating from the old SDK, see the [Migration Guide](#).

Build AI agents that autonomously read files, run commands, search the web, edit code, and more. The Agent SDK gives you the same tools, agent loop, and context management that power Claude Code, programmable in Python and TypeScript.

Python

```
import asyncio
from claude_agent_sdk import query, ClaudeAgentOptions

async def main():
    async for message in query(
        prompt="Find and fix the bug in auth.py",
        options=ClaudeAgentOptions(allowed_tools=["Read", "Edit", "Bash"])
    ):
        print(message) # Claude reads the file, finds the bug, edits it

asyncio.run(main())
```

The Agent SDK includes built-in tools for reading files, running commands, and editing code, so your agent can start working immediately without you implementing tool execution. Dive into the quickstart or explore real agents built with the SDK:

Ask Docs

Capabilities

Claude Code features

Get started

Compare the Agent SDK to other Claude tools

Changelog

Reporting bugs

Branding guidelines

License and terms

Next steps

cc

```
* * Claude Code v2.0.76
* * Opus 4.5 · Claude Max
* * ~/agent
```

```
> Draft an email to my co-founder Mark saying that I'm
really excited to see him when he comes to the Bay Area
at the end of January.
```

```
● Bash(cd
  /Users/david/agent/.claude/skills/claude-canvas
  && bun run src/cli.ts spawn document --id demo
  --scenario email-preview --config '{
    "from": "david@heyglide...)"
  }'
  ↳ Spawned document canvas 'demo' via tmux
```

```
+ Hatching... (esc to interrupt)
```

```
> █
```

```
»» bypass permissions on (shift+tab to cycle)
```

Email Preview

From: david@heyglide.com
To: mark@heyglide.com

Subject: Can't wait to see you!

Hey Mark,

Just wanted to say I'm really excited to see you when you're out here at the end of January! It's been way too long since we've had a chance to hang out in person.

Let me know your schedule when you get here - would love to grab dinner and catch up properly. Maybe we can sneak in some non-work conversation too.



David

cc-agent 1:bun

T4 scroll · Esc quit

7 lines

15:09

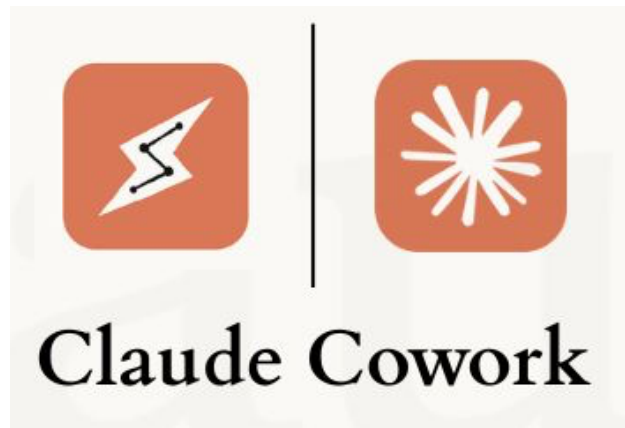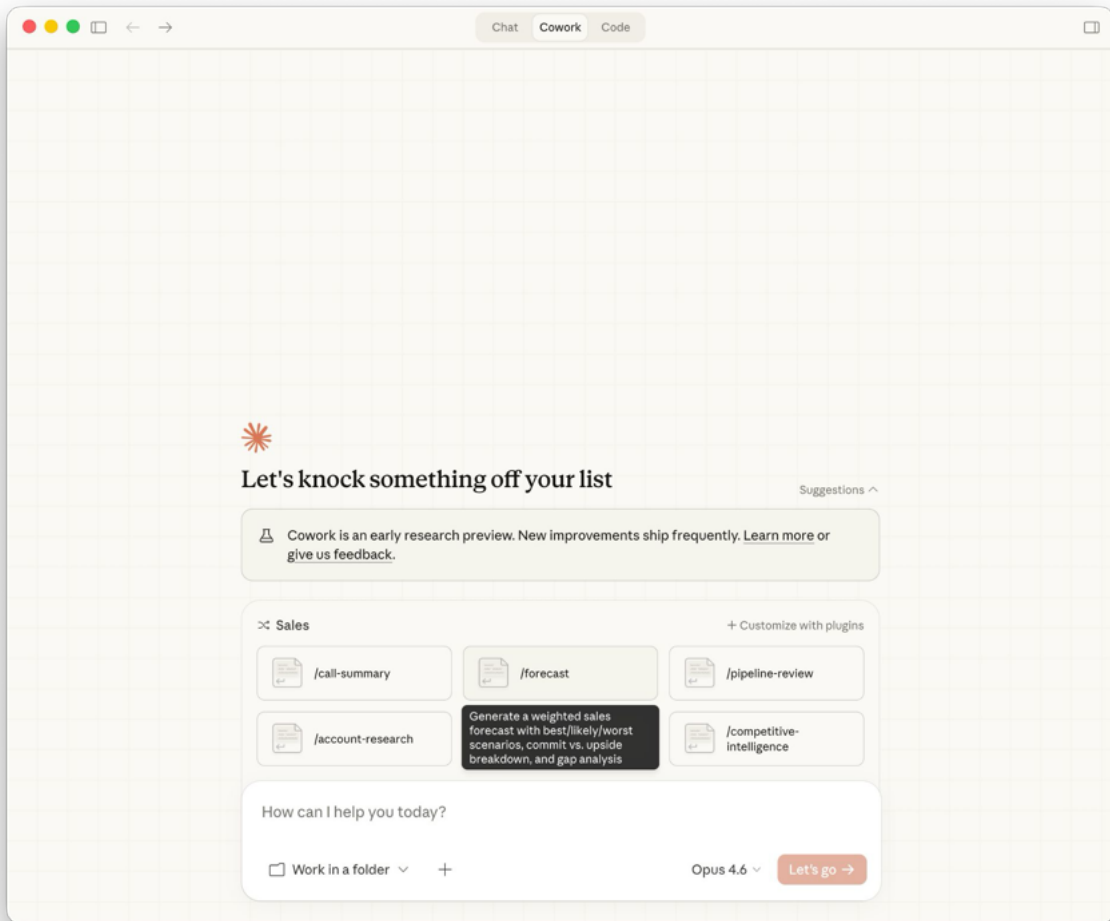


Anthropics Examples

Finance agents: Build agents that can understand your portfolio and goals, as well as help you evaluate investments by accessing external APIs, storing data and running code to make calculations.

Personal assistant agents: Build agents that can help you book travel and manage your calendar, as well as schedule appointments, put together briefs, and more by connecting to your internal data sources and tracking context across applications.

Customer support agents: Build agents that can handle high ambiguity user requests, like customer service tickets, by collecting and reviewing user data, connecting to external APIs, messaging users back and escalating to humans when needed.

Deep research agents: Build agents that can conduct comprehensive research across large document collections by searching through file systems, analyzing and synthesizing information from multiple sources, cross-referencing data across files, and generating detailed reports.

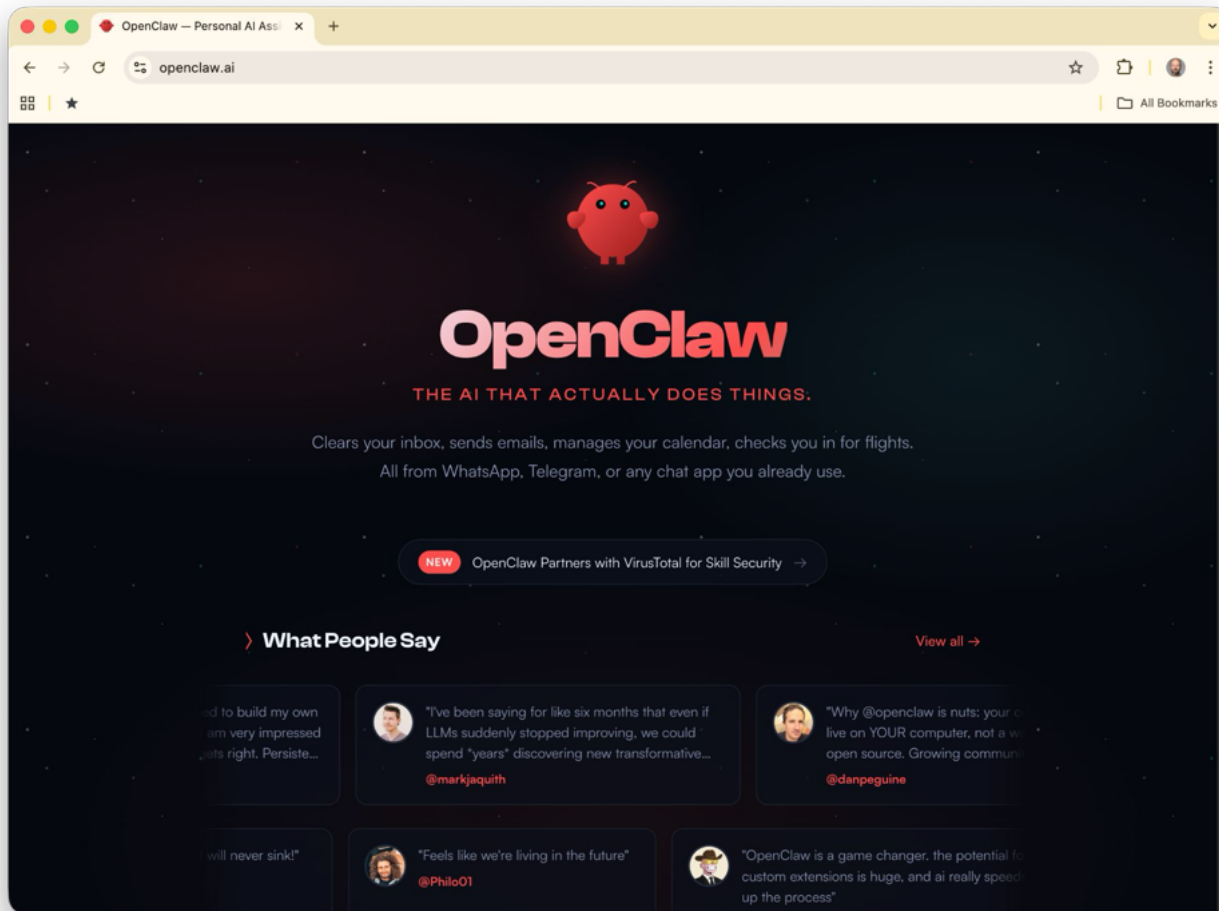

4

My CRM

> Marcus [REDACTED] 2:33 PM

Hallo Herr Lübken,

ja, gerne! Wollen Sie mal in meinem Kalender schauen, wann es bei Ihnen passt?

Nächste Woche wäre gut.

Danke und beste Grüße

Marcus [REDACTED]

[https://outlook.office.com/bookwithme/user/32b3a5738ccf4495afa-\[REDACTED\]:am/meetingtype/uxVq_uT5z0mAnR-\[REDACTED\]bookingcode=d1500afa-03cc-49ff-a\[REDACTED\]df68&anonymous&ep=mmlink](https://outlook.office.com/bookwithme/user/32b3a5738ccf4495afa-[REDACTED]:am/meetingtype/uxVq_uT5z0mAnR-[REDACTED]bookingcode=d1500afa-03cc-49ff-a[REDACTED]df68&anonymous&ep=mmlink)

Book With Me

outlook.office.com

Matthias Lübken sent the following messages at 2:57 PM

View Matthias' profileMatthias Lübken

Matthias Lübken 2:57 PM



Prima. Ich habe einen Termin nächste Woche Mittwoch gefunden. Bis dahin.

- Let me find Marcus [REDACTED] in the CRM and update his record.

- Search(pattern: "marcus-[REDACTED]t", path: "crm/contacts")
 - └ Found 0 files

- Search(pattern: "marcus-w[REDACTED]:", path: "crm/activity")
 - └ Found 1 file (ctrl+o to expand)

- Search(pattern: "***marcus-[REDACTED]t.md")
 - └ Found 1 file (ctrl+o to expand)

- Read(crm/contacts/customers-cold/marcus-[REDACTED]t.md)
 - └ Read 82 lines

● Read(crm/activity/2026-01-02-marcus-v t-linkedin-outreach.md)

└ Read 55 lines

● Great news! Marcus responded positively and you've scheduled a meeting. Let me move him from customers-cold to customers (since trust level increased to warm) and update his record.

● Update(crm/contacts/customers-cold/marcus-w t.md)

└ Added 4 lines, removed 4 lines

```
1 ---
2 role_primary: customer
3 -status: waiting
4 -trust: cold
3 +status: interested
4 +trust: warm
5 priority: B
6
7 -last_contact: 2026-01-02
8 -next_action: "Follow up if no response 2026-01-09"
7 +last_contact: 2026-01-05
8 +next_action: "Meeting scheduled 2026-01-08"
9
10 topics: [ai-in-hr, ai-ethics, knowledge-management, organizational-consulting, change-management]
11 ---
```

● Write(crm/activity/2026-01-05-marcus-v t-linkedin-response.md)

└ Wrote 33 lines to crm/activity/2026-01-05-marcus-v t-linkedin-response.md

```
---
contact: marcus-v t
date: 2026-01-05
type: linkedin
direction: inbound
---
# LinkedIn Response - Marcus V t
Received response at 2:33 PM:
... +23 lines (ctrl+o to expand)
```

● Write(crm/activity/2026-01-05-marcus-w t-linkedin-booking.md)

└ Wrote 34 lines to crm/activity/2026-01-05-marcus-w t-linkedin-booking.md

```
---
contact: marcus-w t
```

```
type: linkedin
direction: outbound
```

```
---
```

```
# LinkedIn Booking Confirmation - Marcus W [REDACTED] t
```

```
Sent message at 2:57 PM:
```

```
... +24 lines (ctrl+o to expand)
```

- Now let me move him from customers-cold to customers folder since trust level increased to warm:

```
• Bash(mv crm/contacts/customers-cold/marcus-w [REDACTED] :.md crm/contacts/customers/marcus-w [REDACTED] t.md)
  | (No content)
```

```
• Bash(ls crm/contacts/customers/marcus-w [REDACTED] :.md)
  | crm/contacts/customers/marcus-w [REDACTED] t.md
```

- Perfect! Updated Marcus W [REDACTED] :s record:

Status Change:

- Moved from customers-cold/ to customers/ (cold → warm trust)
- Status: waiting → interested
- Trust: cold → warm
- Last contact: 2026-01-05
- Next action: "Meeting scheduled 2026-01-08"

Activities logged:

- 2026-01-05: Positive response with booking link
- 2026-01-05: Booking confirmation for Wednesday, Jan 8

Meeting scheduled: Wednesday, 2026-01-08

Prep notes for the meeting:

- He's deeply research-driven and critical about AI ethics
- Expect questions on fairness, transparency, and AI governance
- Focus on evidence-based approach and "human-in-the-loop" dynamics
- Great opportunity for substantive feedback on product

> |

»» accept edits on (shift+tab to cycle)

```

* Draft Creation

- German tone - Professional but approachable, matching the original

Would you like me to adjust anything in the tone or content?

) create a real draft

• I'll create a Gmail draft for the follow-up email to [redacted]

• Skill(/gmail-draft)
  L Successfully loaded skill

• I need to use the correct format for the gmail skill. Let me check the contact slug and create the draft properly.

• Skill(gmail)
  L Successfully loaded skill

• I need to create the draft using the gmail workflow. Let me find the contact and create a follow-up email template, then use the gog CLI to create the draft.

• Bash(echo "Hallo Frai [redacted]
  L draft_id r4600884881157811667
    message_id 19c4840093a51c58
    thread_id 19c4840093a51c58

• Perfect! I've created a Gmail draft for [redacted] follow-up email.


Draft created:
- To: [redacted]
- Subject: Re: Wissenstransfer im Client Services Team
- Draft ID: r4600884881157811667

The draft is now in your Gmail drafts folder, ready for you to review and send. The follow-up is:
- Brief and respectful
- Reinforces the client services knowledge transfer value proposition
- Gives her an easy out if not interested
- Simple 20-minute meeting ask

You can open Gmail to review and send it when ready.

) Send it

? for shortcuts
```

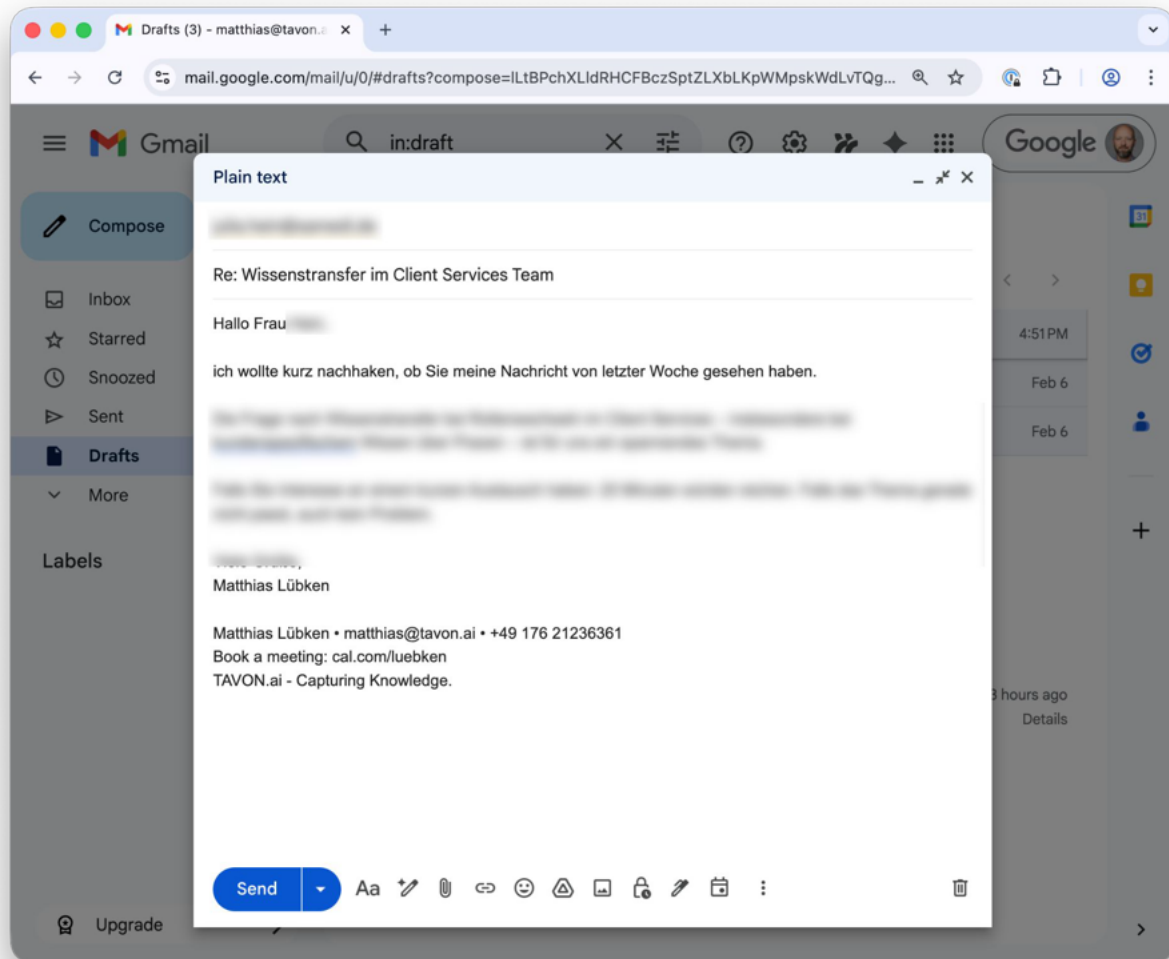

16:13

16

mdclawbot >



Matthias Lübken 16:12

mdclawbot APP 16:12
Business card from:

Dr. Matthias Lübken
Leiter der Unternehmens-Wirtschaft
des Unternehmens-Wirtschaft
Bremen am 16.12.2026

Herrn Matthias Lübken, Herr Lübken
Herr Lübken, Herr Lübken, Herr Lübken
Herr Lübken

16:14

16

mdclawbot >

Dr. Matthias Lübken

Leiter der Unternehmens-Wirtschaft
des Unternehmens-Wirtschaft
Bremen am 16.12.2026

Herrn Matthias Lübken, Herr Lübken
Herr Lübken, Herr Lübken, Herr Lübken
Herr Lübken

- Adresse: Bremerhaven 1 - 20161 Bremen
- Telefon: 0471 123456
- E-Mail: matthias.luebken@bremen.de
- Web: www.bremen.de

Want me to add him as a contact in the CRM?

Matthias Lübken 16:12
Checkmdclawbot APP 16:13
Looks like the shell commands need your approval.
Once approved I'll check if [redacted] is already in the
CRM. Hang tight 🕒

[redacted] is already in the CRM! He has:

- **Contact file:** crm/contacts/main/[redacted]
- **Recent activity:** 2026-02-09 — email about a talk proposal

He's also referenced in [redacted]
contact. Want me to pull up his full contact details
or log a new interaction?

Message @mdclaw..



Working with Claude Code

- /init & CLAUDE.md
 - <https://github.com/tavon-ai/webinars/blob/main/crm/CLAUDE.md>
- /clear
- commands
- skills
- & (something)
- AskUserQuestionTool

Summary: Give it a try

```
$ curl -fsSL https://claude.ai/install.sh | bash
```

```
$ curl -fsSL https://opencode.ai/install | bash
```

```
$ npm i -g @openai/codex
```

```
$ npm install -g @google/gemini-cli
```

```
> /init please create a file based CRM
```

Thanks for listening

- Hire me for AI / agent related engineering work: matthias@tavon.ai
- Check out <https://tavon.ai/>



3b

Getting
Started

Getting Started

- * ask Claude
- * plan mode (start with)
- * Tag @file @dir

4b

Context
Management

Context Management

CLAUDE.md !

\$ /init


\$ /context

\$ /clear

\$ /compact

\$ /rewind

```
/context
L Context Usage
  157k/200k tokens (78%)
  System prompt: 3.0k tokens (1.5%)
  System tools: 14.8k tokens (7.4%)
  Memory files: 6.1k tokens (3.0%)
  Skills: 1.5k tokens (0.7%)
  Messages: 131.2k tokens (65.6%)
  Autocompact buffer: 45.0k tokens (22.5%)
```

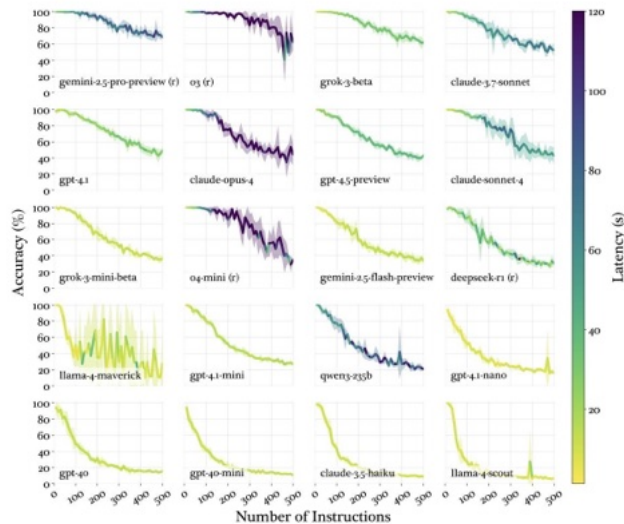

<https://x.com/Oxblacklight/status/1993463357790121998>

5b

How-To &
Workflows

- * custom commands for repetitive tasks

Parallel development

- * Git checkouts

- * Git worktrees

- * Different tasks

Workflows

basic workflows

- * give me an overview of ...
- * find me files ...
- * fix [paste error code]
- * fix [paste image]

advanced workflows

- * research how [feature] was implemented. save as a file.
- * debug ui by drawing borders
- * provide more scripts
- * spec driven: ai-dev tasks / multi-phase plans

Teleport

- &



```
# Fetch emails from this week, extract recipients, dedupe, enrich with  
contact details
```

```
curl "api.gmail.com/messages?since=$(date -d '7 days ago' +%s)" \  
  -H "Authorization: Bearer $TOKEN" | \  
  jq -r '.messages[].to[]' | \  
  sort -u > contacts_this_week.txt
```

```
# Now fetch full contact details for each
```

```
while read email; do  
  curl "api.contacts.com/search?email=$email" \  
    -H "Authorization: Bearer $TOKEN" >> contact_details.jsonl  
  sleep 0.1 # rate limiting  
done < contacts_this_week.txt
```

```
# Aggregate results
```

```
jq -s '.' contact_details.jsonl > final_contacts.json
```




```
# "Find all moments where the speaker says 'quarterly results' in this
earnings call"

# Extract audio, transcribe with timestamps
ffmpeg -i earnings_call.mp4 -vn -acodec pcm_s16le audio.wav
whisper audio.wav --model medium --output_format json > transcript.json

# Find timestamps for keyword
jq -r '.segments[] | select(.text | contains("quarterly results")) |
  "\(.start) - \(.end): \(.text)"' transcript.json > moments.txt

# Create video clips for each moment (with 5 sec context)
jq -r '.segments[] | select(.text | contains("quarterly results")) |
  "\(.start - 5) \(.end + 5)"' transcript.json | \
while read start end; do
  ffmpeg -i earnings_call.mp4 -ss $start -to $end \
    -c copy "clip_${start}.mp4"
done
```

Claude Agent SDK Loop

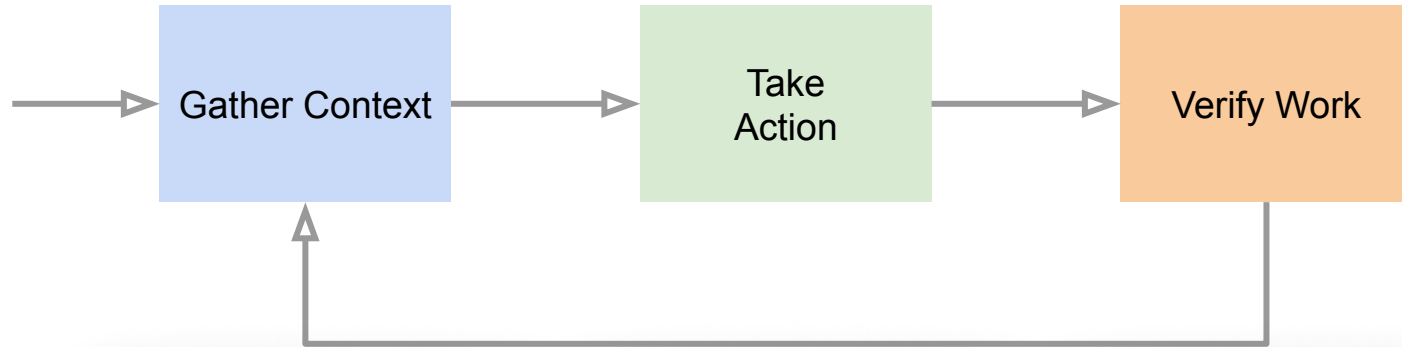

```
~/workspace/tavon
$ ls, find
$ grep, cat
```

```
~/workspace/tavon
$ write
$ execute
```

```
~/workspace/tavon
$ pnpm lint
$ javac
$ pytest
```