

Zero-Knowledge Private Zakat: A Privacy-Preserving Donation Protocol for Blockchain-Based Islamic Social Finance

Muhammad Zidan Fatonie
Computer Science Department
School of Computer Science, BINUS University
Jakarta, Indonesia 11480
muhammad.fatonie@binus.ac.id

Alexander Agung Santoso Gunawan
Computer Science Department
School of Computer Science, BINUS University
Jakarta, Indonesia 11480
aagung@binus.edu

Abstract—Zakat, one of the five pillars of Islam, represents a mandatory annual obligation for wealth redistribution with profound social welfare implications. Despite growing interest in blockchain-based zakat platforms, existing systems expose complete donor-recipient transaction records on public ledgers, creating a fundamental tension with Islamic principles of dignity preservation. This paper proposes a Zero-Knowledge Private Zakat (ZK-PZ) protocol that enables cryptographically private donations while maintaining verifiable transparency and Sharia compliance. The proposed architecture leverages off-chain zero-knowledge proving infrastructure, implementing programmable privacy through Noir circuits, nullifier-based double-donation prevention, and selective disclosure mechanisms. Donors can contribute zakat with complete anonymity or selective disclosure while receiving SBT receipts as proof of donation. The protocol preserves institutional trustworthiness through on-chain verification of proof validity while eliminating public exposure of individual transaction data. A prototype implementation on Ethereum Sepolia demonstrates technical feasibility, with UltraHONK proof generation averaging 247 ms and end-to-end donation gas costs of 721,345 gas per transaction. The results indicate that cryptographic privacy and institutional transparency are simultaneously achievable, opening a practical path toward privacy-respecting digital zakat infrastructure for Muslim-majority jurisdictions. This work proposes a domain-specific privacy protocol designed for Islamic social finance, directly addressing the maqasid al-shariah imperative of *nafs* (dignity) protection.

Index Terms—Aztec Network, Blockchain, Ethereum Sepolia, Islamic FinTech, Noir, Nullifier Mechanism, Privacy-Preserving Donations, Sharia Compliance, Zakat, Zero-Knowledge Proofs

I. INTRODUCTION

Zakat management at the intersection of Islamic jurisprudence and modern blockchain infrastructure presents both an opportunity and a challenge. BAZNAS [1] reports that the annual zakat potential in Indonesia alone is estimated at Rp 327 trillion (approximately USD 20 billion), while actual collection remains a fraction of that figure.

The advent of distributed ledger technology has prompted substantial research into blockchain-based zakat systems. Khan [2] demonstrated that blockchain can provide decentralized zakat collection and distribution. Nazeri et al. [3] found that blockchain features such as transparency, traceability, and

security align with zakat management objectives in Malaysia. Khairi et al. [4] developed a zakat collection blockchain system that offers automated disbursement and an immutable audit trail. However, these systems introduce a critical privacy paradox. By placing complete donor-recipient transaction records on public ledgers, they inadvertently expose socioeconomic vulnerabilities. The principle of maqasid al-shariah (objectives of Islamic law) explicitly protects *nafs* (life and dignity) of individuals [5, 6]. In Islamic jurisprudence, preservation of donor and recipient privacy during charitable giving is considered a virtuous act that maintains dignity for both parties. This ethical foundation motivates the technical contribution: a protocol that uses ZK proofs to reconcile Islamic jurisprudential requirements with modern blockchain infrastructure.

Zero-Knowledge Proofs (ZKPs) offer a cryptographic resolution to this paradox. Hameed et al. [7] survey ZKP constructions, and Wen et al. [8] analyze non-interactive variants (zk-SNARKs) suitable for blockchain deployment. The Aztec Network [9] provides an infrastructure for privacy-preserving transactions on Ethereum. Through its hybrid public-private state model, Aztec enables programmable privacy through Noir circuits [10] and the UltraHONK proof system for efficient verification. Despite these advances, no prior work has proposed a domain-specific protocol for privacy-preserving zakat donations. This paper addresses that gap by designing, implementing, and evaluating a ZK Private Zakat (ZK-PZ) protocol. The work formalizes a private transaction model for zakat donations using off-chain proving with on-chain verification, designs Noir circuits for Sharia-compliant eligibility verification, develops a nullifier-based double-donation prevention mechanism, and deploys a working prototype on Ethereum Sepolia. The study explores how Aztec’s private transaction infrastructure can be adapted for zakat donations while maintaining institutional accountability. It examines what Noir circuit design patterns enable Sharia-compliant eligibility verification. It also investigates how the protocol satisfies the tension between *nafs* protection and amanah requirements in maqasid al-shariah.

This paper contributes a domain-specific privacy protocol for Islamic social finance, featuring a Noir-based circuit implementing nisab and hawl eligibility verification as verifiable predicates, a nullifier mechanism preventing re-claiming without identity exposure, and a tiered donor privacy model. The prototype achieves UltraHONK proof generation averaging 247 ms and end-to-end donation gas costs of 721,345 gas on Ethereum Sepolia.

II. LITERATURE REVIEW

Blockchain-based zakat management has attracted increasing research interest. Khan [2] demonstrated a blockchain-based decentralized zakat collection and distribution platform that eliminates intermediary delays. Khairi et al. [4] developed a zakat collection blockchain system employing ERC-20 tokens to provide an immutable audit trail. Nazeri et al. [3] explored how blockchain features align with zakat management objectives in Malaysia. A recent Emerald study examined the potential and challenges of blockchain technology for zakat institutions [21]. However, these systems share a critical privacy limitation. Complete transparency of donor-recipient relationships on public blockchains enables social stigma, targeted harassment, and pattern analysis attacks [2]. Fauzi et al. [19] confirmed through bibliometric analysis an increasing research trend in Muslim-majority countries. Ascarya [20] demonstrated that Islamic social finance instruments (zakat, infaq, sadaqah, and waqf) play a role in economic recovery, and Unal and Aysan [21] proposed blockchain as a means to harmonize differing Sharia-compliance regimes. Muharam and Osman [27] explored the nexus of blockchain and Islamic social finance for sustainability. Yet none of these works integrate privacy-preserving transaction mechanisms.

On the zero-knowledge proof front, Hameed et al. [7] survey ZKP constructions, and Wen et al. [8] analyze zk-SNARK variants suitable for blockchain deployment. Williams [22] provides a contemporary overview of ZKPs and their expanding role within blockchain technology. Grassi et al. [11] introduce the Poseidon hash function, which reduces constraint count by up to $8\times$ compared to Pedersen Hash on EVM chains. For this work, Noir [10] is selected for its integration with the Aztec Network [9], which provides programmable privacy through a hybrid public-private state model with note hash trees and nullifier mechanisms. Buterin et al. [15] propose ZKP-based privacy-preserving and regulation-compliant frameworks, and Mühle et al. [18] present zk-SNARK-based identity management suitable for KYC integration.

Three research gaps are identified. (1) Existing blockchain-based zakat platforms lack privacy-preserving transaction mechanisms [2, 3]. (2) Private transaction frameworks are designed for general-purpose anonymity without Islamic jurisprudential eligibility criteria [15, 14]. (3) The integration of programmable privacy with Islamic social finance has not been explored [21, 5]. This paper directly addresses all three gaps.

Fig. 1 positions this research relative to three adjacent domains and the Design Science Research methodology. Existing

blockchain zakat systems provide transparency but expose donor-recipient data publicly [2,3,4,19]. General ZKP privacy frameworks enable anonymous transactions without Islamic eligibility predicates [7,8,14,15]. Islamic social finance studies digitize zakat without ZK integration [20,21,24,25]. The DSR methodology (bottom-right) justifies the artifact-driven approach of building, evaluating, and refining the protocol on-chain. ZK-PZ bridges all three domains by combining zero-knowledge proofs with Sharia-compliant eligibility verification, instantiated and validated via Sepolia deployment (v8).



Fig. 1. Research positioning of ZK-PZ relative to four adjacent domains

Fig. 2 contrasts traditional zakat systems, where donor-recipient data sits exposed on a public ledger, with the proposed ZK-PZ model that preserves privacy through off-chain proving and bounded on-chain disclosure.

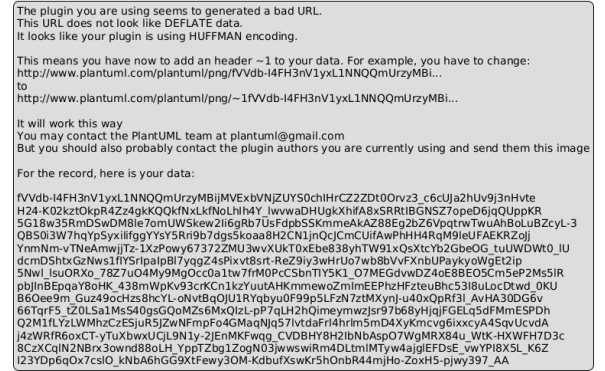


Fig. 2. Traditional Zakat Paradigm vs. Proposed ZK-PZ Model

III. METHODOLOGY

This study adopts a Design Science Research (DSR) approach. Fig. 3 illustrates the five-phase methodology: Phase 1 identifies the research problem through a literature search spanning blockchain zakat, ZKP privacy frameworks, and Islamic finance instruments across 29 papers published between 2021 and 2025. Phase 2 designs the ZK-PZ protocol, Noir circuit architecture encoding nisab and hawl verification, and the four-tier privacy model. Phase 3 implements the system using nargo v1.0.0-beta.21, Barretenberg v4.2.1, 15 Solidity contracts deployed via a single forge script to Sepolia, and a Next.js 15 PWA frontend with wagmi/XellarKit wallet connectivity. Phase 4 demonstrates the prototype on Sepolia testnet with benchmarked performance of 247 ms proof generation and 12.0 ms verification. Phase 5 evaluates through Foundry gas reports, security properties analysis, and Sharia compliance review.

The plugin you are using seems to generate a bad URL.
This URL does not look like DEFLATE data.
It looks like your plugin is using HUFFMAN encoding.

This means you have now to add an header -1 to your data. For example, you have to change:
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...
to
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...

It will work this way
You may contact the PlantUML team at plantuml@gmail.com
But you should also probably contact the plugin authors you are currently using and send them this image

For the record, here is your data:

```

pVbNtttGEL7zKRbuoRIc6j-KR-KSLbVGEYUwJKdwNBISy6ordYmSrBGuoDFH2GvKvLzQ85Wd3
SZG5nKbFgwBduabnfm5liu-zR5Vap3ETvEeEoTThPg6dijUPL0UjFG58GxNwFXK1vRUGwZj8iS
xhIUUCe6TpWE8HVICZARpLR-HX7jP0CcxHURxpGUyMvv-c7zvHX0jboVyx44pBlixHJQNgmBojYKgfz
EDlWmJg85GKvCLO00mJ08vbeSg6eM5LWKNWVNDovAX09gcztcN0QpqtIDy6x3VYw4DxSWPKeHfIOGkd
JhKjBUkC-C-quaUXEDUGuBBf5cbnK-74Jh-Jh-XyPfhTTSYqObnLUYyY93hAKZ56-7mpmc37
cvaRKZNYBjGMVuzwBedUroLAMwRrhQiaKdrEdovTJKAYwDN1K3h2R0eXNPRBqIEDIDu7TGQ9YISgkK
uABylr5PNT1mu-ka_H40PWnGO83Yfpra5DLBfca358LhmTv-8i7W6-6ZHEXnSnzZq6PVvXagU51gmZ
QSpIR84OnGo-bElrAFda-XbR7bIzThQntIdgXwK5ZTcP0maXyIn-H2weQbMIALnrj2W21h8-9le
dYLVtGGKc3U0UHVZiduu9Nk0y9Qp-Hm55d6p-P5v77FeON-a72A0QhWkGmComRu57hK6KjmmT-x4i
hv47H0mruX5GgK3uOCUK3YerUJA-7Dad7yPRAjvQ8KPAHYWfJm7EkqMhg-pxxhhFgF0vVvYH
6xzTS99HjZU_CliUzWBH1-pcjxE38rqVLKpgbDq4u01-PzoxgBuOu0i-szBUBMGS9YBex-DZiqJ03asG
wbZyd7s9CDBQhY7bBmrd7PWHvEzYvyBFiCohnj_o6HxvMA5os2nT35EqusCVtgoetXQX4frKXBO
6zyJ06j7AnqMTTSL0A52pXUeA3APABUSXwNCKMgTme1LwzX03pCbU8mJMK8B5WJ1M2FzeYztInE
cc0HjWuZn-CyTuzNX-G16FH7j6OTR0S6GE4Y2If6pWvNysvAdMqK_L5fHnncZB0e1KSLbLBI
vM8fztEoomuq2UHbVSLCQ-MSN28PymicxmbLvG0UWLnzk-6FQ0U0UjdmEgThLKXnL3-0Xpy-1w
0nFpmrgq74_Nk7JmbF-Lqx-jfVWkGdvG4GYWzblTgDQKASROE9wFRBfCDTbCB350QKNNmEp
UHQCFQFIZ4aV-hRngX6b2jMsPW_U5oavjySh-N2KslrUp6HIGSP6kVsbUzIAfZLR5KvNdk08f
CobxzZ-vwDDBZ_gfIzpnbaWqYiQOr6pYiR-v80UX-LWvzfHNeKymkvk9QXceozXYP9QKW
RtUjUjU6L2m5UhZ7XeMpeSairVa_Xhbqvx-7X9rSYR1M-QZZCPFCdHgb44taEaQyrtok3Zzn970X
MPyQvYSIN5_JXRI-AlpTsm3IQL41ZAako8Ab-5ahjZaBAjWwbbq-jxvLpRfLbLohRNC0-158zk5u
QR-93T5FzEwcktlWXB9oKvNzWK_aC1G6iHomtUhbX56PLRLDRHs_0TWaEaT9NDWfQHW5bjvMXM
8bP8Hw

```

Fig. 3. DSR Methodology with five phases and literature search summary

IV. RESULTS

A. System Overview and Threat Model

The ZK-PZ protocol operates within a five-actor trust model: donor (ZKP prover), recipient (SBT receipt holder), amil institution (verifier), off-chain proving infrastructure (Noir circuits and Barretenberg prover), and Ethereum Sepolia (public settlement layer).

The threat model assumes: (1) an honest-but-curious verifier, (2) a potentially malicious claimant, and (3) a public blockchain network subject to transaction graph analysis. The protocol guarantees the properties summarized in Table I.

TABLE I
ZK-PZ PROTOCOL SECURITY PROPERTIES

Property	Guarantee
Donor anonymity	Identities, amounts, and patterns never exposed on-chain. Only ZK proofs of valid donation are publicly verifiable.
Recipient privacy	Donor-side privacy preserved through ZK proofs. Recipient encrypted notes reserved for future work.
Soundness	Non-eligible recipient cannot generate an accepted proof under q-PKE assumption [11].
Double-donation	Nullifier hash prevents the same recipient from claiming zakat more than once per cycle.
Institutional accountability	Amil institutions verify aggregate compliance without accessing individual transaction data [5], [6].

Fig. 4 depicts the three-layer protocol architecture: the off-chain proving pipeline where Noir circuits compile to ACIR and Barretenberg generates UltraHONK proofs at 247 ms, the Sepolia settlement layer hosting ZKTCORE and ZakatEscrow-Manager, and the Next.js PWA frontend with wagmi/XellarKit wallet connectivity.

B. System Architecture and Payment Flow

The platform employs a hybrid architecture combining Noir circuits on the client side with Ethereum Sepolia for public settlement. Donors pay in stablecoins or ETH. Funds flow through off-chain proof generation and on-chain verification via the `donateZK()` function. This design ensures that individual donation privacy is maintained through cryptographic proofs while institutional accountability is achieved through on-chain event emission and nullifier tracking.

A Progressive Web Application supports the donor-facing workflow, providing wallet connection, privacy tier selection,

The plugin you are using seems to generate a bad URL.
This URL does not look like DEFLATE data.
It looks like your plugin is using HUFFMAN encoding.

This means you have now to add an header -1 to your data. For example, you have to change:
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...
to
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...

It will work this way
You may contact the PlantUML team at plantuml@gmail.com
But you should also probably contact the plugin authors you are currently using and send them this image

For the record, here is your data:

```

pVbNtttGEL7zKRbuoRIc6j-KR-KSLbVGEYUwJKdwNBISy6ordYmSrBGuoDFH2GvKvLzQ85Wd3
SZG5nKbFgwBduabnfm5liu-zR5Vap3ETvEeEoTThPg6dijUPL0UjFG58GxNwFXK1vRUGwZj8iS
xhIUUCe6TpWE8HVICZARpLR-HX7jP0CcxHURxpGUyMvv-c7zvHX0jboVyx44pBlixHJQNgmBojYKgfz
EDlWmJg85GKvCLO00mJ08vbeSg6eM5LWKNWVNDovAX09gcztcN0QpqtIDy6x3VYw4DxSWPKeHfIOGkd
JhKjBUkC-C-quaUXEDUGuBBf5cbnK-74Jh-Jh-XyPfhTTSYqObnLUYyY93hAKZ56-7mpmc37
cvaRKZNYBjGMVuzwBedUroLAMwRrhQiaKdrEdovTJKAYwDN1K3h2R0eXNPRBqIEDIDu7TGQ9YISgkK
uABylr5PNT1mu-ka_H40PWnGO83Yfpra5DLBfca358LhmTv-8i7W6-6ZHEXnSnzZq6PVvXagU51gmZ
QSpIR84OnGo-bElrAFda-XbR7bIzThQntIdgXwK5ZTcP0maXyIn-H2weQbMIALnrj2W21h8-9le
dYLVtGGKc3U0UHVZiduu9Nk0y9Qp-Hm55d6p-P5v77FeON-a72A0QhWkGmComRu57hK6KjmmT-x4i
hv47H0mruX5GgK3uOCUK3YerUJA-7Dad7yPRAjvQ8KPAHYWfJm7EkqMhg-pxxhhFgF0vVvYH
6xzTS99HjZU_CliUzWBH1-pcjxE38rqVLKpgbDq4u01-PzoxgBuOu0i-szBUBMGS9YBex-DZiqJ03asG
wbZyd7s9CDBQhY7bBmrd7PWHvEzYvyBFiCohnj_o6HxvMA5os2nT35EqusCVtgoetXQX4frKXBO
6zyJ06j7AnqMTTSL0A52pXUeA3APABUSXwNCKMgTme1LwzX03pCbU8mJMK8B5WJ1M2FzeYztInE
cc0HjWuZn-CyTuzNX-G16FH7j6OTR0S6GE4Y2If6pWvNysvAdMqK_L5fHnncZB0e1KSLbLBI
vM8fztEoomuq2UHbVSLCQ-MSN28PymicxmbLvG0UWLnzk-6FQ0U0UjdmEgThLKXnL3-0Xpy-1w
0nFpmrgq74_Nk7JmbF-Lqx-jfVWkGdvG4GYWzblTgDQKASROE9wFRBfCDTbCB350QKNNmEp
UHQCFQFIZ4aV-hRngX6b2jMsPW_U5oavjySh-N2KslrUp6HIGSP6kVsbUzIAfZLR5KvNdk08f
CobxzZ-vwDDBZ_gfIzpnbaWqYiQOr6pYiR-v80UX-LWvzfHNeKymkvk9QXceozXYP9QKW
RtUjUjU6L2m5UhZ7XeMpeSairVa_Xhbqvx-7X9rSYR1M-QZZCPFCdHgb44taEaQyrtok3Zzn970X
MPyQvYSIN5_JXRI-AlpTsm3IQL41ZAako8Ab-5ahjZaBAjWwbbq-jxvLpRfLbLohRNC0-158zk5u
QR-93T5FzEwcktlWXB9oKvNzWK_aC1G6iHomtUhbX56PLRLDRHs_0TWaEaT9NDWfQHW5bjvMXM
8bP8Hw

```

Fig. 4. ZK-PZ Protocol Architecture: off-chain proving pipeline and on-chain settlement

The plugin you are using seems to generate a bad URL.
This URL does not look like DEFLATE data.
It looks like your plugin is using HUFFMAN encoding.

This means you have now to add an header -1 to your data. For example, you have to change:
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...
to
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...

It will work this way
You may contact the PlantUML team at plantuml@gmail.com
But you should also probably contact the plugin authors you are currently using and send them this image

For the record, here is your data:

```

pVbNtttGEL7zKRbuoRIc6j-KR-KSLbVGEYUwJKdwNBISy6ordYmSrBGuoDFH2GvKvLzQ85Wd3
SZG5nKbFgwBduabnfm5liu-zR5Vap3ETvEeEoTThPg6dijUPL0UjFG58GxNwFXK1vRUGwZj8iS
xhIUUCe6TpWE8HVICZARpLR-HX7jP0CcxHURxpGUyMvv-c7zvHX0jboVyx44pBlixHJQNgmBojYKgfz
EDlWmJg85GKvCLO00mJ08vbeSg6eM5LWKNWVNDovAX09gcztcN0QpqtIDy6x3VYw4DxSWPKeHfIOGkd
JhKjBUkC-C-quaUXEDUGuBBf5cbnK-74Jh-Jh-XyPfhTTSYqObnLUYyY93hAKZ56-7mpmc37
cvaRKZNYBjGMVuzwBedUroLAMwRrhQiaKdrEdovTJKAYwDN1K3h2R0eXNPRBqIEDIDu7TGQ9YISgkK
uABylr5PNT1mu-ka_H40PWnGO83Yfpra5DLBfca358LhmTv-8i7W6-6ZHEXnSnzZq6PVvXagU51gmZ
QSpIR84OnGo-bElrAFda-XbR7bIzThQntIdgXwK5ZTcP0maXyIn-H2weQbMIALnrj2W21h8-9le
dYLVtGGKc3U0UHVZiduu9Nk0y9Qp-Hm55d6p-P5v77FeON-a72A0QhWkGmComRu57hK6KjmmT-x4i
hv47H0mruX5GgK3uOCUK3YerUJA-7Dad7yPRAjvQ8KPAHYWfJm7EkqMhg-pxxhhFgF0vVvYH
6xzTS99HjZU_CliUzWBH1-pcjxE38rqVLKpgbDq4u01-PzoxgBuOu0i-szBUBMGS9YBex-DZiqJ03asG
wbZyd7s9CDBQhY7bBmrd7PWHvEzYvyBFiCohnj_o6HxvMA5os2nT35EqusCVtgoetXQX4frKXBO
6zyJ06j7AnqMTTSL0A52pXUeA3APABUSXwNCKMgTme1LwzX03pCbU8mJMK8B5WJ1M2FzeYztInE
cc0HjWuZn-CyTuzNX-G16FH7j6OTR0S6GE4Y2If6pWvNysvAdMqK_L5fHnncZB0e1KSLbLBI
vM8fztEoomuq2UHbVSLCQ-MSN28PymicxmbLvG0UWLnzk-6FQ0U0UjdmEgThLKXnL3-0Xpy-1w
0nFpmrgq74_Nk7JmbF-Lqx-jfVWkGdvG4GYWzblTgDQKASROE9wFRBfCDTbCB350QKNNmEp
UHQCFQFIZ4aV-hRngX6b2jMsPW_U5oavjySh-N2KslrUp6HIGSP6kVsbUzIAfZLR5KvNdk08f
CobxzZ-vwDDBZ_gfIzpnbaWqYiQOr6pYiR-v80UX-LWvzfHNeKymkvk9QXceozXYP9QKW
RtUjUjU6L2m5UhZ7XeMpeSairVa_Xhbqvx-7X9rSYR1M-QZZCPFCdHgb44taEaQyrtok3Zzn970X
MPyQvYSIN5_JXRI-AlpTsm3IQL41ZAako8Ab-5ahjZaBAjWwbbq-jxvLpRfLbLohRNC0-158zk5u
QR-93T5FzEwcktlWXB9oKvNzWK_aC1G6iHomtUhbX56PLRLDRHs_0TWaEaT9NDWfQHW5bjvMXM
8bP8Hw

```

Fig. 5. ZK-PZ Donation Flow: from wallet connection to SBT receipt to the donor

The plugin you are using seems to generate a bad URL.
This URL does not look like DEFLATE data.
It looks like your plugin is using HUFFMAN encoding.

This means you have now to add an header -1 to your data. For example, you have to change:
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...
to
http://www.plantuml.com/plantuml/png/-1pVbNtttGEL7zKRbuoRIc6j-KR-KSL...

It will work this way
You may contact the PlantUML team at plantuml@gmail.com
But you should also probably contact the plugin authors you are currently using and send them this image

For the record, here is your data:

```

nVdtb-I4EP7Or7C4L_SurYCWfIK12tKrtqjV1FUnbq3apzEgU59tAu6f97zvCzjlf7qnS04nPM
B3g8Yz4jlbicpUJNLG2xBynKMTRYszKotWcI4-m04yP8chjlmG1oNkNTNaiWGlYxatEDlkmH3K
0ISmRjyMWYozP-qfio69iIBAvRZzwmDKn05jQqDwaadWqyTq98ntwyTv7NGuvuWq-h-ZOLHP6
2r9o9o-qcAKA0I_GknaM6yXTPhdEoJ9D9n86jmerFFPYzKQVL3AD2UlxTWG15g0RARZ5rZvAs
D_05WNTQjTCl_Jh0AOmHcuwPCwb9c3ZmZKgmcbM9FncUAM0kqLrFPLUpOeE_v2B4wN50VzY0uz
2e5cHwv98fT5d-ft98rtfOgRLEOXKcK64u0JEDa_RhFpTRUwKwbyW5Amq4zKd8h5SG2eW0K6
G8UJlU5HxBlpIXwCvZ9Mcc4HZE3jpp_FmpRQXfKwYwEjMcU36C-EpPftzhdYjRfHsFzZ_u1K0tYj
5lur2eXObanZ0nbjZuKnKtH2PjU1FgFK8XKSDbM9V9cZxmKlgR0K3HvVhdCyz2e6008ocbEnK
QYVj7Z2dtb18EAxiHexvUjVhG26uBjUdo50g55uKNE52ZIRAVmBPIllmDm-6a0dQ8epjHw52
PvK6ojmEEO_ofbtCuWk47dm2b0kZuWma3KdhUWPYKfu9V9c1q3Qnftm_wwwZcyf2a92as
3VcCXp50TLNOR_W0zSBEn1VM9DQR07X-zx8nW2D5T2meD0EKYae6Sudkw9eVLZw5pW91uR0tdxRmp
JvU0E0KjRHEHvme-hNrlYIBKcYnuZqVilCOEYKLP_mAZGr-O_xpAeWmiOjYTAB8QsvBNWvRMy9c
BaxRFn6nzThFi_u78T-61Ytdc1CkdwNitaqdaAJ4RhsGmnyMIOrykyteK1yXempopPOU03XmVvc7R2
eZUGmN0wuuuMPLXsqcUbljgdlrH5at53a_jy85btH7v5G0gZLzvdH8iOdgPZoVgWp5L2
Bgg0w3Pn4wC_R4m2P84xx4qzVes_3g8PQJQDOT-A6jUxwTHUKJXh7uJHJ9uXETA-w902puwB
Guf6BPuoz6abQXzQgmATJqfPl3aTOfj3p969D2wqav9B-rStmCdhUWjUmu4WV-vtrdbmsSdqcwCpN
cuA6j4eikzkjhrPCn1eU_cdhkdrCd5GlrWp50X7Zgaur1-oUw_3IEBweYv9AED7Y5XQ20V5
1SEKqy9e90gb00CR-weq8I9BxBI_ZM6AD87x3pD-6ZmEWEKDR7M_BfjlyEz7ASDH8V2cQD0S02gH
XNYCLUCRGuRcdXtGAm2o8Dv8kGvtt4Ym-iOYkWoYUpaKwG7ss9x5p8E5qhvXap-g0vKvT8A

```

Fig. 6. ZK-PZ Smart Contract Architecture with Sepolia addresses and cardinality

donation amount input, proof generation visualization, and transaction confirmation. Proof generation runs in a Web Worker ensuring that private inputs never leave the donor's device [11].

C. Circuit Performance

Circuit benchmarks used Noir v1.0.0-beta.21 and Barretenberg v4.2.1 on a 16-core Linux machine. Gas measurements for standard contract functions were obtained from Foundry gas reports. The end-to-end `donateZK()` gas was measured on the Sepolia testnet at block 10,854,651.

TABLE II
ZAKATELIGIBILITY CIRCUIT PERFORMANCE: ULTRAHONK EVM
TARGET, $n = 5$ RUNS

Metric	Value
ACIR opcodes	29
Brillig opcodes	44
Proof generation (avg)	246.8 ms
Proof verification (avg)	12.0 ms
Proof size	8,384 bytes

D. Sepolia Deployment and Gas Consumption

15 contracts deployed via single forge script to Sepolia (chain ID 11155111). The ZKTCORE (v8, 0xb56a...B60B) routes `donateZK()` through `zakatEscrowManager.donate()` for pool accounting. An end-to-end donation (tx 0x6a0b...b790, block 10,854,651) completed proof verification, nullifier registration, transfer, NFT minting, and event emission in 721,345 gas.

Table III reports gas costs measured via Foundry gas reports.

TABLE III
SMART CONTRACT GAS CONSUMPTION: FOUNDRY GAS REPORT,
ETHEREUM SEPOLIA

Contract	Function	Gas (avg)
ZKTCORE	<code>donate()</code>	490,187
ZKTCORE	<code>createCampaignPool()</code>	365,552
ZKTCORE	<code>castVote()</code>	132,909
ZKTCORE	<code>donateZK()</code> (e2e)	721,345
ZKTCORE	Deploy	5,314,471
ZakatEscrowManager	Deploy	3,069,194
ShariaReviewManager	Deploy	2,114,307

E. Security Analysis

Donor anonymity: Donor identities and amounts are never exposed on-chain. Only ZK proofs are publicly verifiable [12], [22]. **Recipient privacy:** Donor-side privacy preserved through ZK proofs and nullifier anonymity. Recipient-side encrypted note disbursement is reserved for future work [16]. **Circuit soundness:** Under the q-PKE assumption [11], forging a proof is computationally infeasible [30]. **Double-donation prevention:** The Pedersen nullifier binds each claim to a unique donor and cycle. The ZKTCORE contract ensures atomic rejection of duplicate claims [19].

V. DISCUSSION

A. Sharia Compliance and Deployment

The principle of *maqasid al-shariah* (objectives of Islamic law) explicitly protects *nafts* (life and dignity) of individuals [5, 6]. In Islamic jurisprudence, preservation of donor and recipient privacy during charitable giving is considered a virtuous act that maintains dignity for both parties [5, 6]. Azizov et al. [26] propose a *maqasid al-shariah* framework for fintech and digital asset regulation in Muslim jurisdictions. Latang et al. [25]

examine the Islamic legal perspective on cryptocurrency as digital assets, including the application of fatwa in determining compliance. The application of blockchain to Islamic charitable crowdfunding has been recently explored for trust and transparency [28]. This research applies privacy-preserving mechanisms to the donor side through ZK proofs and nullifier-based anonymity. Recipient privacy preservation through encrypted private notes and selective disclosure is reserved for future work by the authors. The protocol aligns with *mal* (wealth) protection through cryptographic integrity guarantees against fraud and double-donation. *Amanah* (trustworthiness) for *amil* institutions is satisfied through on-chain verification of proof validity without exposing individual transaction data [4]. Deployment requires Aztec Network integration, *amil* staff training, and regulatory alignment with OJK Fintech Sandbox requirements.

B. Limitations and Future Work

Circuit scope is limited to *nisab* and *hawl* criteria. Extension to all eight *asnaf* categories is architecturally accommodated. Currently, zakat disbursement is performed by the *amil* institution through the `ZakatEscrowManager` contract without on-chain verifiability of the disbursement to *mustahik* (recipients). Future work includes issuing private decentralized identifiers (DIDs) to *mustahik* for on-chain eligibility attestation, making *amil* disbursements cryptographically verifiable, and implementing a dual governance system combining Sharia Council ZK DAO attestation with Community (Donor) DAO voting. Additional directions include recursive proof systems for multi-period eligibility, compliance-friendly ZK protocols for AML/CFT, and batched settlement optimization [7], [18], [24].

VI. CONCLUSION

This paper presented a Zero-Knowledge Private Zakat (ZK-PZ) protocol addressing the privacy paradox in blockchain-based zakat systems. An implementation using Noir circuits (29 ACIR opcodes) with UltraHONK proving via Barretenberg v4.2.1 was deployed to Ethereum Sepolia, achieving proof generation in 247ms and end-to-end donation in 721,345 gas. The work reconciles cryptographic privacy with *nafts* preservation in Islamic social finance [5], [6], demonstrating that institutional accountability and individual privacy are simultaneously achievable through applied cryptography.

ACKNOWLEDGMENT

This research was conducted as part of the Research Track program at BINUS University and the *pidi.id* hackathon. The authors thank the Ethereum Jakarta community for technical support and Tawf Labs teammates for sharia consultation. The codebase is available at <https://github.com/tawf-labs/zkt-hackathon> and the testnet at <https://ziswaf.tawf.foundation>.

The authors acknowledge the use of AI-assisted tools (OpenAI Codex, Claude Code) for code scaffolding, literature review synthesis, and formatting assistance. AI-generated content is limited to literature review paraphrasing and formatting,

comprising approximately 10% of the document. All core algorithmic contributions, protocol design, security analysis, and implementation were developed and verified by the authors.

REFERENCES

- [1] BAZNAS, "Outlook Zakat Indonesia 2022," Badan Amil Zakat Nasional, Jakarta, Indonesia, 2022. [Online]. Available: <https://baznas.go.id>
- [2] S. Khan, "A blockchain based decentralized zakat collection and distribution platform," in *Proc. 7th Int. Conf. Software e-Business (ICSaB)*, 2023, doi: 10.1145/3641067.3641071.
- [3] A. Nazeri et al., "Exploration of a new zakat management system empowered by blockchain technology in Malaysia," *ISRA Int. J. Islamic Finance*, 2023, doi: 10.55188/ijif.v15i4.568.
- [4] M. Khairi et al., "The development and application of the zakat collection blockchain system," *Virtus Interpress*, 2023, doi: 10.22495/jgvr12i1siart9.
- [5] "Maqasid al-Shariah and the digital data ownership," *J. Islamic Law Digit. Econ. Bus.*, vol. 1, no. 2, pp. 168–181, 2022. [Online]. Available: <https://journal.uui.ac.id/JILDEB/article/view/46815>
- [6] "Sharia governance and personal data protection in Islamic fintech," *Hukmuna*, 2022. [Online]. Available: <https://journals.ai-mrc.com/hukmuna/article/view/913>
- [7] J. Wen et al., "Practical security analysis of zero-knowledge proof circuits," in *Proc. 33rd USENIX Security Symp.*, 2024, ISBN 978-1-939133-44-2. [Online]. Available: <https://www.usenix.org/conference/usenixsecurity24/presentation/wen>
- [8] M. Fauzi, P. Paiman, and O. Othman, "A bibliometric analysis of blockchain-based zakat system design," *Acad. J. Interdiscip. Stud.*, vol. 14, no. 1, 2025. [Online]. Available: <https://www.richtmann.org/journal/index.php/ajis/article/view/13846>
- [9] O. V. Kovalchuk and M. P. Karpiak, "Zero-knowledge proof framework for privacy-preserving financial transactions," *Sci. Bull. Lviv Polytech. Nat. Univ.*, vol. 12, no. 1, pp. 129–136, 2025. [Online]. Available: <https://science.lpnu.ua/mmc/all-volumes-and-issues/volume-12-number-1-2025/zero-knowledge-proof-framework-privacy-preserving>
- [10] I. M. Unal and A. F. Aysan, "FinTech, digitalization, and blockchain in Islamic finance: Retrospective investigation," *FinTech*, vol. 1, no. 4, pp. 388–398, 2022, doi: 10.3390/fintech1040029.
- [11] A. Hameed, A. Farooq, and M. Usman, "Zero knowledge proofs: A comprehensive review of applications, protocols, and future directions in cybersecurity," 2023. [Online]. Available: <https://www.researchgate.net/publication/373097436>
- [12] Aztec Network, "Aztec's ZK-ZK-Rollup: Looking behind the crypt curtain," *Aztec Blog*, 2022. [Online]. Available: <https://aztec.network/blog/aztecs-zk-zk-rollup-looking-behind-the-cryptocurtain>
- [13] Noir Language, "Noir Documentation," 2024. [Online]. Available: <https://noir-lang.org/docs/>
- [14] L. Grassi, D. Khovratovich, C. Rechberger, A. Roy, and M. Schofnegger, "Poseidon: A new hash function for zero-knowledge proof systems," in *Proc. 30th USENIX Security Symp.*, pp. 519–535, 2021. [Online]. Available: <https://www.usenix.org/conference/usenixsecurity21/presentation/grassi>
- [15] Aztec Network, "Introducing Aztec.nr: Aztec's Private Smart Contract Framework," *Aztec Blog*, Sep. 2023. [Online]. Available: <https://aztec.network/blog/introducing-aztec-nr-aztecs-private-smart-contract-framework>
- [16] S. Tessaro and C. Zhu, "Revisiting BBS Signatures," in *Advances in Cryptology – EUROCRYPT 2023*, ser. LNCS, vol. 14008, Springer, 2023, pp. 691–721, doi: 10.1007/978-3-031-30589-4_24.
- [17] Z. Wang, S. Chaliasos, K. Qin, L. Zhou, L. Gao, P. Berrang, B. Livshits, and A. Gervais, "On How Zero-Knowledge Proof Blockchain Mixers Improve, and Worsen User Privacy," in *Proc. ACM Web Conf. 2023 (WWW '23)*, 2023, pp. 2022–2032, doi: 10.1145/3543507.3583217.
- [18] V. Buterin, J. Illum, M. Nadler, F. Schär, and A. Soleimani, "Blockchain privacy and regulatory compliance: Towards a practical equilibrium," *Blockchain: Res. Appl.*, vol. 5, no. 1, Art. no. 100176, Mar. 2024, doi: 10.1016/j.bcr.2023.100176.
- [19] A. Mühle, K. Assaf, and C. Meinel, "One to bind them: Binding verifiable credentials to user attributes," in *Proc. SECRIPT*, 2023, doi: 10.5220/0012057900003555.
- [20] Ascarya, "The role of Islamic social finance during Covid-19 pandemic in Indonesia's economic recovery," *Int. J. Islamic Middle Eastern Finance Manage.*, vol. 15, no. 2, pp. 386–405, 2022, doi: 10.1108/IMEFM-07-2020-0351.
- [21] A. H. Mohd et al., "Blockchain technology in zakat management: potential and challenges," *J. Islamic Account. Bus. Res.*, vol. 15, no. 3, pp. 567–583, 2024. [Online]. Available: <https://www.emerald.com/insight/publication/issn/1759-0817>
- [22] A. Williams, "Zero-knowledge proofs and their role within the blockchain," *Commun. ACM*, vol. 67, no. 7, pp. 78–87, Jul. 2024. [Online]. Available: <https://cacm.acm.org/article/zero-knowledge-proofs-and-their-role-within-the-blockchain/>
- [23] M. A. Dewaya, "Innovation in Islamic finance: Integrating blockchain with Maqāsid al Sharī'ah and Hifz al Māl," *J. Emerg. Econ. Islamic Res.*, vol. 13, no. 1, 2025, doi: 10.24191/jeeir.v13i1.3852.
- [24] M. Elshqirat, "Toward an Islamic cryptocurrency: A proposed halal coin," *J. Account. Finance*, vol. 25, no. 3, pp. 64–78, 2025, doi: 10.33423/jaf.v25i3.7858.
- [25] M. A. Latang, Fathurrahman, and M. Faried, "Fatwa on cryptocurrency as digital assets: An Islamic perspective amidst Indonesia's regulatory landscape," *J. Parewa Saraq*, vol. 3, no. 2, 2024, doi: 10.64016/parewasaraq.v3i2.32.
- [26] E. Azizov, A. Azizov, A. Azizli, and A. A. Babayev, "A Maqasid al-Shariah framework for fintech and digital asset regulation in Muslim jurisdictions," *J. Islamic Law Legal Stud.*, vol. 2, no. 2, 2025, doi: 10.70063/jills.v2i2.119.
- [27] A. S. Muharam and D. Osman, "Transformative trends: Exploring the nexus of innovation, technology, blockchain, and Islamic social finance for global sustainability," *EKIMAD J.*, 2024, doi: 10.38009/ekimad.1511062.
- [28] B. A. Pramuka, W. R. Adawiyah, Z. Sholikhah, M. F. Pramuka, and M. M. Sulthan, "Bridging trust and transparency: The role of blockchain in Islamic charitable crowdfunding," *J. Islamic Account. Bus. Res.*, Dec. 2025, doi: 10.1108/JIABR-11-2024-0468.
- [29] S. T. Nassar, A. Hamdy, and K. Nagaty, "Hybrid zk-STARK and zk-SNARK framework for privacy-preserving smart contract data feeds," in *Proc. IEEE ICCA*, 2024, doi: 10.1109/ICCA62237.2024.10928100.
- [30] N. Ivanov, C. Li, and Q. Yan, "Zero-knowledge proof vulnerability analysis and security auditing," *Cryptology ePrint Archive*, Rep. 2024/514, 2024. [Online]. Available: <https://eprint.iacr.org/2024/514>
- [31] J. P. Cruz, Y. Kaji, and N. Yanai, "RBAC-SC: Role-based access control using smart contract," *IEEE Access*, vol. 6, pp. 12240–12251, 2018, doi: 10.1109/ACCESS.2018.2812844.
- [32] S. Khan and M. Ahmad, "A survey on progressive web applications for decentralized systems," *Preprints*, 2024, doi: 10.20944/preprints202604.0582.v1.
- [33] M. Wang, Q. Li, and Z. Zheng, "Beyond collectibles: A comprehensive review of non-fungible token applications," *IEEE Trans. Serv. Comput.*, vol. 16, no. 6, pp. 4184–4200, 2023. [Online]. Available: <https://ieeexplore.ieee.org/xpl/RecentIssue.jsp?punumber=4629386>