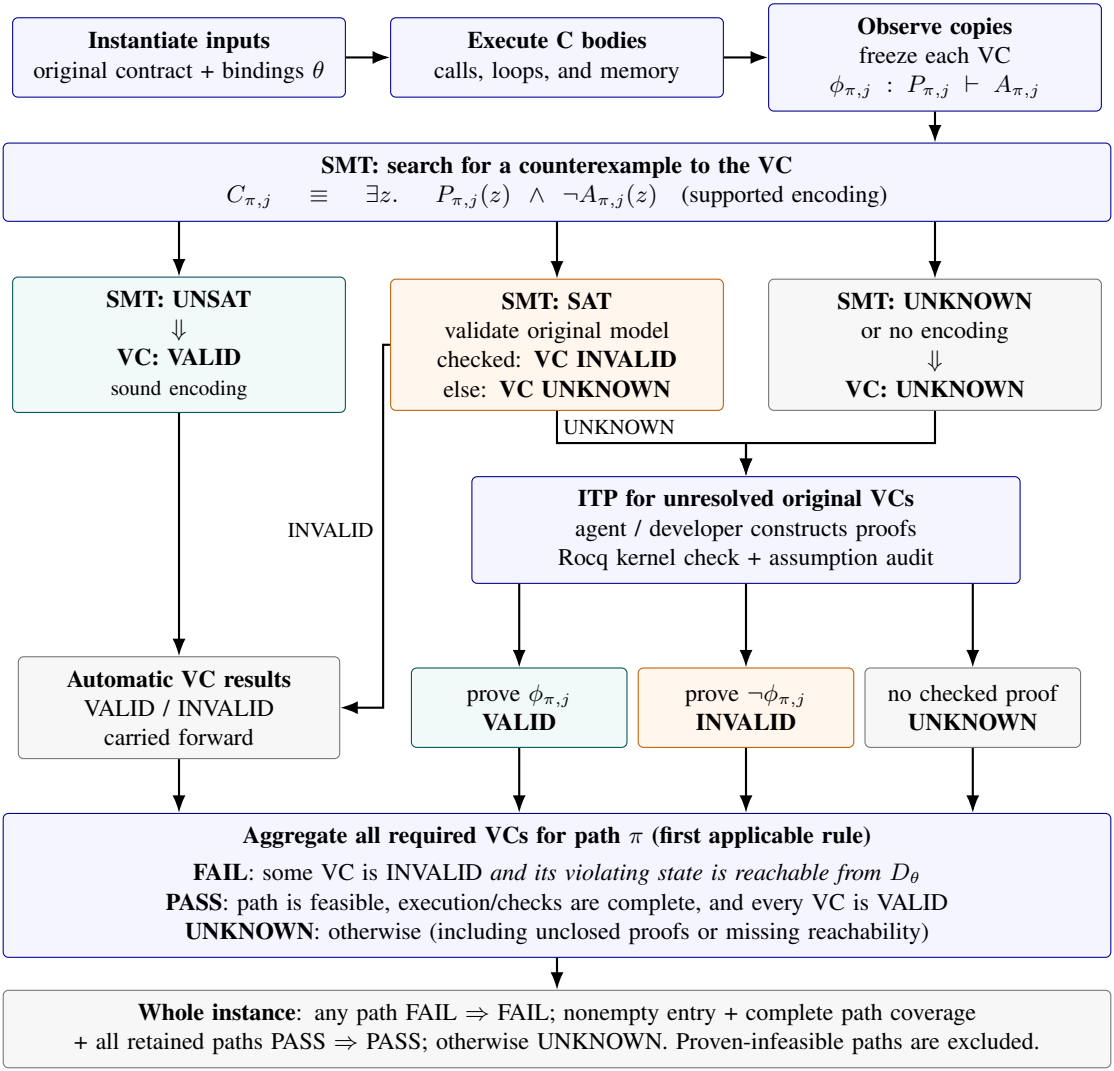


Entry uses a separate existence query: SAT = nonempty; UNSAT = empty instance; UNKNOWN = unresolved.
Entry UNKNOWN needs its own existence proof before PASS.
Empty entry has no executed path (CLI: FAIL, empty-entry reason).