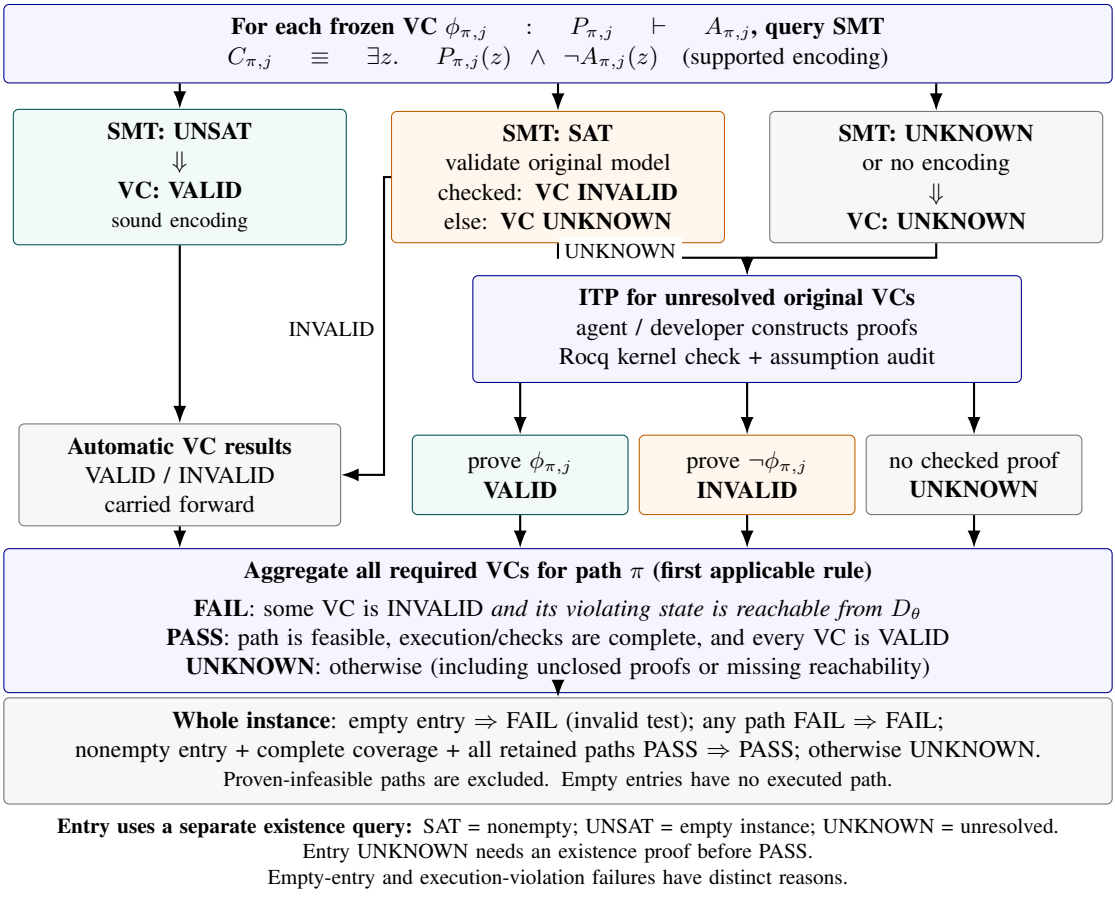


Entry uses a separate existence query: SAT = nonempty; UNSAT = empty instance; UNKNOWN = unresolved.
Entry UNKNOWN needs an existence proof before PASS.
Empty-entry and execution-violation failures have distinct reasons.