Frozen cache timing decoders on fresh held trials

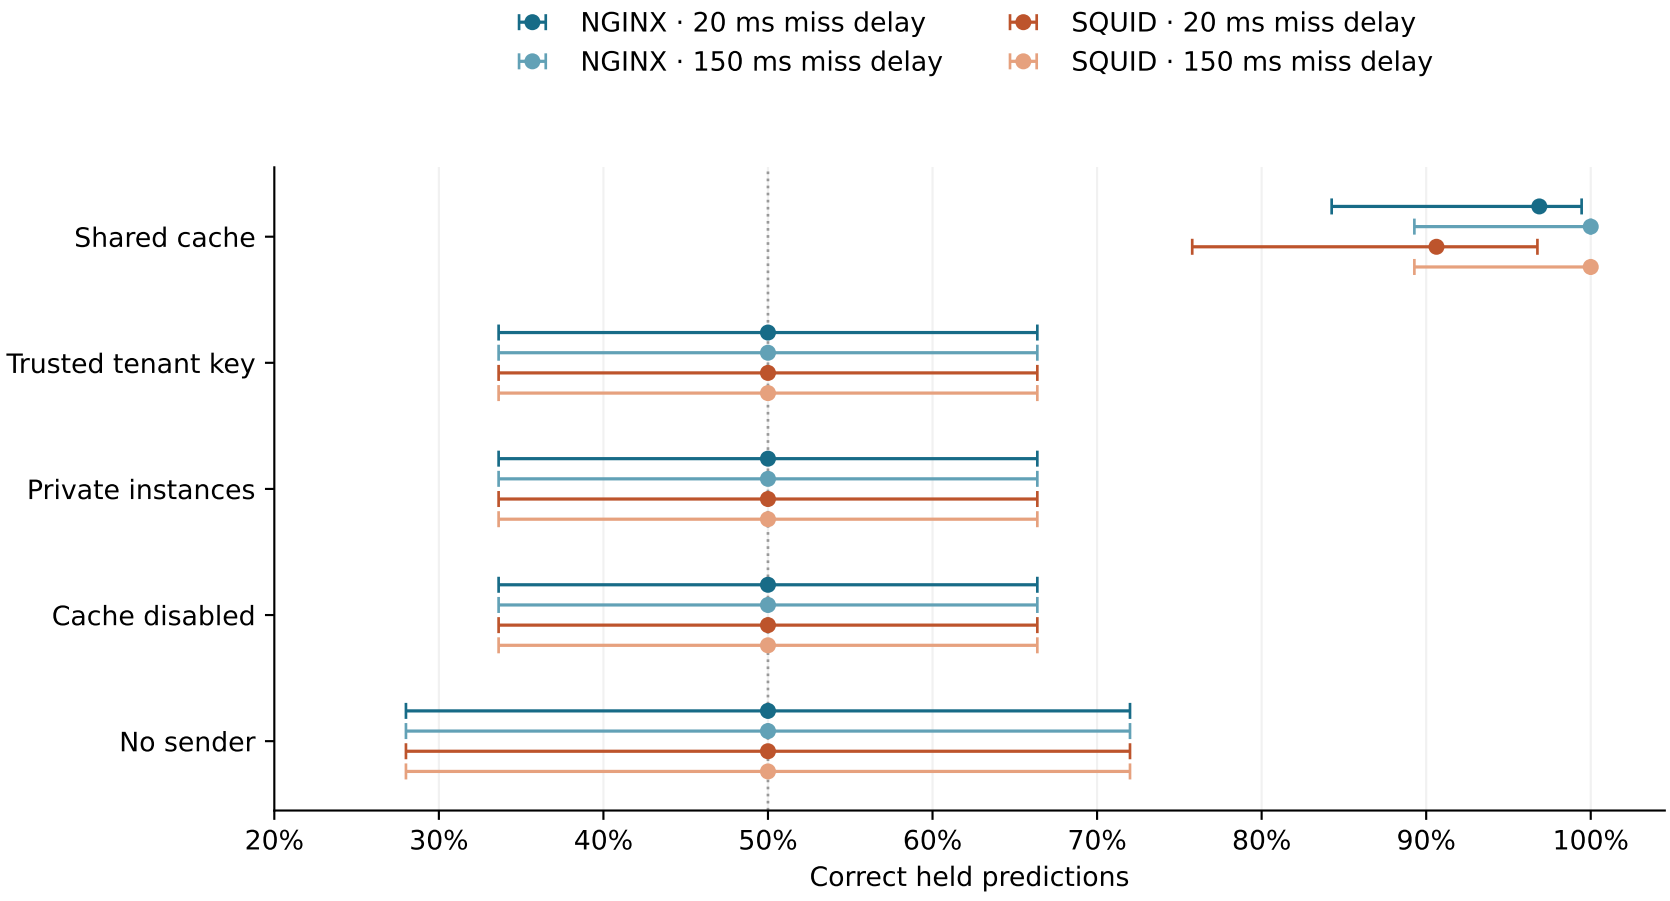

32 trials per cache arm; 16 per no-sender arm. Wilson intervals describe this shared-host run.
All four shared controls pass the frozen Holm test. Each defended decoder always predicts idle;
native origin joins establish the tested application-cache intervention. General timing isolation remains unmeasured.