FATIMA JINNAH WOMEN UNIVERSITY

Department of Software Engineering



COURSE TITLE:

CLOUD COMPUTING

SUBMITTED TO:

WAQAS SALEEM

SUBMITTED BY:

TAYYABA NOOR

SECTION:

B

REGISTRATION NO:

FA24B1-SE-068

Assignment 01

Git, Gitea, GitHub, Git LFS, and GitHub Pages

```
tayyabanoor068@ubuntu:~$
```

```
tayyabanoor068@ubuntu:~$ cd CC
tayyabanoor068@ubuntu:~/CC$ _
```

```
tayyabanoor068@ubuntu:~/CC$ mkdir -p Assignments/Assignment01/screenshots
tayyabanoor068@ubuntu:~/CC$ _
```

Task 1:

Install Gitea and Push a Repository (Ubuntu Server)

Install & Run Gitea

```
tayyabanoor068@ubuntu:~/CC$ sudo apt update -y
[sudo: authenticate] Password:
sudo: Authentication failed, try again.
[sudo: authenticate] Password:
Get:1 http://security.ubuntu.com/ubuntu resolute-security InRelease [137 kB]
Hit:2 http://pk.archive.ubuntu.com/ubuntu resolute InRelease
Get:3 http://pk.archive.ubuntu.com/ubuntu resolute-updates InRelease [137 kB]
Get:4 http://security.ubuntu.com/ubuntu resolute-security/main amd64 Packages [597 kB]
Get:5 http://pk.archive.ubuntu.com/ubuntu resolute-backports InRelease [137 kB]
Get:6 http://pk.archive.ubuntu.com/ubuntu resolute-updates/main amd64 Packages [733 kB]
Get:7 http://security.ubuntu.com/ubuntu resolute-security/main Translation-en [137 kB]
Get:8 http://security.ubuntu.com/ubuntu resolute-security/main amd64 Components [46.7 kB]
Get:9 http://security.ubuntu.com/ubuntu resolute-security/restricted Translation-en [96.3 kB]
Get:10 http://pk.archive.ubuntu.com/ubuntu resolute-updates/main Translation-en [172 kB]
Get:11 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 Packages [199 kB]
Get:12 http://pk.archive.ubuntu.com/ubuntu resolute-updates/main amd64 Components [97.7 kB]
Get:13 http://security.ubuntu.com/ubuntu resolute-security/universe Translation-en [64.8 kB]
Get:14 http://pk.archive.ubuntu.com/ubuntu resolute-updates/restricted amd64 Packages [490 kB]
Get:15 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 Components [55.5 kB]
Get:16 http://pk.archive.ubuntu.com/ubuntu resolute-updates/restricted Translation-en [97.7 kB]
Get:17 http://pk.archive.ubuntu.com/ubuntu resolute-updates/universe amd64 Packages [322 kB]
Get:18 http://pk.archive.ubuntu.com/ubuntu resolute-updates/universe Translation-en [105 kB]
Get:19 http://pk.archive.ubuntu.com/ubuntu resolute-updates/universe amd64 Components [201 kB]
Get:20 http://pk.archive.ubuntu.com/ubuntu resolute-updates/multiverse amd64 Packages [11.9 kB]
Get:21 http://pk.archive.ubuntu.com/ubuntu resolute-updates/multiverse Translation-en [3,276 B]
Get:22 http://pk.archive.ubuntu.com/ubuntu resolute-backports/universe amd64 Packages [3,136 B]
Get:23 http://pk.archive.ubuntu.com/ubuntu resolute-backports/universe amd64 Components [1,056 B]
Fetched 3,847 kB in 38s (101 kB/s)
65 packages can be upgraded. Run 'apt list --upgradable' to see them.
tayyabanoor068@ubuntu:~/CC$ _
```

Docker Install:

```
Unpacking containerd (2.2.2-0ubuntu1.1)…
Preparing to unpack …/04-curl_8.18.0-1ubuntu2.7_amd64.deb…
Unpacking curl (8.18.0-1ubuntu2.7) over (8.18.0-1ubuntu2.5)…
Preparing to unpack …/05-libcurl4t64_8.18.0-1ubuntu2.7_amd64.deb…
Unpacking libcurl4t64:amd64 (8.18.0-1ubuntu2.7) over (8.18.0-1ubuntu2.5)…
Selecting previously unselected package dns-root-data.
Preparing to unpack …/06-dns-root-data_2025080400build1_all.deb…
Unpacking dns-root-data (2025080400build1)…
Selecting previously unselected package dnsmasq-base.
Preparing to unpack …/07-dnsmasq-base_2.92-1ubuntu0.5_amd64.deb…
Unpacking dnsmasq-base (2.92-1ubuntu0.5)…
Selecting previously unselected package docker.io.
Preparing to unpack …/08-docker.io_29.1.3-0ubuntu4.1_amd64.deb…
Unpacking docker.io (29.1.3-0ubuntu4.1)…
Preparing to unpack …/09-libcurl3t64-gnutls_8.18.0-1ubuntu2.7_amd64.deb…
Unpacking libcurl3t64-gnutls:amd64 (8.18.0-1ubuntu2.7) over (8.18.0-1ubuntu2.5)…
Selecting previously unselected package ubuntu-fan.
Preparing to unpack …/10-ubuntu-fan_0.12.17_all.deb…
Unpacking ubuntu-fan (0.12.17)…
Setting up libcurl4t64:amd64 (8.18.0-1ubuntu2.7)…
Setting up libcurl3t64-gnutls:amd64 (8.18.0-1ubuntu2.7)…
Setting up dnsmasq-base (2.92-1ubuntu0.5)…
Setting up runc (1.4.0-0ubuntu1)…
Setting up dns-root-data (2025080400build1)…
Setting up bridge-utils (1.7.1-4ubuntu3)…
Setting up pigz (2.8-1build1)…
Setting up curl (8.18.0-1ubuntu2.7)…
Setting up containerd (2.2.2-0ubuntu1.1)…
Created symlink '/etc/systemd/system/multi-user.target.wants/containerd.service' → '/usr/lib/systemd/system/containerd.service'.
Setting up ubuntu-fan (0.12.17)…
Created symlink '/etc/systemd/system/multi-user.target.wants/ubuntu-fan.service' → '/usr/lib/systemd/system/ubuntu-fan.service'.
Setting up docker.io (29.1.3-0ubuntu4.1)…
Created symlink '/etc/systemd/system/multi-user.target.wants/docker.service' → '/usr/lib/systemd/system/docker.service'.
Created symlink '/etc/systemd/system/sockets.target.wants/docker.socket' → '/usr/lib/systemd/system/docker.socket'.
Processing triggers for dbus (1.16.2-2ubuntu4)…
Processing triggers for libc-bin (2.43-2ubuntu2.4)…
Processing triggers for man-db (2.13.1-1build1)…
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
tayyabanoor068@ubuntu:~/CC$
```

- **Create the system-wide Docker CLI plug-in directory and download the Docker Compose plug-in for an x86_64 Ubuntu server:**

```
tayyabanoor068@ubuntu:~/CC$ sudo mkdir -p /usr/local/lib/docker/cli-plugins
tayyabanoor068@ubuntu:~/CC$
```

```
tayyabanoor068@ubuntu:~/CC$ sudo curl -SL https://github.com/docker/compose/releases/latest/download/docker-compose-linux-x86_64 -o /usr/local/lib/docker/cli-pl
ugins/docker-compose
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
  0     0    0     0    0     0      0      0          00:01                0
  0     0    0     0    0     0      0      0          00:01                0
100 31.14M 100 31.14M    0     0  37593      0   14:28   14:28         28005
tayyabanoor068@ubuntu:~/CC$
```

```
tayyabanoor068@ubuntu:~/CC$ sudo chmod +x /usr/local/lib/docker/cli-plugins/docker-compose
[sudo: authenticate] Password:
tayyabanoor068@ubuntu:~/CC$ _
```

- **Verify the Git, Docker, and Docker Compose installations:**

```
tayyabanoor068@ubuntu:~$ git --version
git version 2.53.0
tayyabanoor068@ubuntu:~$ docker --version
Docker version 29.1.3, build 29.1.3-0ubuntu4.1
tayyabanoor068@ubuntu:~$ docker compose version
Docker Compose version v5.6.0
tayyabanoor068@ubuntu:~$
```

- **Clone the instructor-provided Gitea setup repository on the Ubuntu server:**

```
tayyabanoor068@ubuntu:~$ cd ~
tayyabanoor068@ubuntu:~$ _
```

```
tayyabanoor068@ubuntu:~$ git clone https://github.com/WaqasSaleem97/Gitea.git
Cloning into 'Gitea'...
remote: Enumerating objects: 16, done.
remote: Counting objects: 100% (16/16), done.
remote: Compressing objects: 100% (9/9), done.
remote: Total 16 (delta 4), reused 7 (delta 2), pack-reused 0 (from 0)
Receiving objects: 100% (16/16), 5.37 KiB | 916.00 KiB/s, done.
Resolving deltas: 100% (4/4), done.
tayyabanoor068@ubuntu:~$
```

```
tayyabanoor068@ubuntu:~/Gitea$
```

- **Use the existing compose.yaml without changing its server URL or port settings. Start Gitea and PostgreSQL:**

```
tayyabanoor068@ubuntu:~/Gitea$ docker compose up -d
[+] up 14/20
 ⠸ Image postgres:17-alpine [⠸ ⣿⣿⣿⣿⣿⣿⣿⣿⣿⣿] 7.944MB / 116.9MB Pulling
 ⠸ Image gitea/gitea:latest [⠸ ⣿⣿⣿⣿⣿] 11.53MB / 71.97MB      Pulling
```

```
[+] up 1/9
 ⠙ Image postgres:17-alpine [      ] Pulling
 ✔ Image gitea/gitea:latest          Pulled
```

```
tayyabanoor068@ubuntu:~/Gitea$ docker compose up -d
[+] up 6/12
 ✔ Image postgres:17-alpine Pulled
 ✔ Network webnet           Created
 ✔ Volume gitea_postgres    Created
 ✔ Volume gitea             Created
 ✔ Container gitea          Started
 ✔ Container gitea_db       Started
tayyabanoor068@ubuntu:~/Gitea$
```

- Confirm that both containers are running:

```
tayyabanoor068@ubuntu:~/Gitea$ docker compose ps
NAME       IMAGE               COMMAND                  SERVICE   CREATED         STATUS         PORTS
gitea      gitea/gitea:latest  "/usr/bin/entrypoint…"   gitea     2 minutes ago   Up 2 minutes   22/tcp, 0.0.0.0:3000->3000/tcp, [::]:3000->3000/tcp
gitea_db   postgres:17-alpine  "docker-entrypoint.s…"   db        2 minutes ago   Up 2 minutes   5432/tcp
tayyabanoor068@ubuntu:~/Gitea$
```


- Confirm that Gitea responds locally on port 3000:


```
tayyabanoor068@ubuntu:~/Gitea$ curl -sS -o /dev/null -w "Gitea HTTP ststus: %{http_code}\n" http://127.0.0.1:3000/
Gitea HTTP ststus: 200
tayyabanoor068@ubuntu:~/Gitea$
```


- Display the Ubuntu server's IP address:


```
tayyabanoor068@ubuntu:~/Gitea$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: ens33: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 00:0c:29:59:0e:10 brd ff:ff:ff:ff:ff:ff
    altname enp2s1
    altname enx000c29590e10
    inet 192.168.157.131/24 metric 100 brd 192.168.157.255 scope global dynamic ens33
       valid_lft 1499sec preferred_lft 1499sec
    inet6 fe80::20c:29ff:fe59:e10/64 scope link proto kernel_ll
       valid_lft forever preferred_lft forever
3: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc noqueue state DOWN group default
    link/ether de:60:e9:b5:3c:c8 brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
       valid_lft forever preferred_lft forever
4: br-aad25261f6cc: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether de:89:af:5c:75:2d brd ff:ff:ff:ff:ff:ff
    inet 172.18.0.1/16 brd 172.18.255.255 scope global br-aad25261f6cc
       valid_lft forever preferred_lft forever
    inet6 fe80::dc89:afff:fe5c:752d/64 scope link proto kernel_ll
       valid_lft forever preferred_lft forever
5: veth5a615bf@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-aad25261f6cc state UP group default
    link/ether 76:38:3c:94:d3:34 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet6 fe80::7498:3cff:fe94:d334/64 scope link proto kernel_ll
       valid_lft forever preferred_lft forever
6: veth89cf53d@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master br-aad25261f6cc state UP group default
    link/ether 8e:93:16:b5:6e:54 brd ff:ff:ff:ff:ff:ff link-netnsid 1
    inet6 fe80::3a:43ff:feb2:44f8/64 scope link proto kernel_ll
       valid_lft forever preferred_lft forever
tayyabanoor068@ubuntu:~/Gitea$
```

- Open Gitea in a web browser using the server address provided for your lab:

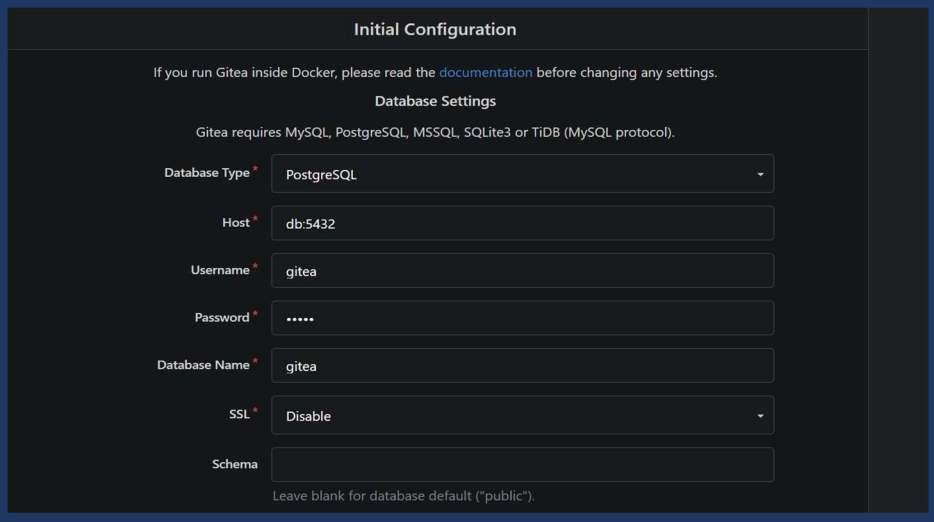




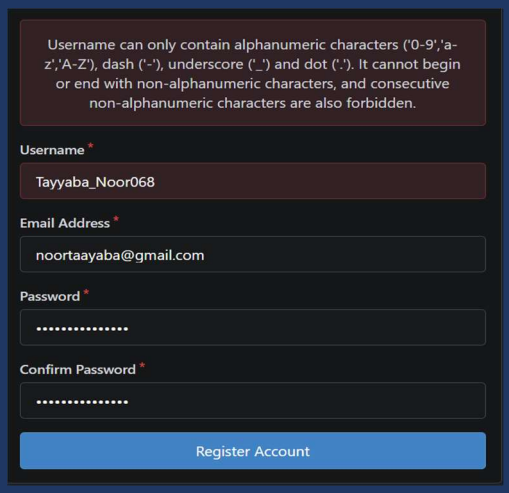


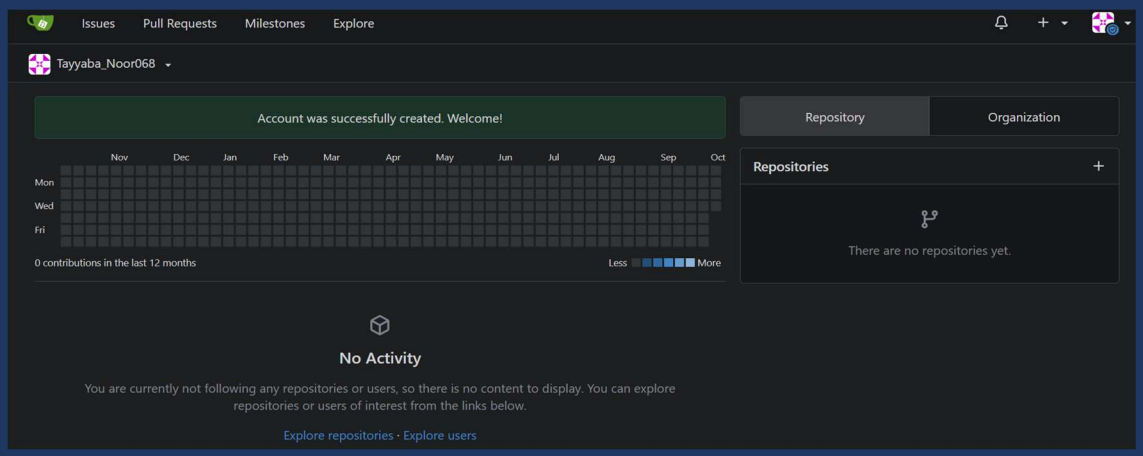

- Create and Push the Initial Repository:

In Gitea, create an empty public repository named exactly Assignment01.

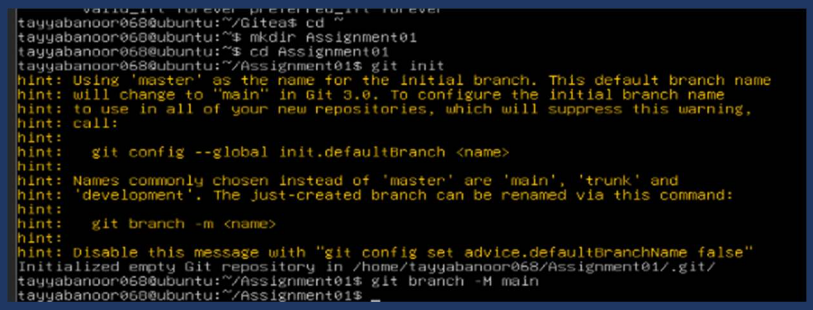




```
Initialized empty Git repository in /home/tayyabanoor068/Assignment01/.git/
tayyabanoor068@ubuntu:~/Assignment01$ git branch -M main
tayyabanoor068@ubuntu:~/Assignment01$ echo -e "Name:Tayyaba Noor\nRegistration Number: <FA24B1-SE-068>" >README.md
tayyabanoor068@ubuntu:~/Assignment01$ git add README.md
tayyabanoor068@ubuntu:~/Assignment01$ git commit -m "Add student information"
```

```
  git config --global user.email "you@example.com"
  git config --global user.name "Your Name"

to set your account's default identity.
Omit --global to set the identity only in this repository.

fatal: unable to auto-detect email address (got 'tayyabanoor068@ubuntu.(none)')
tayyabanoor068@ubuntu:~/Assignment01$ git config --global user.email "tayyaba@example.com"
tayyabanoor068@ubuntu:~/Assignment01$ git config --global user.name "tayyabanoor068"
tayyabanoor068@ubuntu:~/Assignment01$ echo -e "Name: Tayyaba Noor\nRegistration Number: FA24B1-SE-068" > README.md
tayyabanoor068@ubuntu:~/Assignment01$ git add README.md
tayyabanoor068@ubuntu:~/Assignment01$ git commit -m "Add stuudent information"
[main (root-commit) 76b64be] Add stuudent information
 1 file changed, 2 insertions(+)
 create mode 100644 README.md
tayyabanoor068@ubuntu:~/Assignment01$ _
```

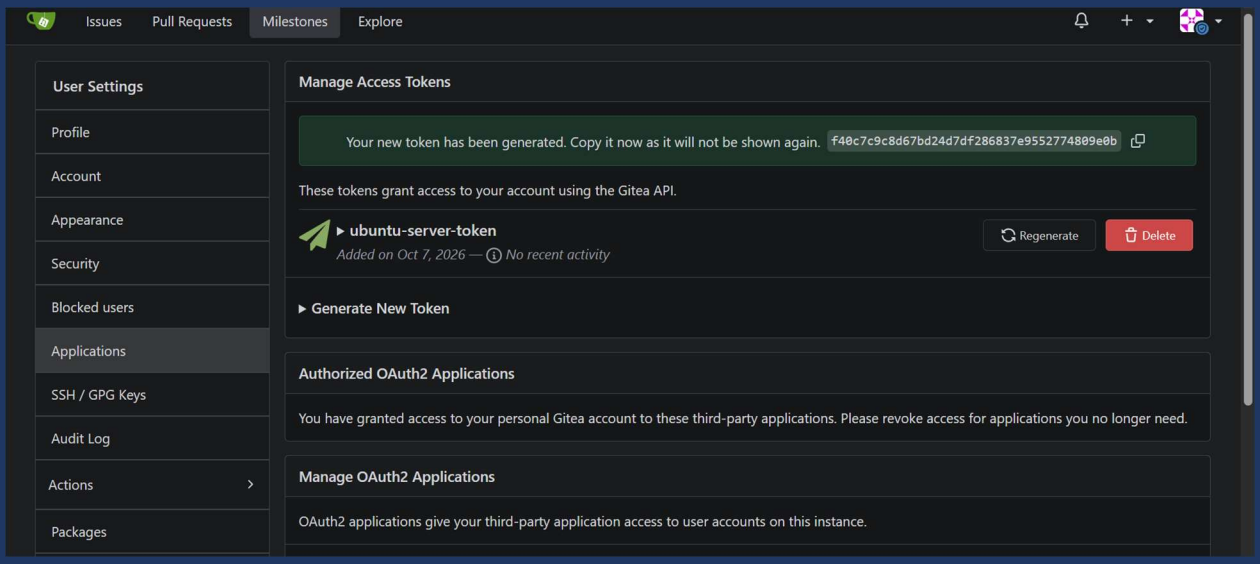


```
tayyabanoor068@ubuntu:~/Assignment01$ git remote add gitea http://tayyabanoor068@127.0.0.1:3000/tayyabanoor068/Assignment01.git
tayyabanoor068@ubuntu:~/Assignment01$ _
```

```
tayyabanoor068@ubuntu:~/Assignment01$ git remote -v
gitea   http://tayyabanoor068@127.0.0.1:3000/tayyabanoor068/Assignment01.git (fetch)
gitea   http://tayyabanoor068@127.0.0.1:3000/tayyabanoor068/Assignment01.git (push)
tayyabanoor068@ubuntu:~/Assignment01$
```


➢ Verifi the Git Repository:



```
tayyabanoor068@ubuntu:~/Assignment01$ git push http://Tayyaba_Noor068:49481fe42c19080bdf774e7a4583705879c0fd2b@127.0.0.1:3000/Tayyaba_Noor068/Assignment01.git m
ain
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 275 bytes | 137.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To http://127.0.0.1:3000/Tayyaba_Noor068/Assignment01.git
 * [new branch]      main -> main
tayyabanoor068@ubuntu:~/Assignment01$
```

Task 2:

Push the Same Repository to GitHub

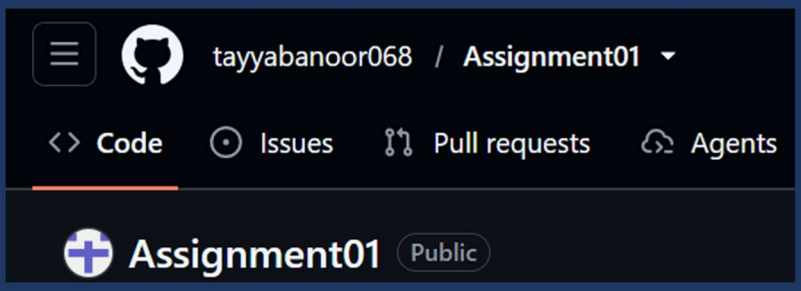


```
tayyabanoor068@ubuntu:~/Assignment01$ cd ~/Assignment01
```

```
tayyabanoor068@ubuntu:~/Assignment01$ git remote add github https://github.com/tayyabanoor068/Assignment01.git
tayyabanoor068@ubuntu:~/Assignment01$
```

```
tayyabanoor068@ubuntu:~/Assignment01$ git remote -v
gitea   http://Tayyaba_Noor068@127.0.0.1:3000/Tayyaba_Noor068/Assignment01.git (fetch)
gitea   http://Tayyaba_Noor068@127.0.0.1:3000/Tayyaba_Noor068/Assignment01.git (push)
github  https://github.com/tayyabanoor068/Assignment01.git (fetch)
github  https://github.com/tayyabanoor068/Assignment01.git (push)
tayyabanoor068@ubuntu:~/Assignment01$
```


- **Push to GitHub**

```
tayyabanoor068@ubuntu:~/Assignment01$ git push -u github main
Username for 'https://github.com': _
```

```
tayyabanoor068@ubuntu:~/Assignment01$ git remote set-url github https://ghp_2MDADCgAIIn77jdTccxBa1mS25Dchk3DqncP@github.com/tayyabanoor068/Assignment01.git
tayyabanoor068@ubuntu:~/Assignment01$
```

```
tayyabanoor068@ubuntu:~/Assignment01$ git push -u github main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 275 bytes | 34.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/tayyabanoor068/Assignment01.git
 * [new branch]      main -> main
branch 'main' set up to track 'github/main'.
tayyabanoor068@ubuntu:~/Assignment01$
```

- **Verify the GitHub Repository**

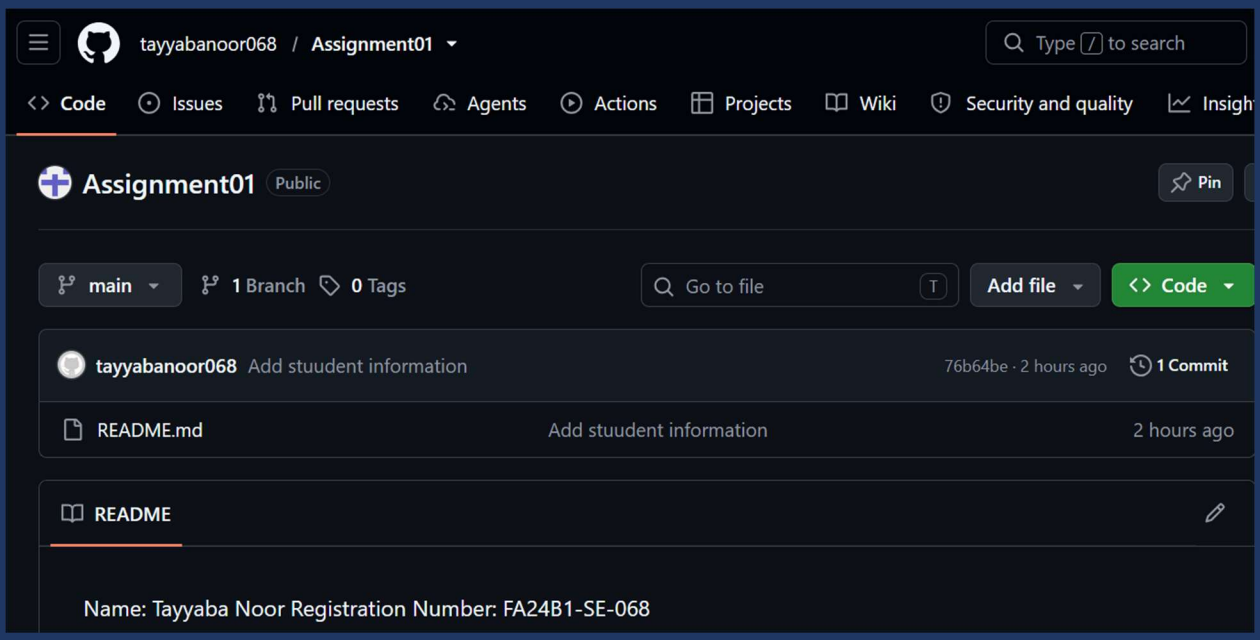

Task 3:

Track Three Large Files with Git LFS

Configure Git LFS On the Ubuntu server, open the local Assignment01 repository, initialize Git LFS, confirm its version, and configure tracking for.bin files:

```
tayyabanoor068@ubuntu:~/Assignment01$ cd ~/Assignment01
```

```
tayyabanoor068@ubuntu:~/Assignment01$ git lfs install
Updated Git hooks.
Git LFS initialized.
tayyabanoor068@ubuntu:~/Assignment01$ git lfs version
git-lfs/3.7.1 (GitHub; linux amd64; go 1.25.0)
tayyabanoor068@ubuntu:~/Assignment01$ git lfs track "*.bin"
Tracking "*.bin"
tayyabanoor068@ubuntu:~/Assignment01$ cat .gitattributes
*.bin filter=lfs diff=lfs merge=lfs -text
tayyabanoor068@ubuntu:~/Assignment01$
```

- **Create and Verify Three LFS Files**

```
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 101M large-file-1.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 102M large-file-2.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 103M large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$
```

```
tayyabanoor068@ubuntu:~/Assignment01$ git add .gitattributes large-file-1.bin large-file-2.bin large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ g
```

```
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 101M large-file-1.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 102M large-file-2.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 103M large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git add .gitattributes large-file-1.bin large-file-2.bin large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git lfs ls-files --size
f1753a034b * large-file-1.bin (106 MB)
2338a970c0 * large-file-2.bin (107 MB)
cb91d5908e * large-file-3.bin (108 MB)
tayyabanoor068@ubuntu:~/Assignment01$
```

- **Commit and Push the LFS Files**

```
tayyabanoor068@ubuntu:~/Assignment01$ git commit -m "Add three files using Git LFS"
[main 9f7d030] Add three files using Git LFS
 4 files changed, 10 insertions(+)
 create mode 100644 .gitattributes
 create mode 100644 large-file-1.bin
 create mode 100644 large-file-2.bin
 create mode 100644 large-file-3.bin
```

```
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 101M large-file-1.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 102M large-file-2.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 103M large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git add .gitattributes large-file-1.bin large-file-2.bin large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git lfs ls-files --size
f1753a034b * large-file-1.bin (106 MB)
2338a970c0 * large-file-2.bin (107 MB)
cb91d5908e * large-file-3.bin (108 MB)
tayyabanoor068@ubuntu:~/Assignment01$ git commit -m "Add three files using Git LFS"
[main 9f7d030] Add three files using Git LFS
 4 files changed, 10 insertions(+)
 create mode 100644 .gitattributes
 create mode 100644 large-file-1.bin
 create mode 100644 large-file-2.bin
 create mode 100644 large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git push github main
Uploading LFS objects:   0% (0/3), 590 KB | 12 KB/s
```


```
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 101M large-file-1.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 102M large-file-2.bin
tayyabanoor068@ubuntu:~/Assignment01$ truncate -s 103M large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git add .gitattributes large-file-1.bin large-file-2.bin large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git lfs ls-files --size
f1753a034b * large-file-1.bin (106 MB)
2338a970c0 * large-file-2.bin (107 MB)
cb91d5908e * large-file-3.bin (108 MB)
tayyabanoor068@ubuntu:~/Assignment01$ git commit -m "Add three files using Git LFS"
[main 9f7d030] Add three files using Git LFS
 4 files changed, 10 insertions(+)
 create mode 100644 .gitattributes
 create mode 100644 large-file-1.bin
 create mode 100644 large-file-2.bin
 create mode 100644 large-file-3.bin
tayyabanoor068@ubuntu:~/Assignment01$ git push github main
Uploading LFS objects: 100% (3/3), 418 MB | 657 KB/s, done.
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 2 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (6/6), 795 bytes | 159.00 KiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/tayyabanoor068/Assignment01.git
   76b64be..9f7d030  main -> main
tayyabanoor068@ubuntu:~/Assignment01$
```

Task 4:

- **Create a Portfolio or CV with GitHub Pages**

Create and Push the Portfolio Repository

1. Create a new public GitHub repository named:

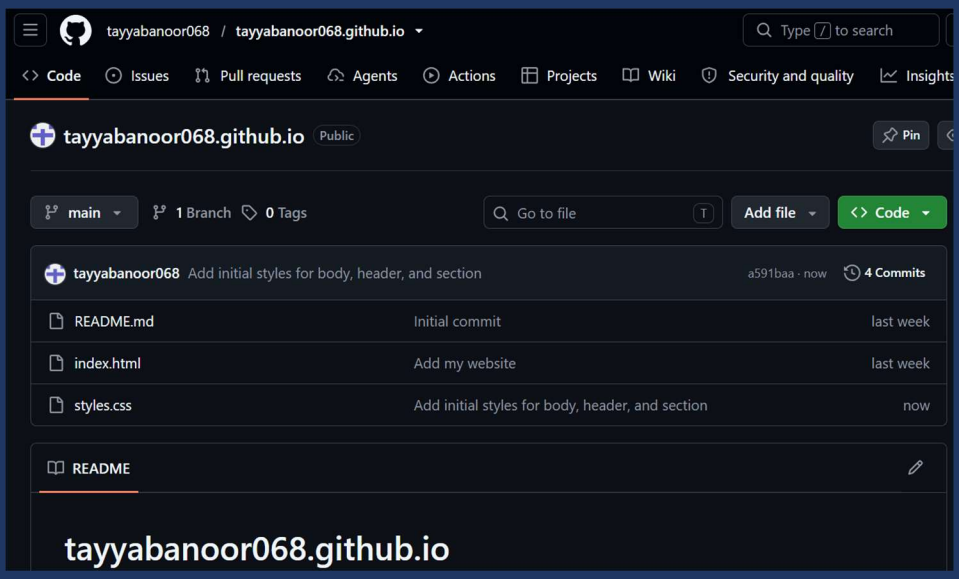



- **Publish with GitHub Pages**


Open the portfolio repository on GitHub.

2. Go to Settings → Pages.


3. Under Build and deployment, select Deploy from a branch.

4. Select the main branch and the / (root) folder, then save.

5. Wait until GitHub reports that the site is published or live. The page must show GitHub Pages, a successful published or live status, and your .github.io URL.

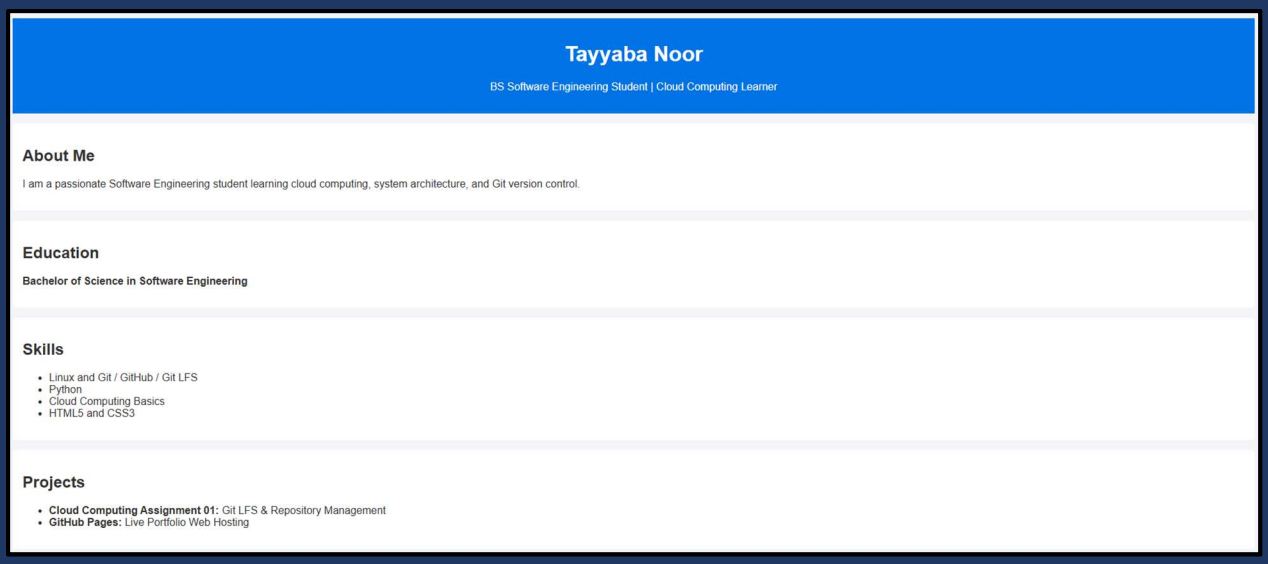

➢ Verify the Live Portfolio

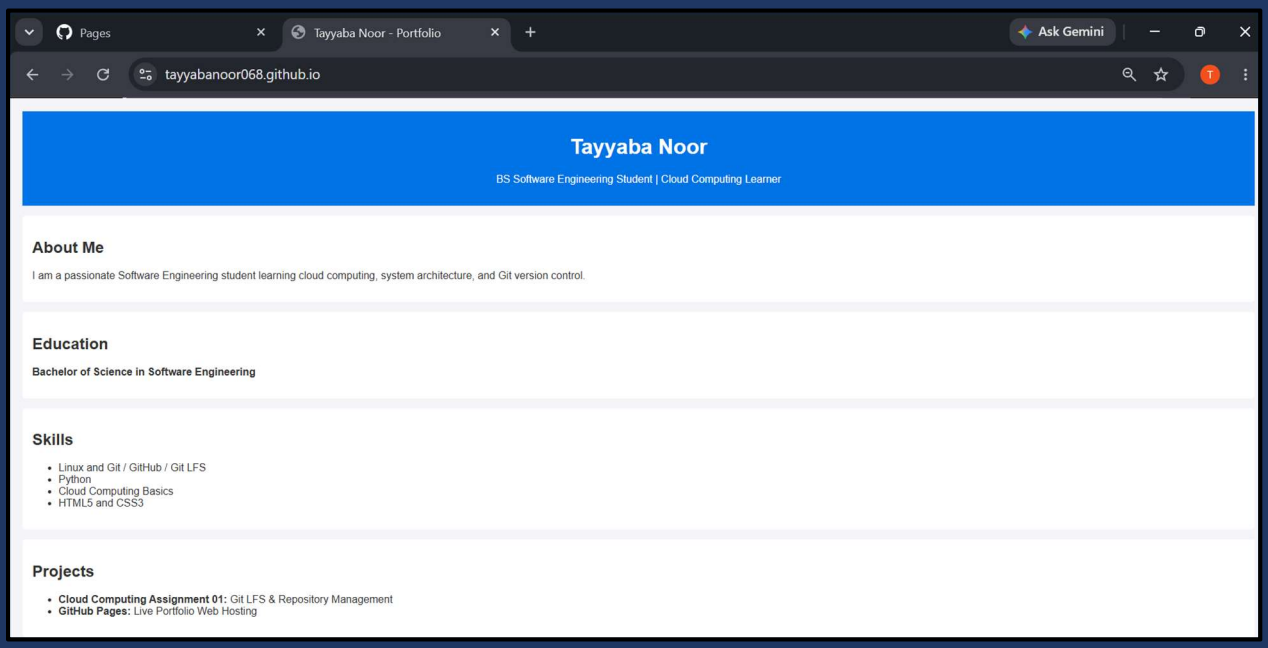

Complete Assignment 01