
(a) Data and region features



31 atlas regions




52 ferrets, 21 scan sessions
sham / 10 psi / 20 psi, 3 d / 7 d

template SyN, distortion corr.,
WLS tensors → 6 channels
(T2, FA, MD, AD, RD, log|J|)


feature x_{rc} per region r, channel c:
mean value (RAW) or mean $|x - \hat{x}|$ (RES)

(b) Sham-trained normative model

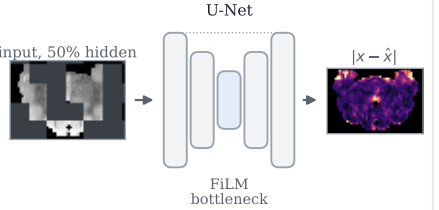

trained on sham animals only, 3 seeds
RES-A: folds by animal RES-S: folds by session
(no fold model sees the scored animal's session)

(c) Session-aware calibration

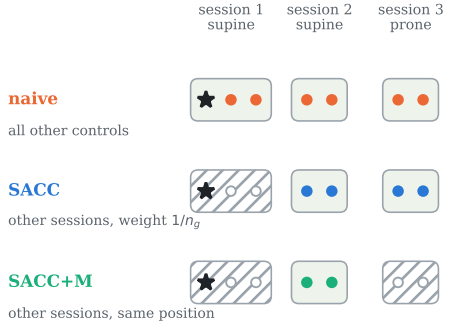

conformal p per region → BH (q = 0.10) per animal