

Bayesian Neural Networks

Blair, Taylor Sorgmon, Ava Conor

March 31, 2024

Abstract

Bayesian Neural Networks are...

Contents

1	Introduction	2
1.1	History	2
2	Neural Network	3
2.1	Convolutional Neural Networks	3
3	Bayesian Neural Networks	4
3.1	Bayesian Conolutional Neural Networks	4
4	Simulation	4
4.1	CIFAR-10	4

4.2	Hyperparamaters	4
4.3	Results	6
5	Closing	6

1 Introduction

1.1 History

- 1987 • The patent a 'Method of providing digital signatures' is filed by Ralph C. Merkle[merkle-pater
- 1999 • The original patent expires.
- 2009 • Bitcoin uses Merkle Trees for 'block header commitment.'[friedenbach_alm_2017]
- 2009 • BitTorrent uses Merkle Trees for data integrity[bep30].

2 Neural Network

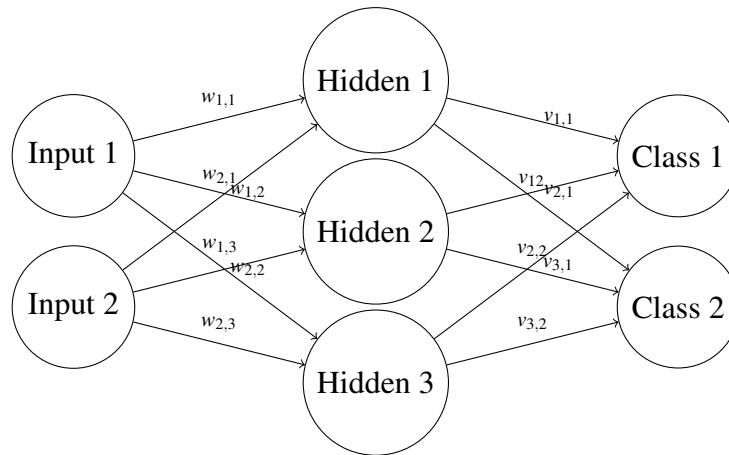


Figure 1: Example neural network

Neural networks....

2.1 Convolutional Neural Networks

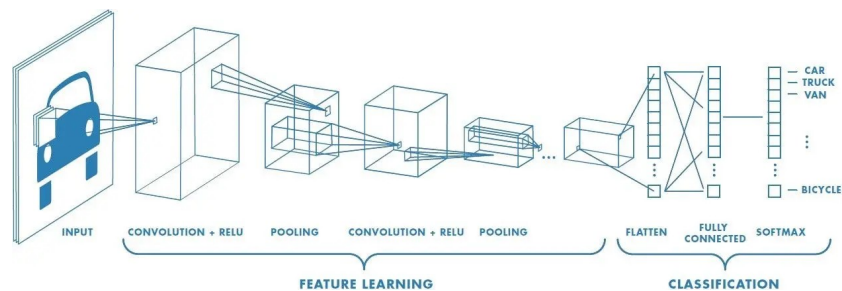


Figure 2: CNN pipeline [2]

Convolutional neural networks (CNN) are a type of neural network that is better suited for image recognition. Instead of reading the entire image a CNN slides over the image...

The result is that the neural network trains faster..

3 Bayesian Neural Networks

Bayesian neural networks take the

3.1 Bayesian Conolutional Neural Networks

Same principle...

4 Simulation

We use a BCNN implementation from [Github](#) based on work from ... [4] [3]

4.1 CIFAR-10

The CIFAR-10 dataset...

4.2 Hyperparamaters

We used the following hyperparamaters for training

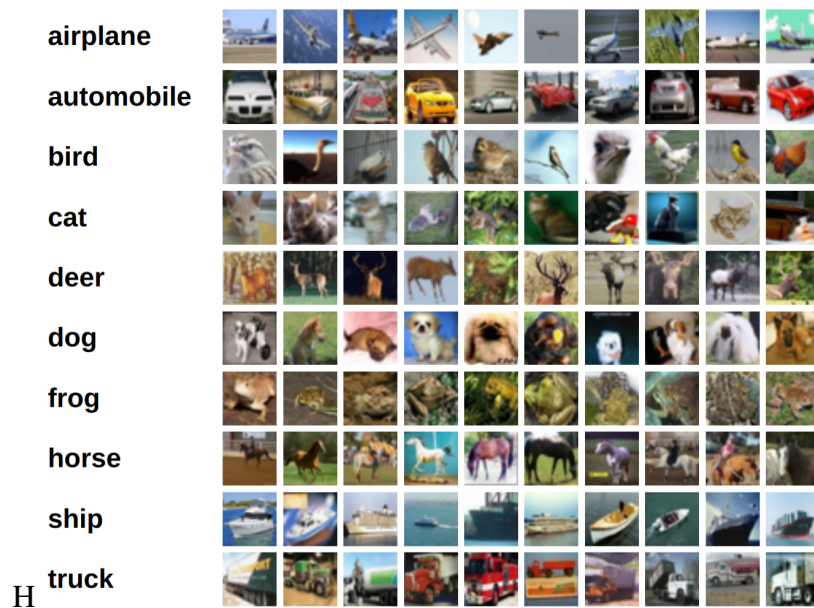


Figure 3: Example CIFAR-10 images [1]

Hyperparameter	CNN	BCNN
Epochs	500	500
Learning Rate	May be higher (0.01 - 0.1) due to simpler structure
Regularization	L1/L2 weight decay or Dropout common to prevent overfitting	Can benefit from Dropout, but weight decay might be less crucial
Optimizer	Adamw	Adamw

4.3 Results

5 Closing
