

# Bayesian Neural Networks

Blair, Taylor      Sorgmon, Ava      Conor

April 2, 2024

**Abstract**

Bayesian Neural Networks are...

**Contents**

|          |  |          |
|----------|--|----------|
| <b>1</b> | <b>Introduction</b>                              | <b>2</b> |
| <b>2</b> | <b>Machine Learning</b>                          | <b>2</b> |
| 2.1      | Neural Network . . . . .                         | 4        |
| 2.2      | Convolutional Neural Networks . . . . .          | 5        |
| <b>3</b> | <b>Bayesian Neural Networks</b>                  | <b>6</b> |
| 3.1      | Bayesian Convolutional Neural Networks . . . . . | 7        |
| <b>4</b> | <b>Simulation</b>                                | <b>7</b> |
| 4.1      | CIFAR-10 . . . . .                               | 7        |

|     |                           |   |
|-----|---------------------------|---|
| 4.2 | Hyperparamaters . . . . . | 8 |
| 4.3 | Results . . . . .         | 9 |
| 5   | Closing                   | 9 |

## 1 Introduction

## 2 Machine Learning

Machine learning includes a variety of topics of which artificial intelligence (AI) and neural networks are a subset. Neural networks in particular involve an abstract imitation of the human brain using simulated neurons which is trained on data using particular algorithms.

The term supervised learning refers to a specific common method of machine learning which uses a labeled dataset to train a model to correctly predict the labels via some training algorithm. A classification problem in supervised learning involves predictions where all labels are grouped into a set of categories. The training process can be broken down into three major steps, which include a decision process, an error function, and an optimization process [7]. The decision process is the set of steps the algorithm takes after receiving the data based on the goal of the model. The second step in the process is the error function, which is the method of measuring chosen to see if the algorithm gave a “good” or “bad” input. The two most common choices of the error function is a simple yes or no on if a data point was classified correctly in the case of classification, or the

---

difference in value between the predicted outcome and the actual observed outcome for continuous values. Finally, the third and last step is the part of the process that implements learning. This step, the updating or optimization process, requires the algorithm to review the past data and outputs of the error function in order to better correct its decision making process in the future.

Throughout this report, we'll often use the terms machine learning, deep learning, and neural networks. It is important to note that although these are fundamentally related fields, deep learning is a subfield of neural networks that in particular focuses on more complicated neural networks, while neural networks are a subfield in machine learning.

We will be training a classifier on labeled images in a supervised learning process to predict what is depicted in the image from a range of possibilities such as dog, cat, and plane.

---

## 2.1 Neural Network

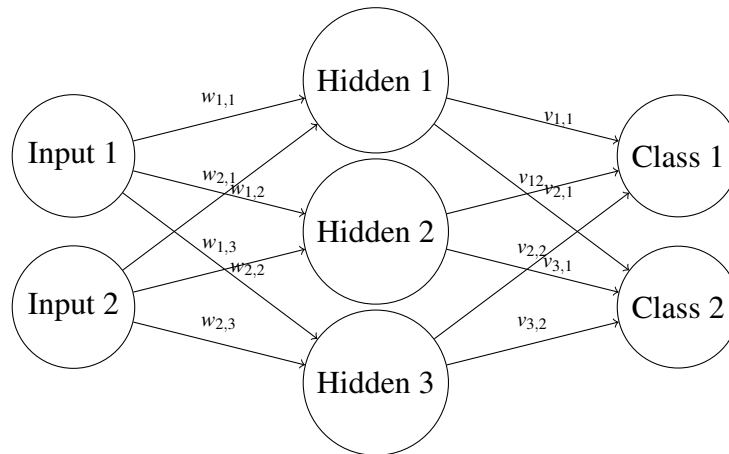


Figure 1: Example neural network

A neural network takes a series of inputs... In figure 1, the network takes two inputs, has one hidden layer of size

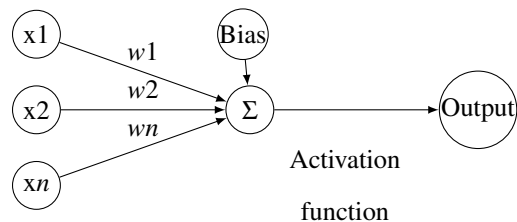


Figure 2: Neural network neuron

Neural networks are made out of a series of neurons... The neurons take a set of inputs, multiplies the inputs by the weights, sums the weighted input, adds a bias, and runs the output through an activation function...

## 2.2 Convolutional Neural Networks

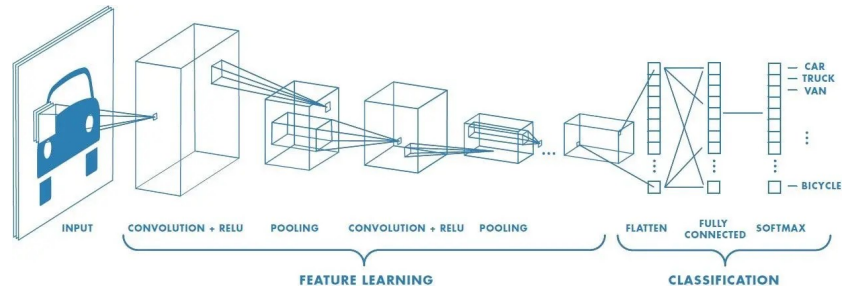


Figure 3: CNN pipeline [4]

Convolutional neural networks (CNN) are a type of neural network that is better suited for image recognition. While this might sound like a separate model structure, CNNs are largely the same. In figure 3 the difference between a traditional neural network is the convolutional layer. Instead of reading the entire image at once, a convolutional layer slides over the image...

IMAGE OF SLIDING (gif split)

...

### 3 Bayesian Neural Networks

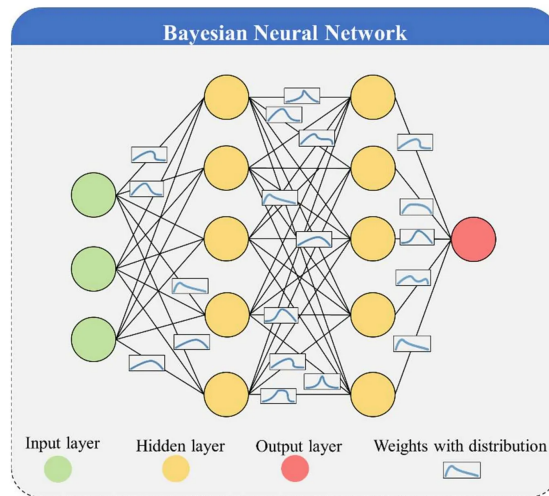


Figure 4: Example BNN [1]

Bayesian neural networks take the same principle as

Similar to a Neural network such as...

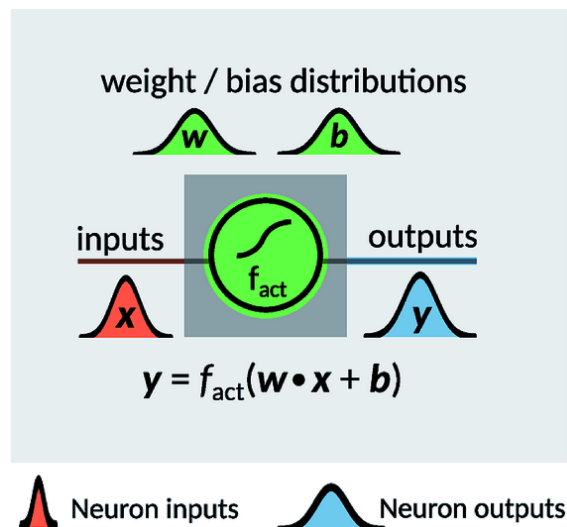


Figure 5: Example BNN Neuron [2]

### 3.1 Bayesian Convolutional Neural Networks

Bayesian convolutional neural network (BCNN) are similar to CNNs. The difference between is that BCNNs and a CNN is that the BCNN uses a bayesian neuron.

## 4 Simulation

We use a BCNN implementation from [Github](#) based on work from ... [6] [5]

### 4.1 CIFAR-10

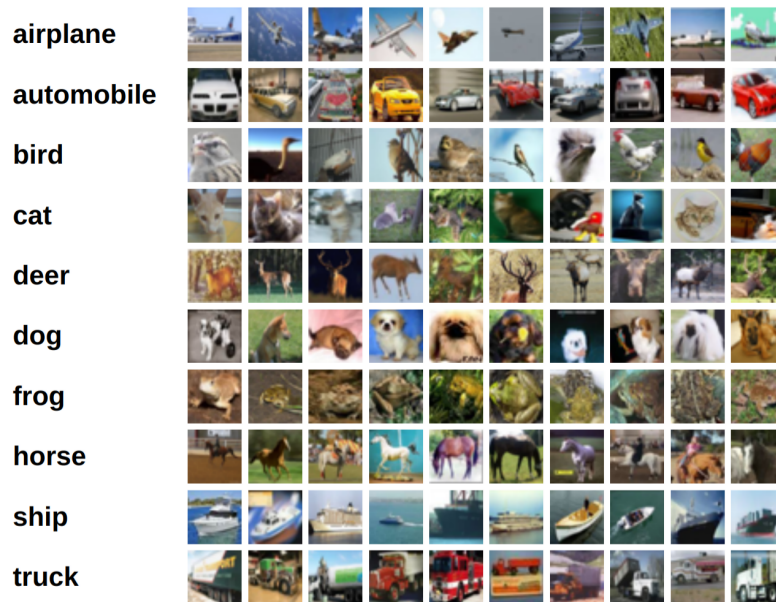


Figure 6: Example CIFAR-10 images [3]

The CIFAR-10 ((Canadian Institute For Advanced Research 10) dataset is a machine learning benchmarking set. It contains 60,000  $16 \times 16$  RGB pictures of: airplanes, cars, birds, cats, deer, dogs, frogs, horses, ships, and trucks[3]. It is used...

## 4.2 Hyperparameters

We used the following hyperparameters for training:

| Hyperparameter | CNN   | BCNN   |
|----------------|---|--|
| Epochs         | 500   | 500  |
| Learning Rate  | ....  | May be higher (0.01 - 0.1) due to simpler structure              |
| Regularization | L1/L2 weight decay or Dropout common to prevent overfitting | Can benefit from Dropout, but weight decay might be less crucial |
| Optimizer      | Adamw   | Adamw  |

In addition to the above, the two models have the same number of levels...

---



## 4.3 Results

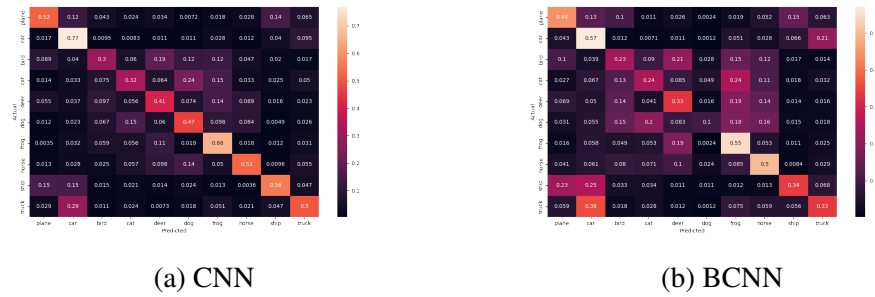


Figure 7: Confusion matrices

The two have roughly similar accuracies given the model

## 5 Closing

---

## References

- Fleszar, J. (2023). Bayesian neural networks - capturing the uncertainty of the real world !!
- Häse, F., Galván, I. F., Aspuru-Guzik, A., Lindh, R., & Vacher, M. (2019). How machine learning can assist the interpretation of ab initio molecular dynamics simulations and conceptual understanding of chemistry. *Chemical science*, 10(8), 2298–2307.
- Krizhevsky, A., Nair, V., & Hinton, G. (n.d.). Cifar-10 (canadian institute for advanced research). <http://www.cs.toronto.edu/~kriz/cifar.html>
- Saha, S. (2018). A guide to convolutional neural networks — the eli5 way.
- Shridhar, K., Laumann, F., & Liwicki, M. (2018). Uncertainty estimations by softplus normalization in bayesian convolutional neural networks with variational inference. *arXiv preprint arXiv:1806.05978*.
- Shridhar, K., Laumann, F., & Liwicki, M. (2019). A comprehensive guide to bayesian convolutional neural network with variational inference. *arXiv preprint arXiv:1901.02731*.
- What is machine learning (ml)? (2020).
- What is machine learning (ml)? (n.d.).
-