

Name: T Cameron Waller


Project: Profondeur

Date: 31 October 2016

Number: 2

The idea here is to distinguish between node properties (sets) by position. Cellular compartment is an obvious example. This layout is fairly intuitive.

The dynamic layout algorithm might be complex

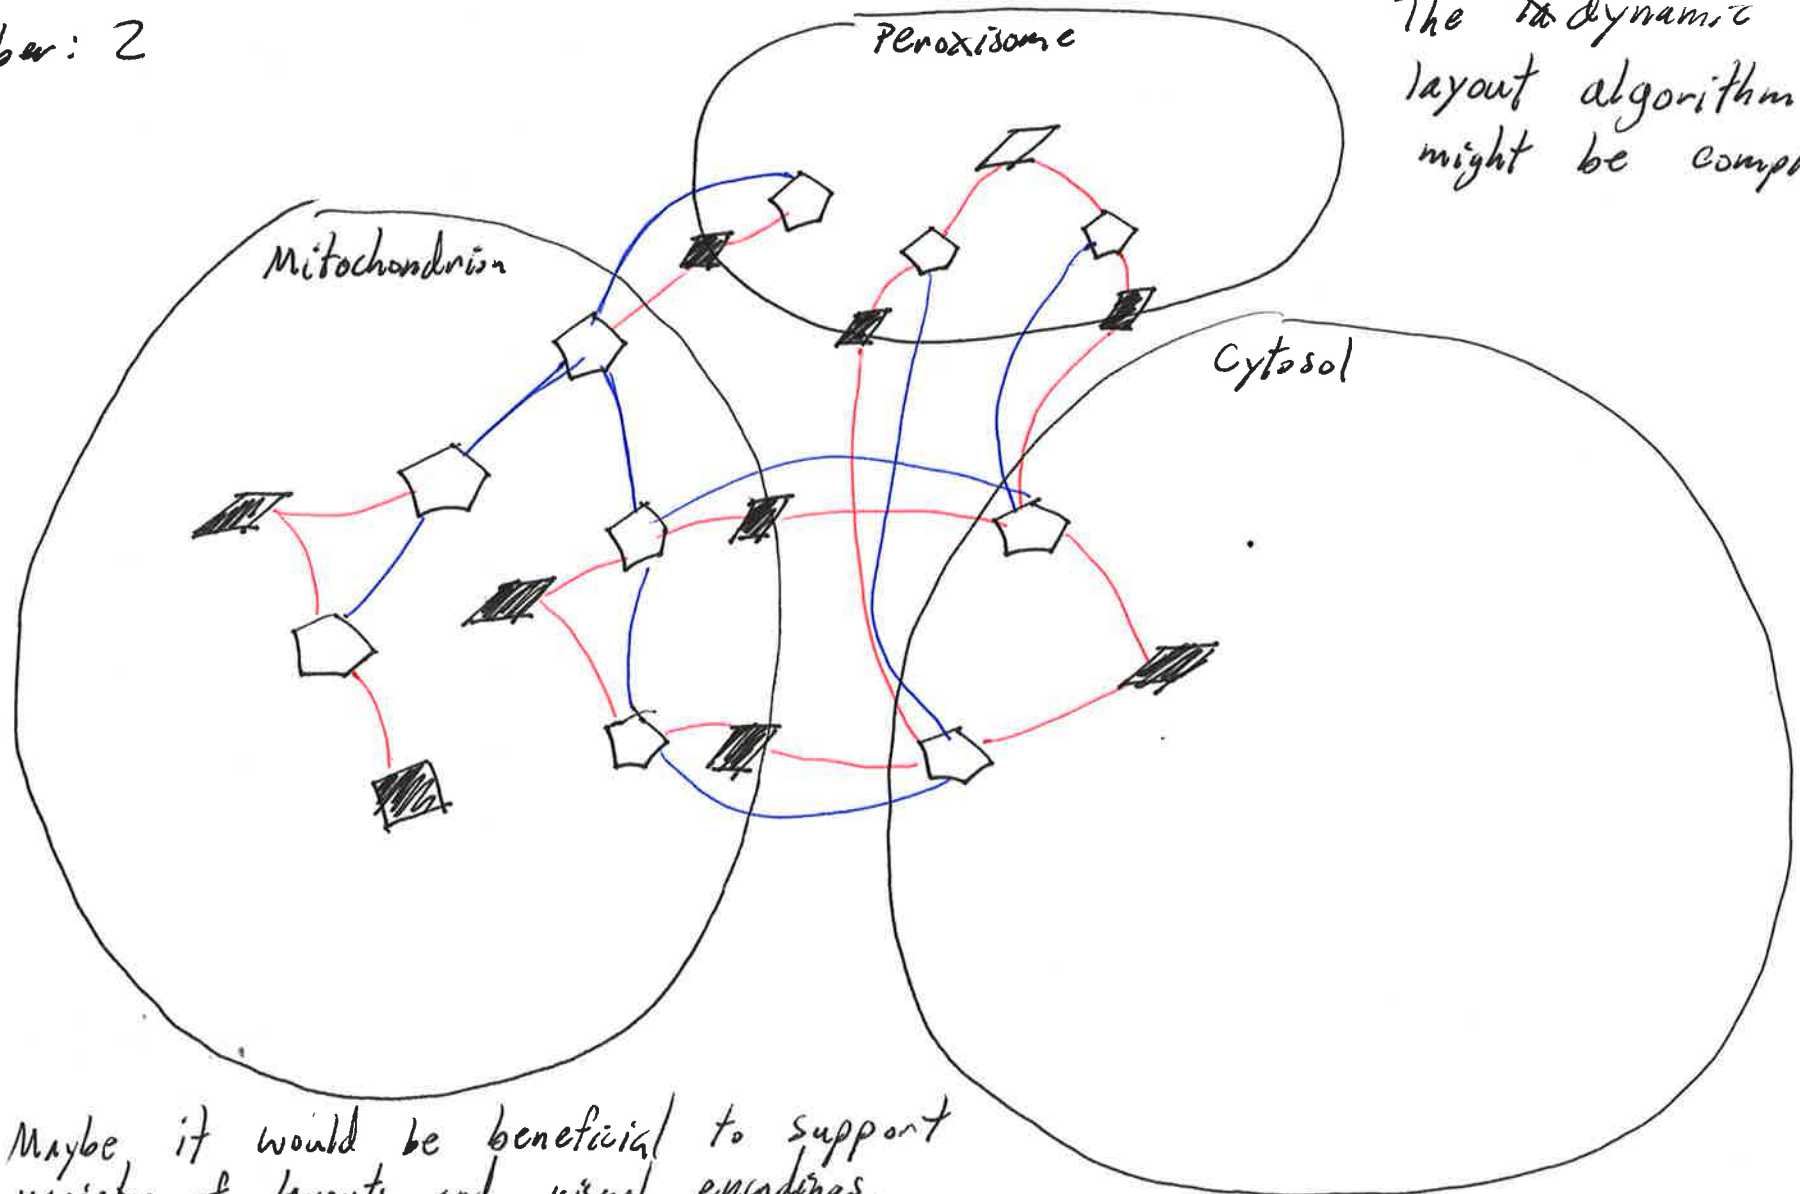

Maybe it would be beneficial to support a variety of layouts and visual encodings.

Then user could set encoding appropriately, according to interest.