

Presentation Project Template

that looks good

Thomas C Eskridge

Computer Science and Human-Centered Design,
Florida Institute of Technology

Thanks to Mirajul Islam and Ali Almashaykhi

August 14, 2026

Outline of the talk

- 1 Introduction 4
 - 1.1 Colors 5
 - 1.2 Frames 6
 - 1.3 Fonts 9
 - 1.4 Lists 10
 - 1.5 Table 11
 - 1.6 Figures 12
 - 1.7 Blocks 13
- 2 Maths 14
 - 2.1 Equations 14
 - 2.2 Theorem 15

Part II: Demo Presentation Part 2

- 1 Section 19
 - 1.1 Subsection 20
 - 1.1.1 Subsubsection 21
 - 1.1.2 Subsubsection 22
 - 1.2 Subsection 23
 - 1.2.1 Subsubsection 23
 - 1.2.2 Subsubsection 23
- 2 Section 23
 - 2.1 Subsection 23
 - 2.1.1 Subsubsection 23
 - 2.1.2 Subsubsection 23
 - 2.2 Subsection 23
 - 2.2.1 Subsubsection 23
 - 2.2.2 Subsubsection 23

Part I

Demo Part

- This template provides an elegant and minimalistic layout for beamer slides. Hence the name **Elegant Slides** .
- I created Elegant Slides because I wasn't satisfied with any of the existing Beamer templates, which look slightly different than Elegant Slides.
- My goal was to create a layout that is **simplistic but beautiful** and focuses on the content, rather than crowding each slide with lots of different coloured boxes.
- I designed Elegant Slides for **lecture notes and technical presentations** but it can be used for any kind of talk.

The template provides different color themes.
Set `\usetheme[style=lecture]{elegant}` in `loadslides.tex`

Lecture	
Gold	
Red	
Orange	
Gray	

Gray is a slightly more subtle version of the default *Lecture* theme with gray, rather than pink, subtitles.

Unless the user enters their own custom frame titles and subtitles, Elegant Slides automatically inserts the section title and, if specified, the subsection title as frame titles and frame subtitles.

This frame has a custom subtitle. The frame title is automatically inserted and corresponds to the section title.

Custom Title

This frame has a custom title and a custom subtitle.¹

¹This is a footnote. See also Author (2022).

- Font types can be changed in loadslides.tex.
- For lecture notes or reports, the *Lecture* theme together with `\RequirePackage{palatino}` and `\usefonttheme{serif}` works well.
- For talks and other presentations, `\RequirePackage[scaled]{helvet}` with any of the other themes, such as *Gold*, works better.
- Text can be highlighted as follows:
 - Regular
 - **Emphasize**
 - **Alert**
 - **Example**
 - *Italic*

Items

- Cats
 - British Shorthair
- Dogs
- Birds Peng et al., 2024

Enumerations

- First
 - First subpoint
- Second
- Last

Descriptions

Apples Yes

Oranges No


Grappes No

Table. Largest cities in the world (source: Wikipedia)

City	Population
Mexico City	20,116,842
Shanghai	19,210,000
Peking	15,796,450
Istanbul	14,160,467

City	Population
Mexico City	20,116,842
Shanghai	19,210,000
Peking	15,796,450
Istanbul	14,160,467

Figure. Plot of $y = x^2$

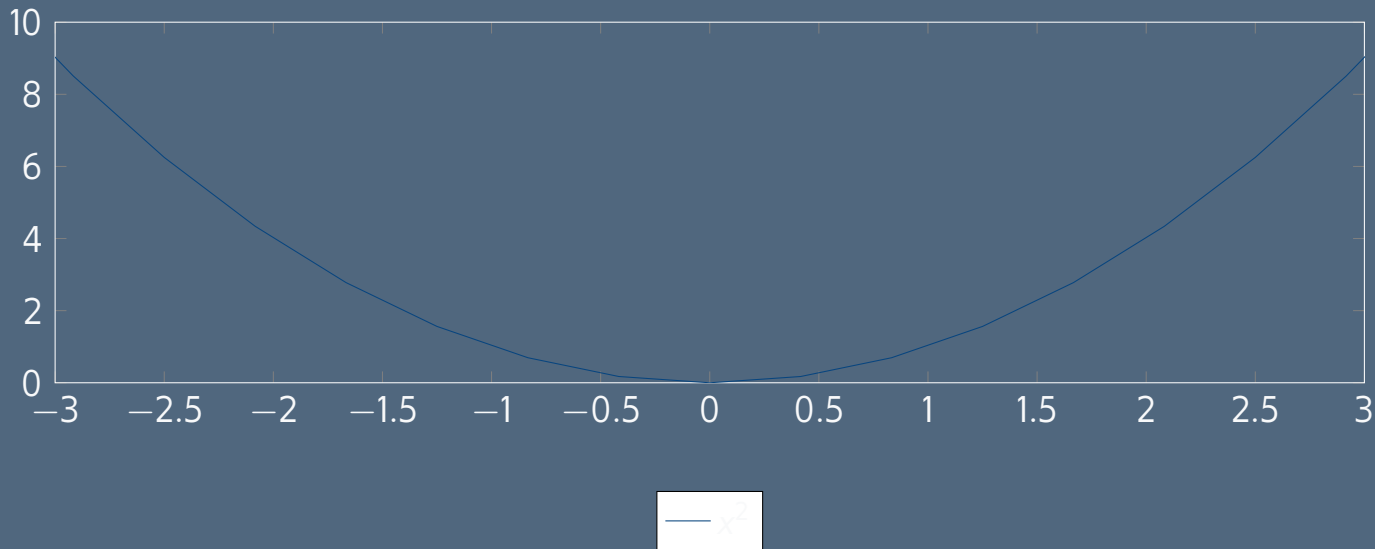

Default
Block content.

Alert

Block content.

Example

Block content.

- A numbered equation:

$$y_t = \beta x_t + \varepsilon_t \quad (1)$$

- Another equation:

$$\mathbf{Y} = \beta \mathbf{X} + \varepsilon_t$$

- Theorems are numbered consecutively.

Theorem 1 (Example Theorem)

Given a discrete random variable X , which takes values in the alphabet $\mathcal{X}$ and is distributed according to $p : \mathcal{X} \rightarrow [0, 1]$:

$$H(X) := - \sum_{x \in \mathcal{X}} p(x) \log p(x) = \mathbb{E}[-\log p(X)] \quad (2)$$

- Definition numbers are prefixed by the section number in the respective part.

Definition 2.1 (Example Definition)

Given a discrete random variable X , which takes values in the alphabet $\mathcal{X}$ and is distributed according to $p : \mathcal{X} \rightarrow [0, 1]$:

$$H(X) := - \sum_{x \in \mathcal{X}} p(x) \log p(x) = \mathbb{E}[-\log p(X)] \quad (3)$$

- Examples are numbered as definitions.

Example 2.1 (Example Theorem)

Given a discrete random variable X , which takes values in the alphabet $\mathcal{X}$ and is distributed according to $p : \mathcal{X} \rightarrow [0, 1]$:

$$H(X) := - \sum_{x \in \mathcal{X}} p(x) \log p(x) = \mathbb{E}[-\log p(X)] \quad (4)$$

Part II

Demo Presentation Part 2

section!

subsection1

subsubsection

subsubsection

References I

Author, E. (2022). **Reference title.** *Journal of Examples*, 0(0), 1–10.

Peng, B., Narayanan, S., & Papadimitriou, C. (2024). **On limitations of the transformer architecture.**