IPIPELINE®
INNOVATION UNLEASHED

Single Sign-On User Guide

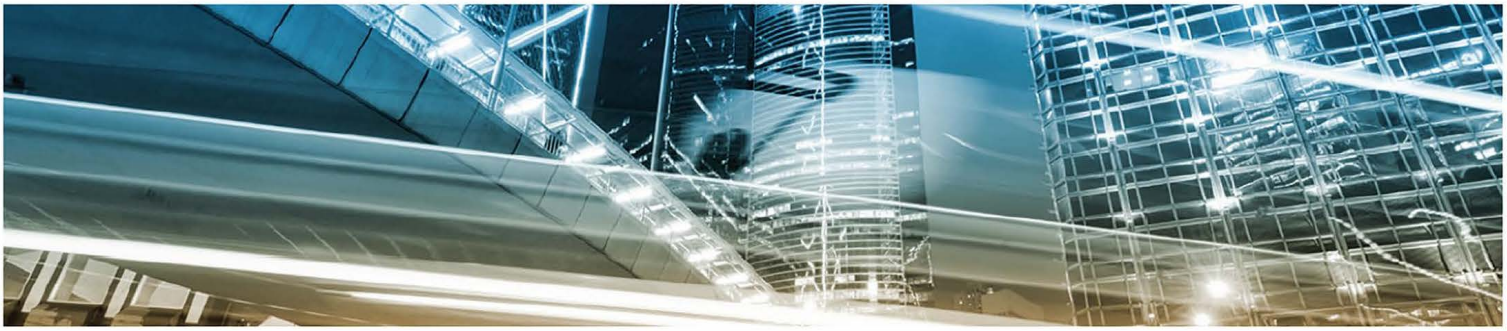

Implementation Details

1. What iPipeline needs from the Distributor

1.1. The Distributor will be the identity provider (IdP) and will need to provide us their IdP metadata file. This XML file differentiates the Distributor as a separate entity on our system, and identifies the certificate to expect their SAML response to be signed with.

1.2. Important parts of metadata file:
- entityID - A unique string identifying a SAML authority that issues the Web SSO assertions. Used to identify the Distributor in our system. Note: Must match what is passed in "Issuer" of SAML Response.
- X509Certificate - The public key of the certificate being used to sign their SAML response and all applicable cert chain(s) of signing cert.
- *Security Constraint - Both the X509Certificate and the entityID used for the UAT environment will need to differ from the ones used in PRODUCTION.*

1.3. Public key file of the certificate being used to sign their response and all applicable cert chain(s) of signing cert.

1.4. A list of all data they wish to have prepopulate in iGO system and/or passed across in 103 ACORD submission.

2. When iPipeline needs this from the Distributor

2.1. Metadata file exchange - 2 weeks prior to testing

2.2. Signed off list of data - 2 weeks prior to testing

3. What the Distributor needs from iPipeline

3.1. Profile/Binding being used:
- SAML 2.0 HTTP POST Binding http://saml.xml.org/wiki/idp-initiated-single-sign-on-post-binding
- This defines that the Distributor will need to include to following in their SAML post:
  - SAMLResponse - Base64 encoded SAML XML
  - RelayState - The iPipeline web application link
- Sample HTTP form POST:

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
    <head>
        <title/>
    </head>
    <body>
        <form name="samlpost" id="samlpost" method="post" target="_blank"action="https://federate-uat.ipipeline.com/sp/ACS.saml2">
            <input type="hidden" name="SAMLResponse" id="SAMLResponse"value="[ENTER BASE 64 ENCODED SAML RESPONSE
STRING HERE]" />
            <input name="RelayState" type="hidden" id="RelayState"value="[ENTER THE RELAYSTATE HERE]" />
        </form>
        <a href="#" onclick="samlpost.submit()">iPipeline</a>
    </body>
</html>
```

3.2. URLs to post SAML to:
- UAT: https://federate-uat.ipipeline.com/sp/ACS.saml2
- Production: https://federate.ipipeline.com/sp/ACS.saml2
- *Note: iPipeline's metadata files (iPipelineRelyingParty-UAT-SAML20.xml and iPipelineRelyingParty-SAML20.xml) also contain this data. These files also contain more details about our Service, i.e. Name, Description, Attributes we are expecting.*

3.3. URLs to use for RelayState (URL user will be redirected to after authentication):
- iGO:
  - UAT: https://pipepasstoigo-uat3.ipipeline.com/default.aspx?gaid=2643
  - PROD: https://pipepasstoigo.ipipeline.com/default.aspx?gaid=2643
- FormsPipe:
  - UAT: https://formspipe-uat.ipipeline.com/?GAID=2643
  - PROD: https://formspipe.ipipeline.com/?GAID=2643
- LifePipe:
  - UAT: https://quote-uat.ipipeline.com/LTSearch.aspx?GAID=2643
  - PROD: https://quote.ipipeline.com/LTSearch.aspx?GAID=2643
- ProductInformation:
  - UAT: https://prodinfo-uat.ipipeline.com/productlist?GAID=2643
  - PROD: https://prodinfo.ipipeline.com/productlist?GAID=2643
- DocFast:
  - UAT: https://docfastpartnerportal-td1.ipipeline.com/?gaid=2643
  - PROD: https://docfastpartnerportal.ipipeline.com/?gaid=2643

3.4. What Attributes to send, and the values needed:

AttributeName	Description	Values
CompanyIdentifier	Mandatory. Used to determine the username	2643
ChannelName	Mandatory. Used to determine the username	APEX
Action	Mandatory. Used to tell the service what action to take.	CREATE
Groups	Mandatory. Defines Group user is associated with and what systems user has access to	02643-UsersGroup
TimeoutURL	Optional.	
ApplicationData	Optional. Contains User and Client data being passed from the client's system to select iPipeline applications in XML format. More information on this format is detailed below. NOTE: If the contents are in XML format, they need to be wrapped in a CDATA tag.	

4. Generating the SAML XML

4.1. iPipeline does not own intellectual property which can be used to generate SAML XML. Instead, iPipeline suggests the use of a SAML editor available from one of the following third party vendors to assist with generating SAML XML:

- PingFederate - https://www.pingidentity.com/en/products/pingfederate.html
- OpenSAML - http://www.opensaml.org
- SAML Toolkit for C#, VB.NET, and ASP.NET Applications - http://www.componentspace.com/SAMLv20.aspx
- SimpleSAMLphp - https://simplesamlphp.org
- MiniOrange(Wordpress) - http://miniorange.com/

5. iPipeline Specific SAML Data

5.1. The following XML and tables define the SAML data required by iPipeline to process the SAML request as well as optional data to pass in Agent (user) and Client data:

- Sample SAML XML:

```
<samlp:Response xmlns:samlp="urn:oasis:names:tc:SAML:2.0:protocol" ID="pfx6f65e905-1b94-74c4-aa95-569a2f63e2c3"
Version="2.0" IssueInstant="2018-01-03T16:00:04.513Z" Destination="https://federate.ipipeline.com/sp/ACS.saml2">
    <saml:Issuer xmlns:saml="urn:oasis:names:tc:SAML:2.0:assertion">[IdpEntityID]</saml:Issuer>
    <ds:Signature xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
        <ds:SignedInfo>
            <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
            <ds:SignatureMethod Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha1" />
            <ds:Reference URI="#pfx6f65e905-1b94-74c4-aa95-569a2f63e2c3">
                <ds:Transforms>
                    <ds:Transform Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-signature" />
                    <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
                </ds:Transforms>
                 <ds:DigestMethod Algorithm="http://www.w3.org/2000/09/xmldsig#sha1" />
                <ds:DigestValue>CgDgo33NH8jrIRPsp12emtBjWgM=</ds:DigestValue>
            </ds:Reference>
        </ds:SignedInfo>
        <ds:SignatureValue>
        ZujuLRX+erkwWSRnktFr2D8oZJo+Y4gFrJ68MFerRXOjrFJW4M3Aoxp6NDKNmhJwWE448HZ21LqBifvHd6G91ex
        W8KyMri1RgWiIP4Ie4o0BagoeqSc9ToKXrJ8J/z9k4GhE82jo8cHmnBkWBiFvXxTmg48Oxhvg6404ogN73QE=
        </ds:SignatureValue>
        <ds:KeyInfo>
            <ds:X509Data>
                <ds:X509Certificate>Base64 encoded certificate</ds:X509Certificate>
            </ds:X509Data>
        </ds:KeyInfo>
    </ds:Signature>
    <samlp:Status>
        <samlp:StatusCode Value="urn:oasis:names:tc:SAML:2.0:status:Success" />
    </samlp:Status>
     <saml:Assertion xmlns:saml="urn:oasis:names:tc:SAML:2.0:assertion" Version="2.0"
    ID="_6dbfd28d-a606-46ef-8f9b-3d51055288e9" IssueInstant="2018-01-03T16:00:04.513Z">
        <saml:Issuer>CARRIERID-SERVER</saml:Issuer>
        <saml:Subject>
            <saml:NameID Format="urn:oasis:names:tc:SAML:1.1:nameid-format:unspecified">UNIQUE-USERID</saml:NameID>
            <saml:SubjectConfirmation Method="urn:oasis:names:tc:SAML:2.0:cm:bearer">
                <saml:SubjectConfirmationData NotOnOrAfter="2018-01-03T16:05:04.513Z"
                Recipient="https://federate.ipipeline.com/sp/ACS.saml2"/>
```

```
            </saml:SubjectConfirmation>
        </saml:Subject>
        <saml:Conditions NotBefore="2018-01-03T15:55:04.513Z" NotOnOrAfter="2018-01-03T16:05:04.513Z">
            <saml:AudienceRestriction>
                <saml:Audience>federate.ipipeline.com:saml2</saml:Audience>
            </saml:AudienceRestriction>
        </saml:Conditions>
        <saml:AuthnStatement AuthnInstant="2018-01-03T16:00:04.513Z">
            <saml:AuthnContext>
                <saml:AuthnContextClassRef>urn:oasis:names:tc:SAML:2.0:ac:classes:unspecified
</saml:AuthnContextClassRef>
            </saml:AuthnContext>
        </saml:AuthnStatement>
        <saml:AttributeStatement>
            <saml:Attribute Name="CompanyIdentifier" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
            <saml:AttributeValue>2643</saml:AttributeValue>
            </saml:Attribute>
            <saml:Attribute Name="ChannelName" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>APEX</saml:AttributeValue>
            </saml:Attribute>
            <saml:Attribute Name="Action" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>CREATE</saml:AttributeValue>
            undefined</saml:Attribute>
            <saml:Attribute Name="Groups" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>02643-UsersGroup</saml:AttributeValue>
            </saml:Attribute>
            <saml:Attribute Name="TimeoutURL" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue/>
            </saml:Attribute>
            <saml:Attribute Name="ApplicationData" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>
                    <![CDATA[<iGoApplicationData><UserData><Data Name="UpdateUserProfile">TRUE</Data>
                    <Data Name="Address1"/><Data Name="Address2"/><Data Name="BrokerDealerNum"/>
                    <Data Name="City"/><Data Name="Country"/><Data Name="Email"/><Data Name="Fax"/>
                    <Data Name="FirstName"/><Data Name="LastName"/><Data Name="MiddleName"/>
                    <Data Name="Phone"/><Data Name="Phone2"/><Data Name="ZipCode"/>
                    <Data Name="State"/></UserData><ClientData/></iGoApplicationData>]]>
                </saml:AttributeValue>
            </saml:Attribute>
        </saml:AttributeStatement>
    </saml:Assertion>
</samlp:Response>
```


- ApplicationData SAML Attributes
  - iPipeline Specific SAML <ClientData> Object Definition
    - For iGO, iPipeline allows the creation of new clients, opening existing clients and updating existing client. Specifics about Client data passed in the assertion, if needed, will be discussed once the project implementation has begun.
  - iPipeline Specific SAML <UserData> Object Definition
    - The data passed into applications other than DocFast should be in XML format and should consist of the following:


```
<iGoApplicationData>
    <UserData>
        <Data Name="UpdateUserProfile">TRUE</Data>
        <Data Name="Address1"/>
        <Data Name="Address2"/>
        <Data Name="BrokerDealerNum"/>
        <Data Name="City"/>
        <Data Name="Country"/>
        <Data Name="Email"/>
        <Data Name="Fax"/>
        <Data Name="FirstName"/>
        <Data Name="LastName"/>
        <Data Name="MiddleName"/>
        <Data Name="Phone"/>
        <Data Name="Phone2"/>
        <Data Name="ZipCode"/>
        <Data Name="State"/>
    </UserData>
    <ClientData/>
</iGoApplicationData>
```


    - The elements of the above XML are optional but if desired to pass these in then the element [UpdateUserProfile] set to [True] will be manditory otherwise the data will not be read by iGO.

5.2. The following XML and tables define the DocFast SAML data required by iPipeline to process the SAML

request as well as mandatory data to pass in Agent (user):

- Sample SAML XML:


```
<samlp:Response xmlns:samlp="urn:oasis:names:tc:SAML:2.0:protocol" ID="pfx6f65e905-1b94-74c4-aa95-569a2f63e2c3"
Version="2.0" IssueInstant="2018-01-03T16:00:04.513Z" Destination="https://federate.ipipeline.com/sp/ACS.saml2">
    <saml:Issuer xmlns:saml="urn:oasis:names:tc:SAML:2.0:assertion">[IdpEntityID]</saml:Issuer>
    <ds:Signature xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
        <ds:SignedInfo>
            <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
            <ds:SignatureMethod Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha1" />
            <ds:Reference URI="#pfx6f65e905-1b94-74c4-aa95-569a2f63e2c3">
                <ds:Transforms>
                    <ds:Transform Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-signature" />
                    <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
                </ds:Transforms>
                 <ds:DigestMethod Algorithm="http://www.w3.org/2000/09/xmldsig#sha1" />
                <ds:DigestValue>CgDgo33NH8jrIRPsp12emtBjWgM=</ds:DigestValue>
            </ds:Reference>
        </ds:SignedInfo>
        <ds:SignatureValue>
        ZujuLRX+erkwWSRnktFr2D8oZJo+Y4gFrJ68MFerRXOjrFJW4M3Aoxp6NDKNmhJwWE448HZ21LqBifvHd6G91ex
        W8KyMri1RgWiIP4Ie4o0BagoeqSc9ToKXrJ8J/z9k4GhE82jo8cHmnBkWBiFvXxTmg48Oxhvg6404ogN73QE=
        </ds:SignatureValue>
        <ds:KeyInfo>
            <ds:X509Data>
                <ds:X509Certificate>Base64 encoded certificate</ds:X509Certificate>
            </ds:X509Data>
        </ds:KeyInfo>
    </ds:Signature>
    <samlp:Status>
        <samlp:StatusCode Value="urn:oasis:names:tc:SAML:2.0:status:Success" />
    </samlp:Status>
     <saml:Assertion xmlns:saml="urn:oasis:names:tc:SAML:2.0:assertion" Version="2.0"
    ID="_6dbfd28d-a606-46ef-8f9b-3d51055288e9" IssueInstant="2018-01-03T16:00:04.513Z">
        <saml:Issuer>CARRIERID-SERVER</saml:Issuer>
        <saml:Subject>
            <saml:NameID Format="urn:oasis:names:tc:SAML:1.1:nameid-format:unspecified">UNIQUE-USERID</saml:NameID>
            <saml:SubjectConfirmation Method="urn:oasis:names:tc:SAML:2.0:cm:bearer">
                <saml:SubjectConfirmationData NotOnOrAfter="2018-01-03T16:05:04.513Z"
                Recipient="https://federate.ipipeline.com/sp/ACS.saml2"/>
            </saml:SubjectConfirmation>
        </saml:Subject>
         <saml:Conditions NotBefore="2018-01-03T15:55:04.513Z" NotOnOrAfter="2018-01-03T16:05:04.513Z">
            <saml:AudienceRestriction>
                <saml:Audience>federate.ipipeline.com:saml2</saml:Audience>
             </saml:AudienceRestriction>
        </saml:Conditions>
        <saml:AuthnStatement AuthnInstant="2018-01-03T16:00:04.513Z">
            <saml:AuthnContext>
                <saml:AuthnContextClassRef>urn:oasis:names:tc:SAML:2.0:ac:classes:unspecified
</saml:AuthnContextClassRef>
            </saml:AuthnContext>
        </saml:AuthnStatement>
        <saml:AttributeStatement>
            <saml:Attribute Name="CompanyIdentifier" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
            <saml:AttributeValue>2643</saml:AttributeValue>
            </saml:Attribute>
            <saml:Attribute Name="ChannelName" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>APEX</saml:AttributeValue>
            </saml:Attribute>
            <saml:Attribute Name="Action" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>CREATE</saml:AttributeValue>
            </saml:Attribute>
            <saml:Attribute Name="Groups" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>02643-UsersGroup</saml:AttributeValue>
            </saml:Attribute>
             <saml:Attribute Name="TimeoutURL" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue/>
            </saml:Attribute>
            <saml:Attribute Name="ApplicationData" NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:basic">
                <saml:AttributeValue>
                    <![CDATA[<PolicyExApplicationData>
                    <UserData>
                    <CompanyIdentifier>2643</CompanyIdentifier>
                    <UserGroup>02643-UsersGroup</UserGroup>
                    <UserID>[ enter PolicyEX user ID]</UserID>
                    <FirstName>FirstName</FirstName>
                    <LastName>LastName</LastName>
```

```
                    <Email>UserEmail@email.com</Email>
                    <IsAdmin>False</IsAdmin>
                    <IsAgent>True</IsAgent>
                    <CarrierCode>[CARRIERGUID]</CarrierCode>
                    </UserData>
                    </PolicyExApplicationData>]]>
                </saml:AttributeValue>
            </saml:Attribute>
        </saml:AttributeStatement>
    </saml:Assertion>
</samlp:Response>
```


- ApplicationData SAML Attributes
  - Though the ApplicationData Attribute is not required for SAML authentication, it is required for DocFast, and therefore should always be passed.
  - The data passed to DocFast should be in XML format and should consist of the following:

```
<PolicyExApplicationData>
    <UserData>
        <CompanyIdentifier>2643</CompanyIdentifier>
        <UserGroup>02643-UsersGroup</UserGroup>
        <UserID>[ enter PolicyEX user ID]</UserID>
        <FirstName>FirstName</FirstName>
        <LastName>LastName</LastName>
        <Email>UserEmail@email.com</Email>
        <IsAdmin>False</IsAdmin>
        <IsAgent>True</IsAgent>
        <CarrierCode>[CARRIERGUID]</CarrierCode>
    </UserData>
</PolicyExApplicationData>
```

  - The elements of the above XML are defined in the below table.

AttributeName	Description	Values
CompanyIdentifier	This is a mandatory attribute. If this attribute is not passed FIM will display attribute missing error. This attribute is used in determining the username in the iPipeline security system.	2643
UserGroups	This is the RSA user group defined for the user ID (next field).	02643-UsersGroup
UserID	This is a mandatory field. This is the DocFast user ID. If this ID does not exist in the DB, the user ID will be created.	[SAML NameID Value]
FirstName	This is a mandatory field. This is the DocFast user's first name.	[enter user's first name]
LastName	This is a mandatory field. This is the DocFast user's last name.	[enter user's last name]
Email	This is a mandatory field. This is the DocFast user's email.	[enter user's email address]
IsAdmin	This is a mandatory field. A flag to defined if the user is an admin (e.g. CCMA) or a normal user (e.g. CCM)	[True or False]
IsAgent	This is a mandatory field. A flag to determine if the user is an agent (e.g. IA)	[True or False]
CarrierCode	This is an optional field. This is the carrier's GUID. This is not needed if coming from a distributor portal / site.	[enter carrier's GUID from DocFast] This can be left null in most cases.

6. DocFast Email Links

6.1. Default: DocFast will generate and send emails / notification based on certain actions. Below are samples of the links in the emails. When the link is clicked, the user will be prompted to login if they do not have an active session. If they are already logged in, the policy details page will be displayed.

- **Carrier to Consumer**
  This notification is created when the carrier is doing a direct to consumer policy.

https://docfastpartnerportal.ipipeline.com/Account/LogOn?UID=[unique identifier of the consumer]&ExpirationDate=[expiration date of the this email link]&hmac=[hash key]

- **Carrier to Agent**
  This notification is created when the carrier creates a policy that is to be sent to an agent.
  https://docfastpartnerportal.ipipeline.com/Policy/Detail/?policyID=[policy ID from PoliceyEX DB]&hmac=[hash key]
- **Carrier to Distributor**
  This notification is created when the carrier creates a policy that is to be sent to a distributor.
  https://docfastpartnerportal.ipipeline.com/Policy/Detail/?policyID=[policy ID from PoliceyEX DB]&hmac=[hash key]
- **Distributor to Agent**
  This notification is created when the distributor selects the action to e-delivery to the agent.
  https://docfastpartnerportal.ipipeline.com/Policy/Detail/?policyID=[policy ID from PoliceyEX DB]&hmac=[hash key]
- **Agent to Consumer**
  This notification is created when the agent selects the action to e-sign and e-delivery to the consumer.
  https://policyexconsumerportal.ipipeline.com/Account/LogOn?UID=[unique identifier of the consumer]&ExpirationDate=[expiration date of the this email link]&hmac=[hash key]

6.2. Distributor Custom for SP-Initiated SSO: A Distributor may choose to have the link in the email link back to their site. This allows the Distributor to have the email recipient log into their site to access DocFast and the policy details. This is done via a custom page, developed by the Distributor, which performs the SSO (single sign-on) via SAML.

The Distributor would supply a URL similar to the following: http://sso.ClientSite.com/PolicyEX.aspx?PolicyID=

The DocFast support or development team would update the Distributor Docfast configuration with the appropriate URL.

The ASP page (e.g. PolicyEX.aspx) is created by the Distributor to perform the appropriate actions. These actions at a minimum may consist of logging the user into the site, creating the SAML to perform the SSO to DocFast and displaying the DocFast dashboard or policy details page.

DocFast will append the policy number and a hash value (to avoid URL tampering) to the URL. This URL will then be used in the email.

7. iPipeline SP metadata

- **UAT**

```
<md:EntityDescriptor entityID="federate-uat.ipipeline.com:saml2" xmlns:md="urn:oasis:names:tc:SAML:2.0:metadata">
    <md:SPSSODescriptor protocolSupportEnumeration="urn:oasis:names:tc:SAML:2.0:protocol">
        <md:SingleLogoutService Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-Redirect"
Location="https://federate-uat.ipipeline.com/sp/SLO.saml2"/>
        <md:SingleLogoutService Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-POST"
Location="https://federate-uat.ipipeline.com/sp/SLO.saml2"/>
        <md:AssertionConsumerService index="0" Location="https://federate-uat.ipipeline.com/sp/ACS.saml2"
Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-POST" isDefault="true"/>
        <md:AttributeConsumingService index="0">
            <md:ServiceName xml:lang="en">AttributeContract</md:ServiceName>
            <md:RequestedAttribute Name="CompanyIdentifier"/>
            <md:RequestedAttribute Name="Action"/>
            <md:RequestedAttribute Name="ChannelName"/>
            <md:RequestedAttribute Name="Groups"/>
            <md:RequestedAttribute Name="ApplicationData"/>
            <md:RequestedAttribute Name="TimeoutURL"/>
            <md:RequestedAttribute Name="EmailAddress"/>
            <md:RequestedAttribute Name="SMSNumber"/>
        </md:AttributeConsumingService>
    </md:SPSSODescriptor>
    <md:ContactPerson contactType="support">
        <md:Company>iPipeline</md:Company>
        <md:EmailAddress>support@ipipeline.com</md:EmailAddress>
        <md:TelephoneNumber>484-348-6555</md:TelephoneNumber>
    </md:ContactPerson>
</md:EntityDescriptor>
```

- **PROD**

```
<md:EntityDescriptor entityID="federate.ipipeline.com:saml2" xmlns:md="urn:oasis:names:tc:SAML:2.0:metadata">
    <md:SPSSODescriptor protocolSupportEnumeration="urn:oasis:names:tc:SAML:2.0:protocol">
        <md:SingleLogoutService Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-Redirect"
Location="https://federate.ipipeline.com/sp/SLO.saml2"/>
        <md:SingleLogoutService Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-POST"
```

```
Location="https://federate.ipipeline.com/sp/SLO.saml2"/>
        <md:AssertionConsumerService index="0" Location="https://federate.ipipeline.com/sp/ACS.saml2"
Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-POST" isDefault="true"/>
        <md:AttributeConsumingService index="0">
            <md:ServiceName xml:lang="en">AttributeContract</md:ServiceName>
            <md:RequestedAttribute Name="CompanyIdentifier"/>
            <md:RequestedAttribute Name="Action"/>
            <md:RequestedAttribute Name="ChannelName"/>
            <md:RequestedAttribute Name="Groups"/>
            <md:RequestedAttribute Name="ApplicationData"/>
            <md:RequestedAttribute Name="TimeoutURL"/>
            <md:RequestedAttribute Name="EmailAddress"/>
            <md:RequestedAttribute Name="SMSNumber"/>
        </md:AttributeConsumingService>
    </md:SPSSODescriptor>
    <md:ContactPerson contactType="support">
        <md:Company>iPipeline</md:Company>
        <md:EmailAddress>support@ipipeline.com</md:EmailAddress>
        <md:TelephoneNumber>484-348-6555</md:TelephoneNumber>
    </md:ContactPerson>
</md:EntityDescriptor>
```