

Scheduling: FIFO and SJF

CS 571: Operating Systems (Spring 2020)

Lecture 4

Yue Cheng


Outline

- Basic concept
- Scheduling criteria
- Scheduling algorithms
 - First In, First Out (FIFO)
 - Shortest Job First (SFJ)
 - Shortest Time-to-Completion First (STCF)
 - Round Robin (RR)
 - Priority
 - Multi-Level Feedback Queue (MLFQ)

Basic Concepts

- During its lifetime, a process goes through a sequence of CPU and I/O bursts
- The CPU scheduler (a.k.a. [short-term scheduler](#)) will select one of the processes in the ready queue for execution
- The CPU scheduler algorithm may have tremendous effects on the system performance
 - Interactive systems: Responsiveness
 - Real-time systems: Not missing the deadlines


Alternating Sequence of CPU and I/O Bursts

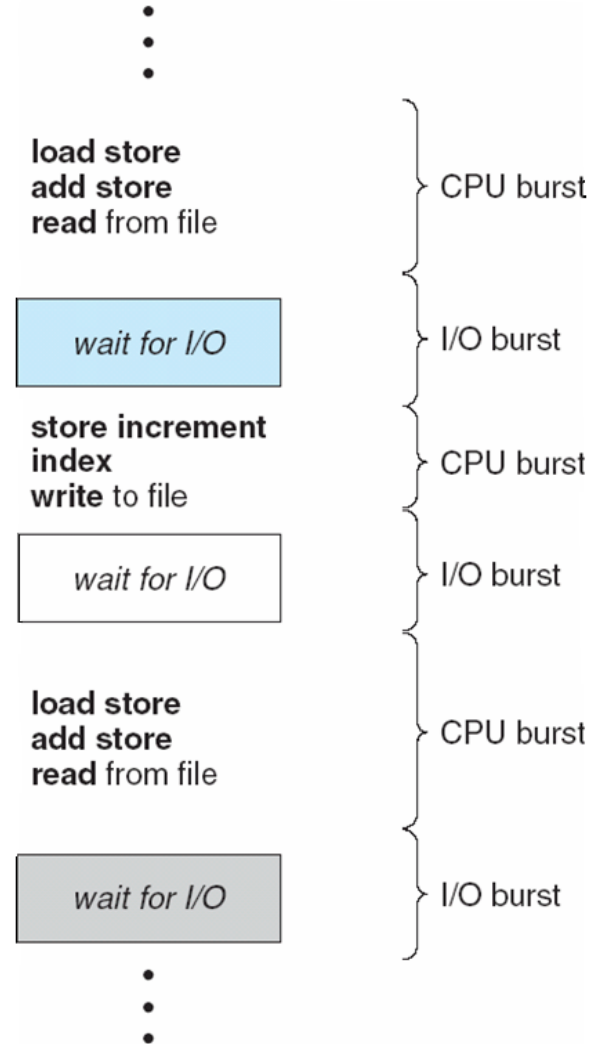


When to Schedule?

- Under the simple process state transition model, CPU scheduler can be **potentially** invoked at five different points:
 1. When a process switches from the new state to the ready state
 2. When a process switches from the running state to the waiting (or blocked) state
 3. When a process switches from the running state to the ready state
 4. When a process switches from the waiting state to the ready state
 5. When a process terminates

Process State Transitions

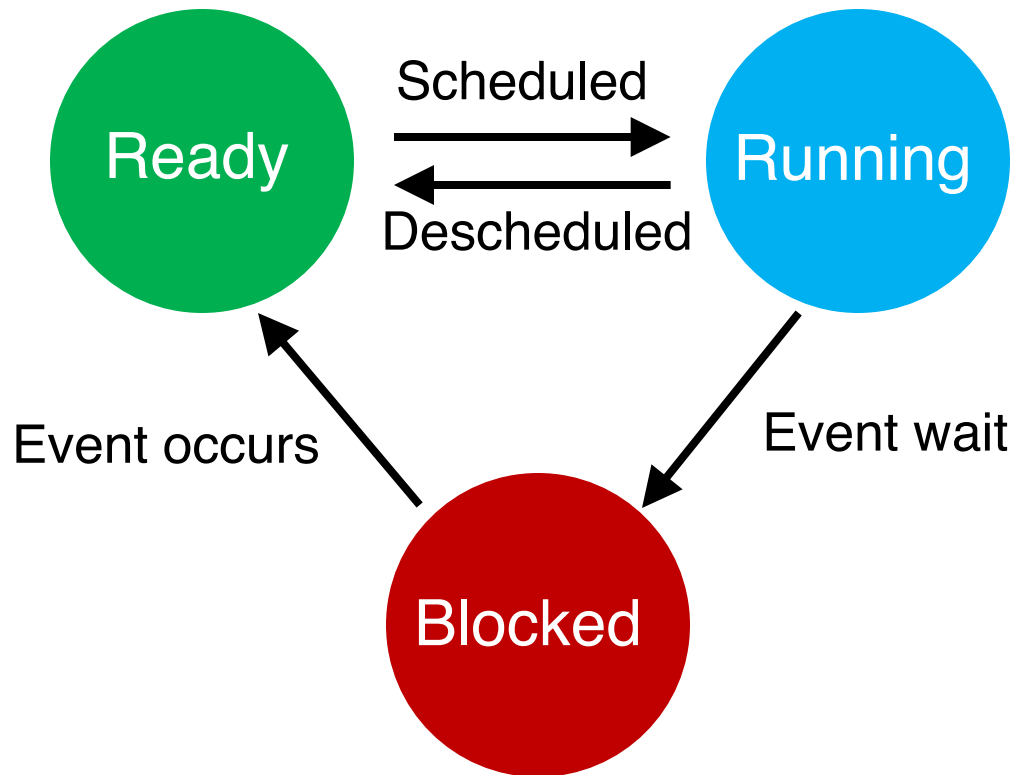

Process State Transitions

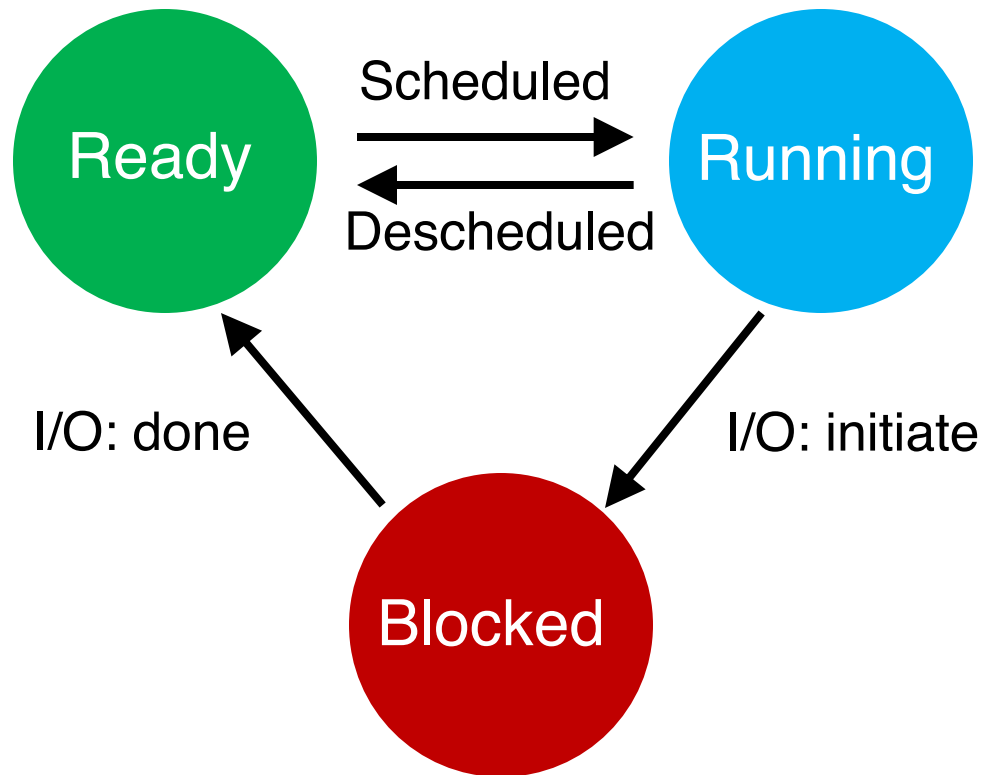

Dispatcher

- Dispatcher module gives control of the CPU to the process selected by the short-term scheduler; this involves:
 - switching context
 - switching to user mode
 - jumping to the proper (previously saved) location in the user program to restart that program
- Scheduler → **Policy**: When and how to schedule
- Dispatcher → **Mechanism**: Actuator following the commands of the scheduler

Scheduling Metrics

- To compare the performance of scheduling algorithms
 - **CPU utilization** – percentage of time CPU is busy executing jobs
 - **Throughput** – # of processes that complete their execution per time unit
 - **Turnaround time** – amount of time to execute a particular process
 - **Waiting time** – amount of time a process has been waiting in the ready queue
 - **Response time** – amount of time it takes from when a request was submitted until the first response is produced, not the complete output

Optimization Goals

- To maximize:
 - Maximize the CPU utilization
 - Maximize the throughput
- To minimize:
 - Minimize the (average) turnaround time
 - Minimize the (average) waiting time
 - Minimize the (average) response time

Waiting Time

- Waiting time definition

$$T_{waiting} = T_{start} - T_{arrival}$$

- Average waiting time = $\text{Sum}(T_{waiting}) / \# \text{processes}$

- For now, we assume


- **Average waiting time** is the performance measure
- Only one CPU burst (e.g., in milliseconds or ms) per process
- Only CPU, No I/O
- All processes arrive at the same time
- Once started, each process runs to completion

First In, First Out (FIFO)

First-In-First-Out (FIFO)

<u>Process</u>	<u>Burst Time</u>
P_1	24


- Suppose that the processes arrive in order: P_1 , P_2 , P_3
The Gantt Chart for the schedule:

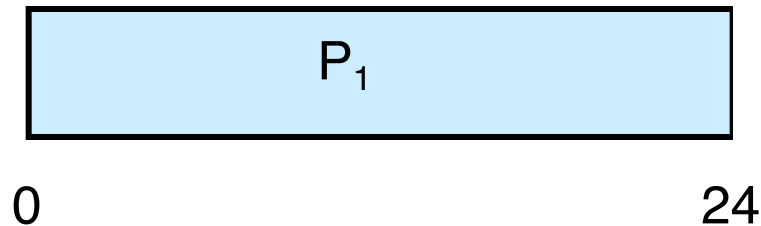

First-In-First-Out (FIFO)

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3

- Suppose that the processes arrive in order: P_1 , P_2 , P_3
The Gantt Chart for the schedule:

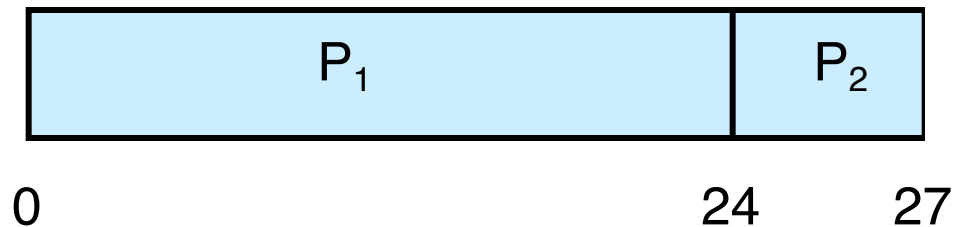

First-In-First-Out (FIFO)

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in order: P_1 , P_2 , P_3
The Gantt Chart for the schedule:



First-In-First-Out (FIFO)

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3


- Suppose that the processes arrive in order: P_1 , P_2 , P_3
The Gantt Chart for the schedule:



- Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$
- Average waiting time: 17


FIFO (cont.)

- Suppose that the processes arrive in order P_2 , P_3 , P_1
- The Gantt chart for the schedule:



FIFO (cont.)

- Suppose that the processes arrive in order P_2 , P_3 , P_1
- The Gantt chart for the schedule:

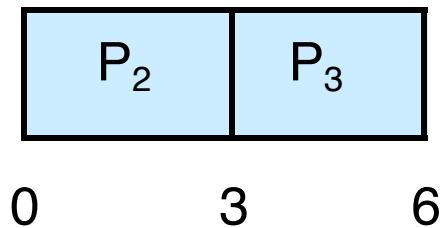

FIFO (cont.)

- Suppose that the processes arrive in order P_2 , P_3 , P_1
- The Gantt chart for the schedule:



FIFO (cont.)

- Suppose that the processes arrive in order P_2 , P_3 , P_1
- The Gantt chart for the schedule:



- Waiting time for $P_1 = 6$; $P_2 = 0$; $P_3 = 3$
- Average waiting time: $(6 + 0 + 3)/3 = 3$

FIFO (cont.)

- Suppose that the processes arrive in order P_2 , P_3 , P_1
- The Gantt chart for the schedule:



- Waiting time for $P_1 = 6$; $P_2 = 0$; $P_3 = 3$
- Average waiting time: $(6 + 0 + 3)/3 = 3$
- Problems:
 - **Convoy effect** (short processes behind long processes)
 - Non-preemptive: Not suitable for time-sharing systems

Shortest Job First (SJF)


Shortest Job First (SJF)

- Associate with each process the length of its next CPU burst
- The CPU is assigned to the process with the smallest (next) CPU burst (run_time)
- Two schemes (modes):
 - Non-preemptive
 - Preemptive: Also known as the **Shortest Time-to-Completion First (STCF)**

Example for Non-Preemptive SJF

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4

- SJF (non-preemptive)

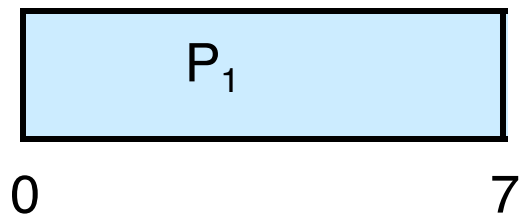

Example for Non-Preemptive SJF

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4


- SJF (non-preemptive)



Example for Non-Preemptive SJF

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4


- SJF (non-preemptive)

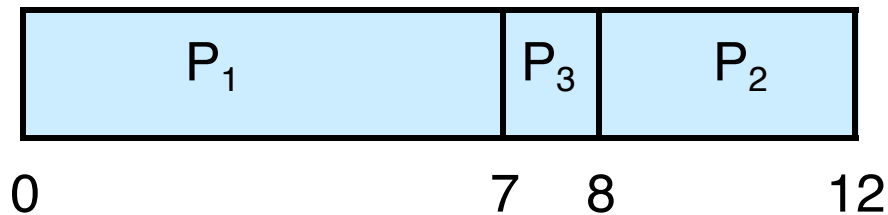

Example for Non-Preemptive SJF

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4


- SJF (non-preemptive)

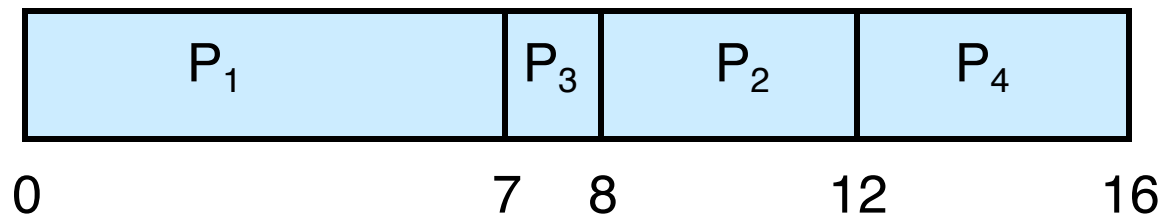

Example for Non-Preemptive SJF

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4

- SJF (non-preemptive)

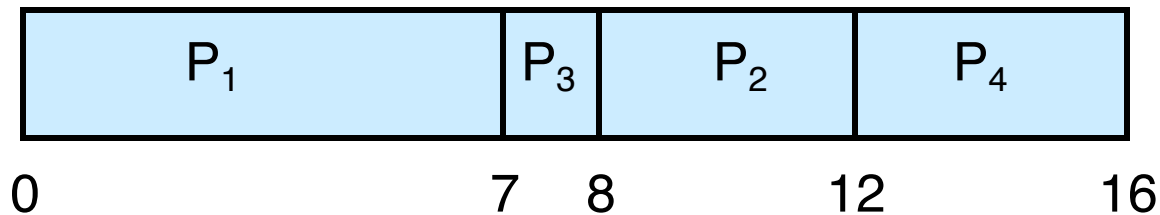

- Average waiting time = $(0 + 6 + 3 + 7)/4 = 4$


Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	Left Time
P_1	0.0	7	

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	

- SJF (preemptive)




0

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	4


- SJF (preemptive)



Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	4
P_3	4.0	1	1


- SJF (preemptive)



Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	2
P_3	4.0	1	1


- SJF (preemptive)



Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	2
P_3	4.0	1	1


- SJF (preemptive)

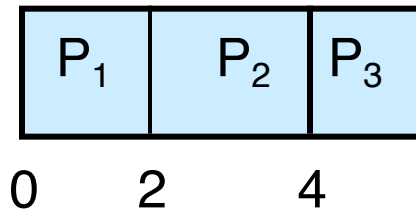

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	2
P_3	4.0	1	0
P_4	5.0	4	4


- SJF (preemptive)

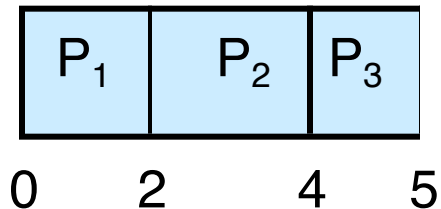

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	2
P_3	4.0	1	0
P_4	5.0	4	4


- SJF (preemptive)

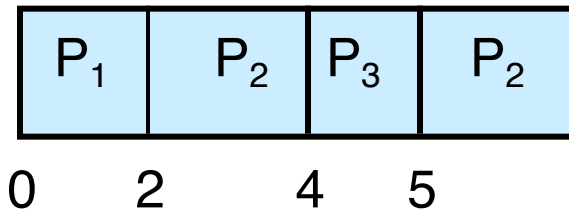

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	0
P_3	4.0	1	0
P_4	5.0	4	4


- SJF (preemptive)

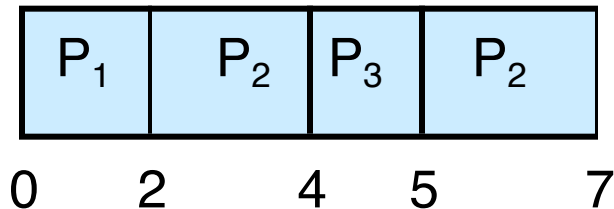

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	5
P_2	2.0	4	0
P_3	4.0	1	0
P_4	5.0	4	0


- SJF (preemptive)

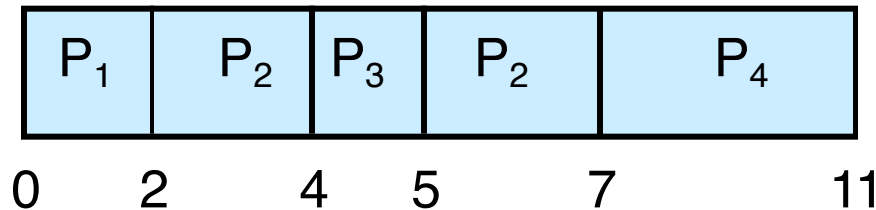

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	0
P_2	2.0	4	0
P_3	4.0	1	0
P_4	5.0	4	0


- SJF (preemptive)

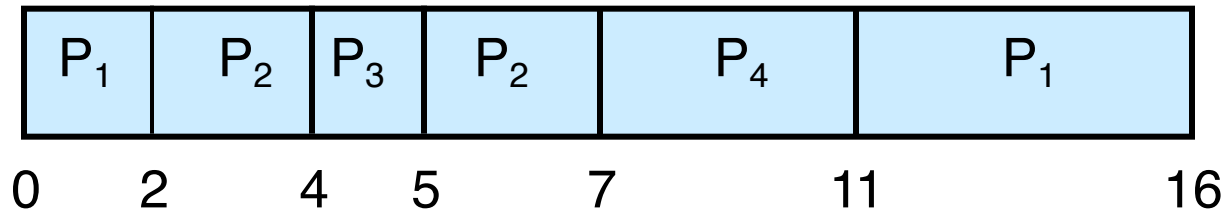

Example for Preemptive SJF (STCF)

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>	<u>Left Time</u>
P_1	0.0	7	0
P_2	2.0	4	0
P_3	4.0	1	0
P_4	5.0	4	0

- SJF (preemptive)

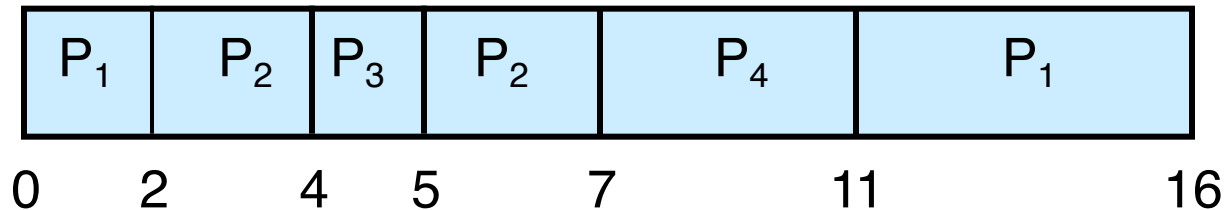

- Average waiting time = $(9 + 1 + 0 + 2)/4 = 3$