


Screening the return geometry before assigning symbols

10/26 intervals pass the three-point screen | 16 families | 156 solver trajectories

$b=0.2$, $c=7.212$. Every original interval retained. Points only: no fitted or certified continuous branches.

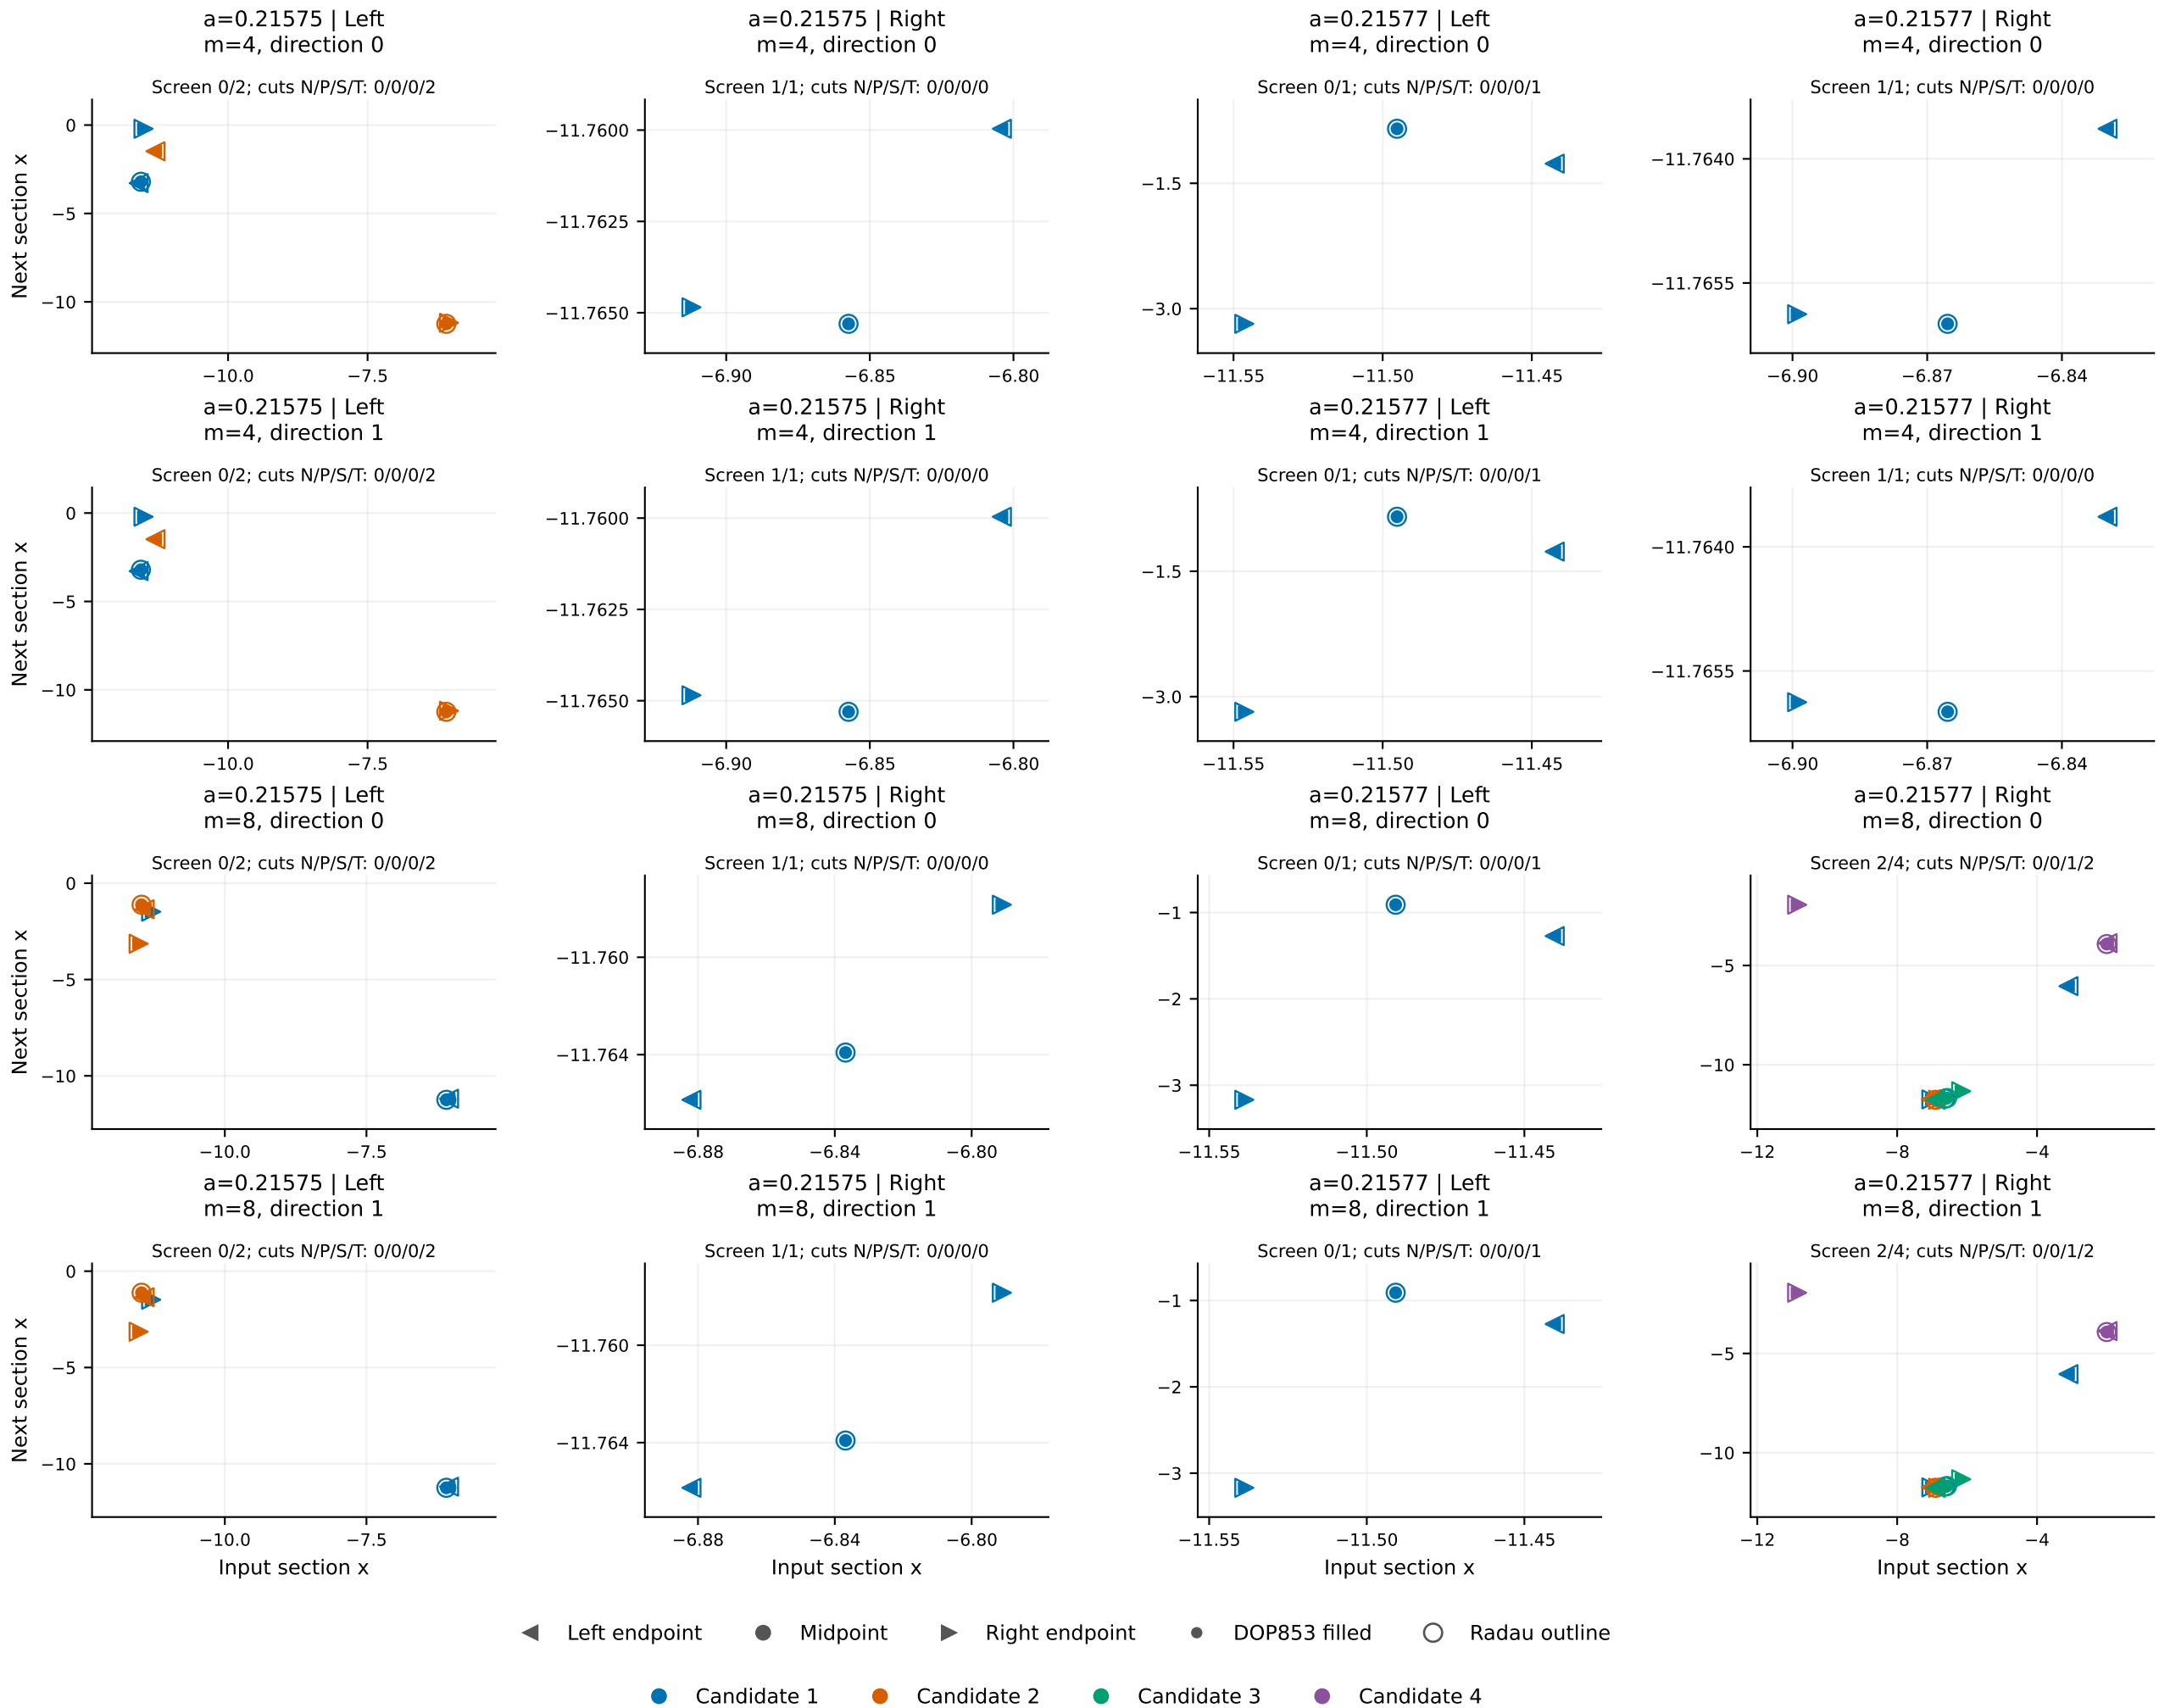

Cuts: N numerical pair, P numerics + input projection, S input-tangent sign, T event-time coherence. Flags overlap; they do not diagnose a grazing root.

Black x: numerical pair fails. Black +: numerics pass, input projection fails. Candidate numbers are local to each family; panel axis ranges differ.

All coordinates use dimensionless model units. Passing three samples does not exclude hidden boundaries, establish an invariant partition or verify Jones's symbolic chains.