Certified periodic training and bifurcation structure beyond the edge of stability

Authorship to be finalized by the human researcher

Private working draft, not for distribution

Private research draft for human review. The study is ongoing and this manuscript has not been submitted or peer reviewed. Generative-AI tools assisted with implementation, execution, analysis, auditing, figures and drafting. The human researcher will review the evidence, authorship and disclosure before release.

Abstract

Deterministic gradient descent can converge to long periodic orbits in neural-network parameter space. We prove attracting cycles at 64 explicit settings in nonlinear networks with 13 or 72 trainable parameters, covering all 61 census representatives and primitive periods up to 58. For a period-18 orbit, validated continuation resolves connected bifurcation structure in the layer-learning-rate plane: the branch from an attracting orbit reaches a saddle-node, whose +1-multiplier locus continues to a generic 1:1 resonance. We prove a continuous attracting interval, a transverse resonance unfolding in the physical rates, and a connected complex-unit branch with certified attracting sides and an interior learning-rate minimum. This branch reaches a certified intersection with a flip boundary, where we prove an open adjacent sector of attracting period-18 cycles. We also certify a second complex-unit/flip intersection. An independently cross-checked numerical census places these proofs within a wider landscape of periodic windows. The results establish long-period attracting training and exact connections between cycles and bifurcations organizing their parameter-space boundaries.

Study status. Results labeled PROSPECTIVELY DESIGNED, INDEPENDENTLY CROSS-CHECKED come from the map study of Section 4, whose design, thresholds and analysis were pushed before outcomes and checked by an independent numerical implementation. This describes design timing and cross-checking; it does not turn the subsequent exploratory mechanism analyses into confirmatory tests on fresh data. Results labeled EXPLORATORY (Section 6) were found while exploring; some used acceptance rules frozen before the run, and we say so where they did. Provenance for every figure and number is described in Section 10.

Component	Evidence rung	Scope and outstanding work
Periodic-window census	2: independently cross-checked	Floating-point orbit closure, primitive-period and attraction tests; finite-horizon chaos diagnostics in surrounding cells.
Local crossing and criticality	1: numerically validated	Tolerance and derivative checks in explored systems; confirmation on fresh losses remains pending.
Global resonance ancestry	0: exploratory/adapted	Near-root scaling is suggestive; the prespecified ancestry test did not pass and the distant-window connection is unresolved.
Training consequences	0–1: exploratory/adapted	Small-model slices and two controlled ramp points; no geometry-specific advantage over a generic rate reduction.
CIFAR and language-model transfer	0: exploratory development	Curved CIFAR corrections improve local gradient-merit progress. Transformer experiments establish full-state Jacobian-order sensitivity and recover quarter-rate responses with a temporal correction; a training or forecasting benefit remains untested.
Full-state orbit certificates	3: computer-assisted proof	64 explicit attracting training settings, including all 61 census representatives in 13 or 72 dimensions. Each new representative is independently proved by scalar-loss automatic differentiation.
Local cycle bifurcations	3: computer-assisted proof	A nondegenerate fold and both flip types with attracting complements; two local cusps have unstable complements; a generic 1:1 resonance has an attracting complement and a transverse unfolding in the actual learning rates. The central primitive branch connects to the fold, whose +1 locus reaches the same proved 1:1 resonance. A finite complex-unit branch is enclosed there with all 11 complementary multipliers uniformly inside the unit circle; 101 positive-angle charts extend its connected geometry, with independently proved transverse stability and an attracting side throughout the first 33. The same connected branch reaches a complex-unit/flip intersection with an adjacent open attracting sector and a finite joined flip locus.
Scalar bifurcation certificate	3: computer-assisted proof	One local supercritical NS of an exact-real primitive period-2 orbit; no finite-detuning curve enclosure or global ancestry.

Table 1: Evidence and scope. Design timing and mathematical rigor are separate: a prospective numerical study can be independently cross-checked without enclosing roundoff. No result here is formally verified in a proof assistant. Source receipts are indexed in Section 10.

1 Introduction

Full-batch gradient descent can continue reducing neural-network training loss beyond the local quadratic stability threshold. In the edge-of-stability regime observed by Cohen et al. [7], sharpness stays near $2/\eta$ while short-term loss fluctuations coexist with longer-term decrease. Related analyses address self-stabilization under local regularity and spectral assumptions [12], progressive sharpening in second-order regression models [1], and initial loss growth followed by convergence in the catapult regime [28]. These descriptions do not define a universal sequence of training phases. Simplified models show period doubling and chaos as the step size grows [5, 17, 22]. Numerical studies report fractal trainability or loss-convergence boundaries in selected learning-rate planes [30, 38, 41]. Related factorization results concern convergence regions in initialization space [29]. Such success criteria do not by themselves distinguish full-state dynamical regimes.

We ask what the dynamics inside such maps are. We treat full-batch gradient descent with separate learning rates for the hidden and output layers as a two-parameter family of maps on parameter space. For every cell of a learning-rate grid we screen the parameter state at the end of a long run, refine selected periodic orbits with Newton's method using an analytic Jacobian evaluated in floating-point arithmetic, and follow orbits and their stability boundaries through the plane.

Main results. We certify attracting training cycles at 64 explicit settings, including all 61 representatives of the numerical census in 13 or 72 dimensions. A nonlinear network with 72 trainable parameters has an attracting training orbit of minimal period 58, proved in the full parameter state by interval arithmetic and independently replayed at higher precision. Stable oscillatory training also occupies intervals of learning rates and belongs to continuous branches with identifiable bifurcation structure. We establish this for a primitive period-18 branch of a 13-parameter tanh network by computer-assisted proof: an attracting interior orbit is connected in the full parameter state to a nondegenerate saddle-node, and an exact interval of hidden-layer rates supports attracting period-18 training. Continuing the fold's $+1$-multiplier locus reaches a generic 1:1 resonance in the actual two-rate family. We prove this connection in the full native state and enclose the resonance's nonlinear coefficients, transverse unfolding and attracting complement (Figure 2). Continuing the complex-unit branch through a proved learning-rate turn reaches a second organizer, where a real multiplier crosses -1. Strict full-state identification proves both organizers lie on the same critical branch. We also enclose an open attracting sector and a finite flip locus through the second organizer. Section 5 gives the exact maps, enclosures and independent checks.

The wider numerical study supplies context and further questions. A separately implemented census cross-checks attracting periodic windows and shows why decreasing loss does not identify a dynamical regime. Complex-pair crossings, rotation and phase locking suggest routes from the period-2 regime to more distant windows. These exploratory connections have different evidence from the rigorous branch results; their unresolved ancestry and transfer tests are reported with their outcomes.

Prior work. Periodic windows, period doubling, positive Lyapunov exponents and broadband power spectra in learning dynamics, with the learning rate as bifurcation parameter, date back at least to van der Maas et al. [42], who studied a three-unit autoassociator. Their delay-embedded chaotic attractors are thin folded curves, effectively one-dimensional chaos of the period-doubling kind, unlike the invariant circles of the two-step map studied here. Period-colored maps over optimizer hyperparameters have been drawn from a two-dimensional projection of the error, without full-state verification [40]. Hofmann [17] studies finite-step gradient descent as a dynamical system

in solvable models: the edge of stability as the first (flip) bifurcation of the training map, the period-doubling route with windows, and, in a two-mode depth-two linear network, a "rotational edge" beyond which the unstable multipliers of the aligned 2-cycle are complex and the system saturates in a persistently misaligned oscillatory state. The edge is Hofmann's result; we show, in that model and in nonlinear networks, numerical evidence for post-edge closed curves whose rotation approaches the crossing angle, and for locking; the linear model requires explicit care with its continuous symmetry. Empirical riddling-like sensitivity and learning-rate-dependent reproducibility under nearby-initialization retraining are reported by Ly and Gong [31]. Invariant curves and phase-locking Arnold tongues appear in a multiplicative-weights learning rule for population games [34], and chaos in learning a two-person game goes back to Sato et al. [37]; both concern games rather than descent on one loss. For heavy-ball momentum, Goujaud et al. [16] construct cycles on smooth strongly convex two-dimensional objectives that advance by $1/K$ of a turn per update.

This paper's contribution.

- Computer-assisted orbit proofs: 64 exact training settings have locally attracting primitive cycles in the full parameter state, including every agreed census representative in 13 or 72 dimensions and primitive period 58 in 72 dimensions. Independent scalar-loss automatic differentiation checks the new 13- and 72-dimensional certificates; all proofs disclose shared dependencies.
- Connected bifurcation geometry: validated native continuation links a primitive period-18 interior orbit, a saddle-node and a generic 1:1 resonance. We prove a continuous attracting interval, the organizer's unfolding in the physical rates, and an emerging complex-unit branch with a uniformly attracting complement. A total of 101 positive-angle charts connect that branch to a complex-unit/simple-flip junction; the first 33 have independently bounded transverse spectra and certified attracting sides. An open attracting sector and a finite joined flip locus are proved at the second organizer. Other local certificates cover both flip types, two cusps and a scalar supercritical NS.
- Confirmed: 61 numerically validated attracting windows embedded in chaos in the learning-rate planes of two small networks, repeated by an independent audit, and a cell-by-cell comparison showing that the published binary score conflates fixed points, periodic orbits, chaos and drift.
- Exploratory, local mechanism: a merged locus of slice-wise period-two complex-pair crossings; pointwise first Lyapunov coefficient, candidate generalized Neimark–Sacker points and dynamical checks; rotation-number maps in which quasi-periodic training begins at the crossing angle.
- Exploratory, generality: the same crossing with a quantitatively predicted rotation in a real-data network with one learning rate; soft onset and locking in symmetry-reduced observables beyond the rotational edge of a linear network; distinct continuation outcomes from two bootstrap procedures and a numerically consistent local period-2 segment in a 72-parameter network.
- Reported negatives: a frozen ancestry test that did not pass; no locking resolved in the real-data network; no robust incremental value of rotation information for reproducibility or loss.
- Reproducible code and hash-bound receipts link each figure, table, number and certificate to its inputs and verification procedure.

The manuscript separates three questions: which training orbits exist and attract, how their stability boundaries connect, and whether that geometry improves training decisions. The exact branch and bifurcation results address the first two. Sections 6 and 8 distinguish their scope from the numerical window census and the exploratory utility and transfer experiments.

2 Gradient descent as a family of maps

Let $L(\theta)$ be the full-batch training loss of a network with parameters $\theta \in \mathbb{R}^n$, split into hidden-layer and output-layer blocks. Gradient descent with per-layer learning rates is the map

$$\theta_{t+1} = F(\theta_t) = \theta_t - P\,\nabla L(\theta_t), \qquad P = \mathrm{diag}(\eta_h \mathbf{1}_{\mathrm{hidden}}, \eta_o \mathbf{1}_{\mathrm{output}}), \tag{1}$$

a family of maps indexed by the two rates (η_h, η_o). Its Jacobian is $DF(\theta) = I - PH(\theta)$ with H the Hessian of L. An orbit of period p is stable when all eigenvalues (multipliers) of $DF(\theta_{p-1}) \cdots DF(\theta_0)$ lie inside the unit circle. Generically it loses stability when a multiplier crosses the circle: at $+1$ (a fold candidate, subject to nondegeneracy and symmetry checks), at -1 (a flip candidate) or as a complex pair $e^{\pm 2\pi i\omega}$ (a Neimark–Sacker candidate). For a simple transverse complex crossing with all other multipliers strictly inside the unit circle, no strong resonance $e^{2\pi ik\omega} = 1$ for $k = 1, 2, 3, 4$, and nonzero first Lyapunov coefficient d, a Neimark–Sacker bifurcation creates an invariant closed curve: attracting with amplitude growing like the square root of the distance beyond the crossing when $d < 0$ (supercritical), repelling and present before the crossing when $d > 0$ (subcritical) [26].

Why the candidates start at period 2. $DF(\theta)$ is similar to the symmetric matrix $I - P^{1/2} H P^{1/2}$, so at a fixed point all multipliers are real and local stability can be lost only through a real unit-circle crossing at $+1$ or -1. The $+1$ case need not be a fold; symmetry and other degeneracies can produce different bifurcations. At a nondegenerate minimum under a common positive scaling of P, the first instability is a -1 crossing. The edge-of-stability period-2 branch is associated with that flip. For a period-2 orbit $\{\theta_a, \theta_b\}$, the two-step Jacobian is similar to $S_b S_a$ with $S_j = I - P^{1/2} H(\theta_j) P^{1/2}$. A product of two symmetric matrices has real eigenvalues when one factor is positive definite (also when one is negative definite). Along post-edge cycles the factors can instead be indefinite and fail to commute, allowing complex multipliers. Indefiniteness alone is not a sufficient condition. This is an elementary observation; complex unstable multipliers of an edge-of-stability 2-cycle were derived for a two-mode linear network by Hofmann [17].

Circle maps and phase locking. On an invariant circle the dynamics has a rotation number ρ, the mean fraction of a turn per iterate. Rational rotation m/q can produce a phase-locked periodic orbit. Near a nondegenerate weak resonance ($q \geq 5$), an appropriate resonant normal form predicts a tongue whose width in angular detuning scales with radial detuning to the power $(q-2)/2$, when the leading resonant coefficient is nonzero. This local scaling does not fix the width along arbitrary distant parameter slices. Analytic circle maps sufficiently close to rotation admit analytic conjugacy to a rigid rotation under arithmetic conditions on their irrational rotation number [2]. Classical circle-map families exhibit devil's staircases [18, 19]; these are hypotheses to test in a learning-rate plane, not automatic consequences of a complex-pair crossing. Breakdown of an invariant circle is one possible route to chaos [3, 10, 35]. Locally near the period-2 bifurcation, F exchanges two disjoint components and a period-q locked orbit of F^2 has primitive period $2q$ for F. This relation follows from the local setting and is not independent evidence of resonance ancestry.

Optimizer state and momentum. Our map study concerns plain gradient descent. For standard heavy ball, $x_{t+1} = x_t - \eta \nabla L(x_t) + \beta(x_t - x_{t-1})$, each Hessian eigenvalue h at a stationary point gives

$$\mu^2 - (1 + \beta - \eta h)\mu + \beta = 0. \tag{2}$$

At fixed $0 < \beta < 1$, a complex pair has modulus $\sqrt{\beta} < 1$ and cannot cross the unit circle as η varies. A nondegenerate minimum first loses local stability through a flip at $\eta h_{\max} = 2(1 + \beta)$. A nonsymmetric augmented Jacobian therefore does not, by itself, imply a fixed-point Neimark–Sacker mechanism. Periodic branches and adaptive optimizers require their own full-state analysis, including moment variables and decay. Bias correction, schedules and minibatches introduce time dependence or randomness; an instantaneous Jacobian along such a trajectory is not automatically a Floquet matrix.

Shrimps. In two-parameter families of dissipative maps, periodic windows inside chaos often take a characteristic "shrimp" shape, with a primary periodic body bounded by fold and flip curves and adjoining period-doubling regions [14, 15]. We test for this anatomy explicitly rather than assume it.

3 Methods

Network	Parameters	Training points	Architecture	Weight decay	Seeds	Maps
S1	72	72 standard-normal	8 inputs, 8 tanh units, no biases, mean-field	0	28001, 28002	2 coarse
S1R	72	72 standard-normal	8 inputs, 8 tanh units, no biases, mean-field	10^{-3}	28001, 28002	2 coarse, 2 zoom
S2	13	24 from a tanh teacher	2 inputs, 3 tanh units, biases	10^{-3}	28011, 28012	2 coarse, 2 zoom

Table 2: Design of the map study. Every map has 256×256 logarithmically spaced pairs of hidden- and output-layer rates; coarse maps span 3 decades in each rate and zoom maps 0.36 decades. Every cell runs 20,000 full-batch updates in float64 from its seed's initial parameters. S1 is the published configuration of the fractal-trainability study and is reported descriptively.

Networks and data. Table 2 lists the design of the map study. S1 reproduces the published mean-field configuration of the fractal-trainability study [38]; S1R adds weight decay; S2 is a 13-parameter tanh regressor fitted to points from a random tanh teacher. We refer to a network and seed together, for example S2-28011. Training is deterministic full-batch gradient descent in float64.

Three different quantities. The published binary score measures loss reduction: a run counts as convergent when its loss, normalized by the initial loss and averaged over the last 20 of the first 1,000 updates, is below one [38]. Our screening labels classify the parameter state at the end of a finite run. Orbit refinement tests individual periodic orbits against numerical tolerances. The three need not agree, and we compare them cell by cell.

Screening. Every cell runs 20,000 updates from the seed's initial parameters. The last 384 updates are screened for the smallest full-state recurrence period up to 64: a period p requires the state

to recur with componentwise tolerance $10^{-8} + 10^{-6}\,|\theta|$ over the whole tail, which spans at least 6 repeats. The largest finite-time Lyapunov exponent (FTLE) is averaged over the last 4,000 updates after 1,000 updates of tangent alignment. Labels are fixed point, periodic, chaotic (FTLE above 0.005 per update), drift (parameter norm still growing by more than 1% over the FTLE window), unresolved, or divergent (non-finite or larger than 10^8).

Numerically validated. An orbit of period p is numerically validated when damped Newton iteration on $F^p(\theta) - \theta = 0$, using the exact chain-rule Jacobian of F^p, reaches an undamped relative correction below 10^{-10} within 60 iterations; the converged point closes to within $10^{-9} + 10^{-8}\,|\theta|$ in every component; it lies within 10^{-3} (relative) of the screened candidate; every proper-divisor iterate is separated from it by at least 10^{-6} (relative), so the period is primitive; and it is attracting when the spectral radius of the monodromy matrix is below $1 - 10^{-7}$. These checks use floating-point arithmetic and stated tolerances; they do not enclose rounding error. A reviewed correction to complex left-eigenvector pairing affects a separate sensitivity diagnostic. The audit found no affected saved orbit decision or criticality coefficient; original records and the precise exception-handling limitation are preserved in `docs/complex-left-condition-impact.md`.

Embedded windows and audit. A connected component of equal-period cells qualifies as an embedded window when its period is at least 3, it has at least 4 cells, no cell of its exterior ring is a fixed point or has a proper-divisor period, at least 50% of the ring is rerun-confirmed chaos (reruns of 30,000 updates with a 10,000-update FTLE and a different tangent vector, up to 48 ring cells per component), and its representative orbit passes the numerical orbit and attraction checks. The audit was a separate program that imports neither the batched engine, the orbit-refinement implementation nor the selection helpers: it rewrote the one-cell map, the recurrence screen, the zoom rule and the component and ring rules, rechecked every numerical orbit record with finite-difference Jacobians (all 154 of 154 pass closure, primitivity, stability and seed checks; spectral radii agree within 1.7×10^{-7}), re-simulated the ring cells of every qualifying component, recomputed the gate on its own evidence, and found 0 mismatches among the 276 receipt files.

Continuation, boundary type and criticality. From the center of a window, its numerically validated orbit is continued along 64 rays in the rate plane until it loses stability, located by bisection, and the boundary is typed by the crossing multiplier: fold candidate ($+1$), flip candidate (-1) or complex-pair candidate. These multiplier labels alone do not establish the corresponding nondegeneracy conditions. The same procedure traces where the period-2 orbit loses stability along slices of fixed output rate. Each slice is initialized separately; sorting and deduplicating their crossings gives a merged locus, without establishing full-state branch identity across output rates. At each selected slice-wise crossing we compute the first Lyapunov coefficient d of the Neimark–Sacker normal form with Kuznetsov's formula for n-dimensional maps, using the analytic dense two-step Jacobian evaluated in float64 and Richardson-extrapolated differences of analytic Jacobian-vector products for the higher derivatives; the implementation reproduces the explicit planar formula on random planar maps.

Rotation numbers and the Birkhoff test. For a non-periodic cell we take the two-step samples $z_k = \theta_{2k}$, project them on their first two principal axes, and define the rotation number as the mean unwrapped angle increment in turns per two steps. Rotation-number maps run this on every cell of a grid (float64 on a GPU, 20,000 screening updates followed by 6,000 two-step samples). For a numerically validated orbit of period p we use F^2 for even p ($q = p/2$ points) and F for odd p

($q = p$ points), sort them by angle in their principal plane, and say the orbit passes when every step advances the angular rank by the same shift m with $\gcd(m, q) = 1$, the ordering of a Birkhoff orbit of rotation m/q. The number of points q is fixed by the period and the chosen iterate; the relation $p = 2q$ applies only to the even-period case; what the test measures is the ordering and the shift. Orbits with 2 or 3 points pass by construction. The null is the pass probability of the same test for uniformly random angles; for a group of orbits we report the expected number of chance passes. The refined test also orders points along the shortest closed tour through them and tests the points of $F^{2^{k+1}}$ ($k = 1, 2, 3$), which can detect orbits born by period doubling inside a locked window; it counts only tests on at least 5 points, and its null for each orbit is the sum of the per-test pass probabilities (a union bound), so the summed null is an upper bound on the expected number of chance passes.

Resonance ancestry. For a window selected by a fixed rule (the 1/5 window of S2-28011), we locate the points of the crossing curve whose angle is 1/5, check the onset there, and follow the locked period-10 interval on six cross-sections at distances $0.0128/4^k$ beyond the curve, finding both of its numerical fold-candidate edges on each. Acceptance rules were frozen before the network run: controls must pass first; the interval must be bounded by numerical fold candidates on every level with shrinking width and amplitude; and a linear fit of its center over all levels must extrapolate to within 10^{-4} decades of the predicted point. A second stage tries to connect the tracked interval to the window.

4 Periodic windows inside chaotic training

Status: PROSPECTIVELY DESIGNED, INDEPENDENTLY CROSS-CHECKED.

The learning-rate planes of S1R and S2 contain 61 embedded windows that qualify on both the producer's and the auditor's evidence (62 and 63 respectively; the disagreements all sit at the 50% ring threshold). All 154 attempted orbit refinements passed the specified numerical checks. Confirmed periods range from 4 to 58 and include the odd periods 5, 11, 13, 17 and 29. The exterior rings were checked with 2,801 reruns, and 157 of 160 randomly chosen chaotic cells (16 per map) stayed chaotic on a rerun with a different tangent vector.

Figure 1 compares these dynamics with the published binary score. In the six coarse maps, 87.1% to 99.97% of the cells the score labels convergent were not classified as fixed points after 20,000 updates; the score's success means the loss fell, not that the parameters settled. Task success and non-convergent learning dynamics can coexist: van der Maas et al. [42] reported that their network performed its task across the whole learning-rate range they studied, including where learning was chaotic. The published configuration without weight decay (S1) has 0 periodic cells in both seeds: its runs diverge, stay chaotic, or drift toward large weights while the loss slowly falls. Adding weight decay makes the windows appear.

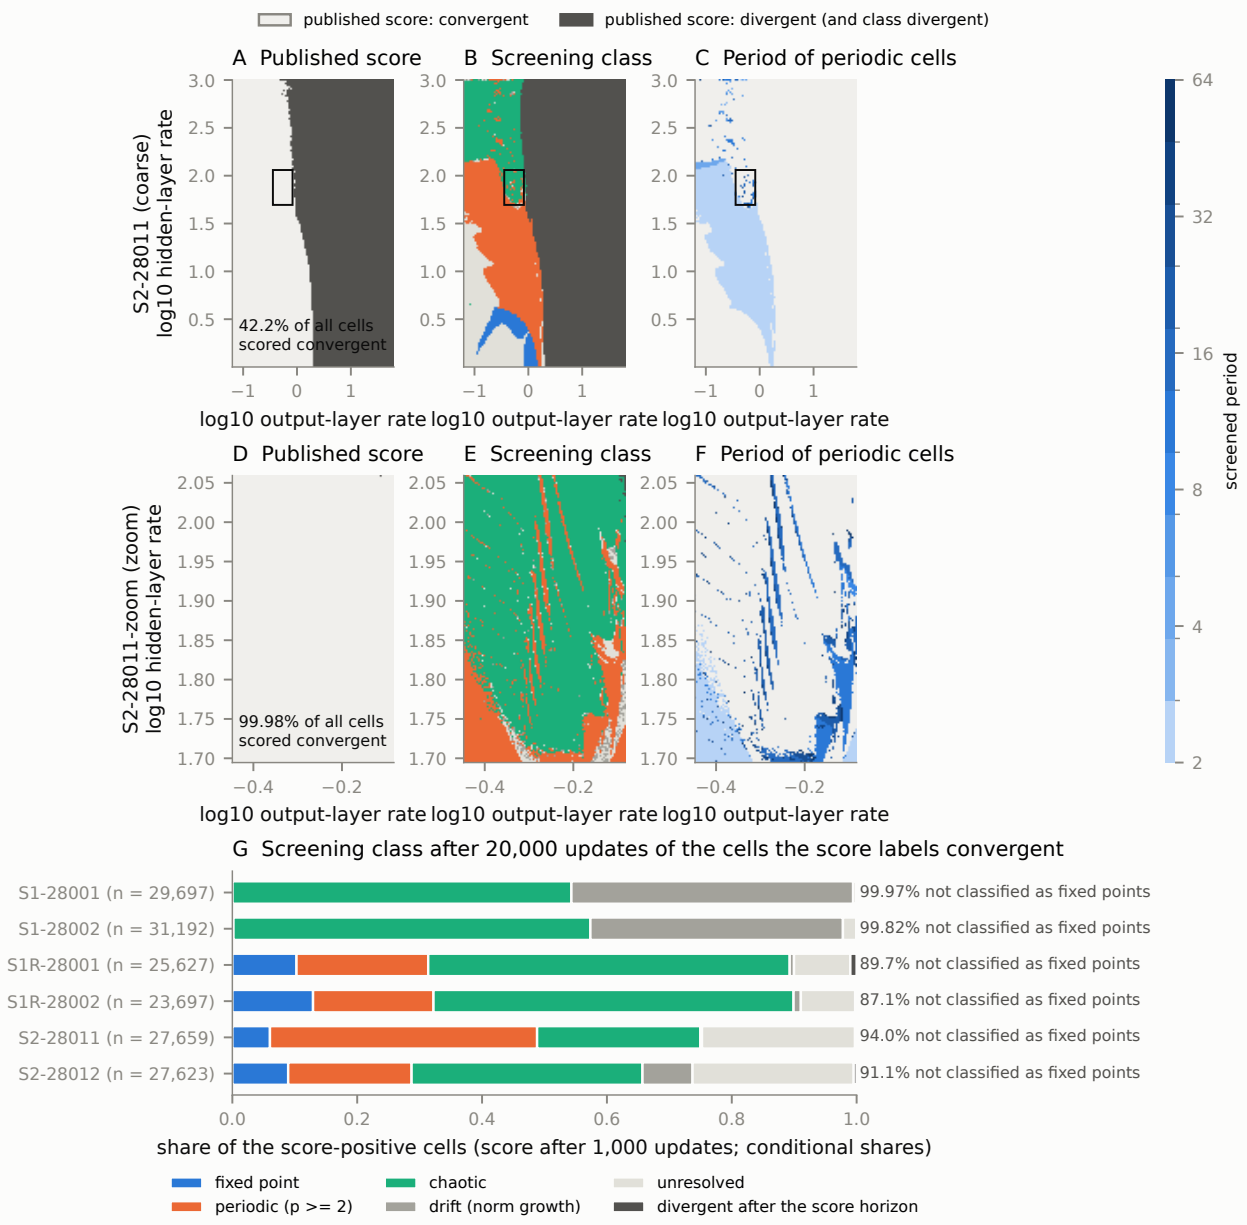


Figure 1: The binary score conflates dynamical regimes: the cells it labels convergent carry fixed-point, periodic, chaotic and drift labels after 20,000 updates. Panels A and D show the published score after 1,000 updates; the printed share is the fraction of all cells in that map scored convergent. Panels B, C, E and F show the screening class and, for periodic cells, the period of the same cells after 20,000 updates (S2-28011, coarse and zoomed; the rectangle marks the zoom). Panel G is conditional: among the cells the score labels convergent, the share in each screening class, for all six coarse maps. Screening labels are finite-time labels; only refined orbits receive numerical closure, primitivity and attraction checks. *Generated by* `paper/gd-route/figures/f1_binary_vs_period.py`; *receipt* `figures/f1_binary_vs_period.provenance.json`.

5 Computer-assisted proofs of selected orbits and local bifurcations

Status: exploratory target selection, evidence rung 3 for the statements below.

5.1 Attracting periodic orbits

The floating-point census motivates a separate proof task. For 2 selected S2 settings with fixed layer-specific learning rates, Arb ball arithmetic encloses a unique zero of $H(x) = F^{10}(x) - x$ in a specified initial box, excludes all proper divisors of 10, and proves attraction. One target, S2-28011 component 140, belongs to the historically qualifying window set. The other, S2-28011-zoom component 936, was the initial feasibility choice; it does not qualify for that historical window claim. Its valid orbit proof is retained with that distinction.

The theorem concerns real arithmetic with the supplied dataset, rates, ridge and loss scale interpreted as exact dyadic constants. It does not assert a periodic orbit of the binary64 implementation. An analytic ball Jacobian encloses the derivative throughout the initial box and its iterated images. With an exact dyadic approximate inverse R, strict Krawczyk inclusion and $\|I - RH'(X)\|_\infty < 1$ establish contraction of $x \mapsto x - RH(x)$ on X and the nonsingularity of R. Disjoint coordinate enclosures of $F^d(X)$ and X exclude each proper divisor d. An interval monodromy M and repeated squaring give

$$\|M^{64}_{\text{window}}\|_\infty < 0.056 \quad \text{and} \quad \|M^{64}_{\text{feas}}\|_\infty < 0.108, \tag{3}$$

respectively, implying spectral radius below one at each enclosed orbit. The initial sequential-power attempt failed to enclose attraction because of interval wrapping; that inconclusive attempt and the disclosed repeated-squaring amendment remain available.

An independent review reproduced the certificates, checked historical input bindings and stored witnesses, compared the analytic derivatives with separate second-order automatic differentiation of the objective, and repeated the proofs with higher precision on smaller nested boxes. The proof trusts the mathematical contraction argument, implementation and Arb/FLINT enclosure library; it is not formalized in a proof assistant. It establishes neither surrounding chaos nor window geometry, invariant circles or training utility. The authoritative artifacts and offline replay are documented in `certificates/README.md`.

The same unchanged checker also proves a primitive period-2 orbit in the full 72-dimensional S1R-28002 map, selected from the saved attracting segment described below. For its enclosed two-step monodromy,

$$\|M^{2048}_{\text{S1R}}\|_\infty < 0.556 < 1. \tag{4}$$

The independent outcome audit binds the original data, rates and selected phase to their exact dyadic interpretations, replays every proof enclosure, and passes a separately declared whole-box proximity test to that saved phase. Proximity does not assert that the saved floating-point state lies inside the proof box, nor does it prove branch identity or continuous parameter continuation. This audit shares the previously reviewed Arb checker; the separate differentiation and higher-precision nested-box checks above concern the two S2 proofs. The new certificate extends the demonstrated proof dimension, without establishing a general scaling law or a proof of the S1R bifurcation. See `certificates/s1r-period2-receipt.json` and `docs/reviews/s1r72-certificate-outcome.md`.

Complete orbit-proof coverage of the 13-parameter census subset. All 28 representatives with 13 trainable parameters in the agreed numerical census now have attracting primitive-cycle certificates. Two reuse the existing exact proofs; the remaining 26 use the same fixed 768-bit interval settings, with no per-case adjustment. The certified primitive periods are 4, 5, 6, 10, 11,

12, 13, 14, 16, 17, 18, 20, 22, 24, 26, 29, 32, 34, 36, 50. For every new case, an independent implementation differentiates the scalar regularized loss by second-order automatic differentiation at 1024 bits, recomputes the full gradient-descent map and Jacobian, and proves contraction, strict inclusion, every proper-divisor exclusion and monodromy-power attraction on the *same exact box*. This checks both the derivative formula and proof reduction through separate implementations; Arb/FLINT remains a shared trusted library. The evidence covers the selected representative orbits. Parameter-space boundaries and connected-component labels are investigated separately by continuation. Exact settings, raw proofs and independent checks are indexed in `certificates/census13-orbits-receipt.json`.

Complete orbit-proof coverage in 72 dimensions. All 33 larger-network representatives are also certified. The 32 new cases use the same fixed proof settings and exact original boxes; independent scalar-loss automatic differentiation at 1024 bits recomputes 1680 center and interval phases, then establishes strict inclusion, all proper-divisor exclusions and full-state attraction. Their primitive periods, together with the previously proved 58-cycle, are 4, 8, 12, 14, 16, 20, 22, 30, 34, 38, 42, 44, 46, 50, 58. Thus every one of the 61 agreed census representatives has an exact attracting-orbit proof. Together with the additional selected settings, there are 64 distinct certified training maps. The proof coverage concerns full-state orbits at their exact learning rates; connected window geometry is established by the separate continuation results below. See `certificates/census72-orbits-receipt.json`.

An attracting primitive period-58 training cycle. The S1R map also admits an attracting orbit of minimal period 58 in all 72 trainable coordinates. The target is the unique largest-period representative in the intersection of the original census and independent qualifying lists, S1R-28002-zoom component 262. The learning rates are approximately $(\eta_h, \eta_o) = (17.86809818, 16.38934350)$; the certificate retains their exact dyadic values and the original dataset. Strict Krawczyk inclusion proves existence and local uniqueness, disjoint enclosures exclude proper divisors $1, 2, 29$, and

$$\|M_{58}^{8}\|_{\infty} < 0.254 < 1 \tag{5}$$

proves attraction in the full state. The first enclosure failed through wrapping; its narrower, higher-precision successor passed. An independent audit recomputed the saved interval products, inclusion, divisor exclusions and power bound at 768 bits, then repeated the native proof at that precision with the identical dyadic center and a larger box. Exact strict containment in every coordinate identifies the same unique root in both proofs. The audit shares the analytic derivative implementation and Arb/FLINT. This promotes the highest-period agreed census representative to a computer-assisted proof. Both complete dimensional subsets are certified above. See `certificates/s1r-period58-receipt.json` and `docs/reviews/census-period58-independent-outcome.json`.

A further selected certificate proves a primitive period-18 orbit near the saved center of S2-28011-zoom component 587, the anatomy candidate in Figure 10. The unchanged checker excludes every proper divisor and proves full-state attraction in 13 dimensions, with $\|M^{16}\|_{\infty} < 0.726$. An independent review replays the enclosures, checks the historical bindings and whole-box proximity, compares two samples with separate Arb differentiation of the objective, and passes a higher-precision proof in a smaller nested box. These checks retain the same library trust and exact-real scope. They certify the selected orbit, not the surrounding boundary or complete shrimp geometry. See `certificates/s2-period18-receipt.json` and `docs/reviews/s2-period18-independent-review.json`.

A parameter-uniform multiple-shooting proof now connects the same attracting period-18 cycle throughout the closed hidden-rate interval

$$\eta_h \in [\frac{1254980807321271}{17592186044416}, \frac{1254997987190455}{17592186044416}], \qquad |I| = \frac{1}{1024}, \tag{6}$$

with the original output rate fixed. Two locally unique orbit charts are joined at a common exact parameter by full enclosure containment; the first is similarly anchored to the earlier center certificate. Proper-divisor exclusion holds throughout. Stability is verified on 32 closed slices covering both charts: positive cyclic metrics satisfy $P_j - J_j^T P_{j+1} J_j \succ 0$ with $P_{18} = P_0$, giving full-state local attraction along the branch. Earlier wider-box stability bounds were inconclusive and remain retained; the slice witnesses close that gap without treating a loose upper bound as evidence of instability.

Independent review reproduced the wider-chart result byte for byte, checked root inclusions, divisors and both full-state joins at higher precision, and reacquired the native interval Jacobians for every stability slice. The analytic map and Arb remain shared trusted dependencies. This is a connected interior segment, not a connection to either bifurcation boundary or complete shrimp geometry. It adds no individually certified attracting-orbit instance to the count above. See `certificates/s2-period18-connection-receipt.json` and `docs/reviews/s2-period18-joined-branch-independent-review.json`.

A later, independently checked localization calculation proves attraction on 2 additional outer intervals, each of exact width 1/32768, on the same primitive branch. It contracts an already established root enclosure using a mean-value bound before applying the cyclic metric inequalities. This resolves the selected intervals whose original image boxes were too wide for the sufficient metric test; it does not fill all intervening stability gaps or identify a bifurcation boundary. See `docs/reviews/s2-period18-localization-independent-review.json`.

Quadratic predictors and positive coordinate weights extend the same primitive branch over a hidden-rate interval of width 1/16. A subsequent independently reviewed set of 18 charts uses an affine continuation coordinate $s = n^T(U - U_0)$, where U contains every native phase and the hidden learning rate, with $s \in [-1/64, 35/64]$. Full enclosure containment identifies the initial anchor and each subsequent common endpoint. The gauge interval is not a hidden-rate interval, and these wider existence/primitive-period checks do not extend the attraction statement to the whole branch. This earlier segment alone does not identify the previously certified fold. Saved arithmetic was independently reconstructed at higher precision; the native derivative and path-jet acquisitions remain shared analytic inputs. See `docs/reviews/s2-period18-weighted-independent-review.json` and `docs/reviews/s2-period18-arclength-independent-review.json`.

Further independently audited continuation gives a connected chain of 144 charts across the original coordinate and a subsequently changed affine coordinate. The change is justified by full containment of the same localized native root, and every later endpoint join is checked in all coordinates. Reboxing failures and an interrupted final proposal remain retained; only the durable qualified prefix enters this count. These are charts along one primitive branch, not additional attracting-cycle instances. That intermediate chain alone does not identify the fold or prove attraction along its entire length. See `docs/reviews/s2-newgauge-chain-independent.json`.

Certified connection to the canonical fold. Further continuation extends the central branch to 156 charts. A complementary chain of 31 charts starts at the previously certified saddle-node, retaining its entire native orbit and actual hidden-rate enclosure. Its last chart strictly contains the same localized endpoint of the central branch in all shooting coordinates; cyclic phase alignment is checked explicitly. Uniform root uniqueness and every full-state endpoint inclusion identify

one continuous primitive period-18 branch from the central orbit to this fold. Independent saved-evidence reductions reproduce the original arithmetic and establish the root, proper-divisor and join inequalities at higher precision. The fold-side coordinate is state based, so the fold's hidden-rate turning point is not a singularity of the continuation gauge.

At the matched near-fold endpoint, fresh physical Jacobian enclosures and 18 cyclic Lyapunov inequalities prove local attraction. An independent direct evaluation of $P_j - J_j^T P_{j+1} J_j$ verifies strict positive definiteness on the entire localized state/rate box, with $P_{18} = P_0$. This endpoint result does not prove attraction at every intervening parameter. The original broad-box stability test was inconclusive and is retained. Thus branch identity is now established for the central orbit and this fold, while complete stability coverage and two-parameter boundary organization remain separate tasks. See `docs/reviews/s2-period18-fold-connection-independent.json` and `docs/reviews/s2-near-fold-endpoint-attraction.json`.

A certified interval of attracting training cycles. An independent audit establishes local attraction throughout 112 adjoining closed slices of this same primitive branch, with the original output learning rate fixed. Their union is $s_{\mathrm{loc}} \in [27/128, 45/128]$ in the later affine full-state coordinate. Projecting the connected branch into the physical learning-rate plane gives the following consequence: for every

$$\eta_h \in [75.552453, 75.688661], \qquad \eta_o = \frac{1848862009810323}{2^{51}}, \tag{7}$$

there is a locally attracting primitive period-18 training cycle. The projected interval is rounded inward from rigorously enclosed endpoint rates. Continuity supplies the intermediate values; monotonicity of the rate along the branch is not assumed.

Known-root localization and implicit first and second derivatives enclose the state, rate and Jacobian variation. A cyclic change of frame retains the common continuation parameter in a polynomial monodromy bound, with all discarded terms enclosed. Strict Lyapunov inequalities prove attraction on each entire closed slice. Independent arithmetic reconstructs these bounds at higher precision; the analytic derivative kernels and Arb remain shared dependencies. This proves an attracting interior cross-section. Its extension to the two bifurcation boundaries is the remaining stability-coverage problem. See `docs/reviews/s2-attraction-tail-independent-outcome.json`.

5.2 A local fold of primitive period-18 cycles

For the same biased S2 tanh model and exact dataset, hold the output learning rate at $\eta_o = \frac{1848862009810323}{2^{51}}$ and vary the actual hidden learning rate η. Write $R(\theta, \eta) = F_\eta^{18}(\theta) - \theta$ and $A = D_\theta R$. A strict Krawczyk inclusion and whole-box contraction enclose a unique normalized augmented root of

$$R = 0, \qquad Av = 0, \qquad (v^T v - 1)/2 = 0, \tag{8}$$

in the recorded 27-dimensional box, with $\eta_* \in [75.76429203111452, 75.76429203111453]$. Coordinate separation excludes every proper divisor of 18. At that root, the uniformly invertible transpose border $\left[\begin{smallmatrix} A^T & v \\ v^T & 0 \end{smallmatrix}\right]$ produces $A^T w = 0$ and $w^T v = 1$, establishing an algebraically simple multiplier $+1$ of $M = A + I$. The exact-ball bounds, displayed with outward rounding, give

$$\begin{aligned} a_\eta = w^T R_\eta &\in [-0.015615973444, -0.015615973264], \\ \frac{c}{2} = \frac{1}{2} w^T D_\theta^2 R[v, v] &\in [-4.000058029, -4.000057978], \\ \|Q^{32}\|_\infty < 0.036 < 1, &\qquad Q = M - vw^T. \end{aligned} \tag{9}$$

Thus parameter transversality and quadratic nondegeneracy hold, and all other multipliers lie strictly inside the unit circle. The smooth-map saddle-node theorem gives a local fold of primitive period-18 cycles: a locally attracting and a saddle cycle meet at this point. The fold itself is neutral and is not an additional attracting-orbit certificate. Here a_η differentiates the actual learning rate, not the historical ray coordinate used by the numerical precursor in Section 6.7.

The first radius-2^{-80} attempt passed the root, period, simplicity and coefficient gates but did not enclose contraction of Q. A disclosed same-target amendment used radius 2^{-100} at unchanged 256-bit precision and passed all gates. Independent review reproduced the exact result, checked saved interval arithmetic and passed a 384-bit proof in a strictly nested box. These checks share the analytic mixed-jet kernel and Arb/FLINT; they are not separate automatic differentiation or proof-assistant formalization. The later full-state continuation above identifies this fold with the central primitive branch. No quantitative attracting finite-detuning wedge, whole-window geometry, resonance ancestry or utility claim follows from the local theorem alone. See `certificates/s2-period18-fold-receipt.json`, `docs/reviews/s2-period18-fold-certificate-independent-review.json` and the replay in `certificates/README.md`.

5.3 Two local cusps in the actual learning-rate plane

Two-parameter continuation supplies proposals for 2 distinct cusps of primitive period-18 solutions. For the exact-real training map write $R(\theta,\lambda) = F_\lambda^{18}(\theta) - \theta$, $\lambda = (\eta_h, \eta_o)$, $A = R_\theta$, $B = R_{\theta\theta}$ and $C = R_{\theta\theta\theta}$. The augmented equations are

$$R = 0, \quad Aq = 0, \quad Ah + B(q,q) = 0, \quad (q^T q - 1)/2 = 0, \quad q^T h = 0. \tag{10}$$

A strict whole-box Krawczyk inclusion encloses a locally unique normalized root in each augmented box. The native state still has 13 coordinates; the augmented system has 41 unknowns, including both rates and the two auxiliary vectors. The inverse transpose of the invertible border $\left[\begin{smallmatrix} A & q \\ q^T & 0 \end{smallmatrix}\right]$, applied to $(0,1)$, supplies $A^T w = 0$, $w^T q = 1$. Border invertibility also proves algebraic simplicity of the neutral multiplier $+1$. Proper-divisor exclusions establish primitive period 18.

The cubic coefficient and unfolding matrix are

$$\kappa = \frac{1}{6} w^T \{C(q,q,q) + 3B(q,h)\}, \tag{11}$$

$$U_{1j} = w^T R_{\lambda_j}, \qquad U_{2j} = w^T \{R_{\theta\lambda_j} q + B(q, y_j)\}, \tag{12}$$

where (y_j, β_j) solves the bordered equation with right-hand side $(-R_{\lambda_j}, 0)$. Thus parameter dependence through the complementary state is included. Both κ and $\det U$ exclude zero, giving local generic cusp unfoldings; the discrete-map normal form is described in Meijer et al. [33, Section 5.1]. Table 3 gives outward-rounded bounds from the stronger nested proofs. These are local results; the certificates do not enclose a specified finite wedge between the emerging fold arcs.

Point	η_h (approx.)	η_o (approx.)	κ	$\det U$
A	72.981360	0.831239149	$[4.992805, 4.992806]$	$[0.029003, 0.029004]$
B	71.835429	0.830675874	$[-1.771364, -1.771363]$	$[0.012779, 0.012780]$

Table 3: Two certified local cusps. Rate entries locate the exact boxes approximately; coefficient intervals are rounded outward. Each cusp has one unstable complementary multiplier and a simple neutral multiplier, so these points are not additional attracting-orbit certificates.

For $Q = DF^{18} - qw^T$, a validated complex similarity and separated Gershgorin disks exclude the entire unit circle. One disk is strictly outside, separated from the inside group, proving one unstable complementary multiplier. Consequently these cusps alone do not establish an attracting window. Independent review reproduced both original proofs, obtained strictly nested higher-precision proofs, and separately reconstructed the coefficient, unfolding, spectrum and primitive-period inequalities from saved derivative enclosures. An initially inconclusive transpose-border inversion is retained; an equivalent primal-inverse-transpose enclosure resolved its excess interval width without weakening any exclusion gate. Acquisition and nested proofs share the analytic mixed-jet kernel and Arb/FLINT.

Validated augmented systems and spectral exclusion have precedent in computer-assisted cusp analysis, including the differential-equation setting of Lessard and Pugliese [27]. Our spectral test concerns the unit circle of a discrete return map. The independently checked formulas above use this map and both actual layer rates. Neither numerical continuation from the earlier fold nor proximity of parameter locations proves that these local certificates belong to one rigorously connected boundary component. That connection and the complete shrimp anatomy remain open. See `certificates/s2-period18-cusp-a-receipt.json`, `certificates/s2-period18-cusp-b-receipt.json` and `docs/reviews/s2-cusps-independent-review.json`.

5.4 A generic 1:1 resonance with an attracting complement

For the same exact S2 training map, let $R(\theta, \eta_h, \eta_o) = F^{18}_{\eta_h,\eta_o}(\theta) - \theta$ and $A = D_\theta R$. A strict interval inclusion encloses a unique root of

$$R = 0, \qquad Aq = 0, \qquad Ar = q, \qquad (q^T q - 1)/2 = 0, \qquad q^T r = 0. \tag{13}$$

The actual learning rates satisfy

$$\begin{aligned} \eta_h &\in [73.396887855557, 73.396887855558], \\ \eta_o &\in [0.827244346489, 0.827244346490]. \end{aligned} \tag{14}$$

Every proper divisor is excluded in the native parameter state, so the orbit has primitive period 18. At the root, the monodromy matrix $M = A + I$ satisfies $Mq = q$ and $Mr = r + q$. A validated invertible frame isolates this invariant two-dimensional subspace. All 11 eigenvalues of the quotient have modulus strictly less than $0.487618406 < 1$, using a validated complex similarity and Gershgorin bounds. Hence $+1$ has algebraic multiplicity exactly two and forms one Jordan block; all remaining modes are attracting.

An independent checker reconstructs the saved inclusion and proper-divisor inequalities, evaluates the native center and whole box at higher precision, and rechecks the quotient bounds on that same proved root enclosure. The derivative kernel and Arb arithmetic library are shared dependencies. The same root also satisfies the nonlinear and parameter nondegeneracy tests below. See `docs/reviews/generalized-chain-independent-outcome.json` and `docs/reviews/chain-unfolding-independent.json`.

Connection from the attracting interior to this organizer. The central period-18 branch already connects to the canonical saddle-node (Section 5.2). Starting at that exact saddle-node, we continue

$$F_\eta(x_k) = x_{k+1}, \qquad DF_\eta(x_k)q_k = q_{k+1}, \qquad k \pmod{18}, \tag{15}$$

with the two physical rates included as unknowns, unit normalization of q_0 and a scalar continuation gauge. The full shooting system has 470 unknowns. A chain of 107 closed interval charts proves

existence, local uniqueness and primitive period 18 throughout this +1-multiplier locus. Independent replay checks every chart, its native rate projection and its full-state joins. At the gauge change, three validated localization intersections identify the same orbit and mode; equality of the two gauge coordinates is neither assumed nor needed.

The independently proved root of (13) is then lifted through all native phases. Strict inclusion of all 470 lifted coordinates in the final chart identifies it with that chart's unique solution at its gauge value. Thus the attracting interior orbit, canonical saddle-node and generic 1:1 resonance belong to one certified connected structure. This does not require the entire +1 locus to have an attracting complement or to consist only of nondegenerate folds. The separate connection and membership audits are `docs/reviews/eigenpair-connected107-proof-index.json` and `docs/reviews/eigenpair-chain-membership-independent.json`.

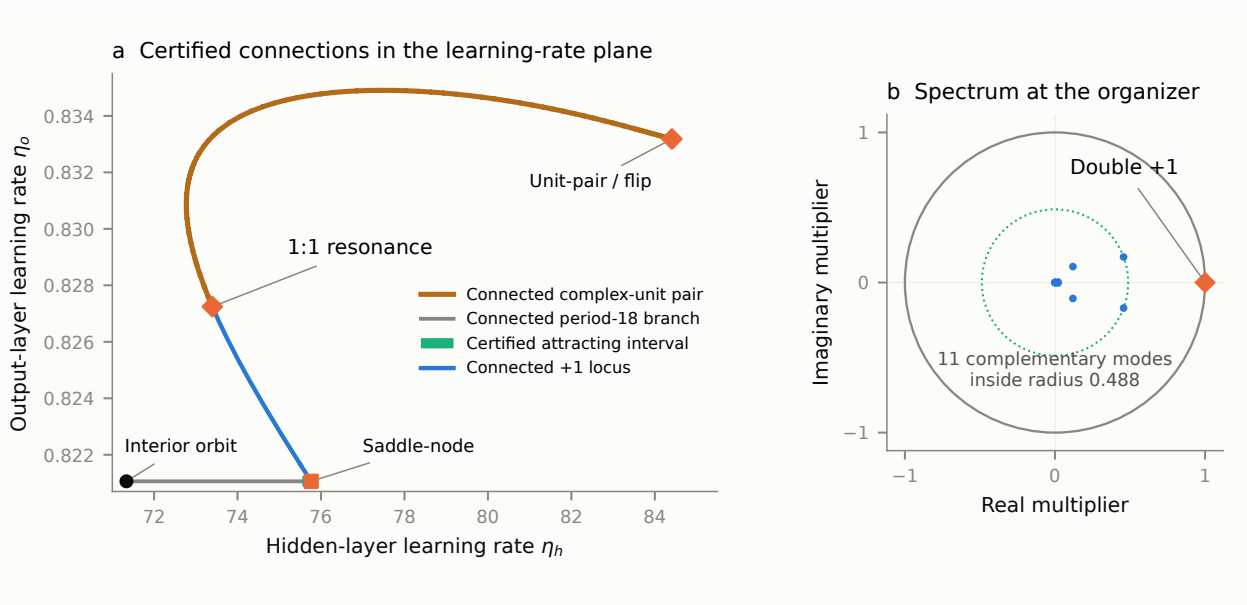


Figure 2: Certified connection to the 1:1 organizer. Left: the interior period-18 branch reaches its saddle-node, and a continued +1-multiplier locus reaches the exact resonance. Orange continues the connected complex-unit-pair branch through the finite initial arc and 101 additional native charts. Green marks the continuously certified attracting cross-section; attraction is not asserted along the whole gray or blue curve. Blue and orange polylines connect midpoint projections of independently enclosed chart endpoints within each gauge family and guide the eye; they are not polygonal interval enclosures. Right: a rigorously isolated double multiplier at +1 and eleven complementary multipliers inside the dotted radius bound. The points show centers of validated quotient Gershgorin discs; their actual radii are mostly below the image resolution.

Generic unfolding in the actual learning rates. Write $B = D_\theta^2 F^{18}$ and choose the dual chain $p_0^T A = 0$, $p_1^T A = p_0^T$, normalized by $p_0^T r = p_1^T q = 1$ and $p_0^T q = p_1^T r = 0$. In the center-manifold convention

$$(u, v) \longmapsto (u + v,\ v + au^2/2 + buv) + O(\|(u, v)\|^3), \tag{16}$$

the coefficients are $a = p_0^T B(q, q)$ and $b = p_0^T B(q, r) + p_1^T B(q, q)$ [24, Section 4.4]. Independent interval evaluation gives

$$\begin{aligned} a &\in [-1.74924, -1.74921], & b &\in [-26.135, -26.132], \\ b - a &\in [-24.386, -24.383], & a(b - a) &\in [42.652, 42.656]. \end{aligned} \tag{17}$$

In particular $a \neq 0$ and $b-a \neq 0$. To check that the two physical learning rates unfold this singularity, let $R_j = \partial_{\eta_j} R$ and $A_j = \partial_{\eta_j} A$. A validated bordered inverse gives h_j satisfying $Ah_j = -R_j + c_j r$, $q^T h_j = 0$, where $c_j = p_0^T R_j$. Define

$$\begin{aligned} H_j &= h_j - q\,\frac{p_0^T\{B(q,h_j) + A_j q\}}{a}, \\ \tau_j &= p_1^T\{B(q,H_j) + A_j q\} + p_0^T\{B(r,H_j) + A_j r\}. \end{aligned} \tag{18}$$

For rate variations with $c_h\,d\eta_h + c_o\,d\eta_o = 0$, the corresponding $H_h\,d\eta_h + H_o\,d\eta_o$ is tangent to the fixed-point/+1 locus, and $\tau_h\,d\eta_h + \tau_o\,d\eta_o$ differentiates the second critical multiplier. The extension off that tangent does not affect the rank test. The matrix with columns $(c_j, \tau_j)^T$, $j \in \{h, o\}$, has determinant in $[-0.1799, -0.1668]$, strictly excluding zero. Thus the actual learning rates supply a transverse two-parameter unfolding. The sign $a(b-a) > 0$ selects the subcritical local case: the emerging invariant circles repel within the center manifold. The other eleven directions contract. This is a local normal-form consequence; a finite-size invariant circle or its basin would require an additional enclosure.

An exact branch of complex unit multipliers. The double-unit root supplies more than a point classification. Put $c(t) = \cos\sqrt{t}$, $e(t) = \sin\sqrt{t}/\sqrt{t}$ and $d(t) = te(t)$, understood through their entire power series at zero. Replace the two chain equations by

$$Mq - c(t)q + d(t)r = 0, \qquad Mr - e(t)q - c(t)r = 0, \tag{19}$$

retaining $R = 0$ and the same normalization. At $t = 0$ this is exactly (13). Its validated nonsingular augmented Jacobian and the analytic implicit-function theorem give an analytic solution through that same root for all sufficiently small $|t|$. For $t > 0$, $q + i\sqrt{t}\,r$ has multiplier $e^{i\sqrt{t}}$. The complementary attraction, primitive period and positive learning rates persist by continuity. Shrinking the neighborhood excludes the low-order strong resonances. This proves a connected local branch with a complex pair on the unit circle.

A separate finite continuation now supplies an explicit interval, $t \in [0,\, 2^{-15}]$. We retain all 18 native phases of the state and both critical vectors, together with the two physical rates, in a 704-dimensional shooting system. Independent 384-bit arithmetic reconstructs the native derivative blocks and entire terminal series, proves a weighted contraction smaller than 0.096571289, and verifies every strict inclusion uniformly on that interval. Proper divisors are excluded on the whole chart. All 704 coordinates of the lifted exact Jordan root lie strictly inside its $t = 0$ section, so this finite branch is attached to the same proved organizer and the preceding +1 locus. The real critical frame remains independent, giving the exact pair $e^{\pm i\sqrt{t}}$ for every $t > 0$ in the interval. The derivative acquisitions and Arb library are shared with the producer; the assembly, series and inclusion calculations are separate. See `docs/reviews/native-unit-pair-independent-outcome.json`. The finite proof establishes the primitive cycle and critical pair throughout the stated interval. Complementary attraction is proved at the organizer and holds on this entire finite arc: independent 480-bit arithmetic proves that every one of the 11 complementary multipliers has modulus below 0.843. In a moving frame that isolates the two critical directions, the complementary return matrix $M(t)$ admits a common positive-definite metric P with $P - M(t)^\top P M(t) \succ 0$ throughout the interval. The proof retains the common parameter across all native phases and bounds the full operator remainder, including changes in the orbit, both learning rates and the critical frame. It uses independently reconstructed root and tangent enclosures and verifies that each lies inside the actual acquired derivative domain. This is a metric contraction proof; no Euclidean operator-norm bound below one is assumed. See `docs/reviews/native704-complement-independent.json`.

The branch is extended with a quadratic predictor in a fixed affine arclength gauge. Including t as an unknown gives a 705-dimensional native system; the gauge adds its final equation. Independent 384-bit arithmetic reconstructs every native block and the cubic Taylor remainder, proving strict inclusion and contraction below 0.462 uniformly for $s \in [-1/4096,\ 63/4096]$. The whole segment has positive t, primitive period 18 and an independent critical frame. A separate 480-bit weighted-Neumann localization of the previously proved endpoint, followed by all 705 strict coordinate inclusions in the curved uniqueness tube, proves that this is the same connected boundary branch. The native derivative acquisitions are shared; the terminal series, polynomial assembly, localization and membership reductions are independently implemented. See `docs/reviews/native705-independent-outcome.json` and `docs/reviews/native705-endpoint-independent-outcome.json`. Four additional charts, with all native blocks and remainders independently recomputed at 384 bits, extend the connected gauge interval to $s \in [-1/4096,\ 319/4096]$. All 5 charts have strict contraction below 0.483. Each adjoining pair uses the identical exact affine gauge; its independently enclosed endpoint passes all 705 strict membership inequalities in the next chart's uniqueness tube. Independent 480-bit moving-frame proofs also bound all eleven complementary multiplier moduli by 0.944 throughout these five charts. Each proof reconstructs its own root and correlated tangent enclosure, checks containment in every acquired derivative domain, and proves a strict common-metric decrease. Thus the connected branch retains exactly the prescribed neutral pair and strictly attracting transverse directions throughout this interval. See `docs/reviews/native705-batch-independent-outcome.json` and `docs/reviews/native705-complement-batch-independent.json`.

One wider successor and 24 further charts extend the independently proved unit-pair branch to 30 charts in total (Figure 2). The latter use three rotated affine gauges to follow the bending branch. At each gauge change, an independently localized previous endpoint is projected into the new gauge and satisfies all 705 strict membership inequalities in the next uniqueness tube; the other joins use identical exact gauges. Every chart has a uniform root, primitive period 18, positive squared angle and independent critical frame. These are connected full-state solutions, not proximity matches in the learning-rate plane. Gauge intervals are local to each packet. The sixth chart also has a strictly attracting complement: independent 480-bit proofs on two adjoining closed halves bound all eleven multiplier moduli below 0.964. The full halves meet at their shared exact gauge endpoint, so the bound covers the whole sixth chart. See `docs/reviews/native705-halves-independent.json`. The receipts are `docs/reviews/native705-forward-independent-outcome.json` and `docs/reviews/native705-rotated-independent-001-outcome.json` through `docs/reviews/native705-rotated-independent-003-outcome.json`.

A further independently checked chart uses a correlated polynomial enclosure of the native Jacobian and an affine approximate inverse. It proves contraction below 0.066721 on $s \in [-49/2048,\ 79/2048]$ in its new local gauge. All 705 inclusion and known-root membership inequalities pass, with primitive period 18 and a nondegenerate positive-angle frame. This extends the same boundary branch using wider local domains. The check reconstructs the polynomial and join reductions independently at 480 bits, sharing the acquired native derivative arrays and Arb/FLINT. See `docs/reviews/native705-correlated-independent-outcome.json`.

Three further cubic-predictor charts advance the same branch to $s = 115/512$ in that gauge. Independent 480-bit arithmetic reconstructs all native Jacobian coefficients, the quartic residual remainder and the degree-five preconditioned forcing. Each chart satisfies all 705 strict inclusion and preceding-root membership inequalities, with contraction below 0.230168. These 3 connected charts retain primitive period 18 and the complex critical frame. Figure 2 includes their independently enclosed endpoint projections. See `docs/reviews/native705-cubic-prefix-independent.json`.

A rotated cubic chart and three more charts in its maintained gauge extend the independently joined branch further. The rotated join uses a freshly evaluated residual to localize the identical

known endpoint before projecting it into the next uniqueness tube. All four new charts pass every strict 705-coordinate root and membership inequality, with contraction below 0.251429. The two unsuccessful continuation attempts remain preserved in the source-bound record. See `docs/reviews/native705-rotated-independent.json` and `docs/reviews/native705-maintained-independent.json`.

A proved learning-rate turn. Two additional independently reconstructed charts extend the same full-state branch to forty positive-angle charts. Their joins retain all 705 coordinates, and the closed connected path contains three successive endpoint enclosures E_0, E_1, E_2 whose hidden-rate projections satisfy

$$\inf \eta_h(E_0) - \sup \eta_h(E_1) > 0.005018993, \qquad \inf \eta_h(E_2) - \sup \eta_h(E_1) > 0.001016317. \tag{20}$$

Continuity and compactness therefore force a hidden-learning-rate minimum in the interior of this connected path. This is an exact geometric turn, proved from disjoint interval bounds rather than a plotted trajectory. The proof establishes existence; uniqueness and nondegeneracy of the minimum require additional derivative information. See `docs/reviews/native705-minimum-independent.json`.

Forty-three further independent full 705-coordinate chart proofs extend this same branch to 83 positive-angle charts. Each predecessor is identified inside the next uniqueness tube using its whole state and critical frame. Three successive endpoint enclosures in the later packet satisfy $t(E_{17}) > t(E_{16})$ and $t(E_{17}) > t(E_{18})$, with strict separation of their entire intervals. Continuity therefore also proves an interior maximum of the critical-pair angle along this connected path. Neither extremum claim assumes uniqueness or nondegeneracy. Figure 2 shows the independently enclosed endpoint projections. The complete accepted and failed histories are retained in `docs/reviews/native705-maintained-tail-independent.json` and `docs/reviews/native705-maintained003-independent.json`.

Transverse stability along the first thirty-one charts. Independent 480-bit proofs on 48 closed subintervals cover original charts 7–30 exactly, with each local gauge, shared endpoint and same-root identity checked against its prior full shooting proof. Every one of the eleven complementary multipliers has modulus below 0.995358. Together with the preceding six proofs, this certifies the complement throughout the first thirty positive-angle charts. The proof uses moving metrics and fresh full-domain derivative enclosures, with all failed subdivisions retained. See `docs/reviews/native705-march-independent.json`.

Fresh center refinements extend this coverage across all of chart 31's local gauge interval $[-49, 79]/2048$. Three independently replayed packets supply exact closed covers of its first quarter, second quarter and remaining half, using 31 cells in total. All eleven complementary multipliers have modulus below 0.980311 throughout the whole chart. Each replay reconstructs the full 705-coordinate root and tangent, checks every actual derivative domain, and bounds all eighteen moving-frame steps. The second quarter contains the entire projected endpoint enclosure of chart 30, establishing the connection of the stable cover to its predecessor. All failed coarser metric attempts are retained. See `docs/reviews/native705-fresh-quarter-independent.json`, `docs/reviews/native705-second-quarter-independent.json` and `docs/reviews/native705-remaining-quarters-independent.json`.

These bounds have a physical consequence: each covered segment consists of regular stability boundaries with attracting primitive period-18 cycles on one side. The full shooting proof itself supplies the required transverse crossing, without an additional numerical estimate of a small normal derivative. The following argument explains why.

Lemma 1 (Physical stability boundary)**.** *Let $F_p : \mathbb{R}^n \to \mathbb{R}^n$ be a C^3 family with two physical parameters $p = (p_1, p_2)$, and let a primitive k-cycle be represented by $x_0, \dots, x_{k-1}$. Write $M = D_x F_p^k(x_0)$. Suppose the full shooting equations have an exact solution with $t > 0$, $\alpha = \sqrt{t} \in (0, \pi)$, and real independent vectors q_0, r_0 satisfying*

$$Mq_0 = \cos\alpha\, q_0 - \alpha \sin\alpha\, r_0, \qquad Mr_0 = \frac{\sin\alpha}{\alpha} q_0 + \cos\alpha\, r_0.$$

Suppose all $n-2$ eigenvalues of the induced quotient by $\operatorname{span}(q_0, r_0)$ lie strictly inside the unit disk. Include the two normalization equations $(q_0^T q_0 - 1)/2 = 0$ and $q_0^T r_0 = 0$, and one affine continuation condition. If the Jacobian with respect to all $3nk + 3$ shooting, mode, parameter and t variables is nonsingular, then, on the local periodic-orbit branch,

$$\nabla_p \sigma(p_0) \neq 0, \qquad \sigma(p) = \log|\lambda(p)|,$$

where $\lambda(p_0) = e^{i\alpha}$ is the continued nonreal multiplier. Consequently $\sigma = 0$ is a regular curve in the physical parameter plane near p_0. Its side $\sigma < 0$ consists locally of attracting primitive k-cycles of this branch, and its side $\sigma > 0$ is unstable.

Proof. The critical multipliers $e^{\pm i\alpha}$ are distinct and nonreal; the strict quotient bound separates them from every other eigenvalue. They are therefore algebraically simple. Also $1 \notin \operatorname{spec}(M)$, so $I - M$ is invertible. The implicit function theorem gives a smooth local fixed point $x_0(p)$ of F_p^k, with all other orbit phases determined by forward iteration. In the linearized full shooting equations, eliminating intermediate orbit states and the orbit closing equation thus determines all orbit variations uniquely from δp.

Eliminating intermediate mode variations by the native transport recurrences reduces the remaining mode equations to the displayed two return equations. This elimination preserves the kernel, including the two normalization rows and the final continuation row. The smooth change of variables

$$v = q_0 + i\alpha r_0, \qquad \lambda(t) = e^{i\sqrt{t}}$$

turns the return equations into $M(p)v = \lambda(t)v$. Here differentiation of $M(p)$ includes the already determined periodic-state motion. Take the complex left eigenvector ℓ with $\ell^T v = 1$; transpose, not Hermitian transpose, is used in this bilinear normalization. Linearized solvability requires

$$\lambda^{-1} \ell^T (D_p M[\delta p]) v - \frac{i}{2\alpha}\, \delta t = 0.$$

Its real part is exactly $\nabla_p \sigma \cdot \delta p = 0$; its imaginary part uniquely determines δt. Simplicity of λ means that, after this solvability condition, every mode variation has the form $\delta v = \delta v_{\text{part}} + av$, with $a \in \mathbb{C}$. The two real components of a are the infinitesimal scale and phase freedoms.

If $\nabla_p \sigma = 0$, both real parameter variations would remain free. Together with the two real scale/phase freedoms, this gives a four-dimensional space of solutions of the linearized native return equations (with angle variation already determined). The two real normalization rows impose at most two independent constraints, leaving a kernel of dimension at least two before the continuation row. One additional affine row cannot remove this entire kernel. This contradicts nonsingularity of the full shooting Jacobian. This argument does not assume a separately nonsingular phase/scale normalization submatrix.

Thus $\nabla_p \sigma \neq 0$. The implicit function theorem makes $\sigma = 0$ a regular physical parameter curve. By continuity, the other $n-2$ multipliers remain strictly inside the unit disk nearby and the proper-divisor separations remain nonzero. On $\sigma < 0$ the critical pair also lies strictly inside the disk; on $\sigma > 0$ that pair lies outside. This proves the stated local attraction and instability for the continued primitive cycle. □

A connected attracting family beside the boundary. Let K be the compact image of a finite, fully joined collection of the above exact periodic-orbit charts, with positive physical parameters and uniformly separated nonreal critical pair and stable complement. It is enough to work on the lifted fixed-orbit manifold $\mathcal{N} = \{(x, p) : F_p^k(x) = x\}$ near K; an embedded or injective curve in the physical parameter plane is not required. The parameter projection is a local diffeomorphism because $I - M$ is invertible. The isolated nonreal pair defines a smooth real function σ near K (either conjugate gives the same modulus). Lift the physical vector field $-\nabla_p\sigma$ to $\mathcal{N}$ by

$$\dot{p} = -\nabla_p\sigma, \qquad \dot{x} = (I - M)^{-1} D_p F_p^k \, \dot{p}.$$

Along this field $\dot{\sigma} = -\|\nabla_p\sigma\|^2 < 0$ on K. Here C^3 regularity of F gives $\sigma \in C^2$ and a C^1 lifted vector field, so its local flow is unique and continuously dependent. Compactness and smoothness give a uniform sufficiently small positive flow time for which the images of all points of K have $\sigma < 0$, while the complementary stability, positive parameters and primitive-period separations persist. Composing this flow with the original joined path gives a continuous attracting primitive-k family arbitrarily close to it in lifted orbit/parameter space. The displacement is qualitative; a numerical collar width is not assigned.

For our analytic training map, $n = 13$ and $k = 18$ give the 705-dimensional system above. Uniform strict contraction makes its Jacobian nonsingular at every exact root; the independently verified positive angle, primitive period, frame independence and eleven-dimensional stability bounds provide the other hypotheses on the first 33 charts. Hence the attracting-side and compact-family conclusions apply to their joined arc. The chart-31 extension uses the same full shooting equations, positive nonreal angle and nonsingular Jacobian; its complete hypothesis mapping is recorded in `docs/reviews/native705-chart31-boundary-hypotheses.json`. The next cubic chart also has a complete independent transverse-stability proof: 22 closed cells cover $[39, 103]/1024$ in its affine coordinate, with all eleven complementary moduli below 0.996091. The entire previous stable endpoint lies within the first covered portion of the same 705-dimensional uniqueness tube. Exact rational cubic extrema and Bernstein bounds close the derivative-domain containments used by the independent replay. See `docs/reviews/native705-cubic32-remaining-independent.json`. The full cubic root and this cover satisfy the same physical-boundary lemma; its regular boundary and connected adjacent attracting family therefore extend through chart 32. The exact hypothesis mapping is recorded in `docs/reviews/native705-chart32-boundary-hypotheses.json`.

The following chart is likewise completely covered: 39 independently checked cells span $[205, 333]/2048$, with all eleven complementary moduli below 0.995409760. Its full 705-coordinate root and predecessor inclusion extend the same regular physical boundary and connected adjacent attracting family through chart 33. See `docs/reviews/native705-chart33-boundary-hypotheses.json`.

Beyond these 33 complete charts, 68 independently checked closed cells cover $[83/512, 57/256]$ of chart 34. All eleven complementary multiplier moduli are below 0.985169. The preceding endpoint lies inside the original full 705-coordinate uniqueness tube, whose root proof excludes every proper divisor of 18. This supplies a connected complementary-stability cover on the stated prefix; the uncovered tail remains outside the claim. The retained record includes every failed subdivision and does not count this as a complete 34th chart. See `docs/reviews/native705-cubic34-prefix-paper-review.json`.

A certified complex-unit/simple-flip junction. A local certificate encloses a primitive period-18 orbit at physical rates approximately $(\eta_h, \eta_o) = (84.40797618, 0.83318323)$ where a nonreal conjugate pair has unit modulus and one real multiplier equals -1. The augmented root contains

the full state, both rates, two real vectors for the complex invariant plane, its squared angle, and a normalized flip eigenvector. All 55 coordinates satisfy strict interval inclusion; every proper divisor of 18 is excluded. A validated basis at that same exact root isolates the three critical modes and bounds all ten complementary multiplier moduli below 0.930. Along the locally unique complex-unit section parameterized by η_h, the total derivative of the real multiplier lies in $[-5.3972, -5.3970]$, proving a transverse flip crossing. An independent 480-bit replay uses a strictly nested box around the original 384-bit root, establishing exact root identity as well as recomputing the inclusion, spectrum and crossing arithmetic. See `docs/reviews/native-unit-pair-flip-independent.json`.

One connected critical branch between the two organizers. Eighteen further full 705-dimensional chart proofs join the preceding branch to this exact junction, giving 101 positive-angle charts after the initial 704-dimensional arc. Every chart has independently recomputed strict root inclusions, primitive period 18, a positive critical angle and a nondegenerate critical frame. All ordered joins identify the entire previous state and frame inside the next uniqueness tube, including each change of gauge. Finally, the independently proved 55-dimensional junction is lifted into all 705 native coordinates, with literal agreement of the training equations and normalizations. This known root satisfies every strict membership inequality inside the final continuation tube. Consequently, the generic 1:1 resonance and the complex-unit/simple-flip junction belong to the same exact connected critical branch. The full sequence includes the proved interior hidden-rate minimum and critical-angle maximum; it is not inferred from projected proximity. Both failed attempts in the final packet are retained. See `docs/reviews/native705-junction-chain-independent.json`.

A separate 470-dimensional native shooting system encloses a finite -1-multiplier locus through this same junction. Its hidden-rate interval is centered at the saved exact dyadic approximation near 84.40797618217 with half-width $1/256$. Independent 512-bit inequalities prove strict inclusion in all 470 coordinates with contraction below 0.082185; exact rational mode propagation identifies the known junction inside this tube. The locus retains primitive period 18. This supplies a finite connected part of the second boundary. See `docs/reviews/native470-independent001.json`. A fresh independently reduced chart extends the same locus by hidden-rate length $1/16$. Its full 470-coordinate enclosure has contraction below 0.545203 and contains the independently recomputed left endpoint of its predecessor in the identical gauge. Primitive period 18 and the -1 mode persist throughout the new interval. See `docs/reviews/native470-advancing-independent.json`.

A correlated polynomial chart extends the joined flip locus by a further hidden-rate length $1/4$. All 470 strict root and predecessor-membership inequalities pass independently, with contraction below 0.076489025, and primitive period 18 persists. See `docs/reviews/native470-correlated-independent.json`.

The same branch continues through 16 further independently verified 470-coordinate charts, spanning $[-2001, -81]/256$ in the unchanged hidden-rate affine coordinate, an extent of 7.5. Each closed piece proves the root, every full-state predecessor inclusion and exclusion of all proper divisors of 18. All 23 producer attempts, including the seven failed wider bounds, remain in the record. See `docs/reviews/native470-march-independent.json`.

An output-rate parameterization then extends this same -1 critical locus beyond the hidden-rate charts. An independent full 470-coordinate inclusion proves contraction below 0.069279977 and exact attachment to the predecessor; primitive period 18 is retained. Its connected endpoint has physical rates approximately $(\eta_h, \eta_o) = (76.5570, 0.8366347977)$. The change of parameterization is checked through full-coordinate root membership, so it does not rely on agreement of projected curves. See `docs/reviews/native470-output-independent-attempt002.json`.

A second exact intersection. A separate local certificate encloses another primitive period-18 complex-unit/simple-flip intersection at $(\eta_h, \eta_o) \simeq (72.233068263399, 0.844974187946)$. An independent 480-bit calculation proves all 55 root inclusions in a box strictly nested inside the first enclosure. At this same exact root, the nonreal unit pair and the real -1 mode are simple, and all ten remaining multiplier moduli lie below 0.288624814. The total flip-multiplier derivative along the local unit-pair section is enclosed by $[-28.20860506,\ -28.20860504]$, proving a transverse crossing. This supplies a second exact junction for the continuing boundary reconstruction. The connected critical branch proved above ends at the first junction; identifying a connecting branch to this second junction requires full-state continuation joins. See `docs/reviews/second-unit-flip-independent.json`.

An open attracting sector at the first junction. The local junction also determines which nearby physical rates produce attracting training cycles. Write λ_c for its continued nonreal multiplier and λ_f for the continued real multiplier near -1, and set

$$\sigma(\eta_h, \eta_o) = \log|\lambda_c|, \qquad \tau(\eta_h, \eta_o) = \lambda_f + 1. \tag{21}$$

At the same exact primitive orbit, two independently implemented interval reductions enclose the total physical derivatives, including motion of the periodic state. They prove

$$\det \frac{\partial(\sigma, \tau)}{\partial(\eta_h, \eta_o)} \in [-148.33, -148.32] < 0. \tag{22}$$

One reduction isolates the critical block by a real Sylvester equation; the other solves a complex bordered left-eigenvector problem and evaluates $\mathrm{Re}(\lambda_c'/\lambda_c)$. Both validate the same full root, primitive period and ten attracting complementary modes.

Since 1 is absent from the return spectrum, the periodic state continues smoothly in both physical rates. The nonzero determinant makes (σ, τ) local parameter coordinates. In a sufficiently small neighborhood, precisely the open sector $\sigma < 0$, $\tau > 0$ has all thirteen return multipliers inside the unit circle and hence locally attracting primitive period-18 training cycles. Its two boundary arcs meet transversely at the certified junction. For the explicit physical direction $v = (-1, 11/20000)$, the independent enclosures

$$D_v\sigma \in [-0.00444718, -0.00444671] < 0, \qquad D_v\tau \in [3.04709, 3.04713] > 0 \tag{23}$$

show that every sufficiently small positive displacement along this ray enters the attracting sector. This direction was selected after the first gradient calculation and then verified independently. The assertion is local; it assigns no numerical length to that ray. The exact interval data and independent proof are in `docs/reviews/unit-flip-corner-independent.json`.

5.5 A local subcritical flip on the historical two-rate ray

For the same S2 model and exact dataset, now vary both layer rates on the selected historical ray,

$$\eta_i(s) = \exp\big(\log(10)(\ell_i + d_i s)\big), \qquad i \in \{h, o\}, \tag{24}$$

with the following exact dyadic constants:

$$\begin{aligned} \ell_h &= \frac{8346605682328643}{2^{52}}, \quad \ell_o = \frac{-192810989890177}{2^{51}}, \\ d_h &= \frac{7718380115405069}{2^{57}}, \quad d_o = \frac{2366892030618129}{2^{56}}. \end{aligned} \tag{25}$$

The directions are the recorded binary64 products of the historical coordinate scales and ray directions, interpreted exactly after rounding. Arb encloses the exponentials and their derivatives. These rates are exact-real exponential values; even at $s = 0$ they are not identified with the dyadic rate constants of the center-orbit certificate.

Write $G(\theta, s) = F_s^{18}(\theta)$, $R = G - \theta$, $M = D_\theta G$ and $A = M - I$. A strict Krawczyk inclusion and contraction enclose a unique normalized augmented root

$$R = 0, \qquad (M + I)q = 0, \qquad (q^T q - 1)/2 = 0, \tag{26}$$

in the recorded 27-dimensional box, with $s_* \in [0.2540544391804196, 0.2540544391804197]$. Every proper divisor of 18 is excluded. The uniformly invertible transpose border of $M + I$ supplies $p^T(M+I) = 0$ and $p^T q = 1$, establishing an algebraically simple multiplier -1. A separate validated inverse of A makes the period-18 orbit branch regular, with $\theta_s = -A^{-1}G_s$.

Let $B = D_\theta^2 G$, $C = D_\theta^3 G$ and $u = A^{-1}B(q, q)$. The total multiplier derivative and resolvent-corrected cubic coefficient are

$$\begin{aligned} \alpha &= p^T\big(D_{\theta s}G\, q + B(\theta_s, q)\big) \in [-51.2346291, -51.2346289], \\ b &= \tfrac{1}{6}p^T C(q, q, q) - \tfrac{1}{2}p^T B(q, u) \in [-78.084775, -78.084774], \\ \|Q^{64}\|_\infty &< 0.046042 < 1, \qquad Q = M + qp^T. \end{aligned} \tag{27}$$

Directional third-order differentiation of the explicit gradient update supplies these enclosures without finite differences in the proof. The first expression differentiates along the moving orbit branch, rather than holding its state fixed. With this cubic convention, the local flip theorem [25] and $\alpha < 0$, $b < 0$ give a subcritical bifurcation: sufficiently close unstable primitive period-36 cycles exist on the $s < s_*$ side, where the nearby parent cycle is attracting. The flip point itself has a neutral multiplier; this is not an additional attracting-orbit certificate or an enclosure of any specified finite-detuning doubled cycle.

The one 256-bit, radius-2^{-100} attempt passes all eight gates. Its entire root box passes an exact-rational proximity check to the selected numerical proposal. This establishes proximity, not seed inclusion or branch ancestry. Independent source and arithmetic review reproduced the original result byte for byte, reconstructed the saved interval bounds, and passed a 384-bit proof in a strictly nested box. The analytic differentiation kernel and Arb/FLINT remain shared trusted dependencies; this is not a second AD implementation or proof-assistant formalization. Detailed review provenance is retained in the companion receipt. The numerical precursor in Section 6.7 finds an earlier instability pocket and re-entry on this ray, so this later flip is not its first observed loss of attraction. Neither this local certificate nor the numerical branch establishes a validated connection to the earlier center certificate or complete shrimp geometry. See `certificates/s2-period18-flip-receipt.json`, `docs/reviews/s2-period18-flip-producer-outcome.md` and `docs/reviews/s2-period18-flip-independent-review.json`.

5.6 A supercritical flip and a separate attracting period-36 orbit

Another selected historical ray through the same window center has the same ℓ_h, ℓ_o but

$$d_h = \frac{3859190057702531}{2^{56}}, \qquad d_o = \frac{-2366892030618129}{2^{56}}. \tag{28}$$

For this exact exponential family, the same normalized augmented system and coefficient convention give $s_* \in [0.1404963141451889, 0.1404963141451890]$ and outward enclosures

$$\begin{aligned} &\alpha \in [-4.85683996, -4.85683995], \quad b \in [999.102645, 999.102646], \\ &\|Q^{16}\|_\infty < 0.429488 < 1. \end{aligned} \tag{29}$$

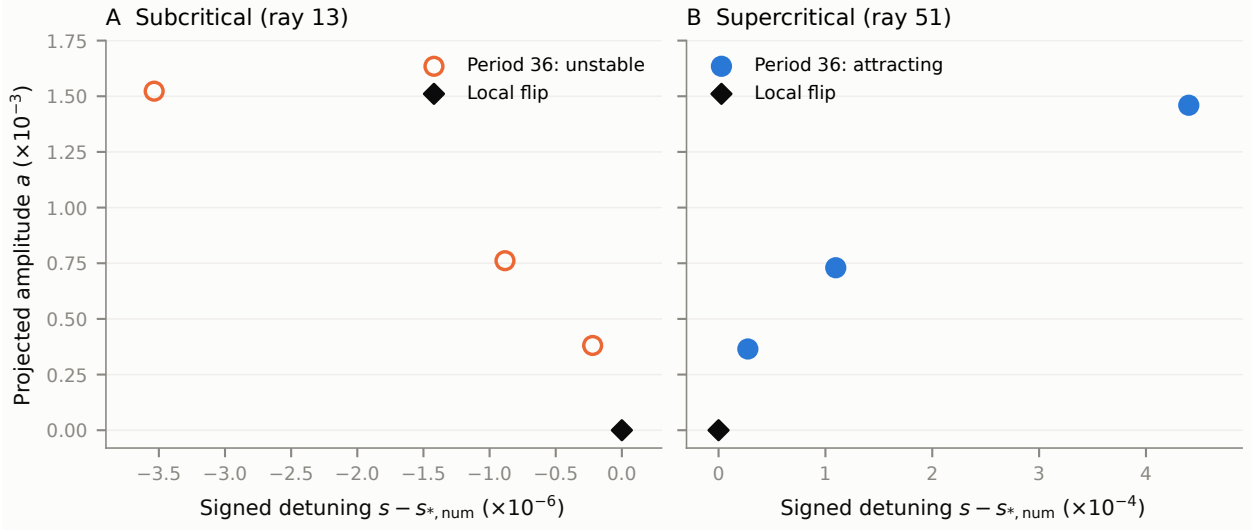


Figure 3: Opposite stability of nearby doubled cycles. All three retained primitive period-36 numerical proposals on each ray are shown. Open markers denote unstable doubled cycles on ray 13; filled markers denote attracting doubled cycles on ray 51, each checked at two native phases. The ordinate is the controlled left-eigenvector projection $a = p_*^T(\theta - F^{18}(\theta))/2$, with $p_*^T q_* = 1$, not a state-space norm. The horizontal axes use different scales and show signed detuning from each numerical flip estimate. Diamonds mark the local flip origins; interval proofs separately establish their subcritical and supercritical types. The six markers are numerical evidence, not six certified orbits or a proved connecting branch. The separate fixed-rate certificate in Section 5.6 is associated with the largest ray-51 proposal. No interpolated curve is asserted. *Generated by* `figures/f10_flip_comparison.py`; *receipt* `figures/f10_flip_comparison.provenance.json`.

The root, primitive period, algebraic simplicity, regular parent branch and nondegeneracy gates all pass. Thus the flip is supercritical: sufficiently nearby attracting primitive period-36 cycles exist for $s > s_*$. This is a local qualitative consequence, with no stated finite detuning or continuous connection to the earlier center certificate.

A separate certificate encloses one selected finite-amplitude primitive period-36 orbit at fixed rates

$$\eta_h = \frac{5107950665142887}{2^{46}}, \qquad \eta_o = \frac{7317034811349323}{2^{53}}, \qquad \|M^{512}\|_\infty < 0.117942 < 1. \tag{30}$$

These are the exact dyadic interpretations of the numerical evaluation's binary64 rates, not the rates defined by the exact exponential family. Strict Krawczyk inclusion and contraction prove a unique local fixed point of F^{36} in the recorded 13-dimensional box; coordinate separation excludes all proper divisors $1, 2, 3, 4, 6, 9, 12, 18$. This is an individually certified attracting orbit. The numerical full-state continuation associates it with the doubled branch, but the two certificates alone do not prove that connection between the distinct exact maps.

Independent input reconstruction, byte-identical replay and saved-ball arithmetic pass for both cases. Fixed stronger proofs at 384 bits for the flip and 512 bits for the finite orbit pass in strictly nested boxes. The analytic implementation and Arb/FLINT remain shared trusted dependencies; the companion review records the source-review scope and contributor overlap. See `certificates/s2-ray51-flip-receipt.json`, `certificates/s2-period36-receipt.json` and `docs/reviews/s2-ray51-certificates-independent-review.json`.

Figure 3 makes the different nearby behavior visible in the retained numerical proposals. It compares all three doubled-cycle points from each selected ray, without fitting a branch.

5.7 A supercritical NS in the scalar unequal-rate model

Consider $L(u,v) = \frac{1}{2}(uv-d)^2 + \frac{\lambda}{2}(u^2+v^2)$, with

$$d = \frac{5404319552844595}{2^{52}}, \qquad \lambda = \frac{5404319552844595}{2^{54}}, \qquad (\eta_u, \eta_v) = (\eta, 4\eta). \tag{31}$$

These are the exact dyadic interpretations of the pilot's nominal target 1.2 and ridge 0.3. This selected case is separate from the illustrative amplitude-scaling example in Section 6.8. Let $G_\eta = F_\eta^2$. A three-variable Krawczyk inclusion encloses a unique root of $(G_\eta(x) - x, \det DG_\eta(x) - 1) = 0$ in the recorded box, whose coordinate radius is $2^{-40} + 2^{-69}$. Disjoint enclosures of $F_\eta(x)$ and x prove primitive period two. The crossing rate obeys $\eta_* \in [0.54834687232917, 0.54834687233100]$.

At that root the complete planar monodromy has determinant exactly one and trace in $[-0.79587626, -0.79587625]$; the trace enclosure excludes $-2, -1, 0, 2$, hence resonances of orders one through four. Invertibility of $DG_\eta - I$ gives an implicit local orbit branch. Along it,

$$\begin{aligned} \left.\frac{d|\mu|}{d\eta}\right|_{\eta_*} &\in [3.3529863, 3.3529864] \subset (0, \infty), \\ \ell = \mathrm{Re}(\overline{\mu} c_1) &\in [-1.700203, -1.700201] \subset (-\infty, 0). \end{aligned} \tag{32}$$

The right eigenvector has Euclidean norm one and its left row is normalized to pair to one with it and to zero with its conjugate. Tensor/resolvent and planar scalar-coefficient formulas both enclose a negative ℓ. Together these bounds meet the generic supercritical NS theorem hypotheses [26] for this polynomial map.

For $\eta > \eta_*$ sufficiently close to the crossing, the theorem supplies a qualitative local attracting invariant-curve consequence for G_η; under F_η the two local components are exchanged. It supplies no specified finite detuning, irrational rotation, global ancestry, basin size or training benefit. The certificate concerns exact-real dynamics and trusts Arb/FLINT and the stated theorems. Independent review uses rational polynomial differentiation, higher-precision nested enclosures and a separate cubic normal-form calculation. The source-bound receipt and scope are in `certificates/scalar-ns-receipt.json` and `certificates/scalar-ns-design.md`. The review separately checked the original seed binding; the frozen replay alone does not authenticate arbitrarily rewritten provenance metadata. This limitation and the independent checks are recorded in `docs/reviews/scalar-ns-independent.md`.

Exact rescaling of the same case. Let d_0 denote the certified target above. For $d > 0$, $\lambda = qd$, fixed rate ratio r, and $S_k(x) = kx$ with $k = \sqrt{d/d_0}$, substitution in the cubic GD map gives

$$F_{d,qd;\eta,r} \circ S_k = S_k \circ F_{d_0,qd_0;k^2\eta,r}. \tag{33}$$

Thus the certificate at $q = 1/4$, $r = 4$ transfers to every $d > 0$ on that ray, with $\eta_*(d) = \eta_*(d_0)d_0/d$ and orbit coordinates scaled by k. At corresponding phases the monodromy is unchanged. The total modulus slope along the orbit branch scales by k^2, and the cubic coefficient under the same unit-eigenvector convention scales by k^{-2}: second and third state derivatives of F^2 scale by k^{-1} and k^{-2}, respectively. This is one dimensionless case in $(\lambda/d, \eta d, r)$, not an independent replication or robustness to varying q or r. The algebra and independent review are in `docs/scalar-similarity-corollary.md`.

6 Exploratory context: crossings, locking and transfer

Status: EXPLORATORY. The analyses in this section were chosen while exploring and used data that shaped the thesis, except where frozen acceptance rules are stated.

6.1 Quasi-periodic training begins where the period-2 orbit's complex pair crosses the unit circle

Within each fixed-output slice, we continued an independently initialized period-two orbit of S2-28011 toward larger hidden-layer rates. The merged locus contains 69 slice-wise complex-pair crossings; continuous full-state branch identity between slices remains unverified. The crossing angle runs from 0.1670 to 0.2987 turns per two steps. Two rotation-number maps cover the region beyond it (Figure 4). At 0.002 decades beyond the curve, the measured rotation number equals the crossing angle at the same output rate with median absolute difference 5.8×10^{-4} over 39 points in the main map (largest 4.7×10^{-3}) and 3.6×10^{-4} over 31 points in the right-wing map (largest 2.7×10^{-3}). Of the resonance points inside each map, 5 of 7 and 5 of 6 have locked cells of the same rotation nearby; the others lie where the maps show no locked region of that rotation. In an independent staircase computation on the slice through the period-18 window, the curve places the crossing at $\log_{10} \eta_h = 1.738$ with angle 0.2180, and the first quasi-periodic cell lies at 1.738 with rotation 0.2180.

6.2 The crossing is mostly supercritical, and its dynamics match the normal form

At 62 of the 69 sampled crossings the first Lyapunov coefficient is negative, so the crossing is supercritical under the generic hypotheses; tested onset trajectories are consistent with the attracting-circle prediction (Figure 5). Negative criticality alone does not exclude phase locking on that circle. At 7 points, at both ends of the sampled output range, it is positive. Adjacent output-ordered rows have opposite signs in three places, near $\log_{10} \eta_o = -0.417$, $+0.005$ and $+0.053$. These nominate locations to investigate for generalized Neimark–Sacker (Chenciner) points. Full-state association across each bracket and the additional nondegeneracy conditions remain unverified. In 8 of 8 dynamical checks the behaviour matches the sign: at supercritical points the circle amplitude follows the square-root prediction (median relative error 0.4%, largest 5.5% next to an adjacent-row sign transition), and at subcritical points the state jumps away beyond the corresponding slice crossing while escape thresholds before it grow like the square root of the offset, with hysteresis. In the 72-parameter S1R network, the coefficient is negative at 15 of 16 sampled crossings, consistent with supercriticality under the same generic hypotheses.

The fixed-start maps show quasi-periodic training beyond sampled supercritical crossings. Their divergent arc cannot be identified with local subcriticality alone: at 7 sampled crossings the fixed-start map is divergent even just below the crossing, where the period-2 orbit is stable, and 4 of those points are supercritical, with a small attracting circle reached when training starts near the 2-cycle. These comparisons show that basin accessibility from the shared initialization matters in interpreting the divergent arc.

6.3 States along one slice

Figure 6 shows what training looks like along that slice. Beyond the crossing, the two-step samples lie on a closed curve (rotation 0.2159, FTLE 0.0001); inside the period-18 window they are nine points (rotation 0.2222, FTLE -0.0072); between the 2/9 and 1/4 plateaus the projected state is irregular and has positive finite-time growth (FTLE 0.0504). These separate sampled trajectories do not establish a connected invariant-circle breakdown.

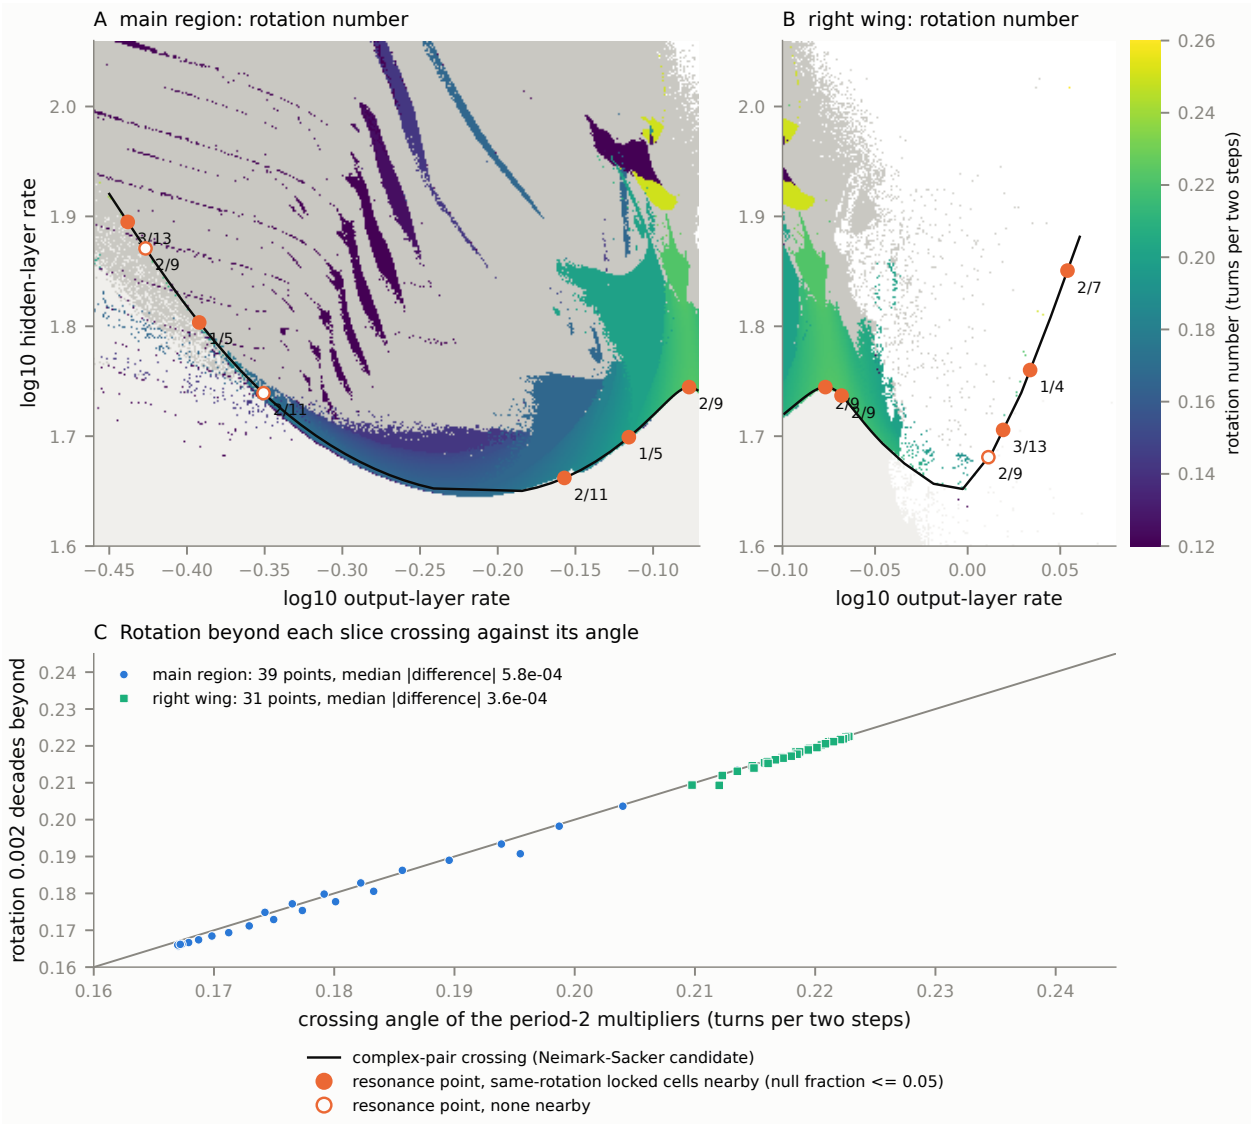


Figure 4: Beyond slice-wise period-two crossings, measured rotation tracks the crossing angle and locked windows appear as plateaus. A and B: rotation-number maps of S2-28011 (1,024 × 1,024 and 1,024 × 400 cells) with the merged crossing locus (69 points, black guide between samples) and provisional resonance locations where the interpolated crossing angle is m/q (filled when locked cells of the same rotation lie closer to the point than in 95% of random placements, hollow otherwise; the 95% level is a descriptive cut); chaotic cells gray, divergent white, period 2 light. C: rotation 0.002 decades beyond the curve against the crossing angle at the same output rate. Resonance points are interpolated between output-ordered slice results; their full-state branch association is unverified. *Generated by* `paper/gd-route/figures/f2_rotation_map.py`; *receipt* `figures/f2_rotation_map.provenance.json`.

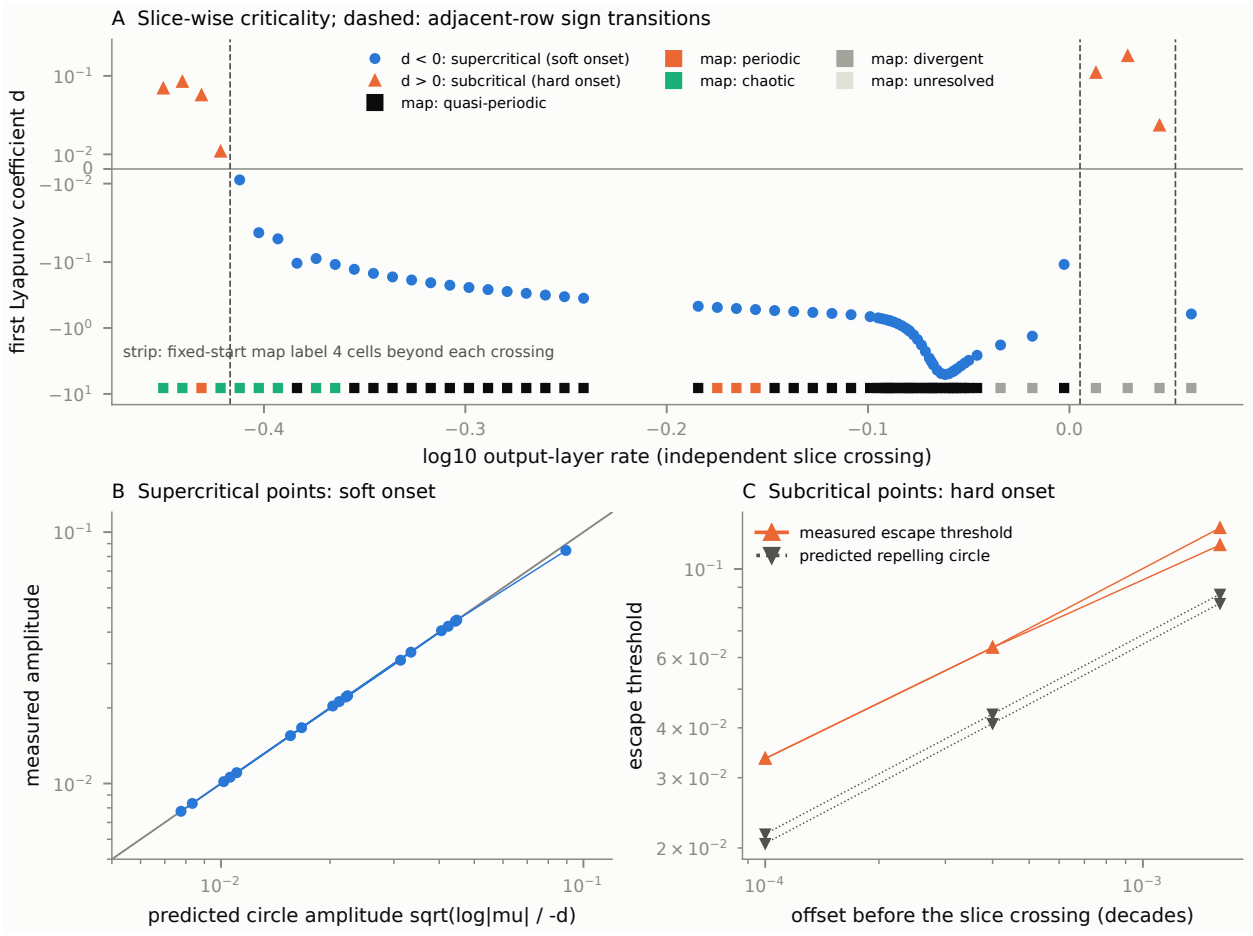


Figure 5: The first Lyapunov coefficient is negative at most sampled crossings and predicts local onset at the tested points. A: d at the merged slice-wise crossings (symmetric-log axis); dashed lines mark sign transitions between adjacent output-ordered rows. Branch identity across these rows is unverified, so these transitions do not locate sign changes along one established orbit branch. The strip shows the label of the fixed-start rotation maps four cells beyond the curve. B: at supercritical points, the amplitude of the circle reached from near the 2-cycle against the normal-form prediction, at three offsets beyond the curve. C: at subcritical points, the escape threshold before the curve against the offset, with the predicted repelling circle. A point counts as consistent when its amplitudes match within 6% (supercritical), or when the state jumps to an offset-independent distant amplitude and the escape threshold grows like the square root of the offset (subcritical). *Generated by* `paper/gd-route/figures/f7_criticality.py`; *receipt* `figures/f7_criticality.provenance.json`.

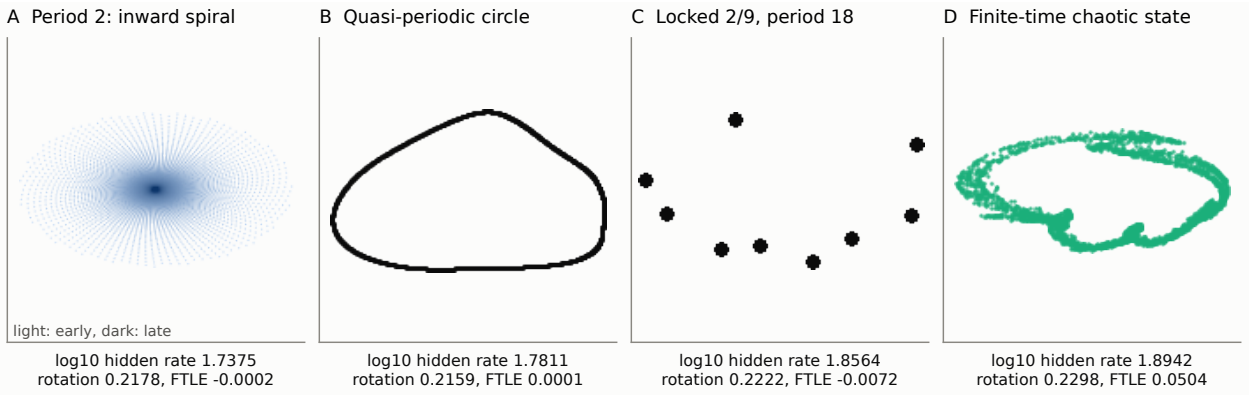


Figure 6: Four states along one slice, in order of increasing hidden-layer rate: an inward spiral to the 2-cycle, a closed projected curve, nine locked points and an irregular projected state. Each panel shows every second parameter vector of one run projected on its own two principal axes. The rates are chosen by a fixed rule from the staircase receipt (the period-2 cell closest to the onset, the median quasi-periodic cell, the middle of the longest 2/9 plateau, the median chaotic cell between the 2/9 and 1/4 plateaus), not by eye. The states are not a monotone sequence: beyond the onset the rotation number first falls, and beyond panel D training locks again at 1/4 before chaos returns (Figure 7). Projections onto two axes can hide structure in the remaining dimensions. *Generated by* `paper/gd-route/figures/f6_route_portraits.py`; *receipt* `figures/f6_route_portraits.provenance.json`.

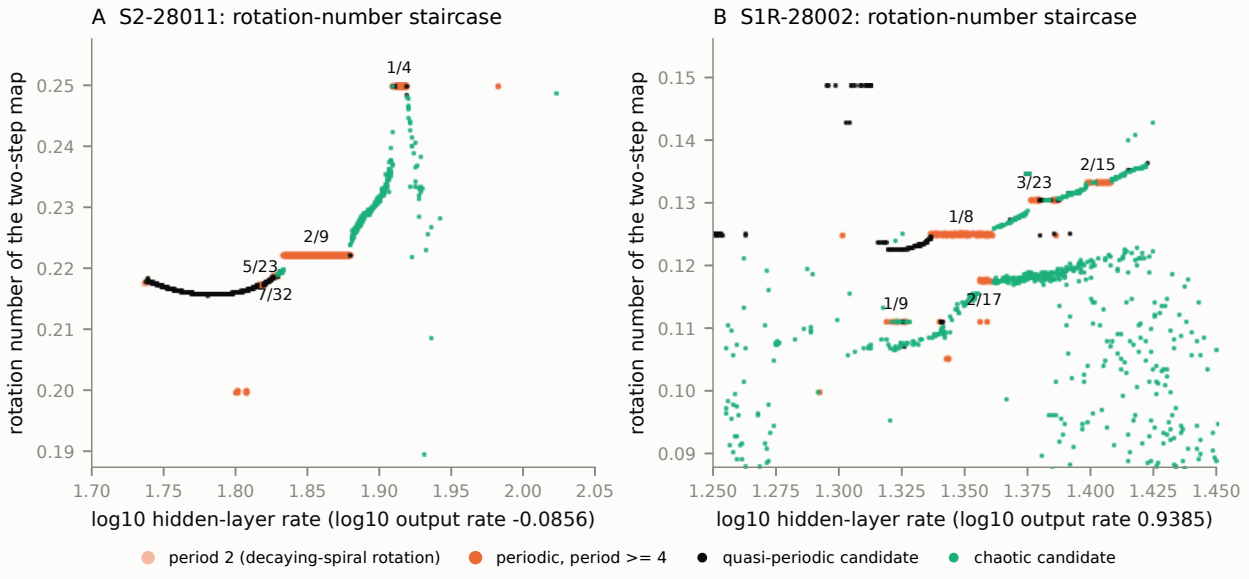


Figure 7: Along slices, quasi-periodic cells trace continuous rotation numbers and periodic cells sit on rational plateaus. Plateaus are detected automatically (locked cells with period $2q$ or a doubling of it, rotation within 6×10^{-4} of m/q) and labeled when they hold at least 8 cells. In S2 the rotation number first falls after the onset, then rises; the cells between the 2/9 and 1/4 plateaus are almost all chaotic candidates. In S1R, rotation bands occupy overlapping rate ranges; this projected scan alone does not establish coexisting full-state attractors at common parameters. Chaotic cells outside the plotted range are not shown. *Generated by* `paper/gd-route/figures/f3_staircases.py`; *receipt* `figures/f3_staircases.provenance.json`.

6.4 Rotation numbers form staircases

Along the slice through the period-18 window of S2-28011 (Figure 7), the rotation number falls from 0.2180 at the onset to 0.2158 at $\log_{10}\eta_h = 1.780$, then rises and locks at 2/9 for $\log_{10}\eta_h$ from 1.833 to 1.879. Of the 168 cells between the 2/9 and 1/4 plateaus, 167 are chaotic candidates; training then locks at 1/4 from 1.909 to 1.919 before chaos returns. The labeled plateaus are 5/23, 7/32, 2/9 and 1/4 in S2 and 1/9, 2/17, 1/8, 3/23 and 2/15 in S1R. Consecutive plateaus are Farey neighbors ($|m_1q_2 - m_2q_1| = 1$) in 3 of 3 pairs in S2, against 49% per pair for randomly drawn fractions in the same range, and in 4 of 4 pairs in S1R, where the null is 100% because every fraction with a small enough denominator in that range appears. The Farey pattern is weak evidence in S2 and uninformative in S1R.

6.5 A Birkhoff ordering test of the windows

Across the 61 windows, the 3,904 rays end at 1,316 numerical fold candidates, 1,012 flip candidates and 1,395 complex-pair crossings (181 rays reached the end of their range or stayed unresolved; Figure 8A). These multiplier-based labels do not establish bifurcation nondegeneracy. Fold edges are what the edges of a locked window on a circle look like, while flips and secondary complex-pair crossings are expected where a locked orbit loses stability off the circle.

The Birkhoff test results depend on which orbits are eligible, so we give each denominator. Of the 129 numerically validated orbits with period at least 3, 115 have at least 5 two-step points; 65 of these pass the plane test, against 1.57 expected by chance. All 61 confirmed windows are eligible for the plane test and 31 pass, against 4.92 expected; this count includes 4 windows with at most 3 points, which pass by construction. For the refined test, 56 confirmed windows have at least one test on 5 or more points (the 5 excluded windows have periods 4, 4, 6, 6 and 8); 35 of them pass, against a union bound of 3.58 chance passes. 28 pass at the two-step level, with measured shifts $m = 1$ for 19, $m = 2$ for 8 and $m = 3$ for 1; 7 pass first at a period-doubled level, for example period-20 orbits ordered under four steps with rotation 2/5, twice 1/5. Of the 5 odd-period windows, 0 pass (null 0.17): they did not pass this diagnostic, and their organization is open.

6.6 Resonance ancestry of a rule-selected window: not established

The test asks whether the rule-selected 1/5 window of S2-28011 descends from the 1/5 resonance of the crossing curve. The controls behaved as required: a resonant normal form's 1/5 tongue passed, the same branch scored against a displaced root was refused (alternative ancestry), and a logistic period-5 window born by a saddle-node was refused (alternative ancestry). At the right 1/5 resonance point 6 of 6 onset criteria passed (complex pair, other multipliers inside, transverse crossing, attracting circle with radius exponent 0.503, converging invariance residual, rotation equal to the crossing angle); at the left point 5 of 6 passed, the radius exponent 0.829 lying outside the frozen band.

From the right point, the locked interval has two numerical fold-candidate edges on all 6 cross-sections, and its width and amplitude shrink toward the point (Figure 9). The frozen estimator nevertheless extrapolates the center to 1.5×10^{-4} decades from the predicted point, 53% above the tolerance of 10^{-4}, so the frozen outcome is alternative ancestry. The connection from the tracked interval to the window ended in exhausted budget, and the left point gave no qualifying window. Under the frozen rules, the ancestry of this window is not established. Post hoc, and not replacing that outcome: the two shallowest levels lie outside the asymptotic regime, and over the three deepest levels the width scales with exponent 1.518 and the amplitude with 0.513, against $(q-2)/2 = 1.5$ and 0.5 for a Neimark–Sacker resonance tongue with $q = 5$.

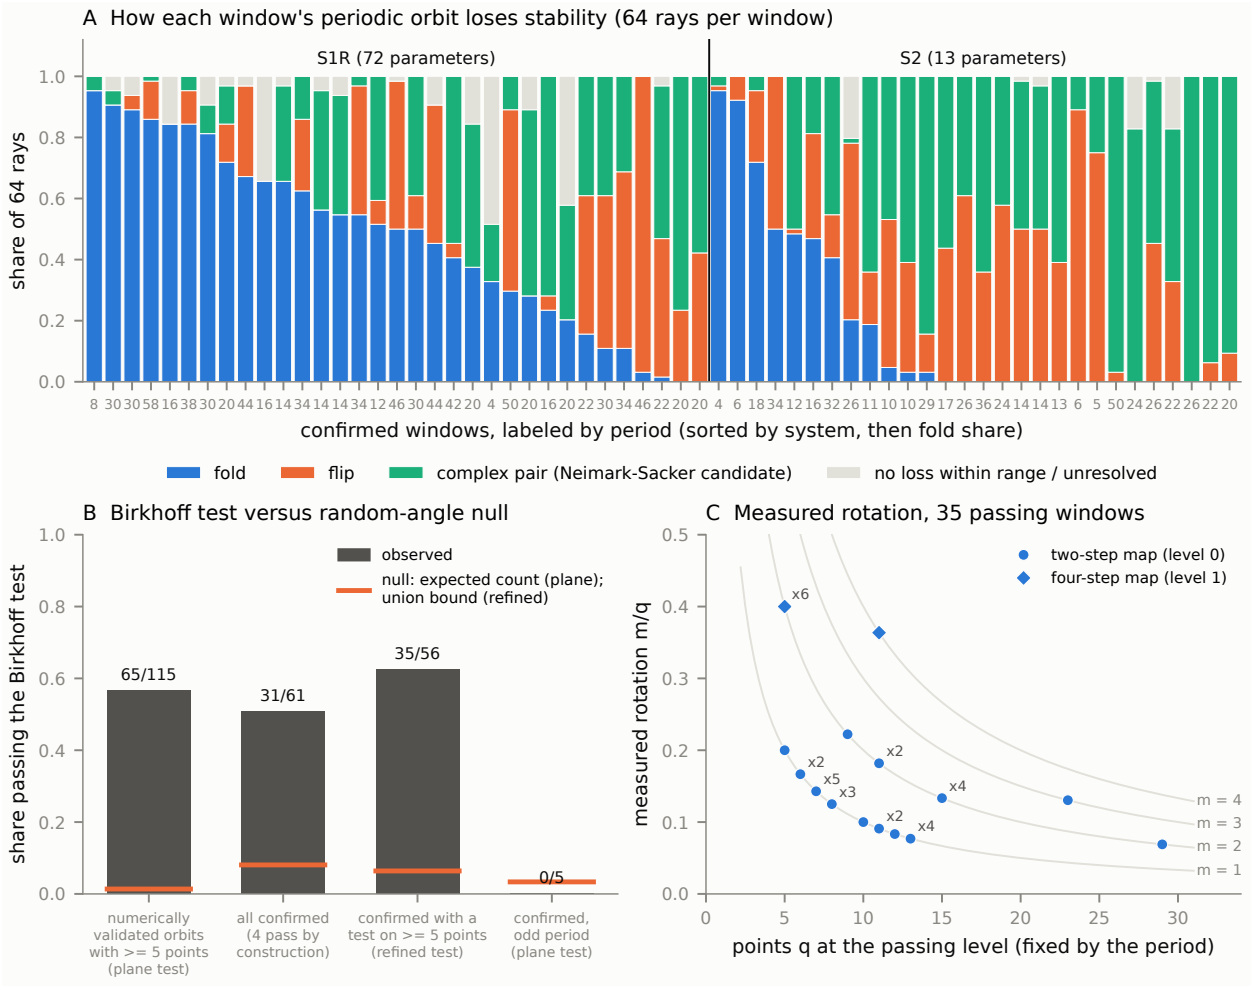


Figure 8: Across all 61 windows, stability boundaries mix numerical fold, flip and complex-pair candidates, and most eligible windows pass a Birkhoff ordering test far above its null. A: boundary type along 64 rays per window. B: share of orbits passing the test (gray) against the null (orange): the expected share of chance passes for the plane test, and the union bound for the refined test; eligibility is printed under each bar. C: rotation m/q measured by the passing test at its first passing level; q is fixed by the period and level by construction, so only the shift m and the ordering are measured. *Generated by* `paper/gd-route/figures/f5_window_census.py`; *receipt* `figures/f5_window_census.provenance.json`.

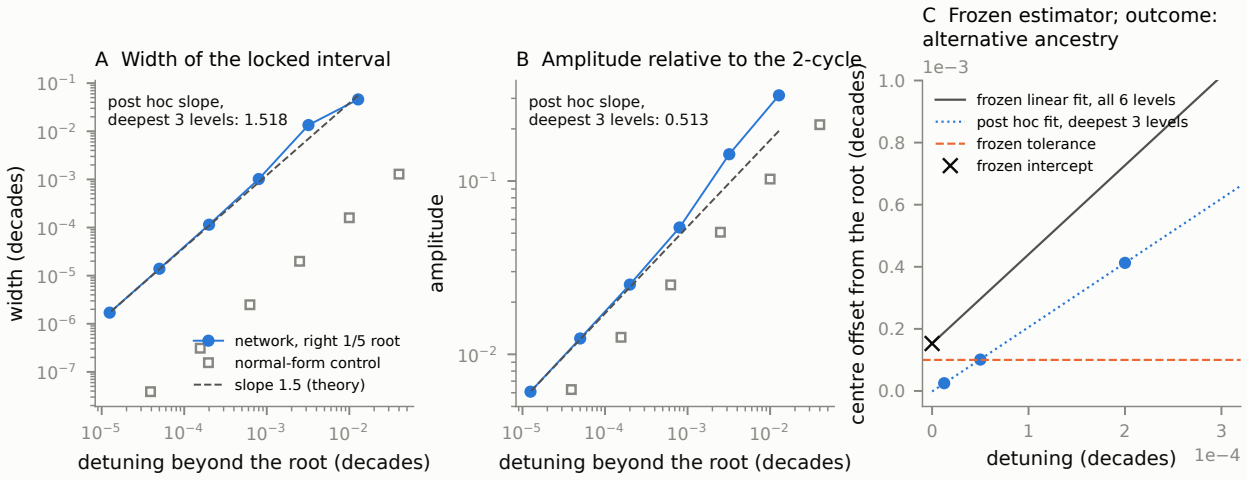


Figure 9: Near the predicted $1/5$ resonance point, a locked region bounded by numerical fold candidates narrows with the scaling of a resonance tongue, but the frozen estimator places its tip outside the tolerance. A and B: width and amplitude of the locked period-10 interval on six cross-sections against the distance beyond the resonance point, with the resonant normal-form control and the theory slopes; the slopes printed are post hoc fits over the three deepest levels. C: the frozen estimator (linear fit of the interval's center over all six levels) and its intercept against the frozen tolerance, with a post-hoc fit over the deepest three levels; the axes show the deepest three levels. *Generated by* `paper/gd-route/figures/f8_ancestry.py`; *receipt* `figures/f8_ancestry.provenance.json`.

6.7 Candidates for classical shrimp anatomy

Draft criteria for classical shrimp anatomy require numerical fold and flip candidates each on at least 8 of 64 rays, at least half of the flip rays opening onto period $2p$ in a local map, and agreement between ray and map edges on at least three quarters of rays. 15 windows meet the boundary-count part and 2 meet all of it under the historical coarse classification. These are anatomy candidates, not proofs of complete shrimp geometry or a census of first stability boundaries. The selected period-18 window of S2-28011 (Figure 10) has 46 fold-candidate, 15 flip-candidate and 3 complex-pair rays; ray and map edges agree within two cells on 61 of 64 rays, and 10 of its flip-candidate rays have neighboring coarse-map cells labeled period 36. These labels do not associate a local doubled branch with the continued parent orbit. Complex-pair candidates, outside the fold–flip anatomy used by our draft criteria, are common: 41 of 61 windows have at least 8 such rays.

A finer exploratory continuation on the lowest-index historical flip ray finds a more complicated sequence: the same numerically carried primitive orbit loses attraction through a complex pair, regains attraction, and only then reaches the later simple -1 crossing. The historical sampling skipped the intervening unstable interval. Amplitude-constrained solves find nearby primitive doubled cycles on the parent-stable side; these doubled cycles are unstable. Full-state closure, proper-divisor separation, reverse corrections and an adjacent starting-phase check support this numerical association, but do not prove a continuous connecting branch. Thus this ray does not establish a stable period-doubling route or complete shrimp anatomy. We retain the original census as historical evidence and do not treat its transition labels as exhaustive. See `docs/reviews/s2-period18-flip-numerical-outcome.md` and its hash-bound numerical receipt.

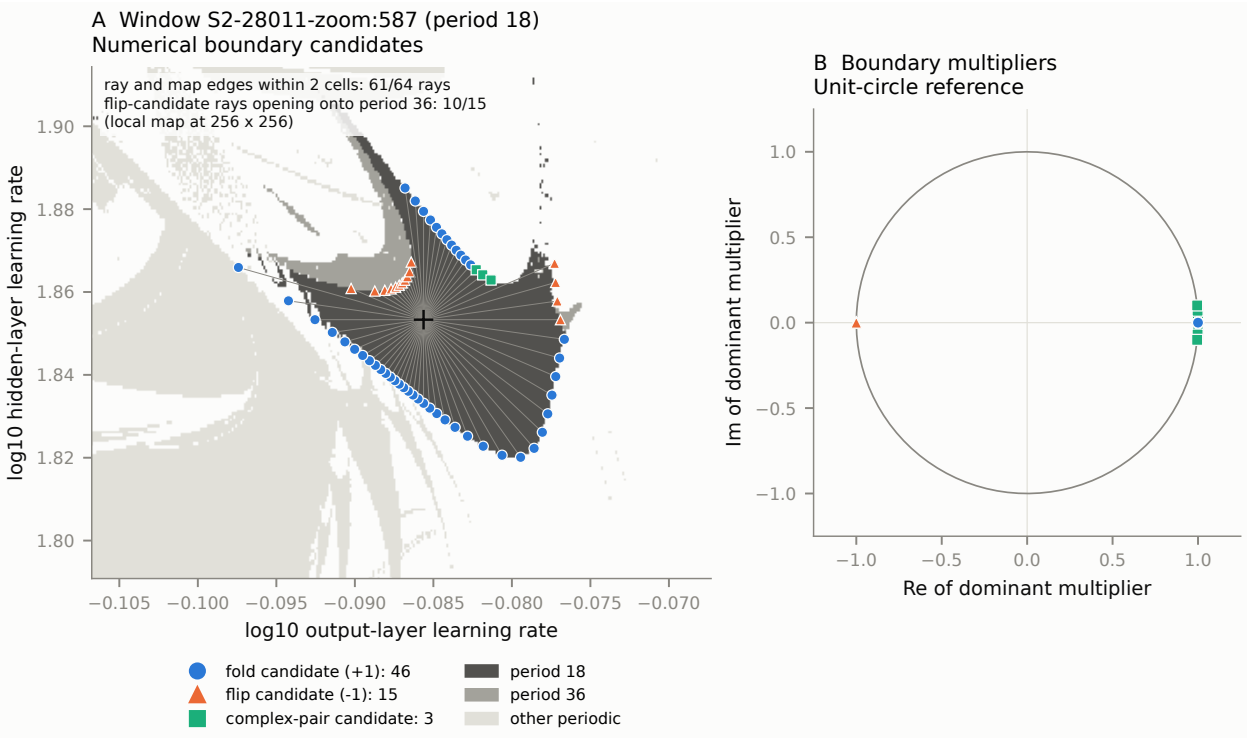


Figure 10: The period-18 window has numerical fold and flip boundary candidates, with neighboring period-36 bands. A: local map from the shared initial parameters with the window's orbit continued along 64 rays; markers show the transitions located by the historical coarse continuation. A finer follow-up on one ray finds an earlier instability pocket, so these markers need not be the first loss of attraction. B: crossing multipliers on the unit circle. This window was selected as the clearest example and is one of only 2 meeting the draft shrimp criteria; it is not representative (Figure 8). *Generated by* `paper/gd-route/figures/f4_window_anatomy.py`; *receipt* `figures/f4_window_anatomy.provenance.json`.

For this same period-18 anatomy candidate, the center-orbit proof in Section 5 is complemented by an exploratory numerical test of one selected boundary ray. A fixed-step corrected path and an augmented solve for $R = F^{18}(x) - x = 0$, $(M - I)v = 0$ and $\|v\|_2 = 1$ locate a simple $+1$ candidate. Two adjacent orbit phases pass closure, primitive-period and nondegeneracy checks, with remaining multiplier modulus approximately 0.8052. With s the normalized historical-ray coordinate and $w^T v = 1$, converging finite differences give $a_s = w^T R_s \approx -0.502622$ and $c = w^T D_x^2 R[v, v] \approx -8.000116$ at the first phase. An independent point-only objective-differentiation check reproduces the local residual, derivative actions and finite-difference coefficients at those two phases; spectral isolation remains the producer calculation. This strengthens the local numerical fold interpretation of one edge. The subsequent certificate in Section 5.2 proves a local fold with fixed output rate, and the certified continuation above connects it to the central primitive orbit. The flip certificate in Section 5.5 separately establishes local nondegeneracy on the selected two-rate ray. Other boundary rays, cusps, resonance ancestry and training utility remain unestablished. Source and retained outcomes are `tools/explore_window_fold.py`, `docs/reviews/s2-period18-fold-outcome.json` and `docs/reviews/s2-period18-fold-independent-review.json`.

6.8 Beyond these two networks

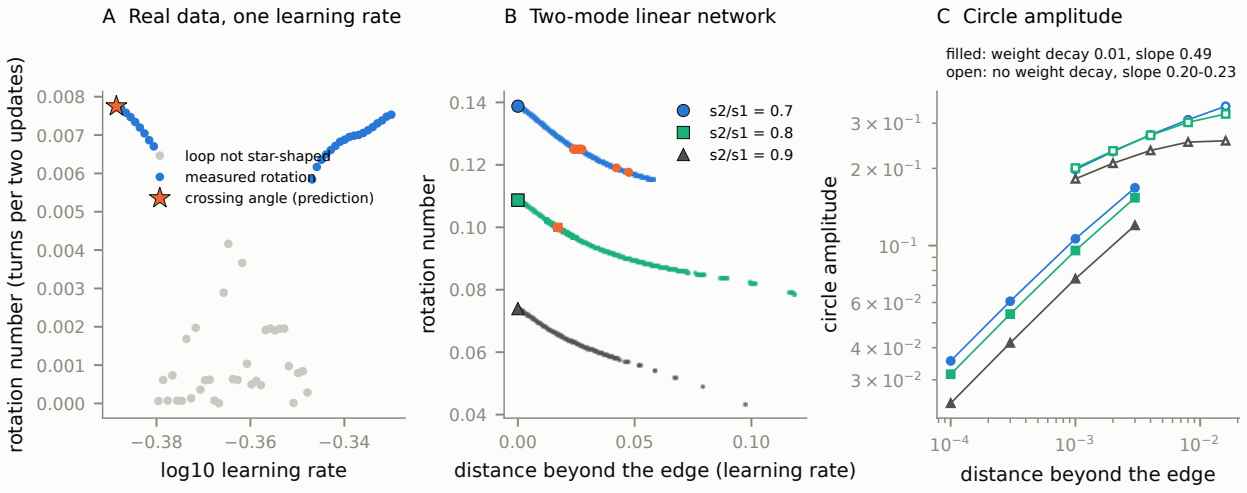


Figure 11: The same crossing, with the rotation predicted by its angle, in a real-data network with one learning rate and in Hofmann's two-mode linear network, where symmetry-reduced observables show soft onset and locking beyond the edge. A: rotation number on the circle beyond the crossing of a 529-parameter tanh network on digit images (gray where the loop is not star-shaped about its centroid, so the angle estimate is invalid), and the crossing angle (star). B: rotation number against the distance beyond the rotational edge for three singular-value ratios, with weight decay; locked cells in orange. C: circle amplitude against the distance beyond the edge with and without weight decay; exponents are slopes between the two smallest offsets. *Generated by* `paper/gd-route/figures/f9_generality.py`; *receipt* `figures/f9_generality.provenance.json`.

Distinct continuation outcomes in S1R. In the 72-parameter S1R network, two bootstrap procedures give different continuation outcomes. Of 36 output rates traced from one start, 16 end in a complex-pair crossing and 20 starts did not pass the finite-horizon period-two tail screen; from a lower start, 25 of 36 end in a complex-pair crossing, 4 at real $+1$ boundary candidates consistent with folds, and 7 starts did not pass that screen. The procedures can reach different crossing locations

and angles, but their historical summaries do not retain states for a common-parameter full-state comparison. A subsequent saved-map audit keeps these starting families separate: each output-rate slice was initialized independently, and adjacent rows need not represent one continuous orbit branch. The retained near-curve map cells remain unresolved under the original status classifier. Provisional rational-angle intersections do not establish association with distant same-period windows; saved full-state continuation is still required. See `docs/explore-s1r-rotation-audit-receipt.json` and its separate replay review, `docs/reviews/s1r-rotation-map.md`.

After a small hidden-rate backoff, a new full-state pilot follows one saved criticality lineage to 5 nearby output rates at a fixed hidden rate. Each neighboring link passes direct, two-half-step and reverse consistency checks, with both phases independently corrected and primitive period two numerically validated. All primary points are numerically attracting; their two-step spectral radii range from 0.998661 to 0.998991. An independent audit replays the saved graph and reconstructs full analytic gradient/Hessian monodromies at the anchor and all primary points. This establishes local numerical consistency at the tested steps, not branch uniqueness or a continuous parameter enclosure. That local pilot alone does not associate a bootstrap family, establish coexistence at common controls, or connect a distant window. See `docs/s1r-branch-association-receipt.json` and `docs/reviews/s1r-branch-outcome.md`.

A subsequent bounded run reproduces both bootstrap procedures with complete saved provenance, using 40,000 updates per start at log hidden rates 1.10 and 0.95 and the same output rate. Refinement of both tails yields numerically attracting primitive period-two pairs at their respective controls. Following the saved lineage through 12 hidden-rate links reaches exactly the upper bootstrap's controls. Every direct, two-half-step and reverse witness passes; after cyclic phase exchange, the normalized full-pair discrepancy is 2.65×10^{-15}. An independent audit checks all recorded qualifications and link decisions, with separate analytic derivatives at fixed representative pairs and direct reevaluation of saved tail transitions. It checks counters and checkpoints for the full warmups, without replaying unsaved intermediate updates. This associates the saved lineage with the new upper-start reproduction at the tested controls. It does not recover the missing historical states, identify the lower-start family at common controls, prove coexistence, or connect a distant window. See `docs/s1r-bootstrap-association-receipt.json` and `docs/reviews/s1r-bootstrap-outcome.md`.

A separate attempt to reach the lower-start controls completes 54 of 75 planned macro steps, comprising 56 accepted witnessed links. The last connected pair is at $\log_{10} \eta_h = 0.992$ and is numerically unstable. The next macro target is 0.990; its first phase corrector stalls at the initial trial and all 4 permitted step halvings. The run retains this gap and makes no lower-endpoint comparison. An independent audit checks the saved path and failure history, including separate analytic derivatives at fixed representative pairs. This leaves the lower-family association unresolved; it establishes neither a fold, global disconnection, coexistence nor absence of a connecting branch. See `docs/reviews/s1r-lower-outcome.md` and `docs/reviews/s1r-lower-independent-outcome.md`.

A fixed-state follow-up finds that the stored direction solves its local Newton equation accurately. With $R = F^2(\theta) - \theta$ and $A = D_\theta R$ at fixed rates, the stored direction has $\|Ap + R\|_2/\|R\|_2 = 3.138 \times 10^{-9}$ and Frobenius-normwise backward error 1.63×10^{-16}. Nevertheless, all 13 retained line-search trials increase the original unscaled infinity-norm residual; the smallest ratio is 1.33778. Independent saved-data checks reproduce the equation and trial reductions using retained derivatives. The qualified predecessor and last accepted pairs remain numerically regular under the declared rank test. The terminal failed state is not a closed orbit: its raw residual Jacobian has condition estimate 1.46×10^7, which does not establish a fold. At that nonclosed state, raw- and scaled-metric secant conventions choose opposite orientations of the local null direction; its sign therefore does not

establish a branch turn. That diagnostic performs no correction or continuation. See `docs/reviews/s1r-lower-gap-outcome.md` and `docs/reviews/s1r-lower-gap-independent-outcome.md`.

A subsequent pseudo-arclength pilot completes 2 locally witnessed links from the last qualified pair. All 9 qualified period-two pairs, including 6 auxiliary witnesses, remain numerically unstable. Each link passes direct, two-half-step and reverse checks, including both native phases and state comparisons at identical controls. With $h = \log_{10} \eta_h$, a fixed raw Euclidean metric on (θ, h) and consistent carried-phase orientation, the second link runs from $(h, t_h) = (0.99190473, -0.014124)$ to $(0.99189083, +0.009173)$, where t_h is the hidden-rate component of the unit tangent. Its qualified midpoint witness has $(h, t_h) = (0.99188533, -0.003697)$. This supports a local numerical turning candidate on the unstable cycle segment, not an attracting-window boundary. No singular point, simple +1 multiplier, parameter transversality or quadratic nondegeneracy is established, so it is not a fold proof. The one-thread producer and independent saved-data audit take 5.20 and 1.50 seconds, respectively; the audit reuses saved derivatives and decompositions. The combined change of chart, predictor and globalization does not isolate which change helped, and the lower-family connection and any training utility remain unresolved. See `docs/reviews/s1r-pseudoarclength-outcome.md` and `docs/reviews/s1r-pseudoarclength-independent-outcome.md`.

Real data, one learning rate. A 64-8-1 tanh network (529 parameters) trained with one global learning rate and weight decay on 1,024 standardized UCI digit images (two-class task) has a numerically validated period-2 orbit that loses stability at $\log_{10} \eta = -0.3885$ with dominant two-step multiplier $0.998814 + 0.048693\mathrm{i}$, a complex pair on the unit circle. Its angle predicts the rotation of the circle beyond: 0.0077528 turns per two updates, against 0.007751 measured just beyond the crossing on a smooth projected loop consistent with an invariant circle (FTLE -0.0006; Figure 11A). This is one branch among those examined: of 4 numerically validated period-2 branches continued to their loss of stability, 1 ends in a complex-pair crossing and 3 yield boundary candidates with a real multiplier near +1, consistent with folds. On a second data subset Newton did not resolve a period-2 orbit to the stated tolerance from 2 starts. No locked window was resolved; at rotations near 0.008 the relevant tongues have very large denominators.

Oscillatory onset beyond the rotational edge of a linear network. In the two-mode depth-two linear network of Hofmann [17], the aligned 2-cycle loses stability at his rotational edge $a(s_1 + s_2) = 2$, which we reproduce to 2.2×10^{-16} for $s_2/s_1 = 0.7, 0.8, 0.9$, with crossing angles 0.1380, 0.1082 and 0.0737 and a transverse crossing ($d|\mu|/da = 1.85$–1.95). Beyond the edge, rotation-invariant observables show an attracting closed curve of the two-step dynamics. An exact rotation symmetry leaves a neutral multiplier at one, including with weight decay, so the generic isolated-orbit Neimark–Sacker theorem requires symmetry reduction here. Without weight decay the second mode's minima form a neutral continuum and the circle amplitude grows with exponent 0.20–0.23, a degenerate bifurcation; with weight decay 0.01 the exponent is 0.49, the square-root growth consistent with supercritical onset in the symmetry-reduced dynamics, and the rotation number at an offset of 10^{-4} is within 3.3×10^{-5} of the crossing angle (Figure 11B and C). Beyond the edge the rotation locks at 1/8 (period 16), 2/17 (period 34), 5/42 (period 84) for $s_2/s_1 = 0.7$, and at 1/10 (period 20) in a fine scan at 0.8. The same crossing occurs in the two-weight scalar factorization $\frac{1}{2}(uv - d)^2 + \frac{1}{2}\lambda(u^2 + v^2)$ with $\lambda = 0.2$ and unequal layer rates (crossing angle 0.4288; the circle amplitude grows by a factor 2.08 for a fourfold offset, close to the square-root value 2), found as one of 6 of 64 cases of a coupled four-weight family that ended in a complex-pair crossing; boundary types for two held-out couplings were predicted correctly in 32 of 32 cases.

A scalar mechanism with an explicit equal-rate control. For $L(u,v) = \frac{1}{2}(uv-d)^2 + \frac{\lambda}{2}(u^2+v^2)$, $0 < \lambda < d$, equal rates preserve $u = v = x$. Set $c = 1 + \eta(d-\lambda)$ and $e = 1 - \eta(d+\lambda)$. The positive balanced 2-cycle for $c > 2$ is

$$x_\pm = \frac{\sqrt{c+2} \pm \sqrt{c-2}}{2\sqrt{\eta}}, \qquad m_\parallel = 9 - 2c^2, \qquad m_\perp = 1 + e^2 + ec. \tag{34}$$

The rescaled cubic cycle and longitudinal multiplier recover the balanced scalar formulas in Hofmann [17, Propositions 2–3]; the transverse multiplier tests the full two-weight state. Both multipliers are real, so this branch cannot have an NS crossing; its longitudinal flip is at $\eta = (\sqrt{5}-1)/(d-\lambda)$ when the transverse direction remains attracting. Unequal rates can break the common eigendirections of the symmetric step factors, allowing complex two-step multipliers. This explains a branch-specific mechanism and does not exclude other equal-rate attractors.

A fixed-target exploratory scan over ridge and rate ratio gives 12 flips and 5 complex-pair crossings in 17 followed branches; all sampled equal-rate cases flip. All complex crossings have negative computed criticality. In the representative case the crossing rate is 0.733508896, birth rotation 0.428819 and coefficient −3.836452; three decreasing detunings give an amplitude exponent of 0.49790. Analytic composed-map derivatives agree with an independent finite-difference calculation. These are numerical checks of local onset, not a complete phase diagram or a rigorous invariant-circle theorem for that numerical representative. Section 5.7 gives a separate local proof for another selected scalar case. The compact receipt is `docs/explore-minimal-model-scalar-receipt.json`.

6.9 Consequences for training

Outcome (median per regime)	period 2 (282 cells)	quasi-periodic (125 cells)	locked (97 cells)	chaotic (223 cells)	ΔR^2 [95%]
function disagreement, 40k updates, start 10^{-8} apart ($\log_{10}$)	−15.87	−6.11	−14.69	−0.63	+0.000 [−0.179, +0.067]
function disagreement after the step-decay anneal ($\log_{10}$)	−15.81	−8.70	−9.41	−2.34	−0.005 [−0.243, +0.070]
spread over 64 anneal start times ($\log_{10}$)	−4.98	−3.73	−3.24	−2.36	+0.045 [+0.001, +0.107]
training loss, last 8,192 updates ($\log_{10}$)	−2.20	−2.10	−2.04	−1.93	−0.001 [−0.010, +0.001]
held-out loss, last 8,192 updates ($\log_{10}$)	−2.06	−1.94	−1.86	−1.73	−0.001 [−0.007, +0.001]
held-out loss after the anneal ($\log_{10}$)	−2.98	−2.98	−2.99	−3.05	+0.057 [−0.169, +0.232]
loss power in spectral lines	1.00	0.99	0.96	0.10	+0.001 [−0.037, +0.010]

Table 4: Consequences per regime (exploratory, S2-28011, one slice of 750 cells). Columns give medians per regime (cell counts in parentheses). ΔR^2 is the cross-validated gain from adding locking and rotation features (locked and quasi-periodic indicators, rotation number, distance to the nearest rational, $1/q$) to a base model of FTLE, sharpness, rate and oscillation amplitude, over the 729 cells beyond the edge of stability, with moving-block bootstrap intervals. Regime differences are large; the incremental value of rotation information is not.

The regime matters for training, but what it predicts is largely generic (Table 4). On a slice of 750 cells through the period-18 window, perturbations of the initial parameters die out on period-2 and most locked orbits, persist in proportion to their size on invariant circles, and saturate in chaos;

locked windows reached through chaotic transients split into runs that reproduce exactly and runs that land on another phase of the same cycle. These differences follow the sign of the Lyapunov exponent, transient amplification, oscillation amplitude, sharpness and rate. Adding locking and rotation features to a model of those quantities gives an incremental R^2 whose interval lies above zero for 1 of 7 outcomes (the spread over anneal start times). In an analysis pooled over two slices with slice-specific slopes, changed after seeing an earlier fit and therefore adapted, two locking effects remain: the dose-response of disagreement on the perturbation size ($\Delta R^2 = +0.179$, [+0.070, +0.357]) and the spread over anneal start times (+0.047, [+0.011, +0.099]); both are carried by the locked indicator rather than the rotation number.

Controlled rate ramps separate criticality from loss spikes. At two previously inspected S2 points, one with positive and one with negative criticality, we match stable and unstable endpoints in $\log|\mu|$, use two ramp speeds, and fork identical terminal states into unchanged rates, reversing the hidden-rate ramp, or halving both rates. For near-orbit starts, the hard point leaves the local branch and does not return under the small reverse ramp; the soft point stays nearby and returns. Nevertheless, both spike: postcrossing peak loss relative to the instantaneous frozen-cycle maximum is 9.59–11.23 at the hard point and 1.60–1.62 at the soft point. A loss spike alone therefore does not identify hard criticality. Halving both rates gives terminal mean losses of 0.570 and 0.494 times the original cycle means. That generic baseline performs better on this endpoint, although its abrupt change can itself produce a transient peak. The interventions have different sizes; this is not evidence of a superior geometry-based controller. Ordinary initialization at the hard point misses the local branch before crossing, so those runs are basin-accessibility controls. Selection and thresholds are exploratory, and the result covers only these two points in one network. Full-state replay and the post-run basin annotation are bound by `docs/warmup-intervention-receipt.json`.

Intervention-dose feasibility (negative). Before collecting further intervention outcomes, we checked a candidate comparison at 4 saved ramp-terminal states. Let g be the gradient and P the baseline block learning-rate matrix. A uniform fractional reduction $\delta = 0.05$ changes the update by $R = \delta\|Pg\|$ relative to the unchanged-rate sham. Matching that displacement using only block b requires fractional reduction $r_b = R/\|(Pg)_b\|$. At the four states, the required output-block fractions are 1.412, 1.444, 0.766, 0.766, all above the declared cap 0.25. This fixed candidate design is infeasible; the first two fractions would even reverse the output update. No pulse or training update was applied. An independent analytic-gradient implementation reproduces the decision. Equal sham-relative displacement would still leave total step lengths unequal, and comparable distant periodic and chaos-qualified controls remain necessary for a geometry-specific claim. The result rejects this dose definition at these states, not geometry-based intervention in general. See `docs/reviews/utility-dose-outcome.md` and `docs/reviews/utility-dose-independent-outcome.md`.

Ordinary gradients explain the tested immediate loss contrast. A separate exploratory comparison evaluates feasible paired states $\theta_c \pm d$ about the same center. In all 4 cases, $2\nabla L(\theta_c)^T d$ explains the measured difference $L(\theta_c + d) - L(\theta_c - d)$ up to an absolute residual fraction between 8.09×10^{-8} and 1.96×10^{-6}. Independent saved-state and scalar reductions verify this result conditional on the recorded analytic gradient and loss evaluations. It supplies no geometry-specific explanation of the immediate loss advantage. Longer-horizon responses and comparable distant controls would be required to test an additional effect. See `docs/reviews/response-utility-saved-audit.json`.

Reading the rotation from the loss. The dominant peak of the even-step training-loss spectrum equals the two-step rotation number within 10^{-3} in 125 of 125 quasi-periodic and 97 of 97 locked cells of the S2 slice, and in 31 of 31 and 19 of 19 on the S1R slice. Before the crossing, with small noise added to every update, an autoregressive fit of the even-step loss recovers the angle of the period-2 orbit's complex multiplier with median error 1.9×10^{-4} over 41 period-2 cells of S2 (largest 9.4×10^{-4}) and 3.6×10^{-4} over 34 cells of S1R; the estimator was chosen after a first pass (adapted). We treat this as local system identification, not early warning, until sampling, harmonic, abstention, autoregressive-baseline and specificity rules are fixed in advance.

Placeholder. Prespecified route-to-chaos path: a connected path, fixed in advance, from the period-2 region through the quasi-periodic band and locked windows into sustained chaos with converged diagnostics (not yet run).

Large-model orbit correction. The CIFAR development model exhibits slowly drifting period-2 motion and loss modulation. We test full-state periodicity by correcting the saved two-step return residual rather than identifying a cycle from the loss trace. At a fixed learning rate and on the same development subset, longer Krylov solves eventually produce a direction passing the declared linear forcing bound; coordinate-diagonal and common input-Gram surrogates do not improve the matched-budget solve. After native transpose qualification, damped LSMR accepts 6 corrections under actual residual decrease, Armijo, reduction-ratio and phase-separation checks, reducing relative closure by 3.49% to 4.727×10^{-6}. An independent compensated-sum audit reproduces those decisions.

A symmetric two-phase formulation then gives a further accepted residual-merit step, reaching 4.632×10^{-6}, still above the fixed 10^{-8} closure requirement. For a scalar-step gradient map F, its shooting residual is $H(x, y) = (F(x) - y, F(y) - x)$, with symmetric derivative $DH = \begin{pmatrix} DF(x) & -I \\ -I & DF(y) \end{pmatrix}$. This uses symmetry of each Hessian; the eliminated product $DF(y)DF(x) - I$ is generally nonsymmetric. The retained direction's true eliminated forcing is 0.6598, which fails the original 0.5 Newton gate. Acceptance therefore belongs to the explicitly separate actual-merit strategy and does not certify an orbit. Native maps and the retained derivative action replay bit-for-bit; an independent saved-arithmetic audit reproduces all five trial decisions, the failed Newton gate and the accepted merit step. The solver comparisons and all failures remain in the linked receipts and research log. See `docs/reviews/cifar-saved-step-independent.json`, `docs/reviews/cifar-merit-saved-independent.json` and `docs/reviews/cifar-saved-shooting-merit-outcome.json`. The second subset remains reserved for a separately frozen test.

A complementary development path seeks a stationary point from which a period-two branch could be continued. At the current full parameter state, a freshly built 512-direction orthogonal basis passes Hessian symmetry, finite-difference, full-rank and physical-action checks. The true linear forcing ratio is 0.419126, below the fixed 0.5 gate. Nonlinear acceptance is much more restrictive: three proposed steps leave the original trust ball, three fail actual gradient-merit decrease, and the step with multiplier 1/64 passes Armijo. Its squared-gradient merit ratio is 0.991753 and relative gradient is 2.57082×10^{-4}. An independent saved-data replay reconstructs all basis recurrences, least-squares coefficients and seven trial decisions. The remaining bottleneck is nonlinear progress; this iterate is not treated as a stationary root or periodic orbit. See `docs/reviews/cifar-current512-independent.json`.

A same-start regularization test chooses the shortest direction in this 512-dimensional space with a target forcing ratio of 0.49. The direction norm falls to 0.593616 times the original, and actual Armijo acceptance moves from 1/64 to 1/32. Nevertheless, its squared-gradient merit ratio is 0.997018, worse than 0.991753 for the original direction. Independent spectral whitening, a separate

singular-value solve, and compensated-sum trial reductions reproduce this comparison. Shortening the linearized correction alone therefore does not resolve the nonlinear bottleneck at this state; the better original endpoint is retained. See `docs/reviews/cifar-regularized-independent.json`.

A correction to the path itself produces more progress at this same state. Let p be the original accepted linear direction and fix an acceleration a from its retained small-step nonlinear remainder, before evaluating new trials. We test $\theta(\alpha) = \theta_0 + \alpha p + \alpha^2 a$ at $\alpha = 1/32$ and $1/64$. Both pass the original trust and actual gradient-merit decrease gates. The predeclared first-passing rule selects $1/32$, with merit ratio 0.979648: a 2.04% decrease compared with 0.82% for the straight correction. The retained second trial gives 0.975765 and is not retrospectively selected. One fresh Hessian action qualifies the acceleration and two fresh gradients evaluate the trials; an independent full-vector and compensated-sum replay verifies the path, action, decisions and comparison. This is improved local progress toward stationarity. The forcing qualification applies to the initial tangent p, and is not transferred to $p + \alpha a$. See `docs/reviews/cifar-curved-path-independent.json`.

At the selected curved endpoint, a fresh full 512-dimensional correction uses 514 Hessian-vector products and ten gradients, including qualification and line search. The true forcing ratio is $0.486221 < 0.5$, but the nonlinear line search again limits progress: three trials leave the global trust region and four further trials fail merit decrease before the first acceptance at $\alpha = 1/128$. The gradient norm falls from 7.790716×10^{-4} to 7.773665×10^{-4}, with squared-gradient merit ratio 0.995627. An independent replay checks the complete basis, all 511 recurrence rows, the retained actions and all eight trial decisions. See `docs/reviews/cifar-curved512-independent.json`.

A quadratic remainder explains the local step-size restriction. For this fresh direction p, write $g(\alpha) = \nabla L(\theta + \alpha p)$ and $r(\alpha) = g(\alpha) - g(0) - \alpha H p$. From the two retained gradients at $\alpha = 1/16$ and $1/32$, fit

$$c = \frac{1}{2}\left[\frac{r(1/16)}{(1/16)^2} + \frac{r(1/32)}{(1/32)^2}\right], \qquad \widehat{g}(\alpha) = g(0) + \alpha H p + \alpha^2 c.$$

The three remaining retained gradients check the approximation without further model evaluations. Define the gradient error by $\|\widehat{g} - g\|/\|g\|$, the increment error by $\|\widehat{g} - g\|/\|g - g(0)\|$, and the merit ratio by $\|g\|^2/\|g(0)\|^2$.

Step	Gradient error	Increment error	Predicted merit	Actual merit
1/8	0.072651	0.079209	17.498902	17.082598
1/64	0.001999	0.034235	1.009104	1.008977
1/128	0.000630	0.042216	0.995680	0.995627

Table 5: Retrospective quadratic approximation along the fresh CIFAR correction. Errors are relative fractions. The two fit gradients are excluded from these checks; all five gradients were already consumed development data.

The quadratic term reproduces the merit increase at the last rejected step and the decrease at the first accepted step (Table 5). Its error relative to the nonlinear remainder is below 10% at all three checks, whereas the largest step fails the fixed 1% full-gradient criterion. Thus the calculation diagnoses the observed line-search restriction locally; it does not yet provide a prospectively validated step selector or a stationary-point certificate. The saved-vector replay is also cross-checked by an independent extended-precision reduction of all 98,666 coordinates. See `docs/reviews/cifar-ray-remainder-attempt001.json` and `docs/reviews/cifar-ray-paper-independent.json`.

An exact structural reduction, with a negative solver diagnostic. For the same fixed-input full-batch model with ridge term $\lambda\|\theta\|^2/2$, write the first-layer weights as $W = QB + N$, where Q has orthonormal columns spanning a space containing range$(X^\top)$, $Q^\top N = 0$, and X contains the fixed training inputs as rows. The data loss is independent of N, so plain GD with common scalar learning rate η separates as $(z, N) \mapsto (G(z), qN)$, with $q = 1 - \eta\lambda$ and z containing B and the other parameters. If $q^p \neq 1$, every period-p orbit has $N = 0$; its primitive period is preserved in the reduced map and its monodromy is the reduced monodromy direct-summed with $q^p I$. With a nonzero complementary subspace, an attracting reduced orbit attracts in the full map exactly when $|q^p| < 1$. These statements do not apply unchanged to adaptive updates, changing input spaces or nonisotropic regularization.

Keeping all 512 columns of the thin QR factor, without rank truncation, reduces the nontrivial coordinates from 98,666 to 16,746 in this development case. However, the complementary directions contain only 1.75×10^{-8} of the original squared period-two residual, below the fixed 0.5 priority criterion. A saved-data audit independently reproduces the projections and decay identities; it does not regenerate the original map images or Jacobian products. Thus this decomposition does not explain most of the observed residual or establish a convergence or speed advantage. Removing N can also change predictions on inputs outside the training span. See `docs/plans/cifar-input-span-diagnostic.md`, `docs/reviews/cifar-input-span-outcome.md` and `docs/reviews/cifar-input-span-independent-outcome.md`.

Fixed curvature approximation (negative exploratory pilot). All 6 selected period-two references in S2-28011 and S1R-28002 pass the unchanged full-state and historical-spectrum checks. Nevertheless, approximating each whitened phase Jacobian by its top-curvature direction plus an isotropic bulk fails to predict the leading pair of the native derivative $DF(F(\theta))DF(\theta)$. Unordered pair errors, normalized by $\max(1, \rho(M))$, range from 0.0802 to 1.9349; every reference exceeds the 0.02 gate. The 2 real controls are falsely predicted complex, while the stable-complex S1R reference is predicted real. The mean error 0.8586 is below the 1.2023 mean of the better aligned or orthogonal commuting control at each reference, but this relative gain does not rescue the absolute errors or class mistakes. This rejects the chosen rank-one/bulk approximation on this fixed panel, not richer curvature mechanisms; it establishes no larger-model or language-model utility. See `docs/plans/curvature-subspace-mechanism.md` and `docs/reviews/curvature-six-reference-outcome.md`.

Actual-text transformer pilot (architectural feasibility). A one-layer causal transformer with 15,776 parameters, tied token/output embeddings and LayerNorm was trained on 256 fixed next-character targets per update from tiny-Shakespeare. Full-batch GD with ridge regularization makes the update autonomous. Of 10 exploratory rates from one shared initialization, 7 completed 1,000 updates and 3 stopped at numerical guards. None of the completed trajectories met the full-state fixed-point or period-2 recurrence screen; the stopped runs did not reach its final-tail window. Moderate rates memorized the small batch while parameters drifted. This is neither a prevalence estimate nor a test of generalization: validation-corpus outcomes remain unconsumed. Reduced dense-derivative controls and matched-state CPU/GPU comparisons support the matrix-free implementation, without establishing agreement of entire finite-precision trajectories. Loss AR(2) fits can improve one-step prediction by modeling drift, and weak complex fitted roots also appear during ordinary descent. These roots therefore do not establish Floquet multipliers or an NS crossing. The complete evidence and failure labels are in `docs/explore-tiny-lm-receipt.json`; methods and corpus attribution are in `docs/explore-tiny-lm.md`.

Drift-aware prediction pilot (negative calibration). A subsequent development pilot compared causal loss/AR and gradient-history predictors with nonlinear update-plane coherence. The matched-history baseline received all Gram histories needed to reconstruct the coherence features, so these features could only add a nonlinear representation of the same information. The declared development gate failed: late-event coverage was insufficient, and adding coherence worsened seed-pooled Brier and average precision on the eventful seed. A loss-history baseline was stronger on its eventful trajectory. This sparse challenge establishes no predictive or controller advantage; it does not exclude useful diagnostics on other workloads. Assessment outcomes and controller stages remained unopened. Source-bound results and their independent saved-data audit are documented in `docs/explore-tiny-lm-calibration.md` and `docs/reviews/tiny-lm-calibration-outcome-review.md`.

Broader-data progress forecast (negative). A separate exploratory unit compares nested batches of 8 and 256 text windows using two new initializations and 800 updates per case. Each initialization shares one initial expanded-objective rate scale across its arms. Broader data reduces memorization and lowers loss on a new disjoint development probe, both at equal updates and at equal processed training targets. These are descriptive contrasts on one fixed text pool; the arms are not independently optimized, and equal token counts do not establish equal wall-clock cost.

Predictors fit earlier trajectory segments and tune on subsequent segments, with a horizon embargo before the late evaluation block. The continuous target is training-CE change over the next 16 updates; the probe does not enter fitting or selection. For the expanded arms in seed order, nonlinear update-plane features (B3) give late normalized MSE 0.2999, 0.5026, versus 0.3051, 0.5153 for the complete matched Gram-history baseline (B2) and 0.1027, 0.0949 for the tuning-selected ordinary comparators (loss/gradient history and AR1 respectively). Normalization uses each arm's fit-only target RMS. B3's small improvement over B2 misses the declared improvement threshold and is substantially worse than the ordinary controls; the forecast gate fails for both seeds. An independent saved-data audit reconstructs all candidate fits, selections, forecasts and gates, directly checks corpus/token identities, and replays fixed sampled features. Probe observations are hash-bound and summarized without independent probe reevaluation. No assessment, policy or inference stage follows. This supplies no geometry-specific language-model advantage and does not exclude other useful diagnostics. See `docs/explore-tiny-lm-broader-outcome.md` and `docs/reviews/tiny-lm-broader-outcome-audit.md`.

Frozen curvature fails to describe transformer response. We next test the local approximation itself on four consumed development checkpoints: update 600 of both initializations and both 8/256-window arms. Each saved float32 parameter vector is promoted exactly to float64 and replayed for 16 updates with its original rate and regularized training objective. This defines a new float64 counterfactual trajectory. For the initial-gradient and a fixed Gaussian unit direction u, central perturbations use both 10^{-4} and 5×10^{-5} times $\max(1, \|\theta_0\|)$. With $J_k = I - \eta H_L(\theta_k)$, we compare the measured response with $J_0^h u$, the scalar estimate $\|J_0 u\|^h$, persistence, and the transported derivative $J_{h-1} \cdots J_0 u$. The last uses the observed trajectory and is a retrospective control.

All direction/horizon comparisons at 1, 4 and 16 updates pass the fixed 1% two-amplitude and transport agreement gates; terminal training-CE directional slopes also agree within the fixed 1% check. Both expanded-arm gradient responses exceed the declared 20% frozen-error threshold (Table 6); the small-arm gradient errors remain small. Independent saved-data arithmetic recomputes all responses, comparator errors, functional slopes and decisions, sharing the acquired

Training windows	Measured gain	Frozen vector error	Transported vector error
8	0.990, 0.990	1.31×10^{-3}, 1.36×10^{-3}	2.87×10^{-9}, 2.81×10^{-9}
256	0.590, 2.331	8.51×10^{4}, 5.27×10^{3}	9.32×10^{-5}, 2.35×10^{-4}

Table 6: Gradient-direction response after 16 updates. Each entry lists the two initializations in the same order. Vector error is $\|p - d\|/\|d\|$ relative to the smaller-amplitude central difference. The frozen-derivative approximation has large errors on the expanded arms while measured gains remain moderate; the transported derivative matches the response.

native gradient/HVP kernel. Thus initial curvature is insufficient for these measured finite-horizon responses. The arm contrast does not isolate data quantity: rates and intervening trajectories also differ. Prediction from information available before the future trajectory, and an intervention that improves training, are separate tests. Complete outcomes, including random directions and scalar/persistence controls, are bound in `docs/reviews/tiny-lm-response-independent.json`.

A second diagnostic isolates the part of the response that changes sign when the same symmetric Jacobians are reversed. For $P = J_{h-1} \cdots J_0$, the reverse product is P^T. Thus

$$A = \tfrac{1}{2}(P - P^T)u, \qquad S = \tfrac{1}{2}(P + P^T)u - J_0^h u, \qquad Pu - J_0^h u = A + S. \tag{35}$$

We retain the cross term $2A^T S$ in the squared-error identity; the norm ratios are not additive shares. All sixteen direction/horizon cases pass the skew and reciprocal-product checks. In the two expanded-arm gradient cases at $h = 16$, the ratios $\|A\|/\|Pu - J_0^h u\|$ are 1.14×10^{-5}, 2.78×10^{-4}, both below the fixed 0.5 materiality threshold. The large frozen-curvature discrepancy is therefore almost entirely in the reversal-even remainder in these cases. This remainder may itself depend on ordering. The independent audit rechecks all 160 retained reverse HVP recurrences and scalar reductions; the native derivative kernel remains shared. See `docs/reviews/tiny-lm-ordering-independent.json`.

A fixed follow-up uses only the first two Jacobians to extrapolate the response by alternating them, and compares it with repeatedly using the second Jacobian and with persistence. Both expanded-arm gradient cases fail the declared joint accuracy-and-improvement gate. Independent saved arithmetic reconstructs every acquired Hessian-vector recurrence and decision. Thus this two-snapshot approximation has not supplied a useful predictor for these consumed development cases; its complete negative result is retained in `docs/reviews/tiny-lm-two-snapshot-independent.json`.

A subsequent causal warning pilot fixes 32 correlated prefixes of the same four consumed trajectories. Every prediction uses only two local states and their derivatives, and all predictions are sealed before the four-step responses are evaluated. Two-amplitude finite differences qualify all prefixes; 8 already exceed the error threshold and are excluded from advance-warning scoring. Among the 24 eligible prefixes, the drift warning catches 1 future failure with 7 false alarms. Ordinary gradient change has the same totals, while directional curvature catches that failure with 5 false alarms. Loss change and persistence miss it. Independent saved arithmetic reconstructs every acquired action, response, warning and confusion count. This comparison supplies no incremental forecasting advantage for the drift rule. See `docs/reviews/tiny-lm-horizon-independent-outcome.json`.

Temporal-mean curvature remains insufficient. Using the same two expanded-arm checkpoints and initial-gradient directions, we compare the measured response with powers of the full-trajectory mean

$$\bar{J} = I - \frac{\eta}{16} \sum_{t=0}^{15} H_L(\theta_t).$$

Each power applies all sixteen saved-state Hessians to the same current vector. At horizon 16, the two original-rate relative vector errors are 56.20709, 34.84956, compared with 8.51×10^4, 5.27×10^3 for frozen curvature. Both improve substantially, but both fail the fixed joint criterion of error below 0.2 and tenfold improvement over the frozen error.

Same-state controls at $\eta/4$ preserve the original perturbation direction and decrease the regularized training objective at every reference step. Their mean-curvature errors are 1.07965, 0.58025, compared with 2.65982, 1.24173 for frozen curvature. All twelve direction/horizon rows retain the original two-amplitude, transported-response and training-CE slope agreement gates of 1%. An independent audit checks all 1308 acquired call associations and reconstructs the mean powers and response metrics from the full retained vectors. Thus the original-rate discrepancy survives access to the mean curvature of the entire observed path. This comparison is retrospective: even commuting, time-varying Jacobians can have a product different from a power of their mean, so the result does not isolate matrix ordering. See `docs/reviews/tiny-lm-temporal-mean-independent.json`.

A full-state ordering intervention. To isolate ordering sensitivity, we now keep all sixteen Jacobians fixed and change only their application order. The chronological product P applies indices $0, 1, \ldots, 15$. Let Q apply the even indices in increasing order, then the odd indices in increasing order; reversing either list gives P^T and Q^T, because each $J_t = I - \eta H_L(\theta_t)$ is symmetric. Define

$$E = \tfrac{1}{2}(Q + Q^T - P - P^T)u, \quad O_Q = \tfrac{1}{2}(Q - Q^T)u, \quad O_P = \tfrac{1}{2}(P - P^T)u.$$

Then $Qu - Pu = E + (O_Q - O_P)$. We check this vector identity and its squared-norm identity including the signed cross term. If the Jacobians commute, all four products coincide and $E = 0$, even when their values change along the path. Thus this contrast detects ordering sensitivity that the earlier reversal-odd test can miss.

For fixed Hessians, the symmetrized product has the expansion

$$\operatorname{Sym} P = I - \eta \sum_i H_i + \frac{\eta^2}{2} \sum_{i<j} (H_i H_j + H_j H_i) + O(\eta^3), \qquad \operatorname{Sym} P = \tfrac{1}{2}(P + P^T).$$

The displayed terms are invariant under every permutation, so $E = O(\eta^3)$ when the states and u are held fixed as $\eta \to 0$. For three symmetric factors, the exact identity $\operatorname{Sym}(ABC) - \operatorname{Sym}(ACB) = \frac{1}{2}[A, [B, C]]$ exhibits the double commutator, where $[A, B] = AB - BA$. This explains why a small reversal-odd contrast does not control the reversal-even ordering contrast. Our quarter-rate controls change the reference trajectory, so they do not test this fixed-Hessian asymptotic law.

Initialization	Rate	$\|Pu\|$	$\|Qu\|$	$\|E\|/\|Pu\|$
1	Original	0.590322	1440.056353	1494.924566
1	Quarter	0.086373	0.072232	0.117328
2	Original	2.330928	4656.815027	1008.293298
2	Quarter	0.119421	0.111885	0.043843

Table 7: Ordering sensitivity in the full transformer parameter space. Each row uses the same sixteen Jacobians and unit perturbation direction for all orders. Quarter-rate rows follow their previously acquired reference trajectories from the same initial states and directions. These are four consumed development cases.

The reversal-even ordering contrast is large in both original-rate cases (Table 7), while their chronological response norms remain moderate. Its ratios to the frozen-curvature error are 0.017564, 0.191320; these norm ratios are not additive explanatory shares. All cases pass the inherited 1% nonlinear-response and functional-slope checks, fresh chronological replay, transpose

and decomposition gates. An independent audit reconstructs every new Hessian-vector recurrence and all reused reverse-product associations using the complete retained vectors. The experiment identifies a strong dependence of finite-horizon linear response on Jacobian order. It permutes operators along a saved trajectory; it does not yet specify a realizable change to training data or optimizer updates. We next test which temporal structure the ordering contrast depends on. See `docs/reviews/tiny-lm-parity-order-independent.json`.

Preserving adjacent steps strongly attenuates the contrast. Let $B_k = J_{2k+1}J_{2k}$, so each block retains two consecutive training steps. Keep the order within each block and reverse the order of the eight blocks: U applies indices $14, 15, 12, 13, \ldots, 0, 1$. Its reversed list gives U^T. The corresponding reversal-even contrast is

$$E_{\text{pair}} = \tfrac{1}{2}(U + U^T - P - P^T)u.$$

This intervention retains the same sixteen full-state Jacobians and direction as the preceding test. It changes only their order.

Initialization	Rate	$\|E_{\text{pair}}\|/\|Pu\|$	$\|E_{\text{pair}}\|/\|E\|$
1	Original	1.540077	0.001030
1	Quarter	0.113757	0.969561
2	Original	2.535039	0.002514
2	Quarter	0.078744	1.796055

Table 8: Adjacent-pair preservation attenuates the reversal-even ordering contrast in both original-rate cases, with a material residual. The quarter-rate controls show that this attenuation is not universal.

The original-rate contrasts fall by factors 970.68, 397.74, while remaining larger than their chronological response norms (Table 8). All four cases pass the inherited nonlinear-response and CE-slope qualifications and the new transpose and decomposition identities. An independent replay checks all 128 newly acquired Hessian-vector products, their actual states and input directions, the complete recurrences and the byte-identical previously qualified baselines. Preserving adjacent-step structure therefore removes most of this particular ordering contrast in the two original-rate cases. It does not imply that two-step blocks commute: the residual is material. The following test measures whether their arithmetic mean predicts the true response. See `docs/reviews/tiny-lm-pair-blocks-independent.json`.

The two-step mean controls amplification but misses direction. On the same four qualified trajectories, define $\overline{B} = \frac{1}{8}\sum_{k=0}^{7} B_k$ and predict the horizon-16 perturbation by $\overline{B}^8 u$. Every block acts on the same full vector at each power, and its second factor acts on the actual within-block intermediate vector. An independent replay checks all 512 acquired Hessian-vector products, all 32 averaged powers and both nonlinear-response amplitudes in every case.

Initialization	Rate	Vector error	Alignment	CE-slope error
1	Original	1.20316	0.10691	1.82270
1	Quarter	1.04220	0.31590	0.58724
2	Original	1.26543	−0.20531	0.77407
2	Quarter	0.56061	0.83593	0.32918

Table 9: The retrospective two-step mean reduces the large original-rate single-step-mean errors while failing the prespecified 20% accuracy criterion. All four cases retain the same 1% response and functional-slope qualifications.

The original-rate vector errors decrease by factors 46.72, 27.54 relative to the single-step mean, but their low or negative signed alignments show that removing excessive amplification does not recover the response (Table 9). The quarter-rate cases also miss the accuracy criterion. Thus adjacent-step correlations explain a substantial failure of the single-step average, while variation among the two-step blocks still matters. Because these predictors use the complete observed path, this result is a retrospective response comparison. It motivates an explicit temporal correction rather than a claim of improved training or online prediction. See `docs/reviews/tiny-lm-block-mean-independent.json`.

First-order block variation recovers the quarter-rate responses. Set $A = \overline{B}$, $v_k = A^k u$ and $r_0 = 0$, and propagate

$$r_{k+1} = Ar_k + (B_k - A)v_k.$$

The corrected prediction $v_8 + r_8$ is the first-order expansion at $\varepsilon = 0$ of

$$[A + \varepsilon(B_7 - A)] \cdots [A + \varepsilon(B_0 - A)]u,$$

evaluated at $\varepsilon = 1$. Each correction uses the full state and the observed block at its actual location in the product. A separate replay verifies all 448 retained Hessian-vector actions and 28 correction means; both nonlinear-response amplitudes and the CE-slope qualification remain unchanged.

Initialization	Rate	Vector error	Alignment	CE-slope error
1	Original	1.19296	0.62515	0.04046
1	Quarter	0.07024	0.99753	0.00489
2	Original	1.23288	0.30430	1.38427
2	Quarter	0.02757	0.99963	0.00258

Table 10: First-order temporal correction of the two-step-block mean, using the same four qualified responses as Table 9. The quarter-rate cases recover direction as well as response magnitude.

At the quarter rates, the relative response errors fall by factors 14.84, 20.33 compared with the block mean. At the original rates, both fixed gates—20% accuracy and twofold improvement over the block mean—remain failed. First-order temporal variation is therefore sufficient for accurate response reconstruction in these two quarter-rate cases, but insufficient at the original rates. This is a learning-rate-dependent mechanistic result on consumed trajectories. Because the calculation uses the complete observed path, training acceleration and future-response prediction require separate tests. See `docs/reviews/tiny-lm-block-first-order-independent.json`.

7 Discussion

This section relates the training results to broader mechanisms and to fixed-weight recurrent activity. The recurrent-network certificates below are separate rigorous results; proposed applications require their own tests.

The local part of the thesis now rests on several independent kinds of evidence: the crossing multipliers, the normal-form coefficient and its dynamical checks, agreement of sampled rotation numbers with corresponding crossing angles in two maps, and the same behaviour in a real-data network and in a solvable linear network. The selected scalar case also has a local computer-assisted proof. The picture that fits is the quasi-periodic organization familiar from circle maps and forced oscillators [3, 10, 19]: a closed period-2 orbit can lose stability at a supercritical NS crossing; under the local nondegeneracy assumptions, an attracting invariant circle is born, with rotation

approaching the crossing angle. Rational rotations can lock; and the circle may eventually break; this last step remains untested here. The global part, that the periodic windows of the learning-rate plane are resonance tongues of this bifurcation, is supported by the Birkhoff test and by the post-hoc tongue scaling, but its frozen test did not pass. The frozen estimator mixed non-asymptotic and asymptotic levels; a confirmatory version should prespecify an asymptotic-regime estimator, and connecting a tongue to a distant window needs two-parameter fold-curve continuation.

An early spectral diagnostic of learning dynamics is that of van der Maas et al. [42], who used broadband spectra to recognize chaotic learning; here a spectral peak carries the rotation number, and an autoregressive fit estimates the complex multiplier before the crossing in the tested closed-orbit references.

Open questions. The odd-period windows did not pass the Birkhoff diagnostic; whether they are organized as in periodicity hubs [21] is open. Fixed-start maps mix local criticality with basin accessibility from one shared initialization, as the divergent arc shows, so statements about trainability maps need both. In the real-data network only one of the examined period-2 branches crossed by complex multipliers, and how common such branches are in larger networks is unknown.

What would constitute transfer to language models? The practical hypothesis is that a few unstable or weakly damped modes organize training even when parameter dimension is large. Matrix-free Jacobian–vector products through the complete optimizer update can estimate those modes without constructing a dense Jacobian. This hypothesis needs tests of numerical residuals, mode coverage, checkpoint-to-checkpoint drift and predictive accuracy. Along nonperiodic or scheduled training, finite-horizon tangent growth is the appropriate initial quantity; Floquet language is reserved for a sufficiently closed periodic reference orbit. The fixed-batch transformer pilot establishes an architectural test path, but has not yielded a periodic reference orbit. Neither the drift-aware event calibration nor the separate broader-data continuous-progress pilot has shown incremental predictive utility. The independently audited perturbation comparison identifies a failure of the initial frozen-curvature approximation; the subsequent causal warning comparison also fails to improve on ordinary curvature. A useful intervention remains to be demonstrated. Separate minibatch, optimizer-state, schedule and precision perturbations remain necessary. Relevant endpoints are prospective transition predictions and improved interventions at comparable compute cost. Similar-looking loss oscillations would not establish either endpoint. A linear loss-based multiplier estimate alone also does not identify nonlinear criticality or basin accessibility.

Testing a possible spectral bridge. Motivated by Clark [6], we tested finite-window regularized response readouts on saved Jacobian midpoint sequences from the certified small training cycles. All 216 direct linear solves pass the numerical residual screen, yet finite-window boundary bias remains: solving the linear system accurately does not establish its infinite-time spectral-count limit. Floquet and repeated-QR reference counts agree in this fixed panel. Both unpreconditioned single-impulse matrix-free probes reach their 300-iteration limit with unresolved readout error. Their operator calls are small matrix products, not measured large-model Hessian-vector products. These results support further work on window boundaries and preconditioning before any expensive language-model experiment; they establish no large-model speedup or training utility. See `docs/reviews/clark-response-outcome.md`. Later operator-only and coordinate-time-line preconditioning pilots also exhaust matched Jacobian/vector-action budgets. The latter reduces the physical normal equation residual but retains readout errors 0.01541 and 0.01703 for the period-10 and period-18 references, respectively. Componentwise saved-arithmetic checks reproduce both terminal residuals

and action counts; no inner-iteration or model replay is claimed. The time-line checker shares an authoring agent with that producer and received a separate root source review. These failures concern the tested finite-window solvers, not Clark's asymptotic theorem. See `docs/reviews/response-utility-saved-audit.json`.

A separate fixed-weight activity pilot. We also explored Clark's finite leaky random-network map,

$$x_{t+1} = (1-\delta)x_t + \delta g J_0 \tanh(x_t),$$

with the full sampled matrix J_0 held fixed while gain g and leak δ vary. A selected 4-state network has a persistent numerical period-5 band with native fold and flip candidates. Independent saved-evidence review checks full-state closure, primitive period, phase consistency, derivatives and multiplier calculations. The refined band reaches the scan boundary; finite-time positive-growth neighbors and local bifurcations do not establish surrounding asymptotic chaos or a complete shrimp. This activity pilot supplies a separate test setting for the methods. Its cycles are not training cycles, and finite-leak observations do not establish an ODE limit. See `docs/reviews/clark-rnn-independent-review.json`.

For a selected setting, a separate outward-rounded proof encloses a primitive period-5 activity cycle at exact dyadic inputs whose decimal displays are $g = 10.02$ and $\delta = 0.956$. Its full-state return derivative satisfies $\|DF^5\|_\infty < 0.008462 < 1$ throughout the certificate enclosure. Oddness of the fixed-weight map supplies a second cycle: every cyclic phase of the enclosed orbit is separated from its negative. This is one directly certified orbit plus a distinct symmetry-derived companion. An independent audit replays the original proof, verifies a strictly nested higher-precision box, and reconstructs the native map, Jacobian and proof inequalities using an exponential representation of tanh. Arb/FLINT remains a shared trusted library. This local activity result establishes neither a periodic window nor training dynamics; it leaves the count of trained-network orbit certificates unchanged. See `certificates/clark-rnn-p5-receipt.json` and `docs/reviews/clark-rnn-p5-independent-review.json`.

A later development panel uses 4 fresh sampled matrices with 12 states and 7,688 trajectories across both starts. It retains all 309 finite-horizon consensus components; all 116 selected native-cycle cases pass the floating-point closure, proper-divisor and stability checks. These are selected numerical activity cycles, not rigorously certified windows or a population success rate. Full maps and failures are retained; boundary refinement remains in progress. See `docs/reviews/clark-rnn-n12-panel.json`. For one refined native period-6 component, the odd map F satisfies the half-wave relation $F^3(x) = -x$. The signed return map $G = -F^3$ therefore fixes x, and $G^2 = F^6$. Along a continued simple flip of G, native phase and reverse-continuation checks retain the same period-6 orbit family. Its cubic coefficient changes sign within the numerical gain bracket $[4.0752782427, 4.0752782456]$. This located the degenerate signed flip that we now certify below. Its critical native multiplier is $+1$: a period-2 daughter of G can remain a period-6 orbit of F. Subsequent joint continuation follows the native period-6 fold and the signed flip toward that bracket. Continuing the same signed orbit to both bracket endpoints and checking all six literal native phases resolves the earlier phase-label mismatch: each endpoint joins uniquely at phase four, including the transported critical eigenvector. Independent saved arithmetic checks the native returns, ordered Jacobian products, reverse joins and strictly opposite cubic signs. The original failed phase-zero comparison is retained in `docs/reviews/clark-rnn-n12-flip-cubic-outcome.json`; the resolved numerical connection is in `docs/reviews/clark-rnn-n12-organizer-connection-001.json`.

Certified local organizer in the activity model. For the exact dyadic sampled matrix above, a 26-dimensional augmented system simultaneously imposes $G(x) = x$, $(DG(x) + I)q = 0$, $q^T q = 1$ and vanishing cubic flip coefficient. Strict interval inclusion proves a locally unique root whose physical coordinates are approximately

$$(g_*, \delta_*) = (4.075278244627,\ 0.781875423639).$$

An independent 512-bit audit proves the original root and a larger uniqueness box containing every original coordinate. It reconstructs the native Jacobians using sech^2 and the fifth-order expansion using exponential and reciprocal series. The augmented derivative kernel and Arb/FLINT remain shared dependencies.

On the one-dimensional center manifold of the signed return, a local coordinate has the normal form

$$u' = -u + c_5 u^5 + O(u^6), \qquad c_5 \approx 0.148588133 > 0.$$

The enclosure excludes zero, and the gain–leak unfolding has nonzero Jacobian determinant, approximately 6.411875524. Specifically, the critical multiplier changes with leak at rate $\partial_\delta \lambda \approx 18.729252188 > 0$ along the fixed-point branch, while the cubic coefficient changes along the critical curve at rate $dc_3/dg \approx -0.342345517 < 0$. With parameter order (g, δ), the unfolding determinant is

$$\det \frac{\partial(\lambda + 1, c_3)}{\partial(g, \delta)} = -(\partial_\delta \lambda)\ \frac{dc_3}{dg}\bigg|_{\lambda=-1} > 0.$$

These strict signs establish a nondegenerate generalized flip of G in the actual physical parameters.

All proper divisors of native period six are excluded. For the signed return's 11-dimensional complementary quotient Q, the same audit proves $\|Q^2\|_\infty < 0.479 < 1$. Since $G^2 = F^6$, the native six-cycle has one critical $+1$ multiplier and all other multipliers strictly inside the unit circle. This is a rigorous local symmetry-breaking organizer of fixed-weight activity. The two exact connections established below link it to the continued symmetric critical curve and to a generic fold of asymmetric native six-cycles. The full proof and independent reconstruction are indexed in `docs/reviews/clark-rnn-generalized-flip-outcome.json` and `docs/reviews/clark-rnn-generalized-flip-independent.json`.

Exact connection to the continued critical curve. A subsequent uniform 26-dimensional interval proof connects this organizer to the original continued critical point at gain $g = 4.0756$, interpreted as its exact saved binary64 value. The independent 512-bit audit proves contraction below 0.148017 and strict full-coordinate membership of the organizer, the separately enclosed endpoint and its normalized native six-step return. The direct and returned mode have the same uniquely qualified orientation. Throughout the connecting curve, native period six remains primitive and $\|Q^2\|_\infty < 0.577 < 1$ bounds all eleven complementary modes. This establishes exact branch identity between the local organizer and the continued critical curve. See `docs/reviews/clark-critical-bridge-independent.json`.

Exact connection to a generic native six-cycle fold. A second continuation resolves the symmetry-breaking branch. Write the two states exchanged by $G = -F^3$ as $x = m + aq$ and $y = m - aq$, with $\|q\| = 1$ and $b = a^2$. Their paired equations and normalization form a 25-equation system $H(U, b, g) = 0$, where $U = (m, \delta, q)$. We continue the 51-dimensional system

$$H = 0, \qquad H_U v + H_b = 0, \qquad v_\delta = 0,$$

with gain g also unknown. A chain of 8 independently proved critical tubes joins the exact generalized-flip organizer to $b = 1/2048$. Every positive-amplitude tube has primitive native period six, a simple $+1$ multiplier, and eleven attracting complementary modes. At the original selected gain $g = 4.0756$, interpreted as its saved exact binary64 value, an independent strict root enclosure in all 51 coordinates belongs to this same continued branch. A separate validated inverse of H_U and total second derivative prove

$$\delta_b = 0, \qquad \delta_{bb} \in [-0.015859138005,\ -0.015859138003] < 0.$$

This is a generic fold in the physical leak parameter. To see why, for $b > 0$ the paired coordinates have the local inverse $m = (x+y)/2$, $b = \|x-y\|^2/4$, and $q = (x-y)/(2\sqrt{b})$ after fixing the discrete orientation. Invertibility of H_U gives a local solution curve $U(b)$ at fixed gain. Its state tangent cannot vanish: $x_b = 0$ and $\delta_b = 0$ would imply $y_b = 0$ through the paired map, contradicting $d\|x-y\|^2/db = 4$. Thus the nonzero δ_{bb} is a nondegenerate fold of native periodic states. This argument uses the separately validated paired inverse, in addition to the full augmented root. The independent reconstruction also checks all six literal phases and normalized modes against the originally selected numerical fold. See `docs/reviews/clark-correlated-prefix-independent.json` and `docs/reviews/clark-correlated-extension-independent.json`.

The same critical branch now extends through 31 independently joined tubes to $b = 1/512$. The additional positive-amplitude tubes retain primitive native period six, the simple $+1$ multiplier and eleven attracting complementary modes. The final endpoint enclosure is independently tightened within its original certified endpoint box before continuation. These joins extend the known branch, without assigning the generic-fold curvature at the original selected gain to every later point. See `docs/reviews/clark-correlated-extent-independent.json` and `docs/reviews/clark-subset-endpoint-independent-attempt004.json`. A subsequent bounded attempt tests four narrower parameter widths but accepts no new tube: the uniform interval bounds remain unresolved. The proved endpoint stays at $b = 1/512$; this failure is a limitation of the current enclosure, not evidence that the physical branch ends there. See `docs/reviews/clark-localized-successor-paper-review.json`.

Inference is a separate question. The training bifurcations studied above concern optimizer updates in parameter space. Freezing weights stops that map; sensitivity of fixed-weight predictions and feedback during generation require separate measurements. Parameter symmetries can even leave predictions unchanged along weight motion. A future inference test could ask whether training diagnostics predict sensitivity to arithmetic or weight perturbations beyond loss and token-score margins. For a unique greedy choice with logit gap m, a uniform logit-error bound $\epsilon < m/2$ preserves that choice at the given prefix. Empirical precision comparisons are not rigorous error bounds, and divergent generated text alone does not establish chaos.

A separate exploratory pilot compares CPU float32 and float64 evaluation at the same float32-rounded frozen weights for all 6 final calibration checkpoints. Each uses 8 previously consumed training prefixes and 32 greedy steps with an explicitly sliding context window. Repeated float32 evaluations are identical. All 1,536 token choices agree across precisions in both matched-history comparisons and free rollouts. The largest measured last-position logit difference is 1.115×10^{-5}; the smallest observed top-two float32 margin is 9.737×10^{-4}. Every measured pair passes the margin screen above. An independent saved-output audit reconstructs each history and checks every retained target forward output. These correlated finite-horizon decisions show no precision-induced token change in this pilot. They do not establish inference chaos, unseen-text quality, a causal effect of training dynamics or an incremental benefit from shrimp geometry. See `docs/reviews/saved-lm-inference-independent.json`.

The tests that would settle the local claims. The criticality prediction is a candidate for confirmation on fresh losses: the sign of d at each crossing predicts a circle of normal-form amplitude beyond a supercritical edge, and a local unstable-circle scale before a subcritical crossing. The distant state, loss spike, recovery and hysteresis also depend on global basins, ramp speed and noise and must be tested separately. An existence-and-replication test would apply this, together with the onset and rotation criteria, to two prespecified independent losses across two architectures, one of them unused so far, with no substitution. The ancestry test additionally needs a prespecified asymptotic-regime estimator, reliable continuation of both numerical fold-candidate edges, and rules for unresolved or disconnected branches before protected holdouts are opened.

The immediate research goal is to determine how the longer primitive cycles arise and where their periodic windows end, using connected continuation and qualified boundary tests. Selected orbit proofs do not establish complete shrimp geometry or resonance ancestry. Any extension to larger models must demonstrate predictive value beyond ordinary loss and curvature baselines.

8 Limitations

The map study uses networks of 13 and 72 parameters on synthetic data; the real-data result is one branch of one 529-parameter network on one subset and task; the linear network is a solvable model. These map and bifurcation experiments use deterministic full-batch float64 training. The transformer development pilot uses float32 with matched-state float64 checks and has no accepted periodic orbit. Screening labels are finite-time; chaotic labels rest on single-tangent exponents and reruns. Complete-grid screening and connected-component assignment remain numerical; all 61 agreed representatives now have exact full-state orbit proofs. The 64 selected exact-real attracting orbits and the local period-18 fold, both flips, two cusps, generic 1:1 resonance and scalar NS in Section 5 have rigorous enclosures. The supercritical flip supplies a local attracting doubled branch, while the subcritical flip supplies an unstable one; no continuous connection to the separately certified finite orbit or whole-window geometry follows. The certified primitive period-18 continuation reaches the canonical fold; its $+1$ locus reaches the exact generic 1:1 resonance, and the connected complex-unit branch reaches the complex-unit/simple-flip junction. A finite -1 locus passes through that same junction. Uniform complementary stability and a connected adjacent attracting family are proved along the first 33 positive-angle charts, with an additional independently covered prefix of chart 34 and an open attracting sector at the junction. The joined flip locus now continues in an output-rate parameterization. Closing the intervening stability coverage, connecting the second junction and attaching the finite attracting interior segment remain active tasks. The first Lyapunov coefficient is a local, third-order quantity; it predicts the birth of a small circle, not how far it survives. Rotation numbers and the Birkhoff test use two-dimensional projections of curves in many dimensions. Merged crossing loci combine independently initialized output slices and do not establish branch identity between them or generalized-NS points. Most mechanism analyses were chosen after seeing related outcomes. The consequence pilot measures held-out loss and perturbation response in small models, but establishes no robust training advantage. Transfer to stochastic training, modern language models and useful interventions remains open.

9 Related work

Edge of stability. Cohen et al. [7] describe the edge of stability; Damian et al. [12] explain self-stabilization of sharpness at the edge, whereas we follow what happens after the period-2 oscillation itself loses stability; Agarwala et al. [1] show progressive sharpening to the edge in

second-order regression models, the approach to the regime we study beyond it; Lewkowycz et al. [28] describe a catapult phase at large rates, in which the loss first grows and then settles in flatter regions, while our maps resolve the long-run dynamics of rates where training does not settle. Hofmann [17] derives the rotational edge whose far side we study. Chen and Bruna [4] analyze two-step GD, proving period-2 convergence in specified scalar and single-neuron settings and testing related conditions in larger models. Song and Yun [39] study alignment with a reduced bifurcation diagram, with proofs for specified single-example models and neural-network experiments. Our orbit tests concern closure and stability of the full parameter state. Further analyses include Kalra et al. [22]. Chen et al. [5] reduce specified quadratic regression settings to a cubic map; their Li–Yorke chaotic regime can also contain attracting periodic orbits. Cohen et al. [9] model time-averaged deterministic GD and RMSProp trajectories with central flows, with explicit limitations on rigor, stochastic training, momentum and computational feasibility. Our full-state orbit and boundary tests complement this averaged description.

Periodic-orbit guarantees. MacDonald and Vidal [32] give a higher-codimension flip normal form (Theorem 4.1) and local period-two convergence under geometric hypotheses (Theorems 5.3 and D.8), including deep matrix factorization (Section 3.3). Theorem D.8 constructs a cycle for each point of the manifold of sharpness-minimizing minima. When that family is positive-dimensional, an individual cycle is not an isolated attractor in every parameter direction; convergence to a member of the family remains meaningful. Our selected tanh certificates instead enclose isolated, full-state attracting orbits at fixed layer-specific rates. We make no claim of priority or a largest certified network.

Adaptive optimizers and larger models. Cohen et al. [8] study full-batch and large-batch adaptive methods at a preconditioned stability threshold. Regis and Chewi [36] model Adam in the joint parameter–first-moment state, with the second moment as an auxiliary variable, and compare rod-flow approximations across architectures and optimizers. Fong and Yang [13] connect second-moment feedback to active curvature and report gradient reversal, including in GPT-2 medium. The latter uses a fixed text batch and describes approximate alternating motion around a drifting center; that description is distinct from full-state periodic-orbit closure. Its minibatch experiments also show that noise and momentum can weaken the reversal. Cohen et al. already examine transformer warmup, while the rod-flow study explicitly limits its model to full-batch steady-state behavior. These studies establish relevant prior work on oscillatory training in larger models. Our proposed extension must identify an additional mechanism or predictive consequence; detecting oscillation in a transformer alone would not supply that contribution.

Chaos and fractals in training. Kong and Tao [23] analyze deterministic GD on multiscale objectives. Jiménez-González et al. [20] relate finite-time perturbation expansion to epochs needed to reach task-specific accuracy thresholds in full-batch MLP/CNN experiments. This is relevant prior utility evidence; our proposed geometry-specific benefit needs an additional comparison. Sohl-Dickstein [38] study fractal trainability boundaries; Torkamandi [41] map loss-based convergence boundaries in a small character transformer trained with Adam; Liu [30] study learning-rate boundaries for cosine-perturbed quadratic objectives. Liang and Montúfar [29] analyze initialization-space convergence regions in regularized factorization, with orthogonality restrictions for their matrix extension. Ly and Gong [31] report empirical riddling-like and functional sensitivity across training runs, including BERT fine-tuning; this concerns outcomes after retraining from nearby initializations, not chaos during frozen inference. Learning dynamics in games show chaos [37] and

phase locking [34], for adaptive rules rather than descent on one loss.

Activity dynamics and spectral descriptions. Numerical shrimp structures and period-adding organization in three-neuron Hopfield activity dynamics were reported by da Silva and Rech [11]. We therefore make no priority claim for shrimps in neural activity; that model and evidence level differ from both optimizer dynamics and the fixed random leaky-network pilot above. Clark [6] derives a large-network Lyapunov-spectrum description for recurrent activity with fixed random asymmetric couplings. The construction combines a finite-state-dimensional, infinite-time minimum-norm response identity with a single-site cavity calculation; the exchange of the large-network and vanishing-regularization limits remains an explicit assumption. The paper proposes training-weight dynamics and looped-transformer reasoning as future extensions. This activity-dynamics result complements our finite training-map analysis. For a period-p training orbit, the exponents per optimizer step are $\lambda_i = p^{-1} \log |\mu_i|$, where μ_i are the return-map multipliers. Multiplier magnitudes do not retain the signs and angles needed to distinguish folds, flips and complex-pair crossings. Spectral counts therefore supplement full-state period, branch-connection and bifurcation tests; they do not replace them.

Dynamical systems. Shrimp-shaped windows are described by Gallas [14, 15]; circle maps, Arnold tongues, devil's staircases and the breakdown of invariant circles by Arnold [2], Aronson et al. [3], Curry and Yorke [10], Jensen et al. [18, 19], Ostlund et al. [35]; numerical bifurcation analysis of maps, by Kuznetsov and Meijer [25], with the local NS theorem and coefficient stated by Kuznetsov and Sacker [26]. Our contribution combines computer-assisted proofs of full-state training cycles and connected bifurcation structure with numerical tests of these mechanisms in the specified training maps. A literature search cannot establish their absence from all earlier optimizer studies.

10 Reproducibility

Code, plans and compact receipts live in the project repository; bulky raw maps live in a separate data store referenced by SHA-256. Every figure is generated by a script in `paper/gd-route/figures/` that reads saved evidence and writes a receipt with input hashes, the generator's hash, output hashes, alt text and the values it displays. Quoted empirical numbers and the design and consequence tables are generated by `paper/gd-route/scripts/build_numbers.py`; `data/numbers.json` records each number's source file, hash and computation, and `provenance.json` indexes all receipts. `paper/gd-route/scripts/verify.py` regenerates every figure and quoted number, replays the scalar-mechanism, warmup and initial transformer feasibility receipts, orbit certificates, the local fold, both flips, scalar NS gates and the joined attracting interior branch, and fails on any difference. The period-58 proof and later S1R, CIFAR and LM pilots, wider primitive-branch continuation including the fold connection, the correlated attraction segments, connected +1 locus, generic 1:1 resonance and its unfolding, finite complex-unit branch, local cusps and fixed-weight activity proof have separate source-bound audits cited with their results; the full verifier does not automatically rerun these later audits. The verification status of every reference is kept in `data/references-ledger.json`. The map study corresponds to the repository's EXP-028 plan and audit; its plan, receipts and audit are linked from `docs/EXP-028-results.md`. The exploratory streams are summarized in `docs/explore-criticality-2026-10-07.md`, `docs/explore-ancestry-2026-10-07.md`, `docs/explore-realdata-2026-10-07.md`, `docs/explore-minimal-model-2026-10-07.md` and `docs/explore-consequence-2026-10-07.md`.

Placeholder. Author contributions, acknowledgments, license choice and public code and data links are human decisions to be made before release.

References

[1] Atish Agarwala, Fabian Pedregosa, and Jeffrey Pennington. Second-order regression models exhibit progressive sharpening to the edge of stability. In *International Conference on Machine Learning*, 2023.

[2] Vladimir I. Arnold. Small denominators. I. Mappings of the circumference onto itself. *American Mathematical Society Translations, Series 2*, 46:213–284, 1965.

[3] D. G. Aronson, M. A. Chory, G. R. Hall, and R. P. McGehee. Bifurcations from an invariant circle for two-parameter families of maps of the plane: a computer-assisted study. *Communications in Mathematical Physics*, 83:303–354, 1982. doi: 10.1007/BF01213607.

[4] Lei Chen and Joan Bruna. Beyond the edge of stability via two-step gradient updates. In *International Conference on Machine Learning*, 2023.

[5] Xuxing Chen, Krishnakumar Balasubramanian, Promit Ghosal, and Bhavya Agrawalla. From stability to chaos: Analyzing gradient descent dynamics in quadratic regression. *Transactions on Machine Learning Research*, 2024.

[6] David G. Clark. Lyapunov spectrum of random neural networks, 2026. URL https://arxiv.org/abs/2610.12426v1. Version 1, 8 October 2026.

[7] Jeremy M. Cohen, Simran Kaur, Yuanzhi Li, J. Zico Kolter, and Ameet Talwalkar. Gradient descent on neural networks typically occurs at the edge of stability. In *International Conference on Learning Representations*, 2021.

[8] Jeremy M. Cohen, Behrooz Ghorbani, Shankar Krishnan, Naman Agarwal, Sourabh Medapati, Michal Badura, Daniel Suo, David Cardoze, Zachary Nado, George E. Dahl, and Justin Gilmer. Adaptive gradient methods at the edge of stability, 2022. Version 2, revised 2024.

[9] Jeremy M. Cohen, Alex Damian, Ameet Talwalkar, J. Zico Kolter, and Jason D. Lee. Understanding optimization in deep learning with central flows. In *International Conference on Learning Representations*, 2025.

[10] James H. Curry and James A. Yorke. A transition from Hopf bifurcation to chaos: computer experiments with maps on R^2. In *The Structure of Attractors in Dynamical Systems*, volume 668 of *Lecture Notes in Mathematics*, pages 48–66. Springer, 1978. doi: 10.1007/BFb0101779.

[11] Angela da Silva and Paulo Rech. On bifurcations along the spiral organization of the periodicity in a hopfield neural network. *Communications in Advanced Mathematical Sciences*, 5(2):92–98, 2022. doi: 10.33434/cams.1064713. URL https://dergipark.org.tr/en/pub/cams/article/1064713.

[12] Alex Damian, Eshaan Nichani, and Jason D. Lee. Self-stabilization: The implicit bias of gradient descent at the edge of stability. In *International Conference on Learning Representations*, 2023.

[13] Yiman Fong and Heng Yang. Adam at the edge of stability: Adaptive feedback, provable oscillation, and gradient reversal, 2026. Version 2.

[14] Jason A. C. Gallas. Structure of the parameter space of the Hénon map. *Physical Review Letters*, 70:2714–2717, 1993. doi: 10.1103/PhysRevLett.70.2714.

[15] Jason A. C. Gallas. Dissecting shrimps: results for some one-dimensional physical models. *Physica A*, 202:196–223, 1994. doi: 10.1016/0378-4371(94)90174-0.

[16] Baptiste Goujaud, Adrien Taylor, and Aymeric Dieuleveut. Provable non-accelerations of the heavy-ball method. *Mathematical Programming*, 2025. doi: 10.1007/s10107-025-02269-2.

[17] Thomas Hofmann. The map behind the flow: Finite-step gradient descent as a dynamical system, 2026. Version 1.

[18] M. Høgh Jensen, Per Bak, and Tomas Bohr. Complete devil's staircase, fractal dimension, and universality of mode-locking structure in the circle map. *Physical Review Letters*, 50:1637–1639, 1983. doi: 10.1103/PhysRevLett.50.1637.

[19] M. Høgh Jensen, Per Bak, and Tomas Bohr. Transition to chaos by interaction of resonances in dissipative systems. I. Circle maps. *Physical Review A*, 30:1960–1969, 1984. doi: 10.1103/PhysRevA.30.1960.

[20] Pedro Jiménez-González, Miguel C. Soriano, and Lucas Lacasa. Leveraging chaotic transients in the training of artificial neural networks. *Physical Review Research*, 8:L022032, 2026. doi: 10.1103/t5p9-kv5w.

[21] Timothy D. Jones. Topological origins of a bi-parameter periodicity hub for the Rössler attractor, 2012.

[22] Dayal Singh Kalra, Tianyu He, and Maissam Barkeshli. Universal sharpness dynamics in neural network training: Fixed point analysis, edge of stability, and route to chaos. In *International Conference on Learning Representations*, 2025.

[23] Lingkai Kong and Molei Tao. Stochasticity of deterministic gradient descent: Large learning rate for multiscale objective function. In *Advances in Neural Information Processing Systems*, 2020.

[24] Yu. A. Kuznetsov and H. G. E. Meijer. Numerical normal forms for codim 2 bifurcations of fixed points with at most two critical eigenvalues. *SIAM Journal on Scientific Computing*, 26 (6):1932–1954, 2005. doi: 10.1137/030601508.

[25] Yuri A. Kuznetsov and Hil G. E. Meijer. *Numerical Bifurcation Analysis of Maps: From Theory to Software*. Cambridge University Press, 2019.

[26] Yuri A. Kuznetsov and Robert J. Sacker. Neimark–sacker bifurcation. *Scholarpedia*, 3(5):1845, 2008. doi: 10.4249/scholarpedia.1845. URL https://www.scholarpedia.org/article/Neimark-Sacker_bifurcation.

[27] Jean-Philippe Lessard and Alessandro Pugliese. Cusp bifurcations: numerical detection via two-parameter continuation and computer-assisted proofs of existence. *Linear Algebra and its Applications*, 728:26–46, 2026. doi: 10.1016/j.laa.2025.08.015. URL https://arxiv.org/abs/2404.00535v2.

[28] Aitor Lewkowycz, Yasaman Bahri, Ethan Dyer, Jascha Sohl-Dickstein, and Guy Gur-Ari. The large learning rate phase of deep learning: the catapult mechanism, 2020.

[29] Shuang Liang and Guido Montúfar. Gradient descent with large step sizes: Chaos and fractal convergence region. In *International Conference on Learning Representations*, 2026.

[30] Yizhou Liu. Complex fractal trainability boundary can arise from trivial non-convexity, 2024.

[31] Andrew Ly and Pulin Gong. Fractal basin geometry and the limits to predictability and reproducibility in deep learning, 2025.

[32] Lachlan Ewen MacDonald and René Vidal. Dynamics of gradient descent with large step size near a manifold of flat minima, 2026. URL https://arxiv.org/abs/2607.08380v2. Version 2.

[33] H. G. E. Meijer, W. Govaerts, Yu. A. Kuznetsov, R. Khoshsiar Ghaziani, and N. Neirynck. *MatContM: A toolbox for continuation and bifurcation of cycles of maps: Command line use*, 2017. URL https://webspace.science.uu.nl/~kouzn101/NBA/ManualMatcontMNov2017.pdf. 14 November 2017, Section 5.1.

[34] Konstantinos Metaxas and Themistoklis P. Sapsis. Risk-sensitive learning in population games under extreme events: Bifurcations and chaotic dynamics, 2026.

[35] Stellan Ostlund, David Rand, James Sethna, and Eric Siggia. Universal properties of the transition from quasi-periodicity to chaos in dissipative systems. *Physica D*, 8:303–342, 1983. doi: 10.1016/0167-2789(83)90229-4.

[36] Eric Regis and Sinho Chewi. A rod flow model for Adam at the edge of stability, 2026.

[37] Yuzuru Sato, Eizo Akiyama, and J. Doyne Farmer. Chaos in learning a simple two-person game. *Proceedings of the National Academy of Sciences*, 99(7):4748–4751, 2002. doi: 10.1073/pnas.032086299.

[38] Jascha Sohl-Dickstein. The boundary of neural network trainability is fractal, 2024. Version 1.

[39] Minhak Song and Chulhee Yun. Trajectory alignment: Understanding the edge of stability phenomenon via bifurcation theory. In *Advances in Neural Information Processing Systems*, 2023.

[40] Sergiy Sveleba, Ivan Katerynchuk, Yaroslav Shmyhelskyy, Lucjan Pelc, Volodymyr Brygilevych, and Nazar Sveleba. Multi-parameter dynamic learning maps of neural networks trained with Adam optimiser. *Electronics and Information Technologies*, 34, 2026. doi: 10.30970/eli.34.2.

[41] Bahman Torkamandi. Mapping the edge of chaos: Fractal-like boundaries in the trainability of decoder-only transformer models, 2025.

[42] Han L. J. van der Maas, Paul F. M. J. Verschure, and Peter C. M. Molenaar. A note on chaotic behavior in simple neural networks. *Neural Networks*, 3:119–122, 1990. doi: 10.1016/0893-6080(90)90050-U.