



Foody — request sequence (today)


An installed Slack agent · how one lunch order flows, end to end

⚠ Steps 4 & 9 use browser automation

— Slack event (Events API, over Socket Mode) — Slack Web API call — Human action — Browser automation — fragile today — Result

0

Installed once → Admin adds Foody from the `manifest.yml` → OAuth grants bot scopes (`chat:write` , `reactions:read/write` , `channels:history` , `reactions:read`) → the **@Foody** bot user joins the workspace → the app opens a persistent **Socket Mode** WebSocket with an app-level token (`xapp-...` , `connections:write`). **No public URL, no inbound port.**

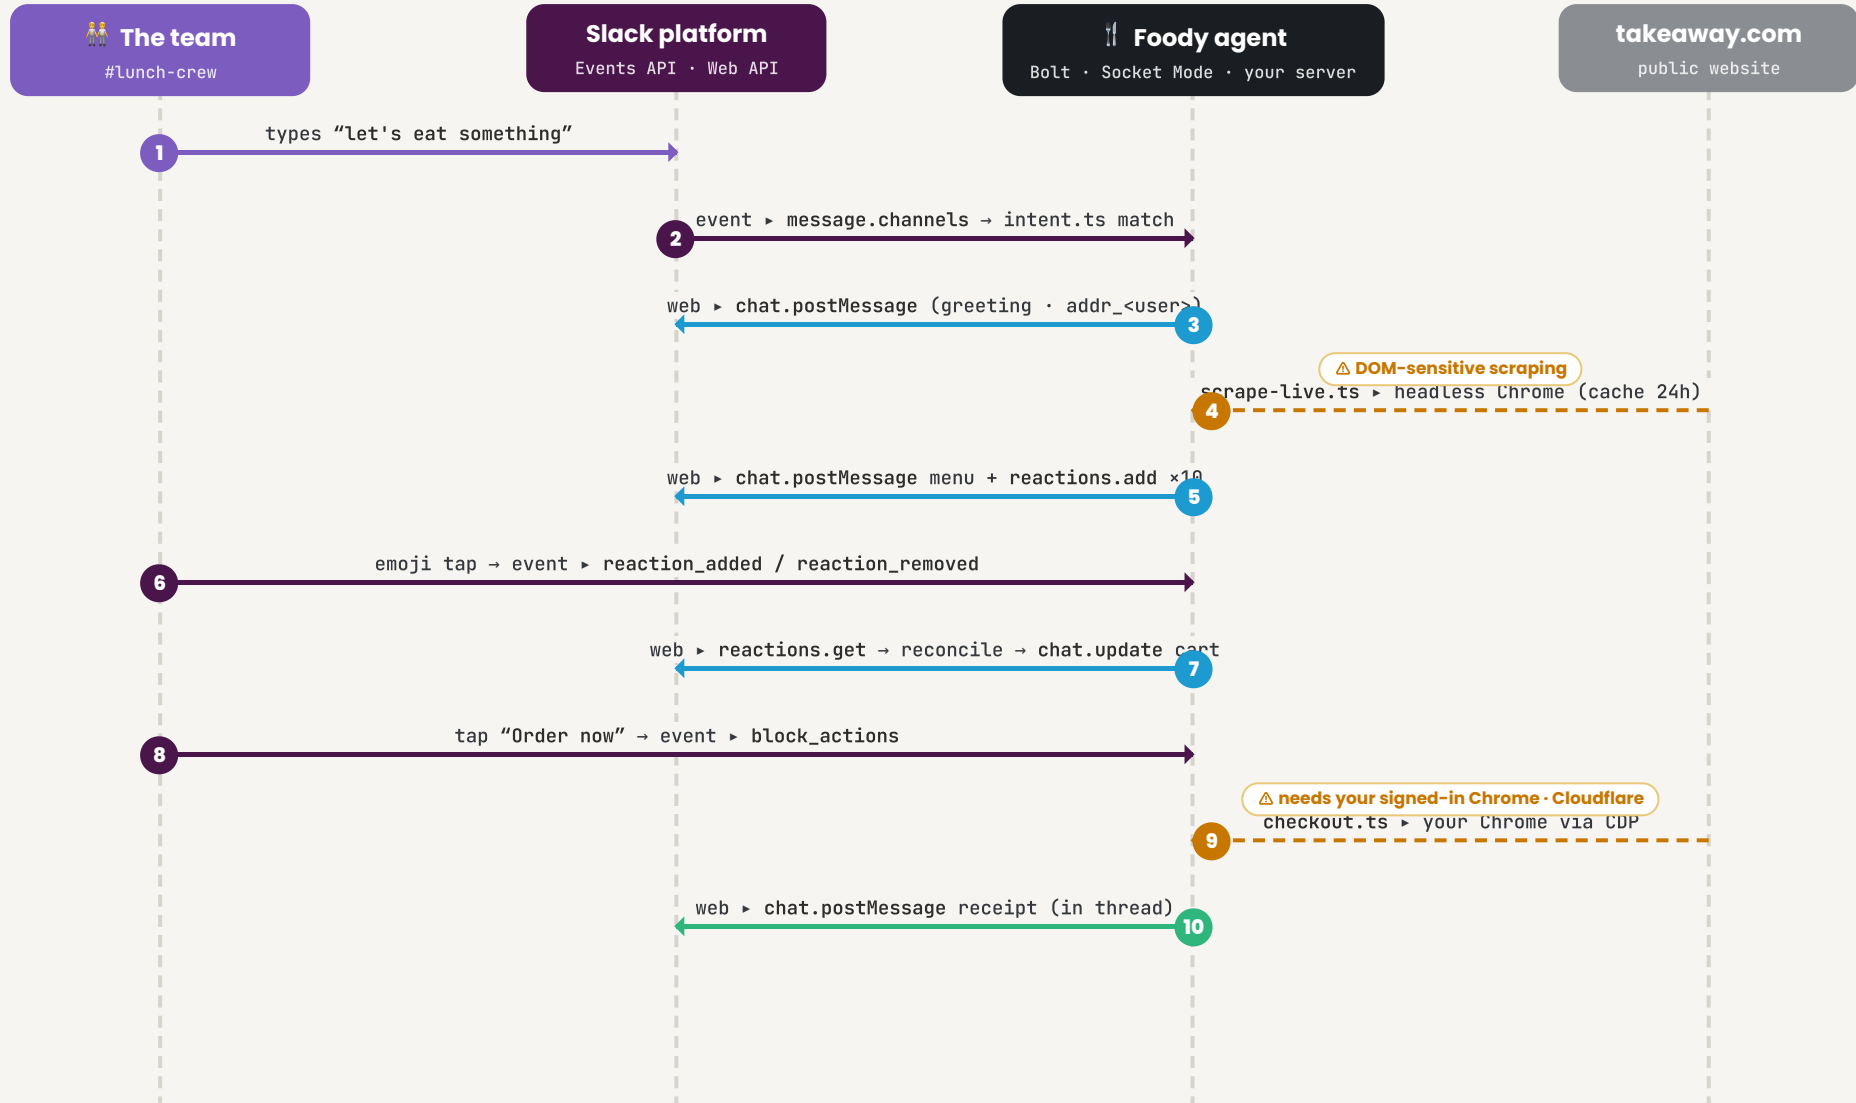

8 of 10 steps are pure Slack (events in over Socket Mode, Web API out). Only the **amber steps 4 & 9** reach takeaway.com — and today they do it through a browser, which is the one fragile part.

Foody · Work hard, skip hangry.