



Foody — request sequence (today)


A Slack AI app · from a natural-language ask to a filled basket, end to end

⚠ Steps 4 & 9 use browser automation

— Slack event (Events API, over Socket Mode) — Slack Web API call — Human action — Claude (AI assistant) tool-use — Browser automation — fragile today — Result

0

Installed once → Admin adds Foody from the `manifest.yml` → OAuth grants bot scopes (`chat:write` , `reactions:read/write` , `channels:history` , `assistant:write`) → the **@Foody** bot user joins the workspace → the app opens a persistent **Socket Mode** WebSocket with an app-level token (`xapp-...` , `connections:write`). **No public URL, no inbound port**. The manifest enables the ✨ **AI-app assistant surface** — assistant threads, live status, suggested prompts.

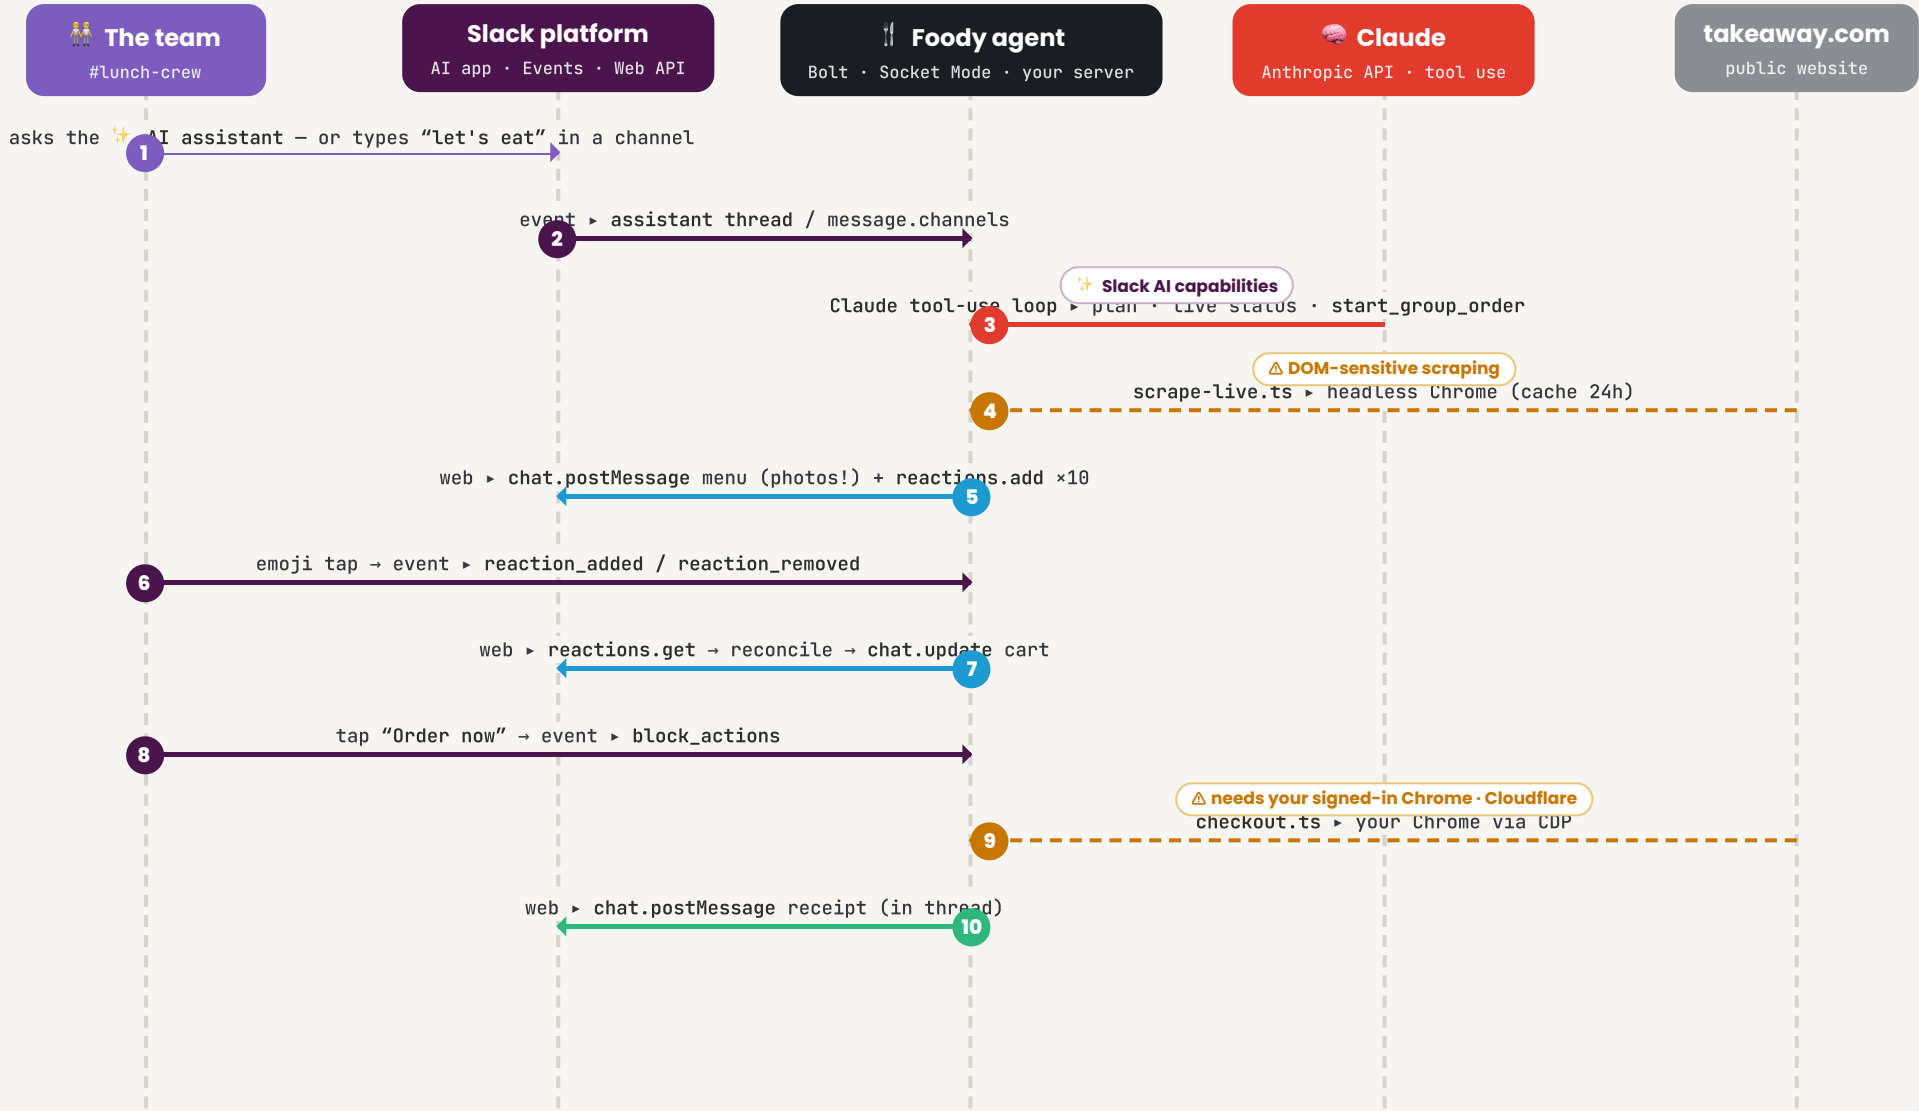

7 of 10 steps are pure Slack (events in over Socket Mode, Web API out) — step 3 is Claude planning the order via Slack’s AI-app assistant surface. Only the amber steps 4 & 9 reach takeaway.com, and today they do it through a browser — the one fragile part.

Foody · Work hard, skip hangry.