

AWS Lab Work

Boris TEABE

`boris.teabe@inp-toulouse.fr`

Goals

In this lab, you will deploy a simple highly available web application on AWS and experiment with different Cloud service models.

You will use:

- EC2 for compute
- Security Groups for network access control
- Application Load Balancer for traffic distribution
- S3 for object storage
- Lambda for event-driven serverless computing
- CloudWatch for monitoring

EC2 Service of AWS

Tax settings

④ Lightsail feature

[Explore category costs](#) 

Security group creation (firewall)

← → ↺

https://us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#SecurityGroups:

☆

📧 ⬇️ 📄 🌐 🏠 📦 📱 📺

» ⋮

aws

Services

Search for services, features, blogs, docs, and more

[Alt+S]

🔍 🔔 ⓘ

N. Virginia

Recherchetresserieuse

Events

Tags

Limits

▼ Instances

Instances New

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances New

Dedicated Hosts

Scheduled Instances

Capacity Reservations

▼ Images

AMIs New

AMI Catalog

▼ Elastic Block Store

Volumes New

Snapshots New

Lifecycle Manager New

▼ Network & Security

Security Groups

Elastic IPs

Placement Groups

Key Pairs

Network Interfaces

▼ Load Balancing

Security Groups (1/3) Info

🔄 Actions

Export security groups to CSV

Create security group

< 1 > ⚙️

🔍 Filter security groups

☐	Name	Security group ID	Security group name	VPC ID	Description	Owner	Inbound rules count	Outbound rules co...
☐	-	sg-018d18d7492fd2bd2	default	vpc-0c513531372931e93	default VPC security gr...	905785452291	1 Permission entry	1 Permission entry
☐	-	sg-01146055127e14e97	launch-wizard-1	vpc-0c513531372931e93	launch-wizard-1 create...	905785452291	1 Permission entry	1 Permission entry
☑	-	sg-00e75b6a809db6e6f	launch-wizard-2	vpc-0c513531372931e93	launch-wizard-2 create...	905785452291	0 Permission entries	1 Permission entry

Details

Inbound rules

Outbound rules

Tags

📘 You can now check network connectivity with Reachability Analyzer

Run Reachability Analyzer

✕

Inbound rules

🔄

Manage tags

Edit inbound rules

🔍 Filter security group rules

< 1 > ⚙️

☐	Name	Security group rule...	IP version	Type	Protocol	Port range	Source	Description
No security group rules found								

© 2022, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

MyWebServerGroup

Text cannot be edited after creation.

Description

Info

Allows SSH access to developers

VPC Info

Q vpc-0c513531372931e93 X

Inbound rules [Info](#)

This security group has no inbound rules.

Add rule

Outbound rules [Info](#)

Type [Info](#)

Protocol [Info](#)

Port range [Info](#)

Destination [Info](#)

Description - optional [Info](#)

All traffic ▼

All

All

Custom ▼

Delete

Security rules. In a real DC, you should be careful when defining the rules

Inbound rules

Type	Protocol	Port range	Source	Description - optional
All traffic	All	All	Anywhere-I...	

0.0.0.0/0

Delete

Add rule

Outbound rules

Type	Protocol	Port range	Destination	Description - optional
All traffic	All	All	Custom	

0.0.0.0/0

Delete

Add rule

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags

Cancel

Create security group


Questions

Q1. What is the difference between a Security Group and a traditional firewall?

Q2. Which ports actually need to be opened for this application?

Q3. Why is allowing all inbound traffic a bad practice?

Create a new VM

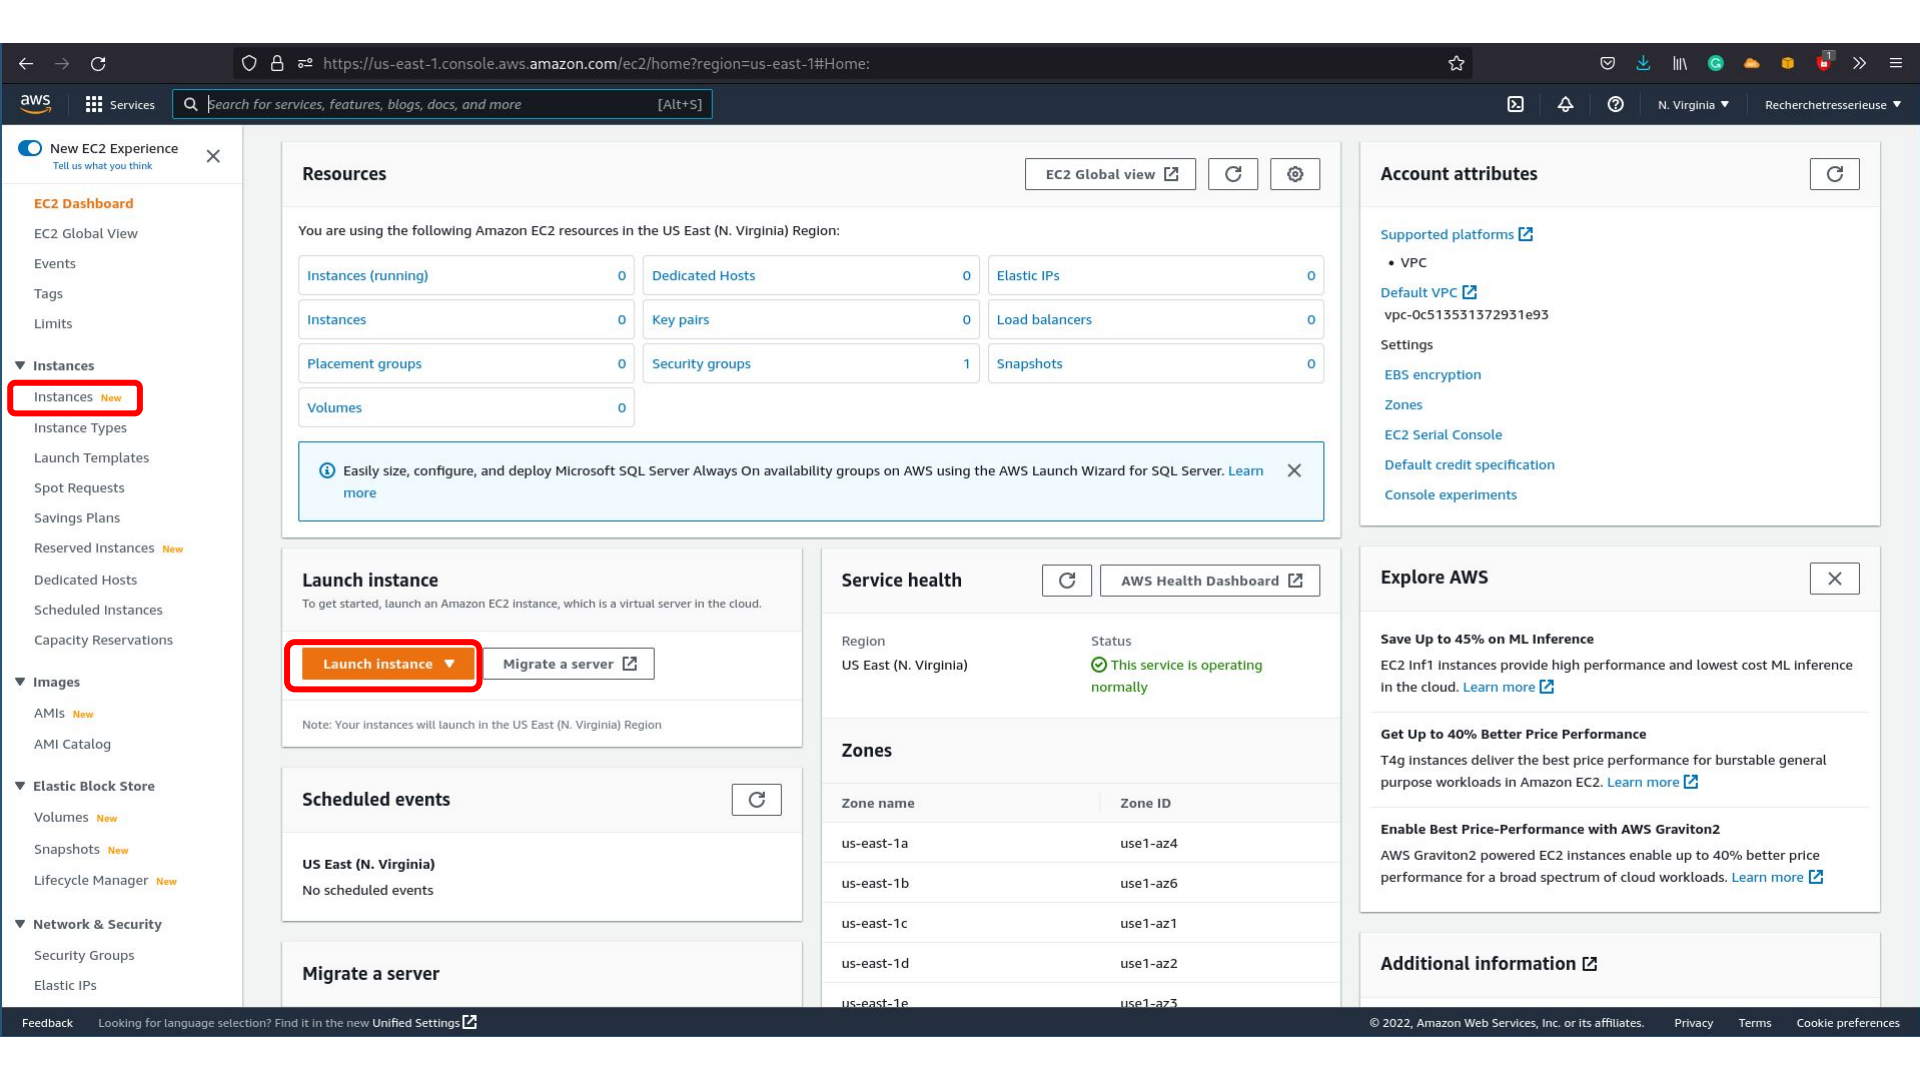

EC2 > Instances > Launch an Instance

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name

e.g. My Web Server

[Add additional tags](#)

▼ Application and OS Images (Amazon Machine Image) [Info](#)

An AMI is a template that contains the software configuration (operating system, application server, and applications) required to launch your instance. Search or Browse for AMIs if you don't see what you are looking for below

Search our full catalog including 1000s of application and OS images

Quick Start



[Browse more AMIs](#)
Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2 AMI (HVM) - Kernel 5.10, SSD Volume Type

Free tier eligible

▼ Summary

Number of Instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2 Kernel 5.10 AMI...[read more](#)
ami-05fa00d4c63e32376

Virtual server type (Instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Important because it is free tiers

ⓘ **Free tier:** In your first year includes 750 hours of t2.micro (or t3.micro in the Regions in which t2.micro is unavailable) instance usage on free tier AMIs per month, 30 GiB of EBS storage, 2 million IOs, 1 GiB of snapshots, and 100 GiB of bandwidth to the internet.

Cancel

Launch instance

▼ Instance type [Info](#)

Instance type

t2.micro

Free tier eligible

Family: t2 1 vCPU 1 GiB Memory
On-Demand Linux pricing: 0.0116 USD per Hour
On-Demand Windows pricing: 0.0162 USD per Hour

[Compare instance types](#)

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

Select

↻ [Create new key pair](#)

▼ Network settings [Info](#)

[Edit](#)

Network [Info](#)

vpc-0c513531372931e93

Subnet [Info](#)

No preference (Default subnet in any availability zone)

Auto-assign public IP [Info](#)

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group

☐ Select existing security group

We'll create a new security group called 'launch-wizard-1' with the following rules:

▼ Summary

Number of Instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2 Kernel 5.10 AMI...[read more](#)

ami-05fa00d4c63e32376

Virtual server type (Instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Free tier: In your first year includes 750 hours of t2.micro (or t3.micro in the Regions in which t2.micro is unavailable) Instance usage on free tier AMIs per month, 30 GiB of EBS storage, 2 million IOs, 1 GB of snapshots, and 100 GB of bandwidth to the Internet.

Cancel

[Launch instance](#)

Don't forget to save the generated key.

← → ↺

https://us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LaunchInstances:

☆

📧 ⬇ 📑 🌐 🗑 📦 📄 🔍

🔍 Search for services, features, blogs, docs, and more [Alt+S]

📄 🔔 ⓘ N. Virginia Recherche et sérieuse

🔍

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group

Select existing security group

We'll create a new security group called 'launch-wizard-1' with the following rules:

☐ Allow SSH traffic from
Helps you connect to your instance

☐ Allow HTTPs traffic from the internet
To set up an endpoint, for example when creating a web server

☒ Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server

⚠ Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only. ✕

▼ Configure storage Info Advanced

1x 8 GiB gp2 Root volume

📘 Free tier eligible customers can get up to 30 GB of EBS General Purpose (SSD) or Magnetic storage ✕

Add new volume

0 x File systems Edit

▶ Advanced details Info

▼ Summary

Number of instances Info
1

Software Image (AMI)
Amazon Linux 2 Kernel 5.10 AMI...read more
ami-05fa00d4c63e32376

Virtual server type (instance type)
t2.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

📘 Free tier: In your first year includes 750 hours of t2.micro (or t3.micro in the Regions in which t2.micro is unavailable)
Instance usage on free tier AMIs per month, 30 GiB of EBS storage, 2 million IOs, 1 GB of snapshots, and 100 GB of bandwidth to the internet. ✕

Cancel Launch instance

Feedback Looking for language selection? Find it in the new Unified Settings

© 2022, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Opt out to the old experience

Successfully initiated launch of instance (i-0b99fb732cdaddebc)

Next Steps

Create [billing alerts](#) to get an email notification when estimated charges on your AWS bill exceed an amount you define (for example, if you exceed the free usage tier

Your instance is launching and it might be a few minutes until it is in the running state, when it will be ready for you to use

Click **View Instances** to monitor your instance's status. Once your instance is in the 'running' state, you can connect to it from the Instances screen. Find out [how to connect to your instance](#)

[View more resources to get you started](#)

[View all instances](#)

Connect to instance [Info](#)

Info

EC2 Instance Connect	Session Manager	SSH client	EC2 serial console
----------------------	-----------------	------------	--------------------

EC2 Instance Connect

Session Manager

SSH client

EC2 serial console

X

 i-0b99fb732cdaddebc (MyVM)

- Example:**

```
ssh -i "MyVM.pem" ec2-user@ec2-3-91-6-208.compute-1.amazonaws.com
```

Note: In most cases, the guessed user name is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI user name.

Feedback Looking for language selection? Find it in the new Unified Settings

```
[tab@lab-pc Download]$ chmod 400 MyVM.pem
[tab@Tab-pc Download]$ ssh -i "MyVM.pem" ec2-user@ec2-3-91-6-208.compute-1.amazonaws.com
^C
[tab@Tab-pc Download]$ ssh -i "MyVM.pem" ec2-user@ec2-3-91-6-208.compute-1.amazonaws.com
The authenticity of host 'ec2-3-91-6-208.compute-1.amazonaws.com (3.91.6.208)' can't be established.
ED25519 key fingerprint is SHA256:9X96YZBpA6YndIfC3Hey9P/dBrLsaw+cmJq1vwdhYAM.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-3-91-6-208.compute-1.amazonaws.com' (ED25519) to the list of known hosts.
```

```
  __|  __|_  )
 _| (    /   Amazon Linux 2 AMI
---|\---|---
```

```
https://aws.amazon.com/amazon-linux-2/
4 package(s) needed for security, out of 11 available
Run "sudo yum update" to apply all updates.
[ec2-user@ip-172-31-17-132 ~]$
```

Install an application
in the VM

root@ip-172-31-17-132:/home/ec2-user 117x56

```
[ec2-user@ip-172-31-17-132 ~]$ sudo bash
[root@ip-172-31-17-132 ec2-user]# apt-get update
bash: apt-get: command not found
[root@ip-172-31-17-132 ec2-user]# apt-get install apache2
bash: apt-get: command not found
[root@ip-172-31-17-132 ec2-user]#
```

Instances (1/1) Info

Refresh

Connect

Instance state ▾

Actions ▾

Launch instances ▾

☒	Name ▾	Instance ID	Instance state ▾	Instance type ▾	Status check	Alarm status	Availability Zone ▾	Public IPv4 DNS ▾	Public IPv4 ... ▾	Elastic IP ▾
☒	MyVM	i-0b99fb732cdaddeb	Running	t2.micro	-	No alarms +	us-east-1a	ec2-3-91-6-208.comput...	3.91.6.208	-

Test your installation by using the DNS name in a browser to check the apache2 installation

Instance: i-0b99fb732cdaddebc (MyVM)

Details	Security	Networking	Storage	Status checks	Monitoring	Tags
▼ Instance summary Info						
Instance ID  I-0b99fb732cdadbec (MyVM)	Public IPv4 address  3.91.6.208 open address	Private IPv4 address  172.31.17.132				
IPv6 address –	Instance state  Running	Public IPv4 DNS  ec2-3-91-6-208.compute-1.amazonaws.com open address				
Hostname type IP name: ip-172-31-17-132.ec2.internal	Private IP DNS name (IPv4 only)  ip-172-31-17-132.ec2.internal					
Answer private resource DNS IPv4 (A)	Instance type t2.micro	Elastic IP addresses –				
Auto-assigned IP address  3.91.6.208 [Public IP]	VPC ID  vpc-0c513531372931e93	AWS Compute Optimizer finding  Opt-in to AWS Compute Optimizer for recommendations. Learn more				


Questions

Q4. Which Cloud service model does EC2 correspond to: IaaS, PaaS or SaaS? Justify.

Q5. What resources are still managed by AWS and what resources are managed by you?

Q6. Stop the VM. What happens to the application? Start it again. Does its public IP remain the same?

Create a Load balancer

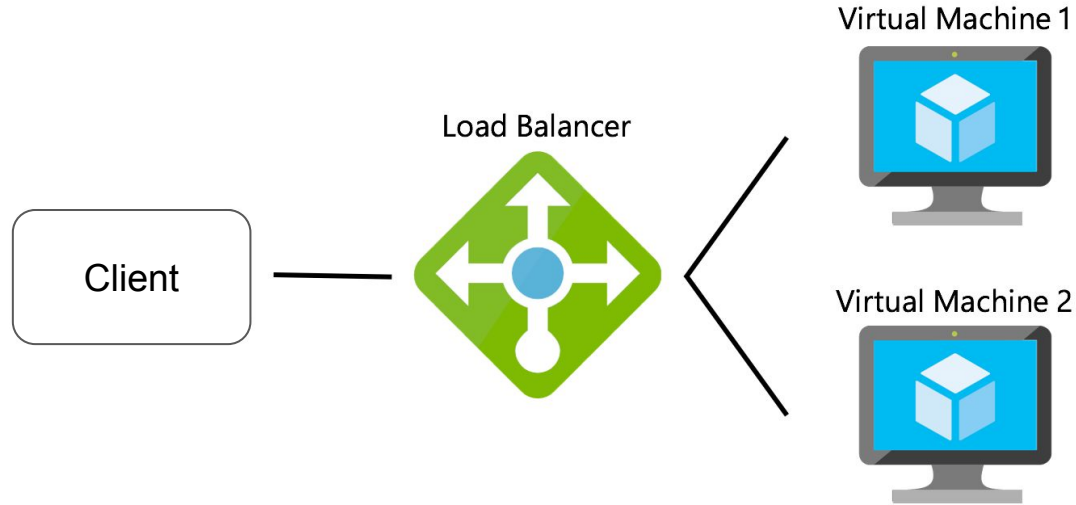

← → ↺

https://us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#TargetGroups:

☆

📧

⬇

📄

🌐

🔒

🔍

🔍 Search for services, features, blogs, docs, and more [Alt+S]

📏

🔔

🔄

N. Virginia ▾

Recherchetresserieuse ▾

aws

Services

Launch Templates

Spot Requests

Savings Plans

Reserved Instances New

Dedicated Hosts

Scheduled Instances

Capacity Reservations

▼ Images

AMIs New

AMI Catalog

▼ Elastic Block Store

Volumes New

Snapshots New

Lifecycle Manager New

▼ Network & Security

Security Groups

Elastic IPs

Placement Groups

Key Pairs

Network Interfaces

▼ Load Balancing

Load Balancers

Target Groups New

▼ Auto Scaling

Launch Configurations

Auto Scaling Groups

EC2 > Target groups

Target groups (1) [Info](#)

🔄

Actions ▾

Create target group

🔍 Search or filter target groups

< 1 > ⚙️

☐	Name ▾	ARN ▾	Port ▾	Protocol ▾	Target type ▾	Load balancer ▾	VPC ID ▾
☐	MyTG	arn:aws:elasticloadbalanc...	80	HTTP	Instance	MyLB	vpc-0c513531372931e93

0 target groups selected

Select a target group above.

Feedback

Looking for language selection? Find it in the new [Unified Settings](#)

© 2022, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

EC2 > Target groups > Create target group

Step 1

Specify group details

Step 2

Register targets

Specify group details

Your load balancer routes requests to the targets in a target group and performs health checks on the targets.

Basic configuration

Settings in this section cannot be changed after the target group is created.

Choose a target type

Instances

- Supports load balancing to instances within a specific VPC.
- Facilitates the use of [Amazon EC2 Auto Scaling](#) to manage and scale your EC2 capacity.

☐ IP addresses

- Supports load balancing to VPC and on-premises resources.
- Facilitates routing to multiple IP addresses and network interfaces on the same instance.
- Offers flexibility with microservice based architectures, simplifying inter-application communication.
- Supports IPv6 targets, enabling end-to-end IPv6 communication, and IPv4-to-IPv6 NAT.

- ☐ Lambda function

- Facilitates routing to a single Lambda function.
- Accessible to Application Load Balancers only.

- Application Load Balancer

- Offers the flexibility for a Network Load Balancer to accept and route TCP requests within a specific VPC.
- Facilitates using static IP addresses and PrivateLink with an Application Load Balancer.

~~CONFIDENTIAL~~

with a hyphen.

Protocol

Port

HTTP : 80

VPC

Select the VPC with the instances that you want to include in the target group.

-

vpc-0c513531372931e93

IPv4: 172.31.0.0/16

Protocol version

☒ HTTP1

Send requests to targets using HTTP/1.1. Supported when the request protocol is HTTP/1.1 or HTTP/2.

☐ HTTP2

Send requests to targets using HTTP/2. Supported when the request protocol is HTTP/2 or gRPC, but gRPC-specific features are not available.

☐ gRPC

Send requests to targets using gRPC. Supported when the request protocol is gRPC.

Health checks

The associated load balancer periodically sends requests, per the settings below, to the registered targets to test their status.

Health check protocol

HTTP

Health check path

Use the default path of "/" to ping the root, or specify a custom path if preferred.

/

Up to 1024 characters allowed.

▶ Advanced health check settings

▶ Tags - optional

Consider adding tags to your target group. Tags enable you to categorize your AWS resources so you can more easily manage them.

Cancel

Next

Step 1

Specify group details

Step 2

Register targets

Register targets

This is an optional step to create a target group. However, to ensure that your load balancer routes traffic to this target group you must register your targets.

Available instances (1/1)

Filter resources by property or value

< 1 > ⚙

☒	Instance ID ▾	Name ▾	State ▾	Security groups	Zone ▾	Subnet ID ▾
☒	i-0b99fb732cdaddebc	MyVM	running	launch-wizard-1	us-east-1a	subnet-0145589b42af62c85

1 selected

Ports for the selected instances

Ports for routing traffic to the selected instances.

80

1-65535 (separate multiple ports with commas)

Include as pending below

Review targets

Targets (0)

Remove all pending

All

Filter resources by property or value

< 1 >

Remove	Health status	Instance ID	Name	Port	State	Security groups	Zone	Subnet ID
No instances added yet Specify Instances above, or leave the group empty if you prefer to add targets later.								

← → ↺

https://us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LoadBalancers:sort=loadBalancerName

☆

📄 ⬇️ 📑 🌐 🗑️ 📧

» ⋮

aws

Services

Search for services, features, blogs, docs, and more [Alt+S]

📄 🔔 ⓘ

N. Virginia

Recherchetresserieuse

Launch Templates

Spot Requests

Savings Plans

Reserved Instances New

Dedicated Hosts

Scheduled Instances

Capacity Reservations

▼ Images

AMIs New

AMI Catalog

▼ Elastic Block Store

Volumes New

Snapshots New

Lifecycle Manager New

▼ Network & Security

Security Groups

Elastic IPs

Placement Groups

Key Pairs

Network Interfaces

▼ Load Balancing

Load Balancers

Target Groups New

▼ Auto Scaling

Launch Configurations

Auto Scaling Groups

Create Load Balancer

Actions ▼

🔍 Filter by tags and attributes or search by keyword

⏪ < None found > ⏩

☐	Name	DNS name	State	VPC ID	Availability Zones	Type	Created At	Monitoring
You do not have any load balancers in this region.								

Select a load balancer

⏏️ ⏏️ ⏏️

Feedback

Looking for language selection? Find it in the new Unified Settings

© 2022, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences


EC2 > Load balancers > Select load balancer type

Select load balancer type

A complete feature-by-feature comparison along with detailed highlights is also available. [Learn more](#)

Load balancer types


Application Load Balancer [Info](#)



Choose an Application Load Balancer when you need a flexible feature set for your applications with HTTP and HTTPS traffic. Operating at the request level, Application Load Balancers provide advanced routing and visibility features targeted at application architectures, including microservices and **containers**.

Create

Network Load Balancer [Info](#)



Choose a Network Load Balancer when you need ultra-high performance, TLS offloading at scale, centralized certificate deployment, support for UDP, and static IP addresses for your applications. Operating at the connection level, Network Load Balancers are capable of handling millions of requests per second securely while maintaining ultra-low latencies.

Create

Gateway Load Balancer [Info](#)



Choose a Gateway Load Balancer when you need to deploy and manage a fleet of third-party virtual appliances that support GENEVE. These appliances enable you to improve security, compliance, and policy controls.

Create

EC2 > Load balancers > Create Application Load Balancer

Create Application Load Balancer [Info](#)

The Application Load Balancer distributes incoming HTTP and HTTPS traffic across multiple targets such as Amazon EC2 instances, microservices, and containers, based on request attributes. When the load balancer receives a connection request, it evaluates the listener rules in priority order to determine which rule to apply, and if applicable, it selects a target from the target group for the rule action.

► How Application Load Balancers work

Basic configuration

Load balancer name

Name must be unique within your AWS account and cannot be changed after the load balancer is created.

A maximum of 32 alphanumeric characters including hyphens are allowed, but the name must not begin or end with a hyphen.

Scheme [Info](#)

Scheme cannot be changed after the load balancer is created.

☒ Internet-facing

An Internet-facing load balancer routes requests from clients over the Internet to targets. Requires a public subnet. [Learn more](#)

☐ Internal

An internal load balancer routes requests from clients to targets using private IP addresses.

IP address type [Info](#)

Select the type of IP addresses that your subnets use.

☒ IPv4

Recommended for internal load balancers.

☐ Dualstack

Includes IPv4 and IPv6 addresses.

Network mapping [Info](#)

The load balancer routes traffic to targets in the selected subnets, and in accordance with your IP address settings.

The load balancer routes traffic to targets in the selected subnets, and in accordance with your IP address settings.

VPC [Info](#)

Select the virtual private cloud (VPC) for your targets. Only VPCs with an internet gateway are enabled for selection. The selected VPC cannot be changed after the load balancer is created. To confirm the VPC for your targets, view your [target groups](#).

vpc-0c513531372931e93
IPv4: 172.31.0.0/16

↻

Mappings [Info](#)

Select at least two Availability Zones and one subnet per zone. The load balancer routes traffic to targets in these Availability Zones only. Availability Zones that are not supported by the load balancer or the VPC are not available for selection.

☐ us-east-1a

☐ us-east-1b

☐ us-east-1c

☐ us-east-1d

☐ us-east-1e

☐ us-east-1f

Security groups [Info](#)

A security group is a set of firewall rules that control the traffic to your load balancer.

Security groups

Select up to 5 security groups

↻

[Create new security group](#)

Security groups [Info](#)

A security group is a set of firewall rules that control the traffic to your load balancer.

Security groups

Select up to 5 security groups

[Create new security group](#)

default sg-018d18d7492fd2bd2 X
VPC: vpc-0c513531372931e93

Select your security group

Listeners and routing [Info](#)

A listener is a process that checks for connection requests using the port and protocol you configure. The rules that you define for a listener determine how the load balancer routes requests to its registered targets.

▼ Listener HTTP:80

[Remove](#)

Protocol Port
HTTP : 80

1-65535

Default action [Info](#)

Forward to Select a target group



[Create target group](#)

[Add listener](#)

▼ Add-on services - optional

Additional AWS services can be integrated with this load balancer at launch. You can also add these and other services after your load balancer is created by reviewing the "Integrated Services" tab for the selected load balancer.

AWS Global Accelerator [Info](#)

- ☐ Create an accelerator to get static IP addresses and improve the performance and availability of your applications. [Additional charges apply](#) 📄

► Tags - optional

Consider adding tags to your load balancer. Tags enable you to categorize your AWS resources so you can more easily manage them. The 'Key' is required, but 'Value' is optional. For example, you can have Key = production-webserver, or Key = webserver, and Value = production.

Summary

Review and confirm your configurations. [Estimate cost](#) 📄

Basic configuration [Edit](#)

Load balancer name not defined

- Internet-facing
- IPv4

Security groups [Edit](#)

- default
[sg-018d18d7492fd2bd2](#) 📄

Network mapping [Edit](#)

VPC [vpc-0c513531372931e93](#) 📄
Subnet not defined

Listeners and routing [Edit](#)

- HTTP:80 defaults to
Target group not defined

Add-on services [Edit](#)

None

Tags [Edit](#)

None

Attributes

📘 Certain default attributes will be applied to your load balancer. You can view and edit them after creating the load balancer.

Cancel

Create load balancer

- New EC2 Experience
- EC2 Dashboard
- EC2 Global View
- Events
- Tags
- Limits
- Instances
 - Instances
 - Instance Types
 - Launch Templates
 - Spot Requests
 - Savings Plans
 - Reserved Instances
 - Dedicated Hosts
 - Scheduled Instances
 - Capacity Reservations
- Images
 - AMIs
 - AMI Catalog
- Elastic Block Store
 - Volumes
 - Snapshots
 - Lifecycle Manager
- Network & Security
 - Security Groups
 - Elastic IPs

Create Load Balancer Actions

search : MyLB

Add filter

<<


<

1 to 1 of 1

>

>>

	Name	DNS name	State	VPC ID	Availability Zones	Type	Created At	Monitoring
	MyLB	MyLB-112483625.us-east-1...	Provisioning	vpc-0c513531372931e93	us-east-1b, us-east-1a	application	September 16, 2022 at 6:41:...	

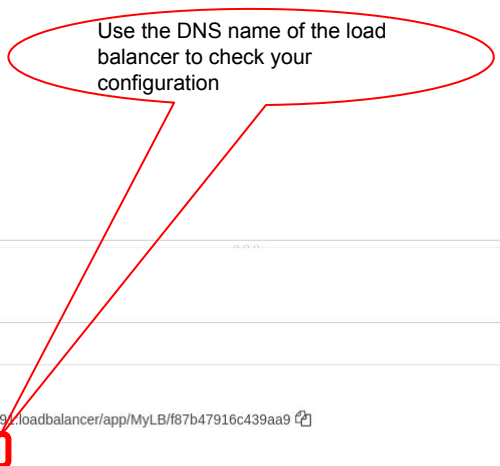

Load balancer: MyLB

Description Listeners Monitoring Integrated services Tags

Basic Configuration

Name	MyLB
ARN	arn:aws:elasticloadbalancing:us-east-1:90578545229:loadbalancer/app/MyLB/f87b47916c439aa9
DNS name	MyLB-112483625.us-east-1.elb.amazonaws.com (A Record)
State	Provisioning

To Do: Add a new VM to you LB

- Therefore, clone your running VM and add the the new VM to the target Group, you need to install apache in the newly cloned VM.
- Change the content of the Index.html page on you servers, by using the command echo on a terminal on the servers:
 - **echo** "<h1>Server 1</h1>" > /var/www/html/index.html #for server 1
 - **echo** "<h1>Server 2</h1>" > /var/www/html/index.html #for server 2
- Check if your load balancer balances the load between the two VMs (you can use the curl command from your terminal:
 - **for i in {1..20};**
 - **do curl http://<LOAD-BALANCER-DNS>**
 - **done**

New EC2 Experience
Tell us what you think

EC2 Dashboard
EC2 Global View
Events
Tags
Limits

▼ Instances

Instances **New**
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances **New**
Dedicated Hosts
Scheduled Instances
Capacity Reservations

▼ Images

AMIs **New**
AMI Catalog

▼ Elastic Block Store

Volumes **New**

Instances (1/1) Info

Find instance by attribute or tag (case-sensitive)

☒	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS
☒	MyVM	i-0b99fb732cdaddebc	Running	t2.micro	2/2 checks passed	No alarms	us-east-1a	ec2-3-91-6-208.compute-1.amazonaws.com



Connect

Instance state

Actions

Launch instances

Connect

View details

Manage instance state

Instance settings

Networking

Security

Image and templates

Monitor and troubleshoot

Create image

Create template from instance

Launch more like this

Instance: i-0b99fb732cdaddebc (MyVM)

Details

Security

Networking

Storage

Status checks

Monitoring

Tags

▼ Instance summary Info

Instance ID
i-0b99fb732cdaddebc (MyVM)

IPv6 address
-

Public IPv4 address
3.91.6.208 | [open address](#)

Instance state
Running

Private IPv4 addresses
172.31.17.132

Public IPv4 DNS
ec2-3-91-6-208.compute-1.amazonaws.com | [open address](#)

Select your cookie preferences

We use cookies and similar tools to enhance your experience, provide our services, deliver relevant advertising, and make improvements. Approved third parties also use these tools to help us deliver advertising and provide certain site features.

Accept all cookies

Continue without accepting

Customize cookies

Questions


Q7. Why should clients access the load balancer instead of individual EC2 addresses?


Q8. Stop EC2-1. What happens to requests?

Q9. Explain the role of the health check.

S3 and Lambda function

- Add a bucket to S3

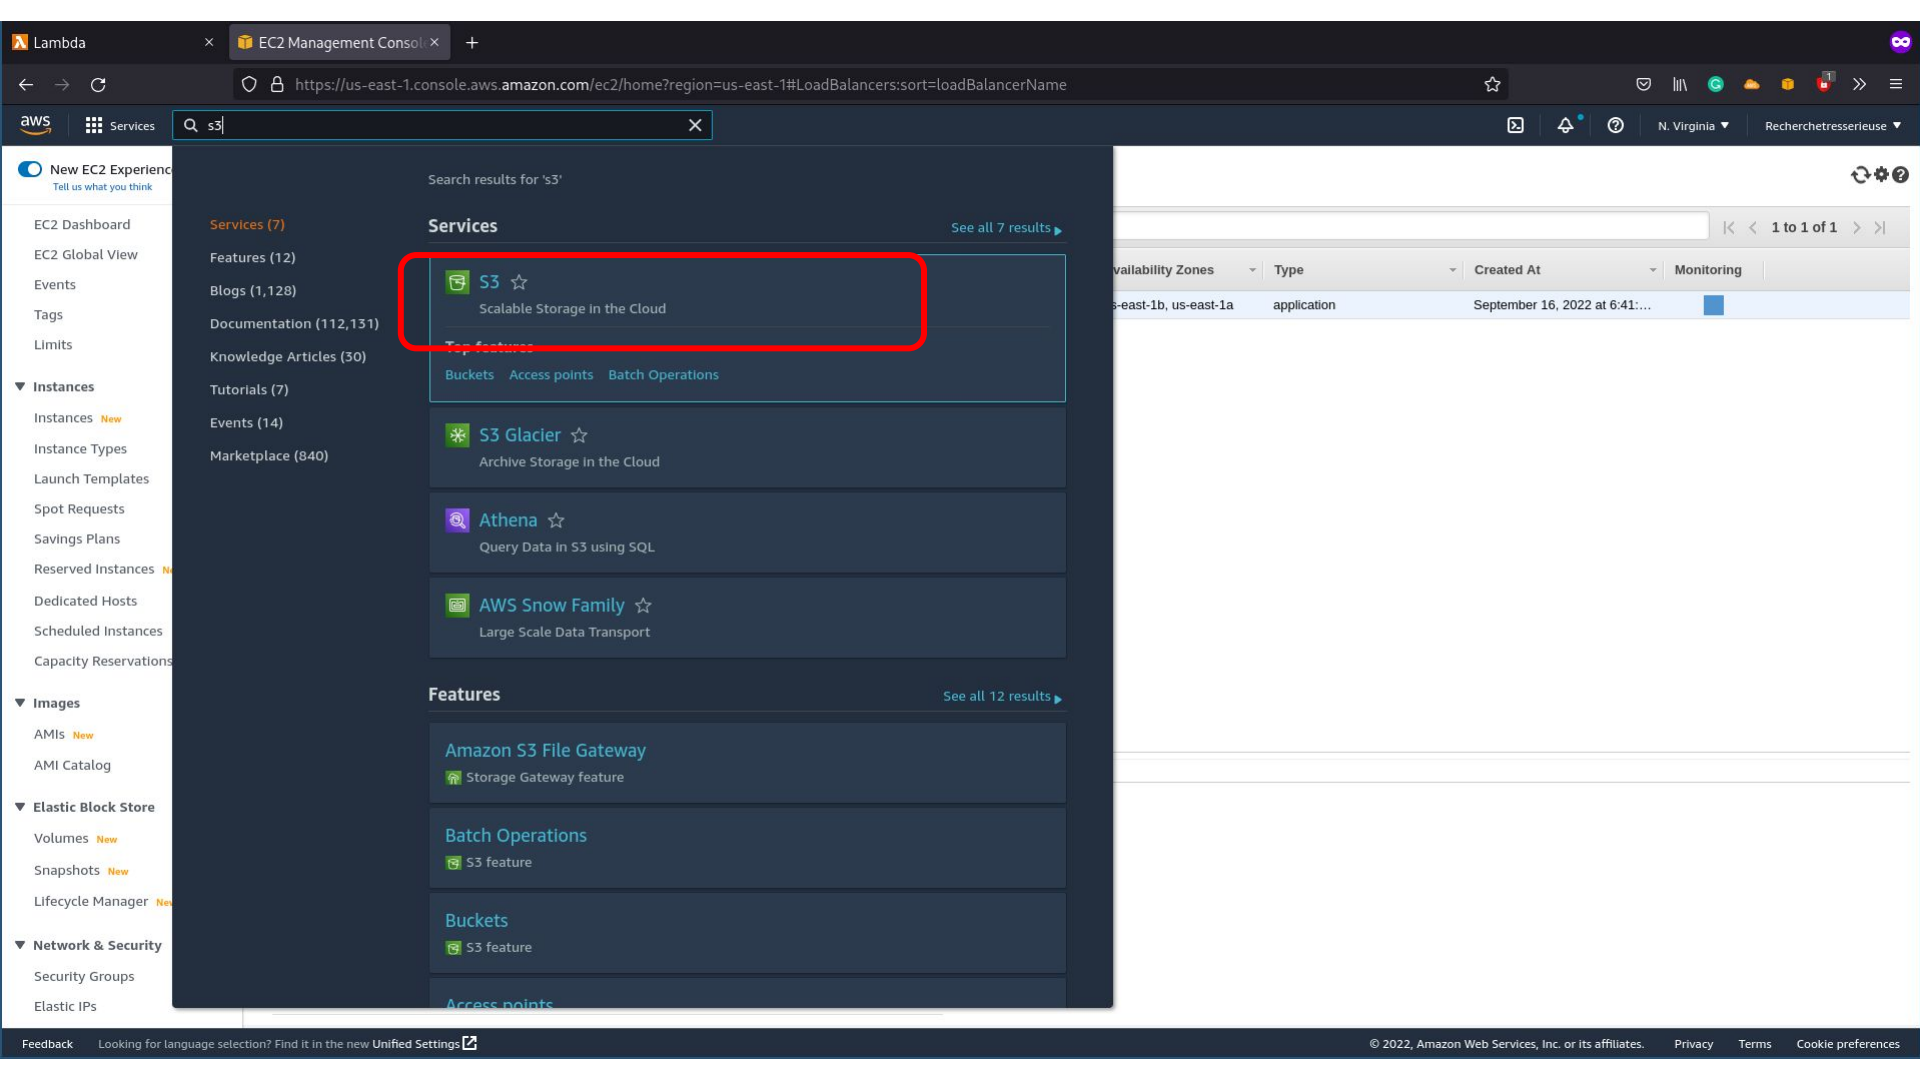

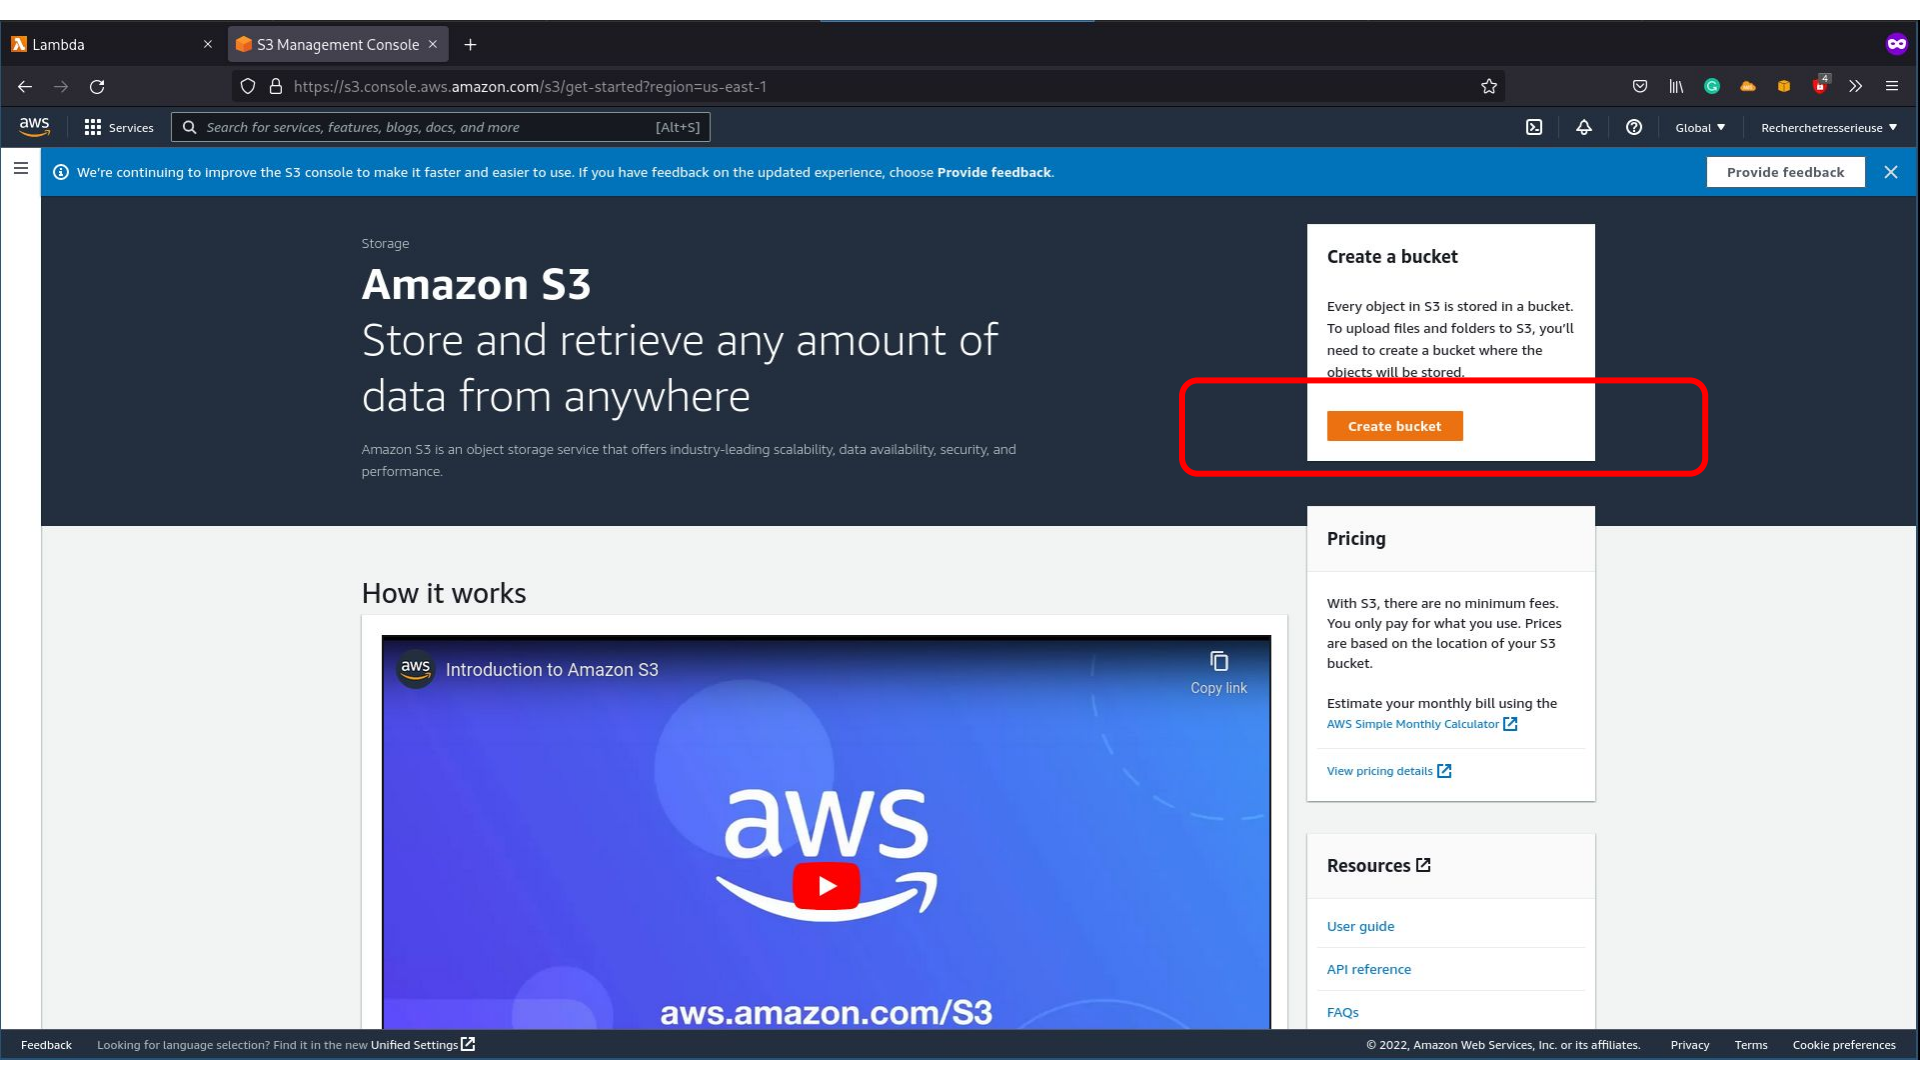

Storage

Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

Create a bucket

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

Create bucket

How it works



Pricing

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the [AWS Simple Monthly Calculator](#)


[View pricing details](#)


Resources

[User guide](#)

[API reference](#)

[FAQs](#)

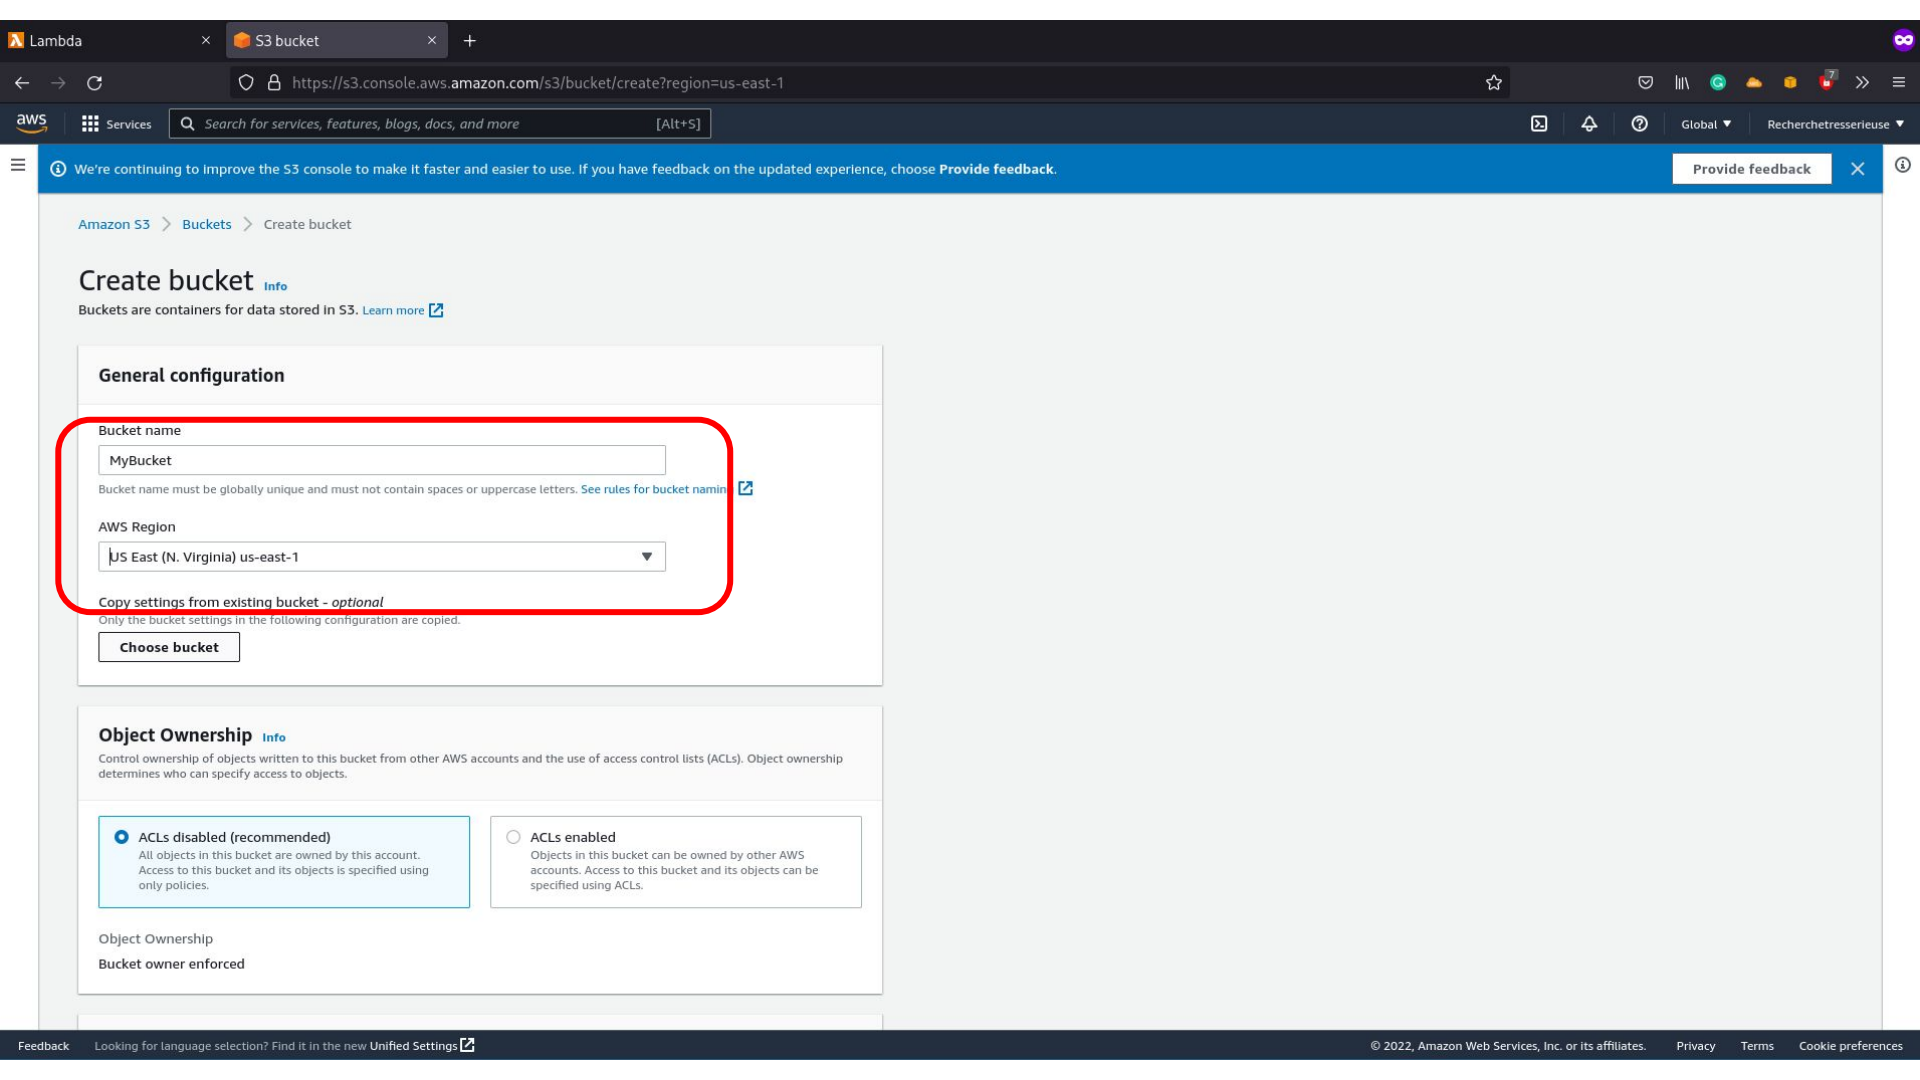

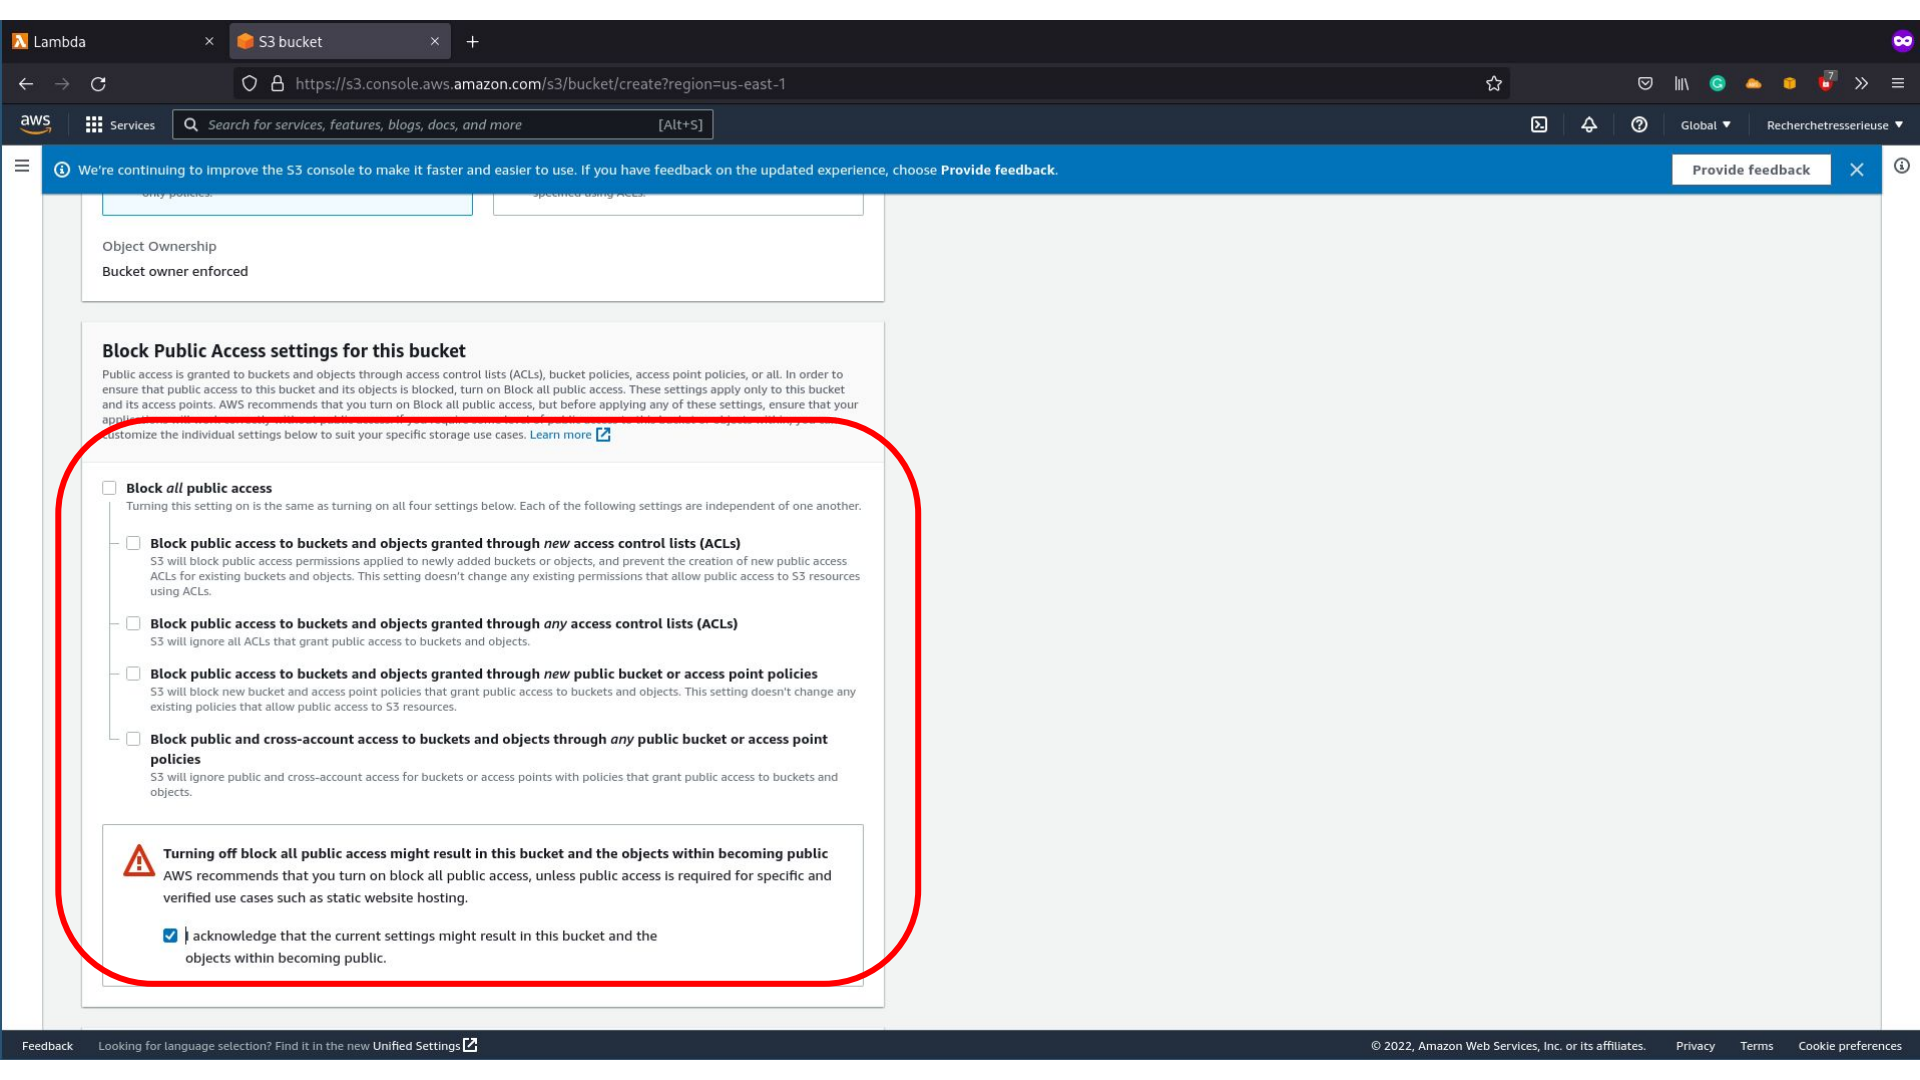

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your application will not require any public access. If you require some level of public access, you must turn on Block all public access and then customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access


Turning this setting on is the same as turning on all four settings below. Each of the following settings is independent of one another.

- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.



Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

- ☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

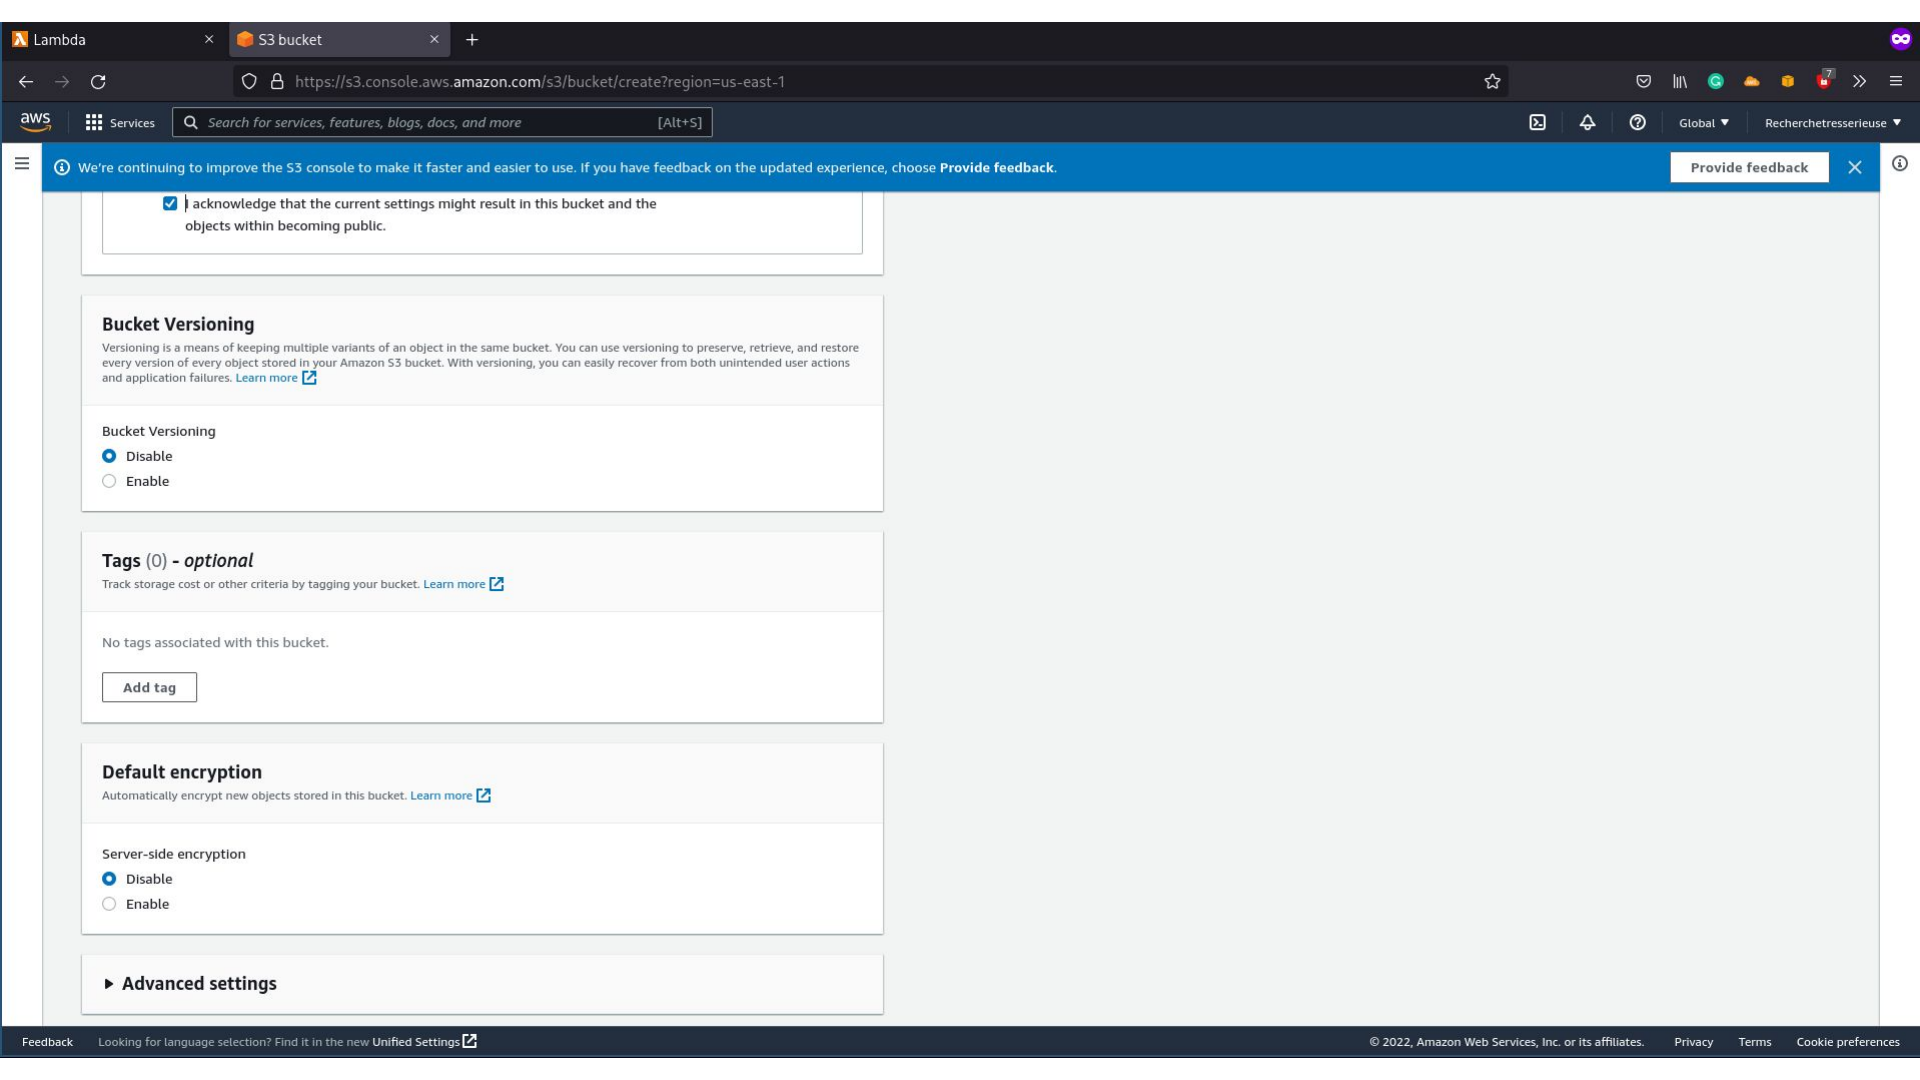

☰ ⓘ We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose **Provide feedback**.

Provide feedback ✕ ⓘ

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

- ☒ Disable
- ☐ Enable

Tags (0) - optional

Track storage cost or other criteria by tagging your bucket. [Learn more](#)

No tags associated with this bucket.

Add tag


Default encryption

Automatically encrypt new objects stored in this bucket. [Learn more](#)

Server-side encryption

- ☒ Disable
- ☐ Enable

► Advanced settings

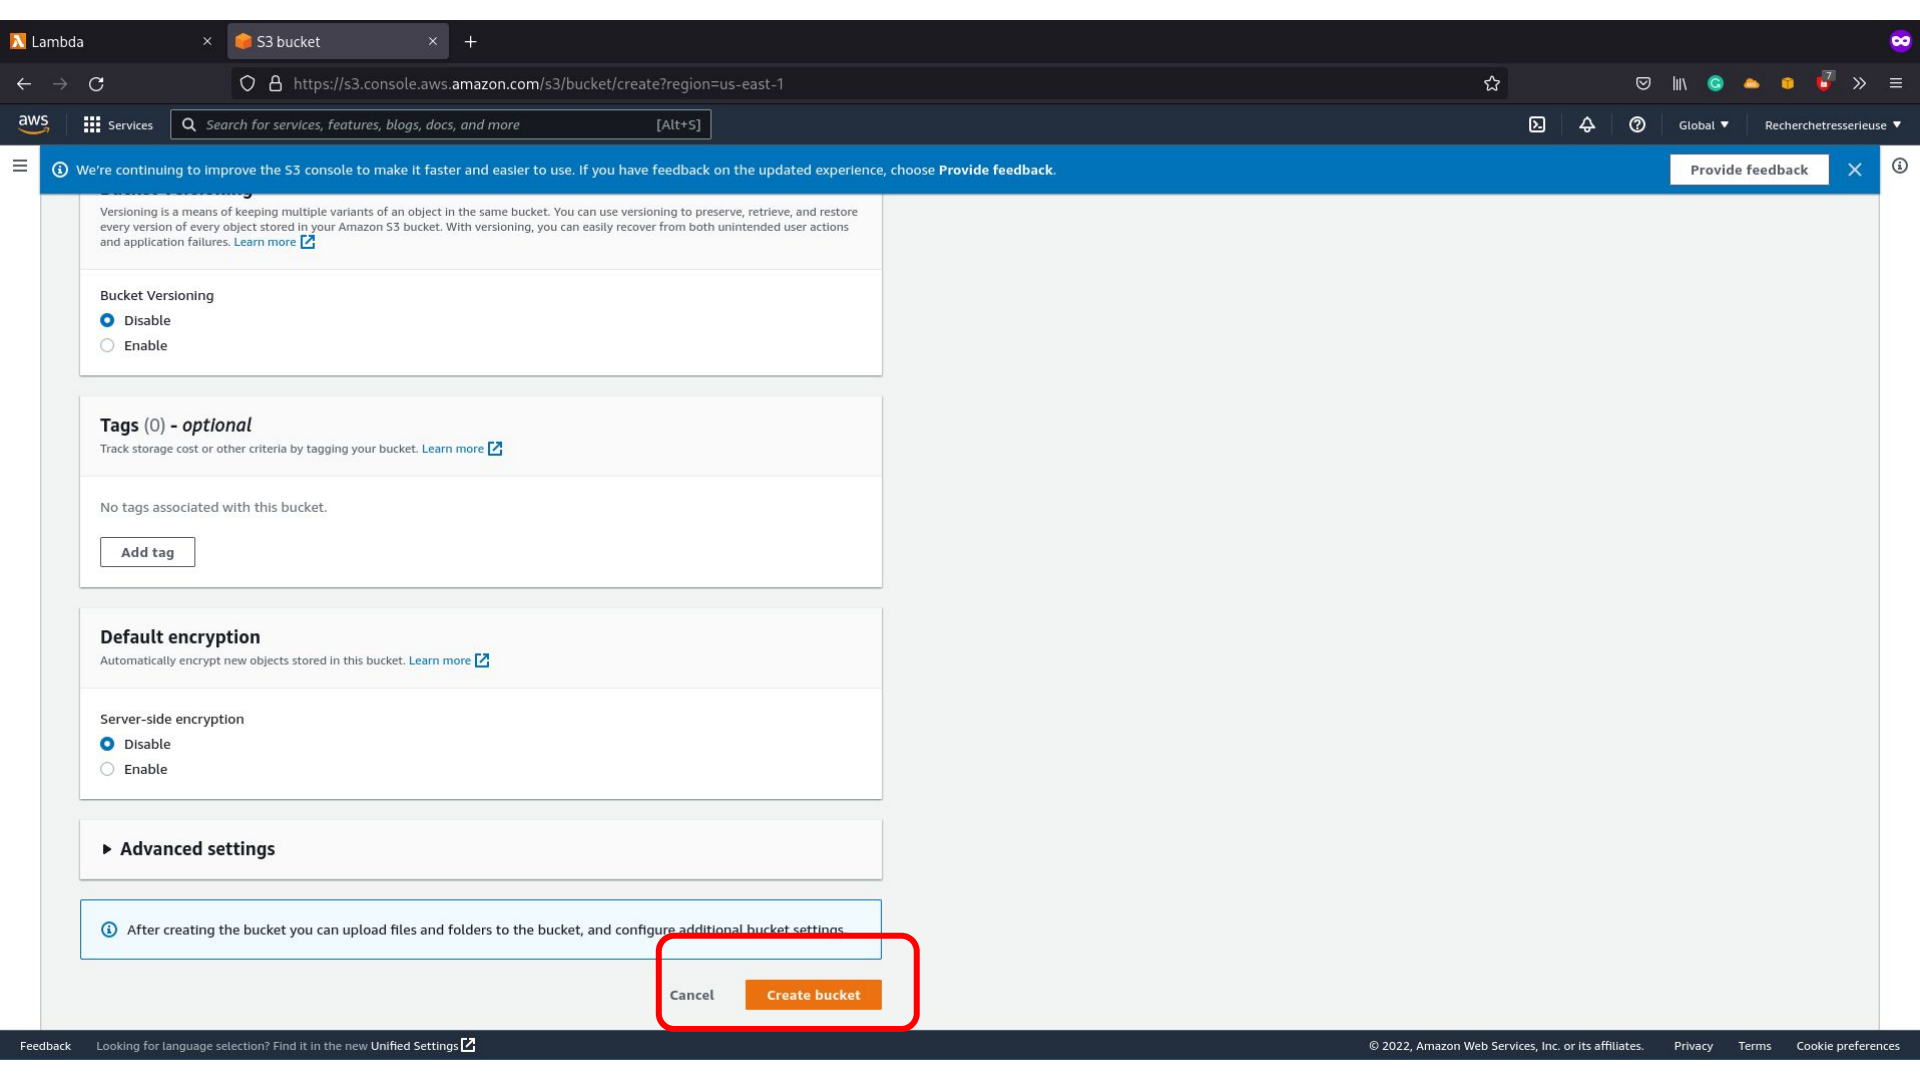

We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose **Provide feedback**.

Provide feedback

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Disable

☐ Enable

Tags (0) - optional

Track storage cost or other criteria by tagging your bucket. [Learn more](#)

No tags associated with this bucket.

Add tag

Default encryption

Automatically encrypt new objects stored in this bucket. [Learn more](#)

Server-side encryption

☒ Disable


☐ Enable

Advanced settings

After creating the bucket you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

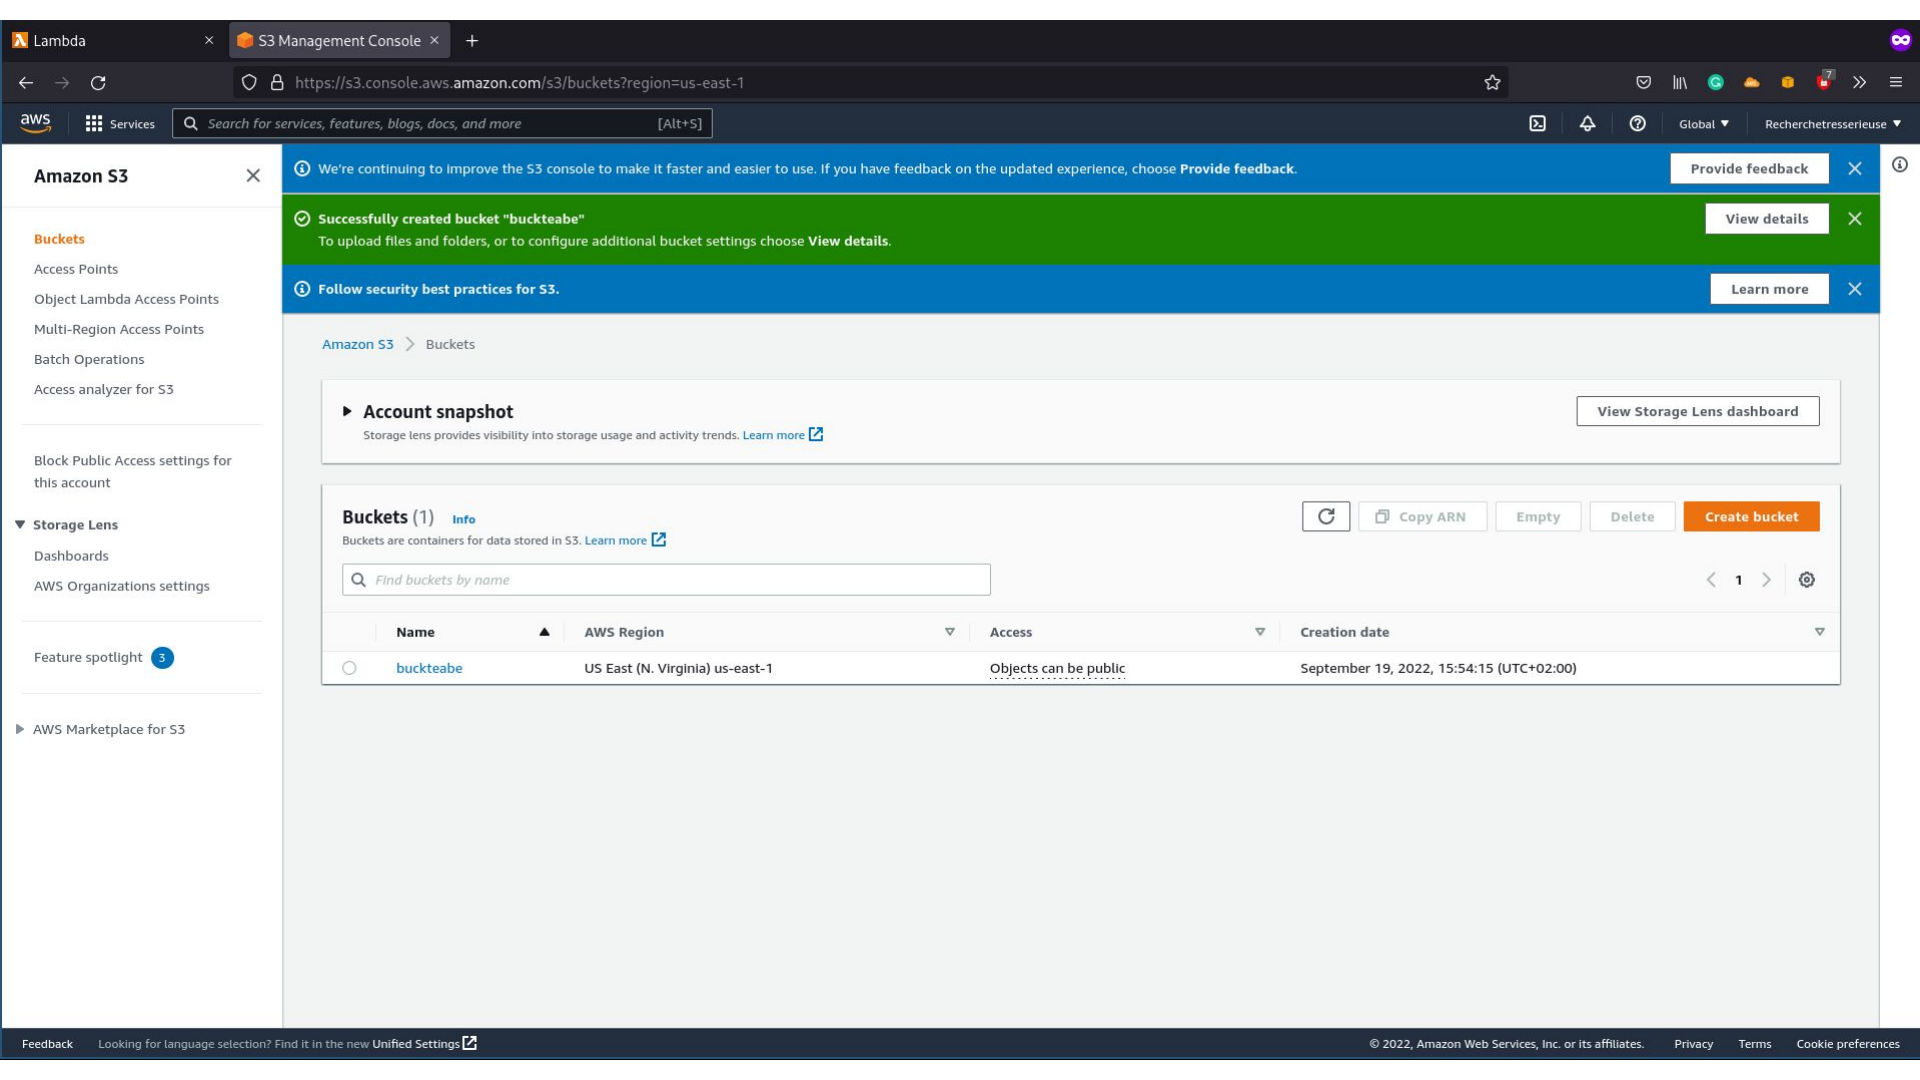

Amazon S3

Buckets

- Access Points
- Object Lambda Access Points
- Multi-Region Access Points
- Batch Operations
- Access analyzer for S3

Block Public Access settings for this account

Storage Lens

- Dashboards
- AWS Organizations settings

Feature spotlight 3

AWS Marketplace for S3

We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose [Provide feedback](#).

Successfully created bucket "buckteabe"
To upload files and folders, or to configure additional bucket settings choose [View details](#).

Follow security best practices for S3. [Learn more](#)

Amazon S3 > Buckets

Account snapshot
Storage lens provides visibility into storage usage and activity trends. [Learn more](#)

[View Storage Lens dashboard](#)

Buckets (1) [Info](#)

Buckets are containers for data stored in S3. [Learn more](#)

[Refresh](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

< 1 > [Settings](#)

	Name	AWS Region	Access	Creation date
☐	buckteabe	US East (N. Virginia) us-east-1	Objects can be public	September 19, 2022, 15:54:15 (UTC+02:00)

- Create your function

Instances | EC2 Management | +

← → ↺

https://us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#Instances:

☆

🔒

📶

🌐

📁

📧

🔔

🔍

N. Virginia

Recherchetresserieuse

aws

Services

🔍 lambda

×

New EC2 Experience

Tell us what you think

EC2 Dashboard

EC2 Global View

Events

Tags

Limits

▼ Instances

Instances New

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances New

Dedicated Hosts

Scheduled Instances

Capacity Reservations

▼ Images

AMIs New

AMI Catalog

▼ Elastic Block Store

Volumes New

Snapshots New

Lifecycle Manager New

▼ Network & Security

Security Groups

Elastic IPs

Search results for 'lam'

Services

See all 11 results ▶

 **Lambda** ☆

Run Code without Thinking about Servers

 **CodeBuild** ☆

Build and Test Code

 **AWS Signer** ☆

Ensuring trust and integrity of your code

 **Amazon Lex** ☆

Build Voice and Text Chatbots

Features

See all 19 results ▶

Local processing

 IoT Core feature

Target groups

 EC2 feature

Publish applications

 Serverless Application Repository feature

Groups

 IAM feature

🔄

Connect

Instance state ▼

Actions ▼

Launch instances

▼

< 1 >

⚙️

Alarm status	Availability Zone ▼	Public IPv4 DNS ▼	Public IPv4 ... ▼	Elastic IP ▼
No alarms +	us-east-1a	ec2-3-91-6-208.comput...	3.91.6.208	-

⚙️

×

Feedback

Looking for language selection? Find it in the new Unified Settings

© 2022, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

Functions - Lambda

+

← → ↻

🔒

https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/functions

☆

📧 🔔 ⓘ

N. Virginia

Recherchetresserieuse

aws

Services

🔍 Search for services, features, blogs, docs, and more

[Alt+S]

AWS Lambda

×

Dashboard

Applications

Functions

▼ Additional resources

Code signing configurations

Layers

Replicas

▼ Related AWS resources

Step Functions state machines

Lambda > Functions

Functions (0)

🔍 Filter by tags and attributes or search by keyword

❏

Function name

▼

Description

▼

Package type

▼

Runtime

▼

Last modified

▼

There is no data to display.

Last fetched now

🔄

Actions ▼

Create function

< 1 > ⚙️

Feedback

Looking for language selection? Find it in the new Unified Settings: 📄

© 2022, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

Lambda > Functions > Create function

Create function [Info](#)

Choose one of the following options to create your function.

Author from scratch

Start with a simple Hello World example.

Use a blueprint

Build a Lambda application from sample code and configuration presets for common use cases.

Container image

Select a container image to deploy for your function.

Browse serverless app repository

Deploy a sample Lambda application from the AWS Serverless Application Repository.

Basic information

Function name

Enter a name that describes the purpose of your function.

MyFunction

Use only letters, numbers, hyphens, or underscores with no spaces.

Runtime [Info](#)

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.

Python 3.8

Architecture [Info](#)

Choose the instruction set architecture you want for your function code.

☒ x86_64

☐ arm64

Permissions [Info](#)

By default, Lambda will create an execution role with permissions to upload logs to Amazon CloudWatch Logs. You can customize this default role later when adding triggers.

► Change default execution role

► Advanced settings

MyFunction - LambdaCloudWatch ManagementS3 Management ConsoleS3 Management ConsoleTutorial: Using an Amazon Private Browsing

←→↺https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/functions/MyFunction?tab=code

awsServicesSearch for services, features, blogs, docs, and more[Alt+S]

☰

☑ Successfully updated the function **MyFunction**.

Function URL Info

CodeTestMonitorConfigurationAliasesVersions

Code source Info

Upload from

FileEditFindViewGoToolsWindowTestDeploy

Go to Anything (Ctrl-P)

lambda_function

MyFunction

lambda_function.py

```
1import json
2
3def lambda_handler(event, context):
4    print("je fais un test")
5    return "Un test"
6
7
```

1:1 Python Spaces: 4

FeedbackLooking for language selection? Find it in the new Unified Settings.

© 2022, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences


Function URLs

A function URL is a dedicated HTTP(S) endpoint for your function. When your function URL is configured, you can use it to invoke your function through a browser, curl, Postman, or any HTTP client. When you configure a function URL from the main function page, Lambda assigns the function URL to the **LATEST** unpublished version of your function. You cannot assign a function URL to any other function version, but you can assign a function URL to any function alias.

To add a function URL, choose the **Configuration** tab, then choose the **Function URL** tab in the left menu. To add a function URL to an alias, choose an alias from the **Aliases** tab, choose **Configuration**, and then choose **Function URL**.

Learn more

Function URLs

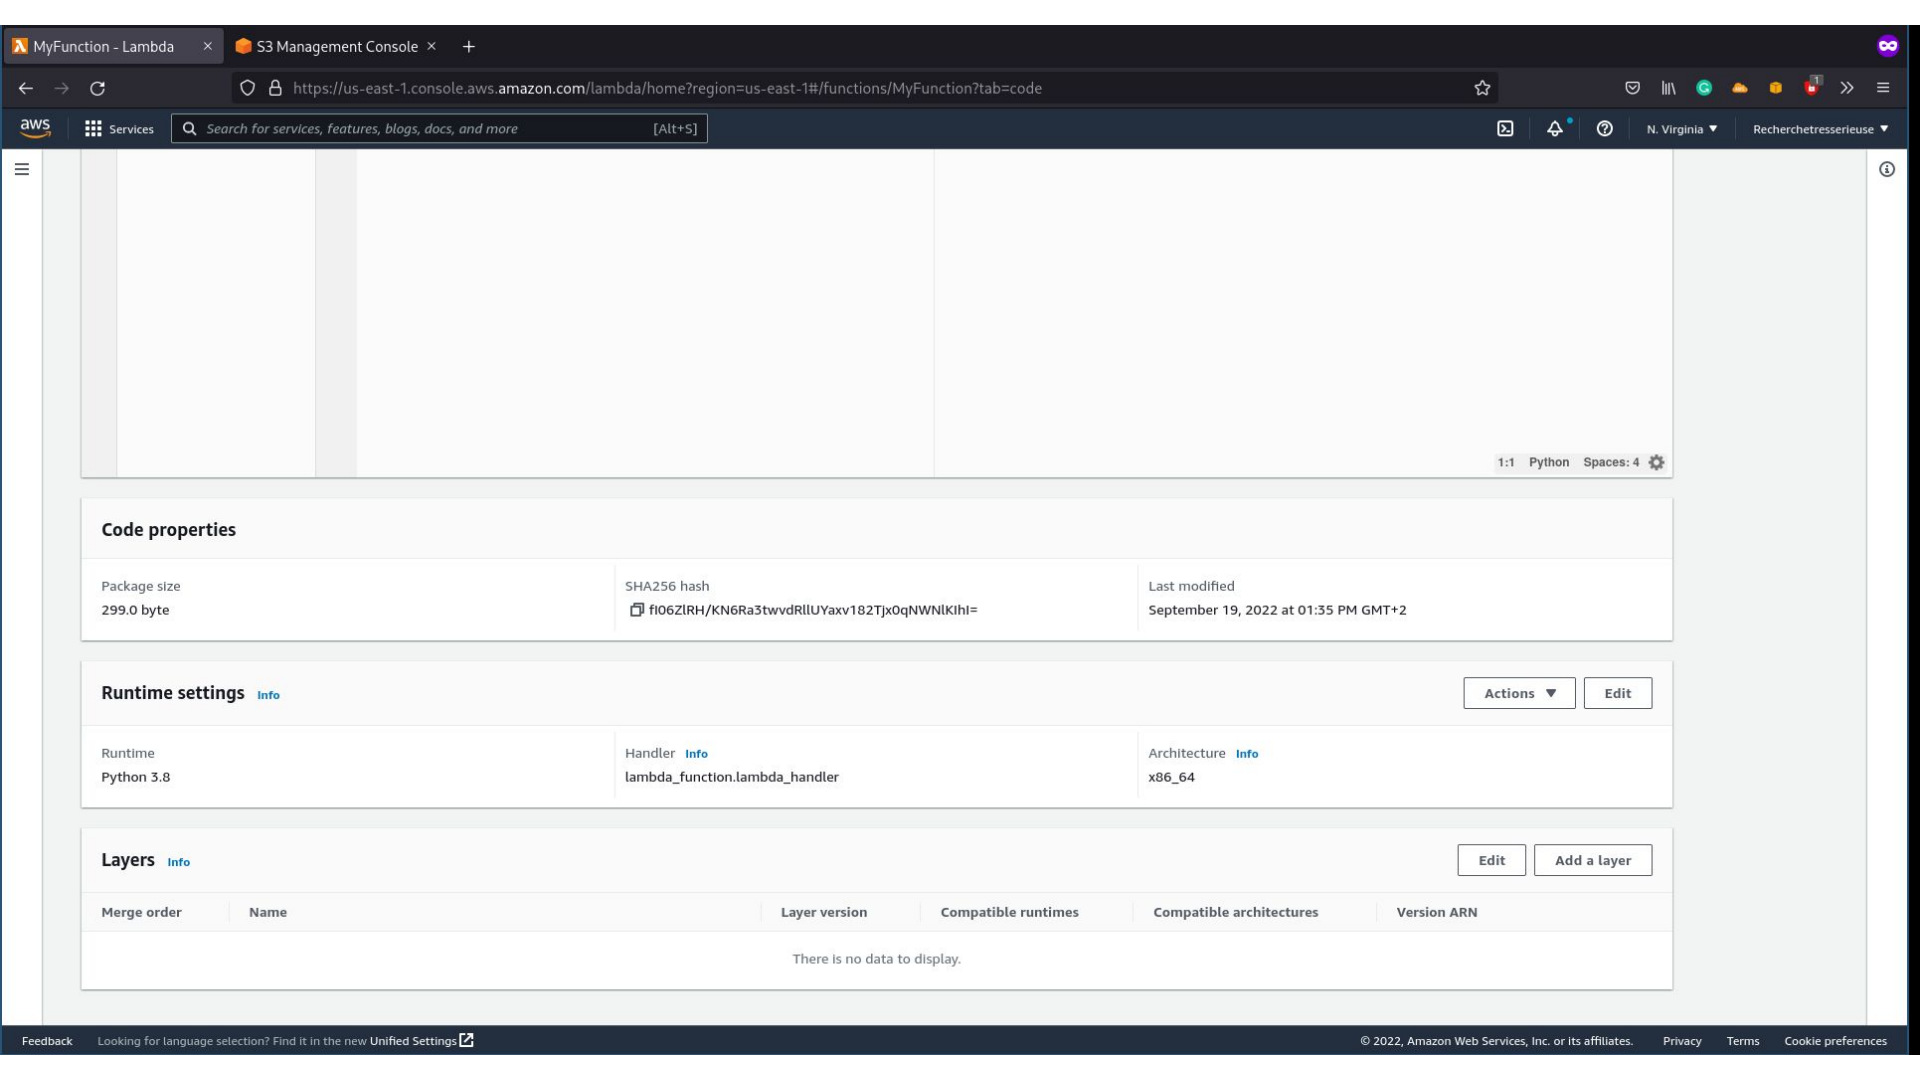

Code properties

Package size
299.0 byte

SHA256 hash
fi06ZIRH/KN6Ra3twvdRIUyYxv182Tjx0qNWNlKiHl=

Last modified
September 19, 2022 at 01:35 PM GMT+2

Runtime settings [Info](#)

Actions ▼

Edit

Runtime
Python 3.8

Handler [Info](#)
lambda_function.lambda_handler

Architecture [Info](#)
x86_64


Layers [Info](#)

Edit

Add a layer

Merge order	Name	Layer version	Compatible runtimes	Compatible architectures	Version ARN
-------------	------	---------------	---------------------	--------------------------	-------------

There is no data to display.

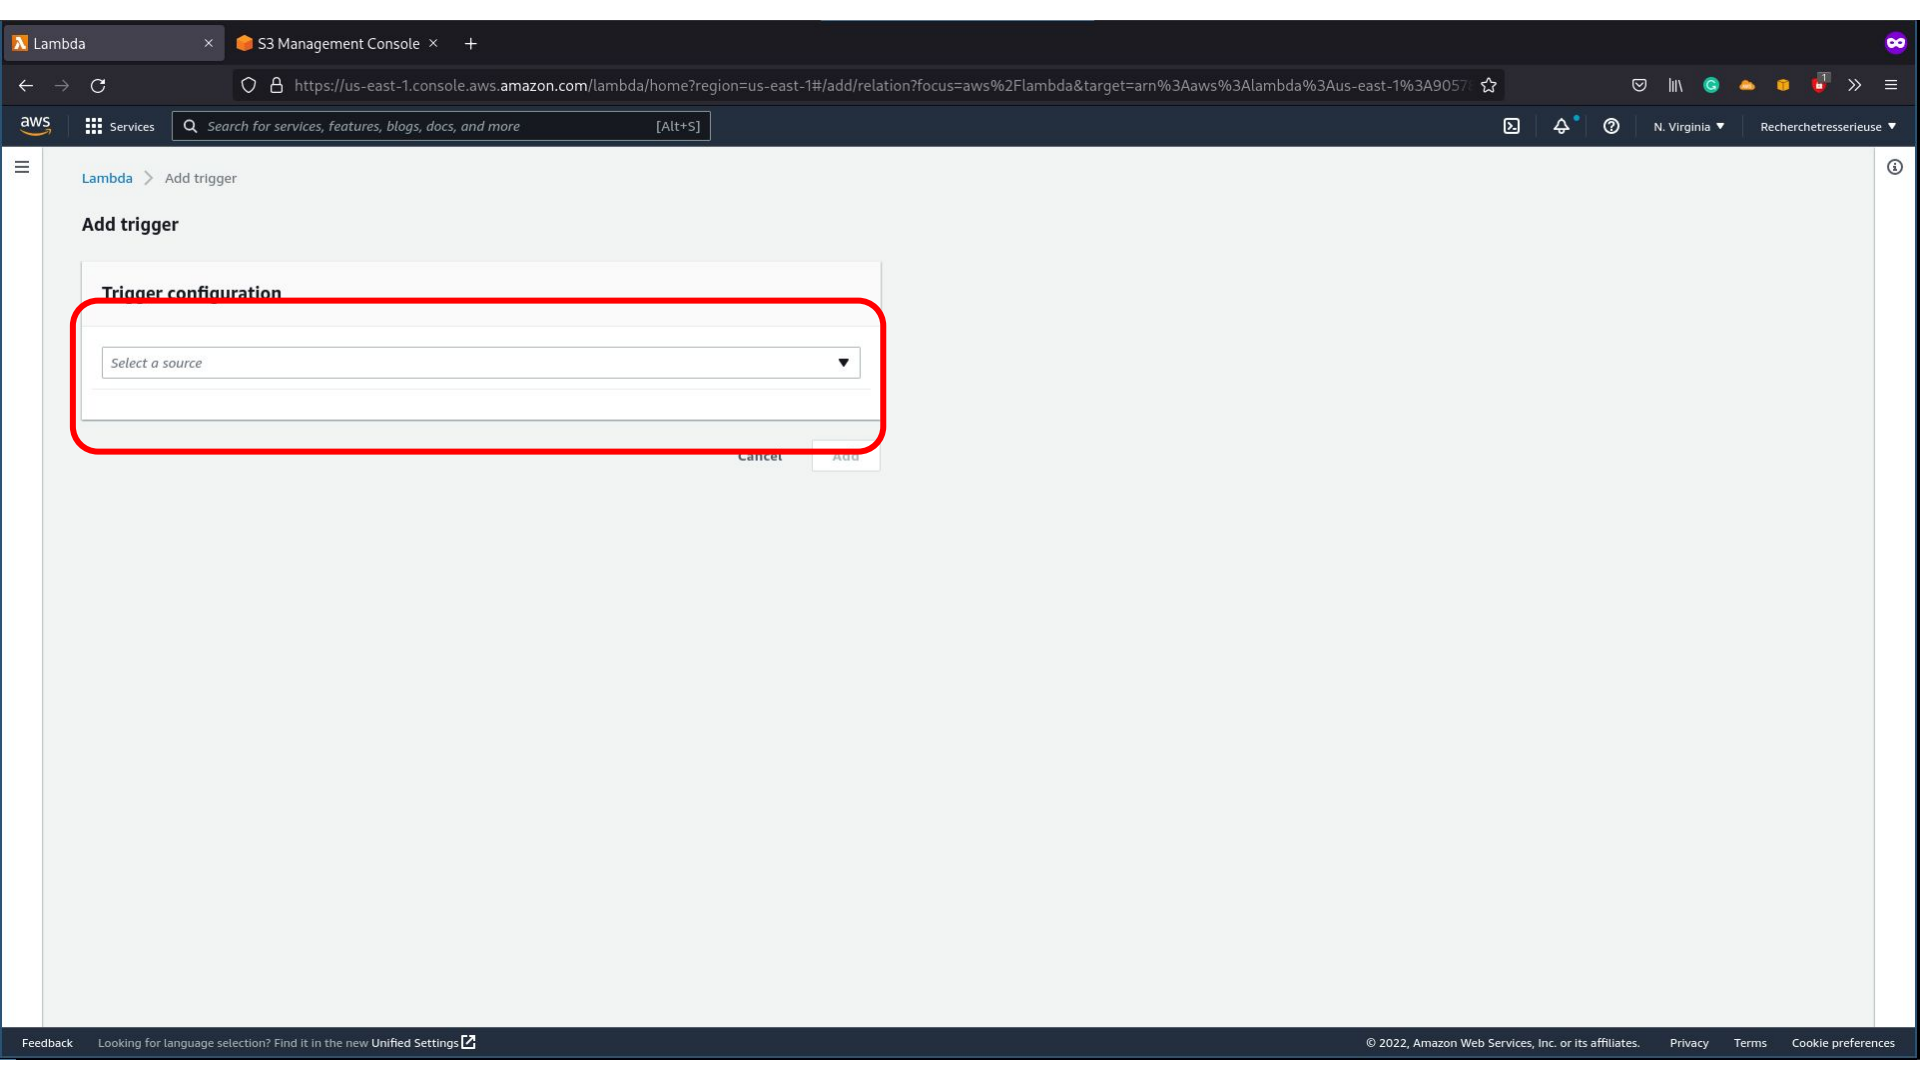

Lambda

S3 Management Console

+

← → ↺

https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/add/relation?focus=aws%2Flambda&target=arn%3Aaws%3Alambda%3Aus-east-1%3A9057:☆

aws

Services

Search for services, features, blogs, docs, and more

[Alt+S]

🔍 🔔 ⓘ

N. Virginia

Recherchetresserieuse

Lambda > Add trigger

3

Add trigger

Trigger configuration

S3

aws storage

Bucket

Please select the S3 bucket that serves as the event source. The bucket must be in the same region as the function.

🔍

↻

Event type

Select the events that you want to have trigger the Lambda function. You can optionally set up a prefix or suffix for an event. However, for each bucket, individual events cannot have multiple configurations with overlapping prefixes or suffixes that could match the same object key.

All object create events

Prefix - optional

Enter a single optional prefix to limit the notifications to objects with keys that start with matching characters.

e.g. images/

Suffix - optional

Enter a single optional suffix to limit the notifications to objects with keys that end with matching characters.

e.g. .jpg

Recursive invocation

If your function writes objects to an S3 bucket, ensure that you are using different S3 buckets for input and output. Writing to the same bucket increases the risk of creating a recursive invocation, which can result in increased Lambda usage and increased costs. [Learn more](#)

☐ I acknowledge that using the same S3 bucket for both input and output is not recommended and that this configuration can cause recursive invocations, increased Lambda usage, and increased costs.

Lambda will add the necessary permissions for AWS S3 to invoke your Lambda function from this trigger. [Learn more](#) about the Lambda permissions model.

Feedback

Looking for language selection? Find it in the new [Unified Settings](#)

© 2022, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Lambda

S3 Management Console

+

← → ↺

https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/add/relation?focus=aws%2Flambda&target=arn%3Aaws%3Alambda%3Aus-east-1%3A9057

☆

🛡️ 📄 🗨️ 🌤️ 📦 🔴 1 >> ☰

aws

Services

Search for services, features, blogs, docs, and more

[Alt+S]

📧 🔔 ⓘ

N. Virginia

Recherchetresserieuse

☰

Add trigger

ⓘ

Trigger configuration

 S3

aws storage

▼

Bucket

Please select the S3 bucket that serves as the event source. The bucket must be in the same region as the function.



Event type

Select the events that you want to have trigger the Lambda function. You can optionally set up a prefix or suffix for an event. However, for each bucket, individual events cannot have multiple configurations with overlapping prefixes or suffixes that could match the same object key.

All object create events ▼

Prefix - optional

Enter a single optional prefix to limit the notifications to objects with keys that start with matching characters.

Suffix - optional

Enter a single optional suffix to limit the notifications to objects with keys that end with matching characters.

Recursive Invocation

If your function writes objects to an S3 bucket, ensure that you are using different S3 buckets for input and output. Writing to the same bucket increases the risk of creating a recursive invocation, which can result in increased Lambda usage and increased costs. [Learn more](#)

☐ I acknowledge that using the same S3 bucket for both input and output is not recommended and that this configuration can cause recursive invocations, increased Lambda usage, and increased costs.

Lambda will add the necessary permissions for AWS S3 to invoke your Lambda function from this trigger. [Learn more](#) about the Lambda permissions model.

Cancel

Add

Feedback

Looking for language selection? Find it in the new Unified Settings

© 2022, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

- Trigger you function.

MyFunction - Lambda

CloudWatch Management

S3 Management Console

S3 Management Console

Tutorial: Using an Amazon

Private Browsing

←

→

↺

https://s3.console.aws.amazon.com/s3/buckets?region=us-east-1®ion=us-east-1

☆

🔍

🔍 Search for services, features, blogs, docs, and more [Alt+S]

🌐

🔍

🔍

Global

Recherchesresserieuse

aws

Services

Amazon S3

×

📘 We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose **Provide feedback**.

Provide feedback

📘

Buckets

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

Access analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

AWS Organizations settings

Feature spotlight 3

AWS Marketplace for S3

Amazon S3 > Buckets

▶ Account snapshot

Storage lens provides visibility into storage usage and activity trends. [Learn more](#)

View Storage Lens dashboard

Buckets (1) Info

Refresh

Copy ARN

Empty

Delete

Create bucket

Find buckets by name

< 1 > ⚙

	Name ▲	AWS Region ▼	Access ▼	Creation date ▼
☐	buckteabe	US East (N. Virginia) us-east-1	Objects can be public	September 19, 2022, 15:54:15 (UTC+02:00)

Feedback

Looking for language selection? Find it in the new [Unified Settings](#)

© 2022, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

MyFunction - Lambda

CloudWatch Management

S3 Management Console

buckteabe - S3 bucket

Tutorial: Using an Amazon

Private Browsing

← → ↺

https://s3.console.aws.amazon.com/s3/buckets/buckteabe?region=us-east-1&tab=objects

☆

🛡️ 📄 🌐 🗑️ 📁 📄 📄 📄 📄 📄

aws

Services

🔍 Search for services, features, blogs, docs, and more

[Alt+S]

🌐 Global

Recherchetresserieuse

Amazon S3

×

Buckets

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

Access analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

AWS Organizations settings

Feature spotlight 3

AWS Marketplace for S3

📘 We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose [Provide feedback](#).

Provide feedback

×

📘

Amazon S3 > Buckets > buckteabe

buckteabe

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (0)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 Inventory](#) to get a list of all objects in your bucket. For others to access your objects, you need to explicitly grant them permissions. [Learn more](#)

🔄

📄 Copy S3 URI

📄 Copy URL

📄 Download

🔗 Open

Delete

Actions

Create folder

📁 Upload

🔍 Find objects by prefix

< 1 >

⚙️

	Name	Type	Last modified	Size	Storage class
No objects					
You don't have any objects in this bucket.					
📁 Upload					

Feedback

Looking for language selection? Find it in the new Unified Settings

© 2022, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

MyFunction

Throttle

Copy ARN

Actions ▾

✓ The trigger buckteabe was successfully added to function MyFunction. The function is now receiving events from the trigger.

▼ Function overview [Info](#)

MyFunction



Layers

(0)

Description

-

Last modified

2 hours ago

Function ARN

arn:aws:lambda:us-east-1:905785452291:function:MyFunction

Function URL [Info](#)

-



S3

+ Add destination

+ Add trigger

Code

Test

Monitor

Configuration

Aliases

Versions

General configuration

Triggers

Permissions

Destinations

Function URL

Environment variables

Triggers (1)



Fix errors

Edit

Delete

Add trigger

Find triggers

< 1 >



Trigger



S3: buckteabe

arn:aws:s3::buckteabe

► Details

MyFunction - Lambda

CloudWatch Management

CloudWatch Management

S3 Management Console

S3 Management Console

Tutorial: Using an Amazon

← → ↺ https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/functions/MyFunction?tab=monitoring ☆ 🔔 ⓘ N. Virginia Recherche et rechercheuse

Services 🔍 Search for services, features, blogs, docs, and more [Alt+S]

☰

Successfully updated the function MyFunction.

Code Test **Monitor** Configuration Aliases Versions

Metrics **Logs** Traces

View logs in CloudWatch View X-Ray traces in ServiceLens View Lambda Insights View profiles in CodeGuru

CloudWatch Logs Insights

Lambda logs all requests handled by your function and automatically stores logs generated by your code through Amazon CloudWatch Logs. To validate your code, instrument it with custom logging statements. The following tables list the most recent and most expensive function invocations across all function activity. To view logs for a specific function version or alias, visit the **Monitor** section at that level.

1h 3h 12h 1d 3d 1w Custom ↻ ▼ Add to dashboard

Recent invocations

#	Timestamp	RequestID	LogStream	DurationIn...	BilledDurationIn...	MemorySetIn...	MemoryUsedIn...
▶ 1	2022-09-19T15:23:10.680Z	9dd6cea8-f70a-4b42-88e4-f03b42daa4c4	2022/09/19/[\$LATEST]82d38068eed4cecb9de12f3dafdb96e	3.57	4.0	128	39
▶ 2	2022-09-19T15:22:11.554Z	9dd6cea8-f70a-4b42-88e4-f03b42daa4c4	2022/09/19/[\$LATEST]82d38068eed4cecb9de12f3dafdb96e	1.33	2.0	128	38
▶ 3	2022-09-19T14:46:14.184Z	f5764ea6-69ab-4bfe-ad34-69d48d946f90	2022/09/19/[\$LATEST]a4412f92c9b94de2852478e19ac37c60	1.32	2.0	128	38

Most expensive invocations in GB-seconds (memory assigned * billed duration)

#	Timestamp	RequestID	LogStream	BilledDurationIn...	MemorySetIn...	BilledDurationInGBSeconds
▶ 1	2022-09-19T15:23:10.680Z	9dd6cea8-f70a-4b42-88e4-f03b42daa4c4	2022/09/19/[\$LATEST]82d38068eed4cecb9de12f3dafdb96e	4.0	128	0.0005
▶ 2	2022-09-19T14:46:14.184Z	f5764ea6-69ab-4bfe-ad34-69d48d946f90	2022/09/19/[\$LATEST]a4412f92c9b94de2852478e19ac37c60	2.0	128	0.00025
▶ 3	2022-09-19T15:22:11.554Z	9dd6cea8-f70a-4b42-88e4-f03b42daa4c4	2022/09/19/[\$LATEST]82d38068eed4cecb9de12f3dafdb96e	2.0	128	0.00025

Function URLs

A function URL is a dedicated HTTP(S) endpoint for your function. When your function URL is configured, you can use it to invoke your function through a browser, curl, Postman, or any HTTP client. When you configure a function URL from the main function page, Lambda assigns the function URL to the **\$LATEST** unpublished version of your function. You cannot assign a function URL to any other function version, but you can assign a function URL to any function alias.

To add a function URL, choose the **Configuration** tab, then choose the **Function URL** tab in the left menu. To add a function URL to an alias, choose an alias from the **Aliases** tab, choose **Configuration**, and then choose **Function URL**.

[Learn more](#)

[Function URLs](#)

Click on the link to see the logs

Feedback Looking for language selection? Find it in the new Unified Settings.

© 2022, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences