



User Manual

TeamAFK - Project Predire in Grafana

gruppoafk15@gmail.com

Informations about the document

Version	1.0.0
Approval	
Drafting	Alessandro Canesso Victor Dutca
Check	Victor Dutca Alessandro Canesso Davide Zilio
Use	External
Addressed to	Prof. Vardanega Tullio Prof. Cardin Riccardo TeamAFK

Description

User manual made by *TeamAFK* for the project *Predire in Grafana*.

changelog

Version	Date	Description	Name	Role
1.0.0	2020-06-09	Document approval	Someone	<i>Approval</i>
0.4.3	2020-06-07	Final translate of section §7	Alessandro Canesso Victor Dutca	<i>Editor Verifier</i>
0.4.2	2020-06-07	Added screenshots to the sections §4, §5, §6, updated JSON description §5	Victor Dutca Alessandro Canesso Davide Zilio	<i>Editor Verifier</i>
0.4.1	2020-06-06	Added screenshots, corrected errors in sections §1,§2,§3	Victor Dutca Alessandro Canesso	<i>Editor Verifier</i>
0.4.0	2020-06-06	Written and checked section §7	Victor Dutca Alessandro Canesso	<i>Editor Verifier</i>
0.3.0	2020-06-05	Written and checked section §5,§6	Victor Dutca Alessandro Canesso	<i>Editor Verifier</i>
0.2.0	2020-06-04	Written and checked section §3,§4	Alessandro Canesso Victor Dutca	<i>Editor Verifier</i>
0.1.0	2020-06-03	Written and checked section §1,§2	Alessandro Canesso Victor Dutca	<i>Editor Verifier</i>

Contents

1	Introduction	4
1.1	General description	4
1.2	Purpose of the document	4
1.3	Predire in Grafana's Purpose	4
1.4	Glossary	4
2	System Requirements	5
2.1	Minimum Hardware Requirements	5
2.2	Compatible Operating Systems	5
2.3	Compatible Browsers	5
3	The Training Tool	6
3.1	Access	6
3.2	Uploading a CSV File in the Tool	6
3.3	Selection of the Algorithm	7
3.4	Training Operation	8
3.5	Obtaining the JSON File	9
4	The Plug-in	10
4.1	Loading the Plug-in	10
4.2	Loading a JSON File	11
4.3	Connecting the Nodes	12
4.4	Modifying the connections	14
4.5	Prediction Operations	15
5	File Structure	17
5.1	JSON structure	17
5.1.1	Support Vector Machine	17
5.1.2	Linear Regression	18
5.2	CSV File structure	18
6	Reporting Errors	20
6.1	Reporting Training Tool errors	20
6.2	Reporting Plug-in errors	20
7	Glosary	22

List of Figures

3.2.1 CSV-File selector	6
3.3.1 Training algorithm selector	7
3.3.2 Incompatible algorithm uploaded	7
3.4.1 Training operation with graphic point	8
3.4.2 Training operation is successfully completed	8
3.5.1 The "Download" button is then clickable	9
4.1.1 Training operation with graphic point	10
4.1.2 Chose Visualization button	10
4.1.3 "Predire in Grafana" Panel	11
4.2.1 Loading window and displayed loaded JSON	12
4.3.1 Node coupling (a)	13
4.3.2 Node coupling error message	13
4.3.3 Node coupling confirm message	14
4.3.4 Node coupling (b)	14
4.4.1 Node linking	15
4.5.1 Time picker	16
4.5.2 Begin\end data monitoring and Prdicton save	16
5.1.1 Support Vector Machine JSON example	17
5.1.2 Linear Regression JSON example	18
5.2.1 CSV file example	19
6.1.1 Linear Regression JSON example	20
6.2.1 Linear Regression JSON example	21

1 Introduction

1.1 General description

This document is “Predire in Grafana”’s user manual, a project developed by “Team AFK” for use on the Grafana_G platform.

1.2 Purpose of the document

This document’s purpose is to demonstrate how to use Predire in Grafana’s two software components: the training tool and the prediction plug-in for Grafana itself.

1.3 Predire in Grafana’s Purpose

Predire in Grafana is a platform which allows users to train linear regression or support vector machine algorithms using machine learning_G , and then use these algorithms to monitor and predict the behaviour of various systems of their choosing. In more detail: Users can supply a CSV file to the training tool and receive a JSON file containing values which can then be used to set and calibrate SVM_G or RL_G algorithms by coupling the values contained in the JSON file with data streams coming from a database.

1.4 Glossary

At the end of the document an appendix is available where explanations for new or ambiguous terms can be found. These are marked with a subscript G.

2 System Requirements

Here the requirements for use of the product are listed.

2.1 Minimum Hardware Requirements

Here the requirements for use of the product are listed.

- 2GB of RAM;
- 5GB of space on a drive;
- Dual core processor.

2.2 Compatible Operating Systems

The software was developed and tested on the following:

- Windows 10;
- MacOS 10.15;
- Ubuntu 18, 20.

2.3 Compatible Browsers

Predire in Grafana can be accessed through the following browsers:

- Google Chrome version 58 or newer;
- Mozilla Firefox version 54 or newer;
- Apple Safari version 10 or newer;
- Microsoft Edge version 14 or newer;
- Opera version 55 or newer.

3 The Training Tool

Here the appropriate way of using the training tool is explained in detail.

3.1 Access

The tool is hosted by a web page and can thus be accessed via browser.

3.2 Uploading a CSV File in the Tool

The user will need to feed the tool a CSV file containing properly marked values for the algorithm the user has intention of training.

This can be done by selecting the "Selezionare il file" button, which will open a window from which the user will be able to select the CSV file he has intention of uploading.

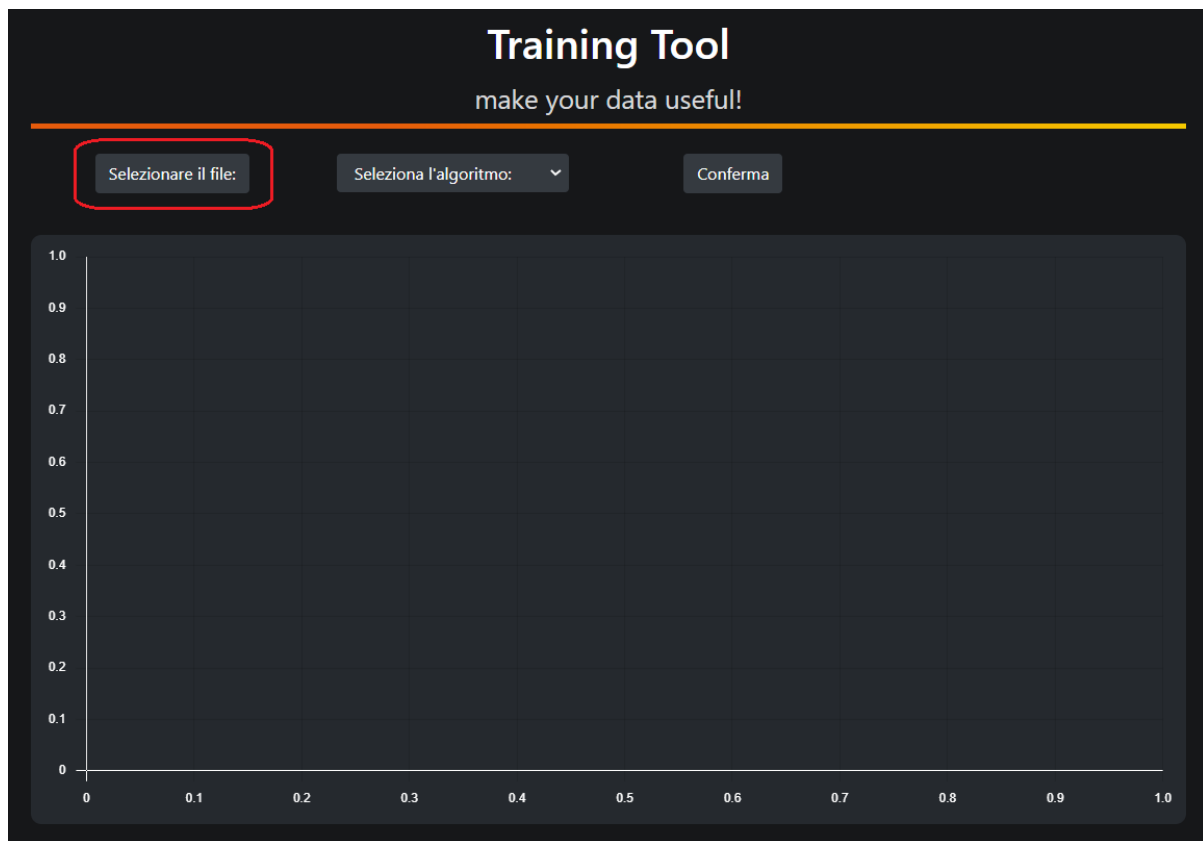


Figure 3.2.1: CSV-File selector

3.3 Selection of the Algorithm

The user will then have to choose between training a support vector machine or a linear regression algorithm with the CSV file he has given to the tool.

To do this, the user can open a drop-down menu called "seleziona l'algoritmo" which displays the two algorithms that can be chosen, the preferred algorithm can at this point be selected.

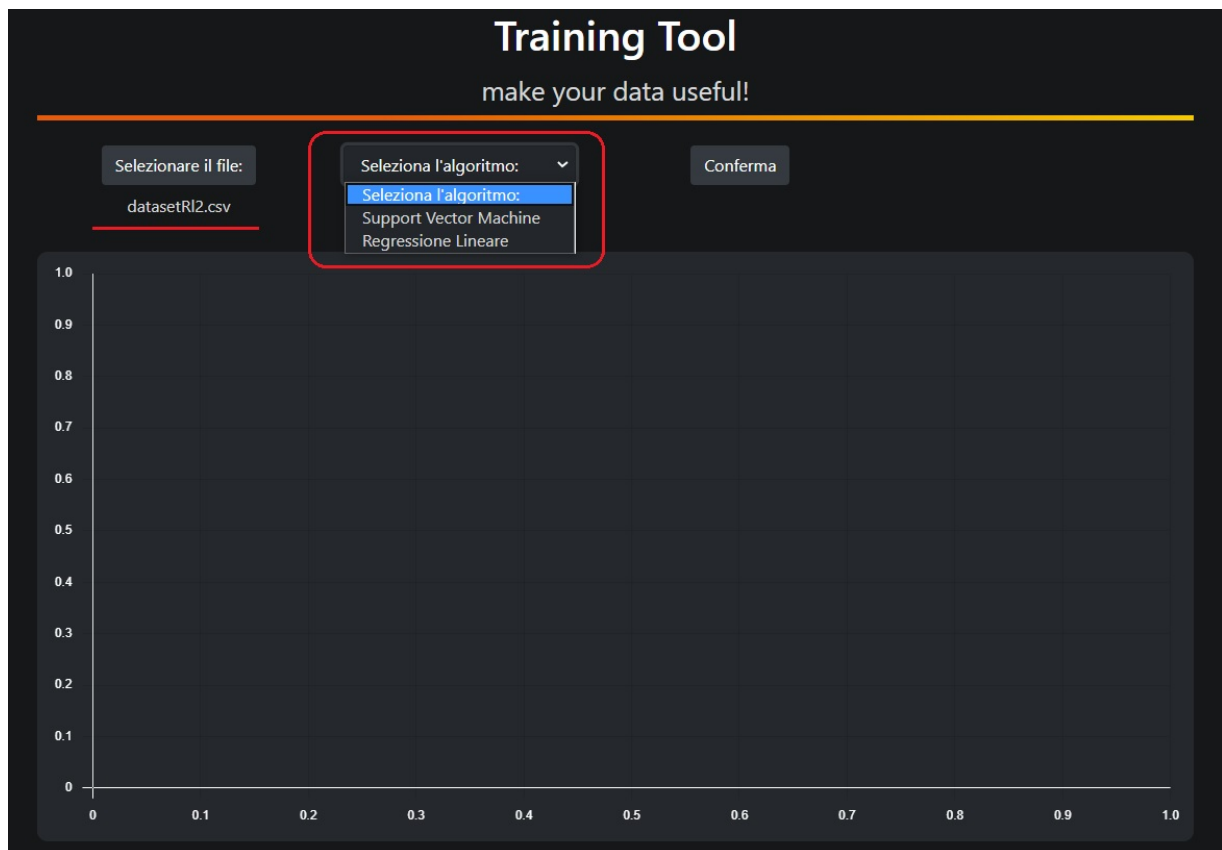


Figure 3.3.1: Training algorithm selector

Should the user have uploaded training data incompatible with the selected algorithm, an error message will be displayed on selection of the "Conferma" button.

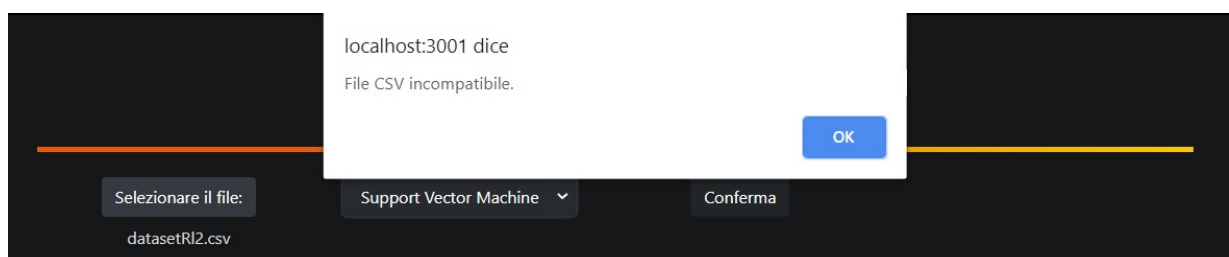


Figure 3.3.2: Incompatible algorithm uploaded

3.4 Training Operation

The tool will now be able to perform the training operation by simply having the user select the “Conferma” button. The tool will now have produced a JSON file containing the values needed for use in the plug-in.

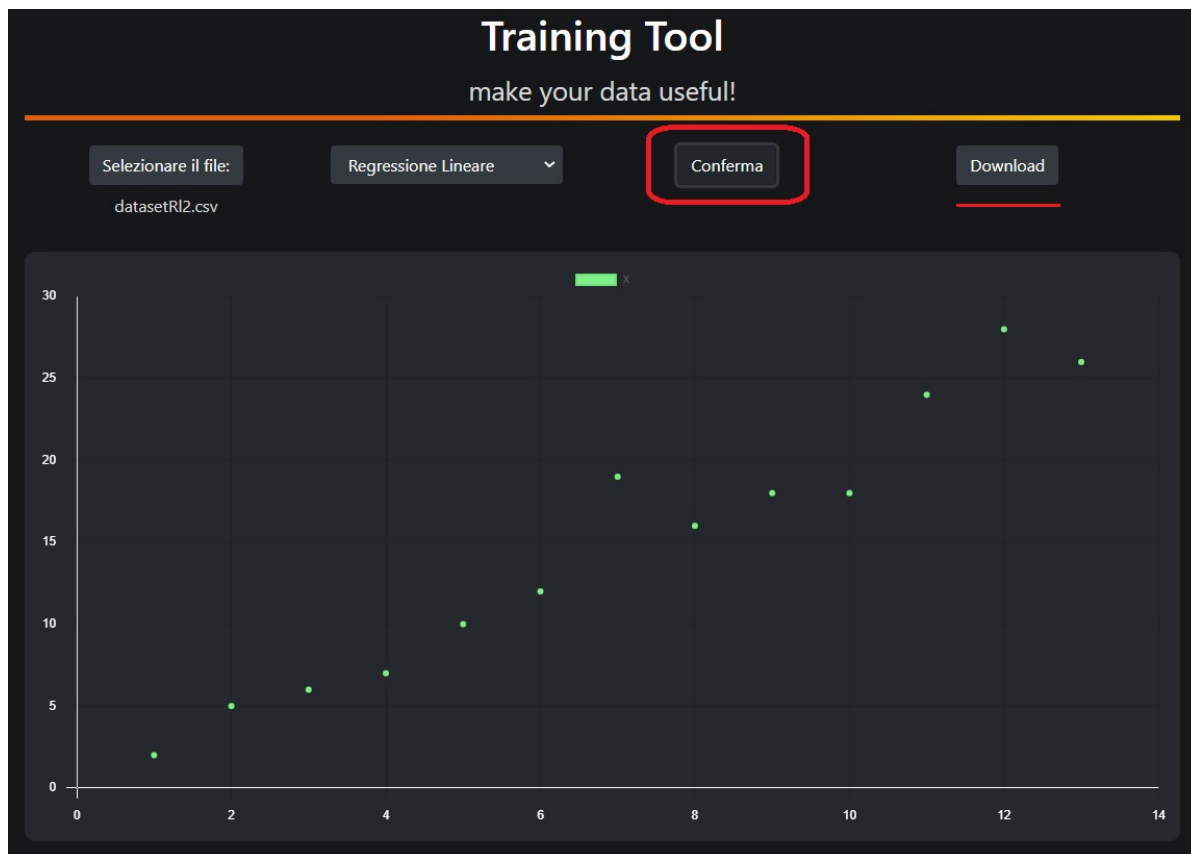


Figure 3.4.1: Training operation with graphic point

A message will be displayed on selection of the "Conferma " button if the training operation is successfully completed

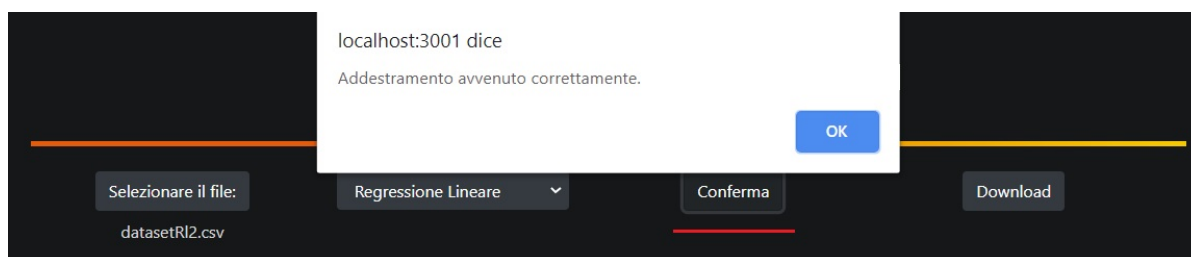


Figure 3.4.2: Training operation is successfully completed

3.5 Obtaining the JSON File

The user can now select the “download” button, which will only appear once the training operation has ended succesfully, and receive the JSON file.

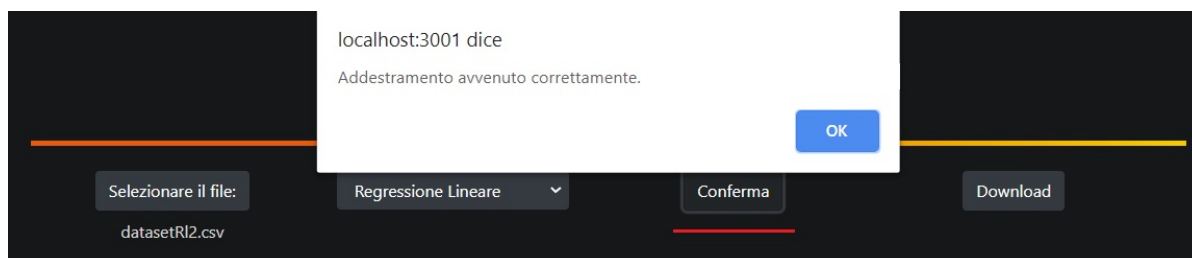


Figure 3.5.1: The "Download" button is then clickable

4 The Plug-in

Here a step by step explanation will guide the user through the proper usage of the prediction plug-in.

4.1 Loading the Plug-in

1. The user will have to select the plus icon from the sidebar, from which a drop-down menu containing four options will appear, from this menu the “dashboard” option has to be selected.

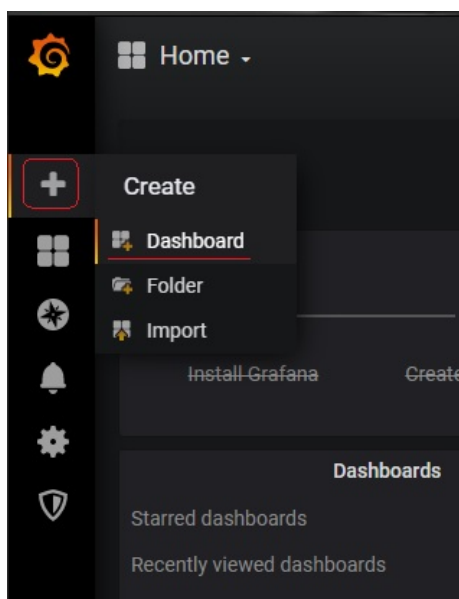


Figure 4.1.1: Training operation with graphic point

2. The user will now have to select the “Chose Visualization” button.

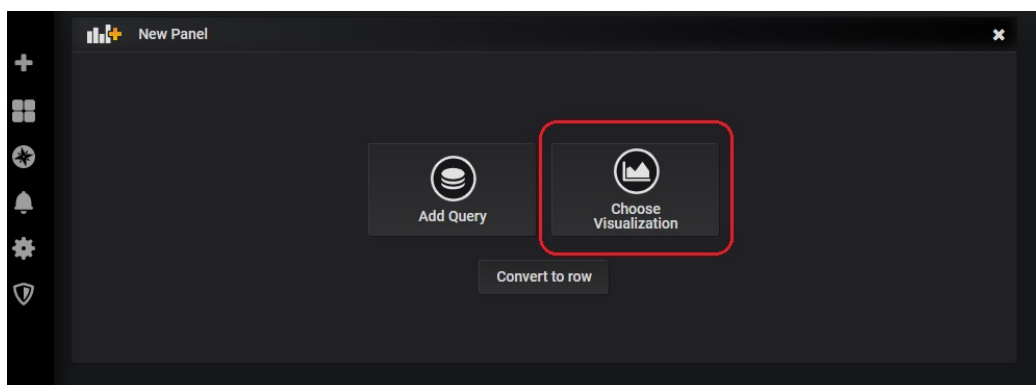


Figure 4.1.2: Chose Visualization button

3. Finally, by pressing on the “Predire in Grafana” button, the user can use the plug-in.

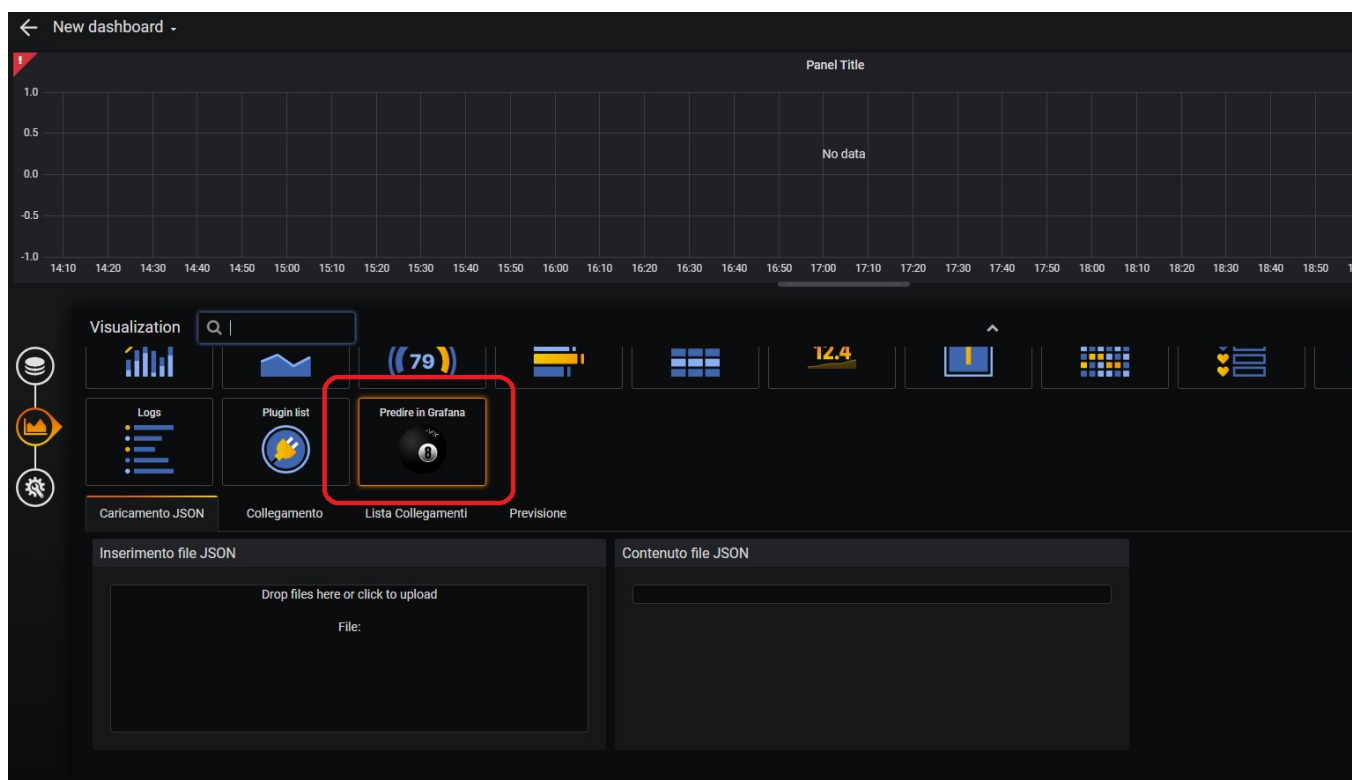


Figure 4.1.3: "Predire in Grafana" Panel

4.2 Loading a JSON File

The user can select the “Inserimento file JSON” button contained in the “Caricamento JSON” section. This will open a window from which the JSON file can be selected. Alternatively, the user can drag and drop the JSON file in the "Inserimento file JSON" section. The content of the JSON file will be displayed in a panel called "Contenuto file JSON" to the right of the previously mentioned section.

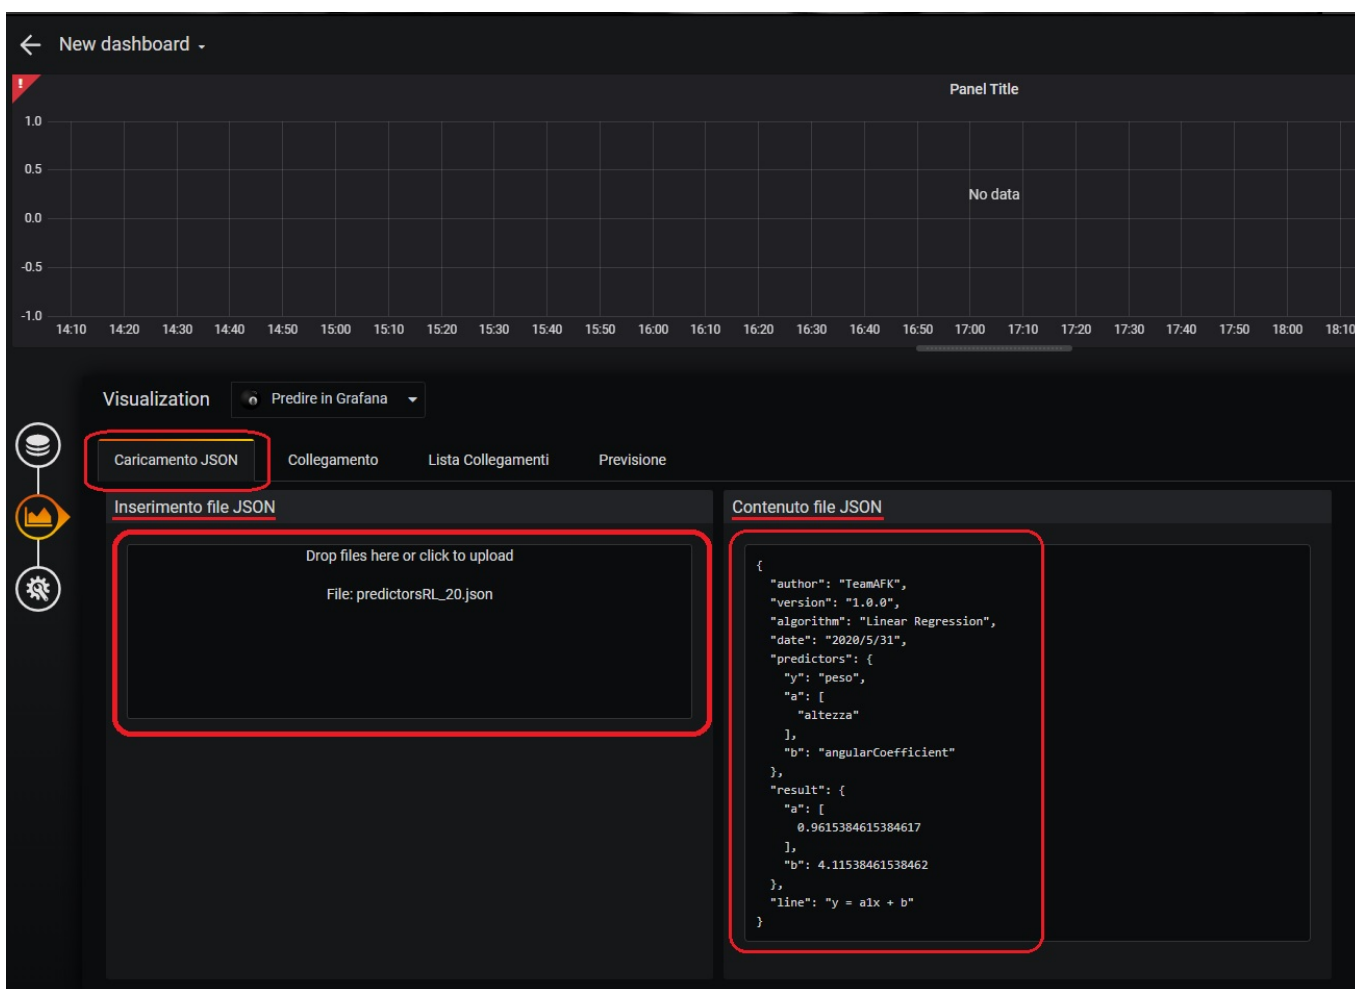


Figure 4.2.1: Loading window and displayed loaded JSON

4.3 Connecting the Nodes

The portion of the software dedicated to the connection of nodes can be accessed by selecting the "Collegamento" tab.

1. The user can choose from the "lista predittori" section which queries are to be associated with which nodes, by selecting a particular query to the right of a predictor: this can be done by opening the drop-down menu tagged with "seleziona il nodo" and then selecting a query. Once all the nodes are connected, the user can select the "inserisci collegamento" button and confirm the operation.

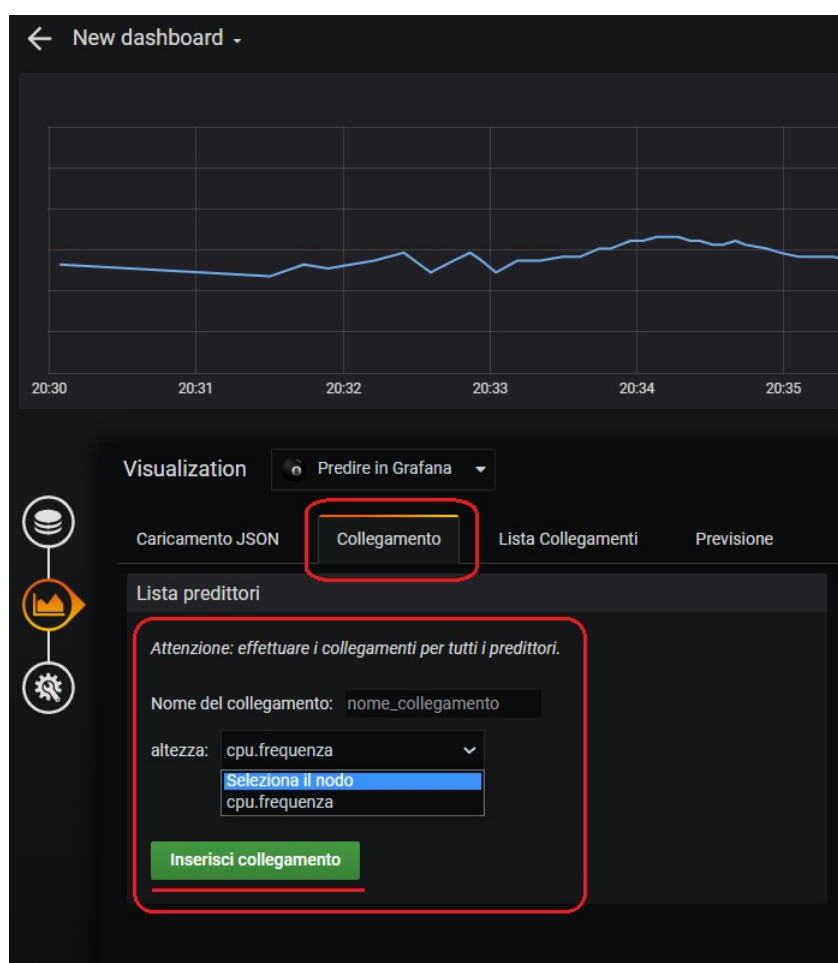


Figure 4.3.1: Node coupling (a)

- 1.1 Should the user have not filled all the required fields, an error message will be displayed on selection of the "Inserisci collegamento" button

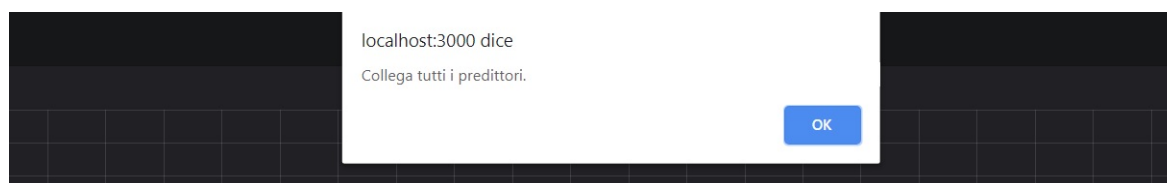


Figure 4.3.2: Node coupling error message

- 1.2 once all the required fields are correctly chosen, a confirm message will be displayed.

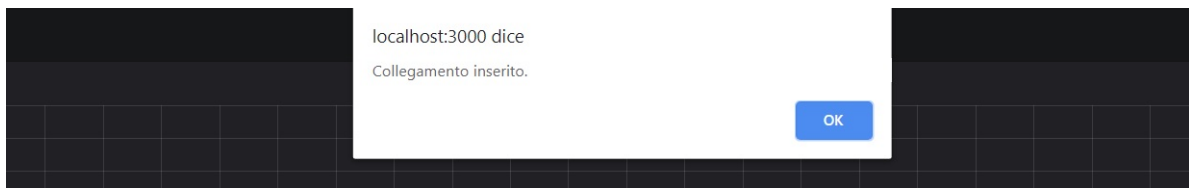


Figure 4.3.3: Node coupling confirm message

2. Maximum and minimum thresholds can be set in the “impostazione soglie” section, by inserting numbers in the dedicated boxes and then selecting the "Conferma Collegamento" button.

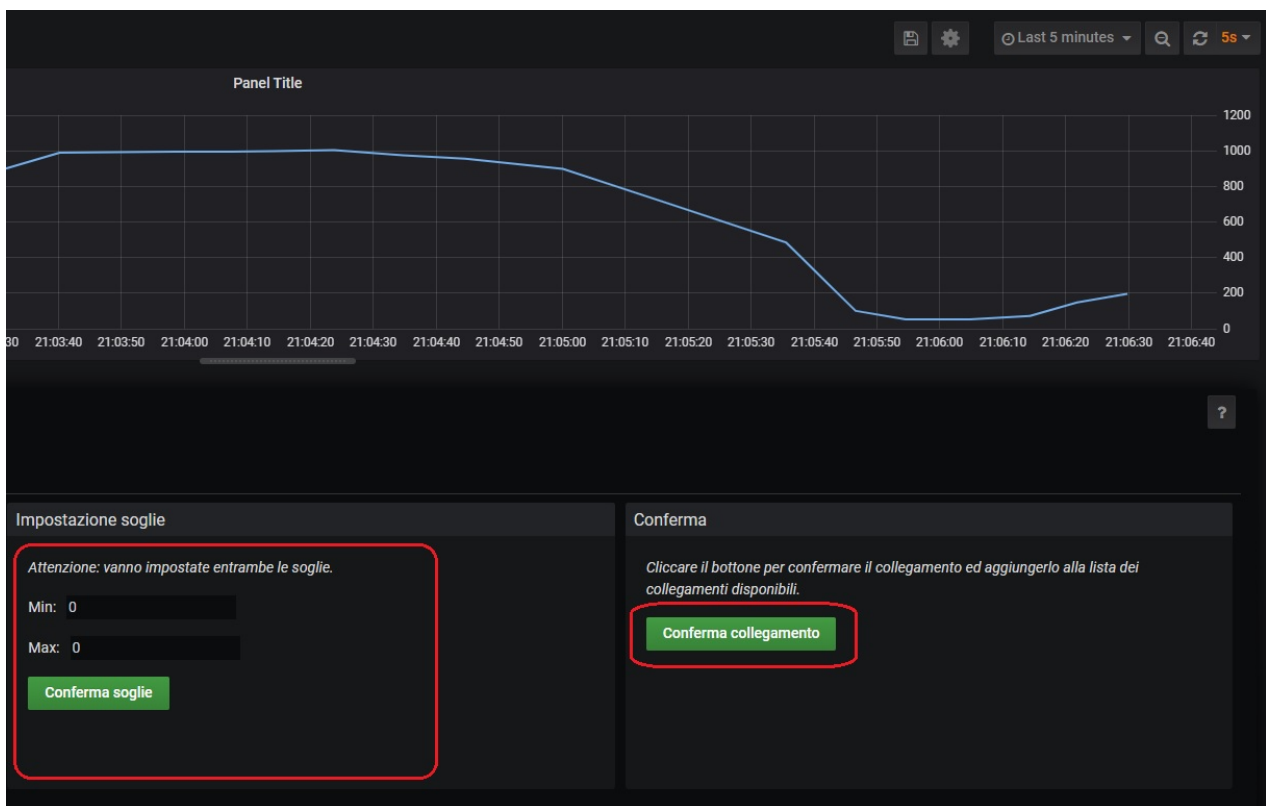


Figure 4.3.4: Node coupling (b)

4.4 Modifying the connections

In this section the user can view all the predictor-data stream connections that have been made. This section can be accessed by selecting the "Lista Collegamenti" tab. The user can also modify the connection, by pressing on the "Modifica Collegamento" button, or delete it, by selecting the "Elimina Collegamento" button.

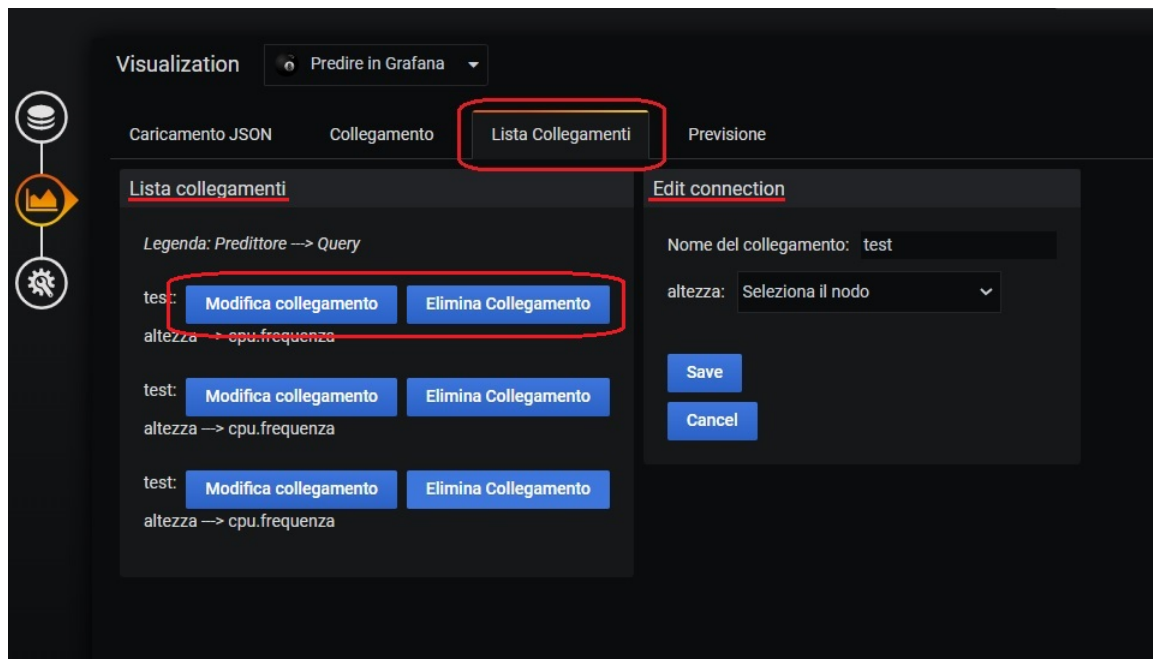


Figure 4.4.1: Node linking

4.5 Prediction Operations

In this last section the user will be able to launch the prediction algorithms of the plugin. This section is accessed by selecting the "Previsione" tab, here the user will be able to select in the top right corner a temporal policy by choosing starting and ending dates and choosing how often to sample the data. The user also has access to two buttons, one called "avvia monitoraggio", which starts the prediction operations, and a second one named "salva previsione", which saves the data collected up to the point it is pressed.

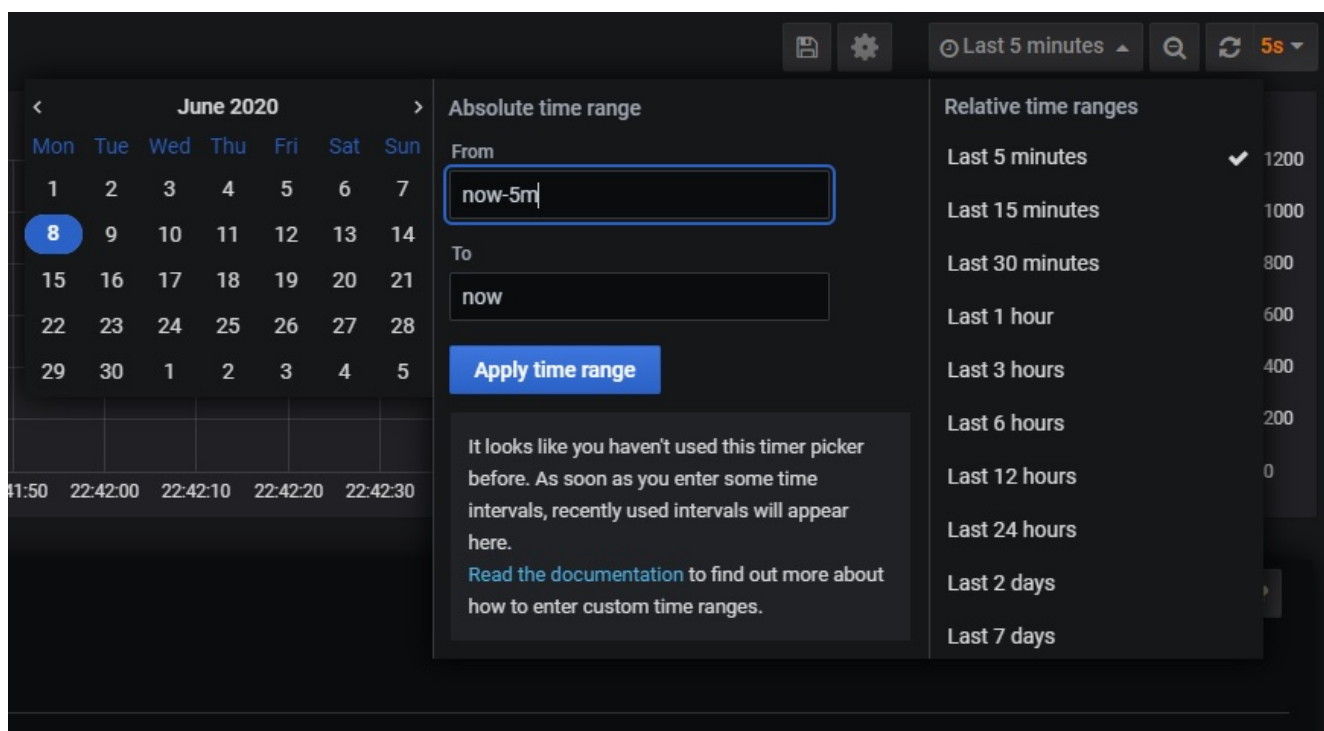


Figure 4.5.1: Time picker

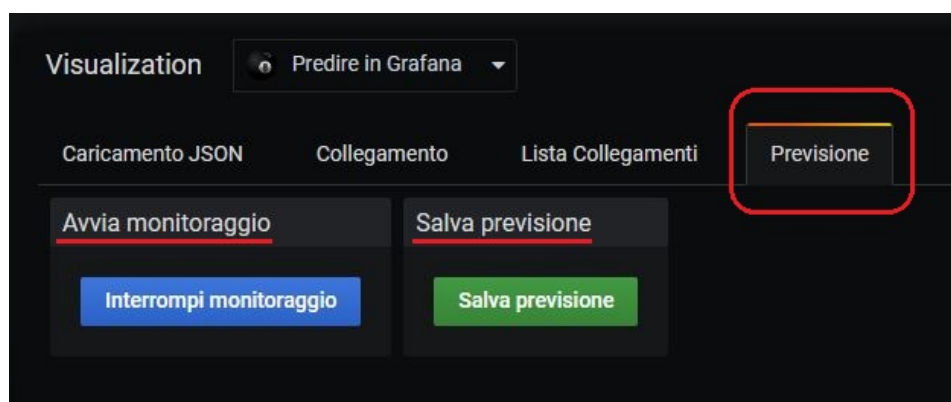


Figure 4.5.2: Begin\end data monitoring and Prediction save

5 File Structure

5.1 JSON structure

The JSON files containing the configurations of the various prediction algorithms must be structured in the following way

5.1.1 Support Vector Machine

- **author:** ;
- **version:** ;
- **algorithm:** ;
- **date:** ;
- **predictors:** ;
- **result:** .

```
1  {
2    "author": "TeamAFK",
3    "version": "1.0.0",
4    "algorithm": "SVM",
5    "date": "2020/5/29",
6    "predictors": {
7      "w": [
8        "x",
9        "z",
10       "s",
11       "y"
12     ],
13     "b": "label"
14   },
15   "result": {
16     "w": [
17       -0.03581449414618954,
18       -0.022834922413948373,
19       -0.0033914640906372653,
20       -0.05088164058443299
21     ],
22     "b": 1.4362243753384667
23   }
24 }
```

Figure 5.1.1: Support Vector Machine JSON example

5.1.2 Linear Regression

- author: ;
- version: ;
- algorithm: ;
- predictors: ;
- result: ;
- line: .

```
1  {  
2    "author": "TeamAFK",  
3    "version": "1.0.0",  
4    "algorithm": "Linear Regression",  
5    "date": "2020/06/08",  
6    "predictors": {  
7      "y": "y",  
8      "a": [  
9        "x"  
10     ]  
11     "b": "angularCoefficient"  
12   },  
13   "result": {  
14     "a": [  
15       2.1098901098901095  
16     ],  
17     "b": -0.07692307692306599  
18   },  
19   "line": "y = a1x + b"  
20 }
```

Figure 5.1.2: Linear Regression JSON example

5.2 CSV File structure

The CSV files are structured based on which algorithm must be trained, RL or SVM. Each column contains the values of the corresponding predictor_G .

	A	B
1	x	y
2	1	2
3	2	5
4	3	6
5	4	7
6	5	10
7	6	12
8	7	19
9	8	16
10	9	18
11	10	18
12	11	24
13	12	28
14	13	26
15		

Figure 5.2.1: CSV file example

6 Reporting Errors

TEXT

6.1 Reporting Training Tool errors

TEXT

- operating system version;
- training tool version;
- detailed explanation of the encountered. error

```
1 {
2   "author": "TeamAFK",
3   "version": "1.0.0",
4   "algorithm": "Linear Regression",
5   "date": "2020/06/08",
6   "predictors": {
7     "y": "y",
8     "a": [
9       "x"
10    ],
11     "b": "angularCoefficient"
12   },
13   "result": {
14     "a": [
15       2.1098901098901095
16     ],
17     "b": -0.07692307692306599
18   },
19   "line": "y = ax + b"
20 }
```

Figure 6.1.1: Linear Regression JSON example

6.2 Reporting Plug-in errors

TEXT

- Grafana version;
- plug-in version;
- browser version;
- operating system version;
- detailed explanation of the encountered.

```
1 {  
2   "author": "TeamAFK",  
3   "version": "1.0.0",  
4   "algorithm": "Linear Regression",  
5   "date": "2020/06/08",  
6   "predictors": {  
7     "y": "y",  
8     "a": [  
9       "x"  
10    ],  
11    "b": "angularCoefficient"  
12  },  
13  "result": {  
14    "a": [  
15      2.1098901098901095  
16    ],  
17    "b": -0.07692307692306599  
18  },  
19  "line": "y = a1x + b"  
20 }
```

Figure 6.2.1: Linear Regression JSON example

7 Glossary

G

Grafana

Piattaforma open-source che consente di monitorare i dati provenienti da diverse sorgenti, attraverso una loro rappresentazione grafica all'interno di una dashboard.

M

Machine Learning

Sinonimo di apprendimento automatico. L'apprendimento automatico è lo studio di algoritmi che si migliorano automaticamente attraverso l'esperienza. Gli algoritmi di apprendimento automatico costruiscono modelli matematici basati su dati campione noti come "dati di addestramento".

P

Predittore

E' una statistica, cioè una funzione dei dati, definita allo scopo di effettuare previsioni su una o più variabili.

R

RL

Rappresenta un metodo di stima del valore atteso condizionato di una variabile dipendente, dati i valori di altre variabili indipendenti. Si definisce retta di regressione la retta: $y = \alpha x + \beta$.

S

SVM

Inventata da V. Vapnik nel 1990, è un modello di apprendimento automatico supervisionato che utilizza algoritmi di classificazione per valutare specifici problemi. Questi algoritmi trovano impiego nell'ambito del machine learning.