
Ferroptosis lipid layer of the HDFI axis — human SAH-CSF lipidomics (verbatim) + real execution-lipid anchor

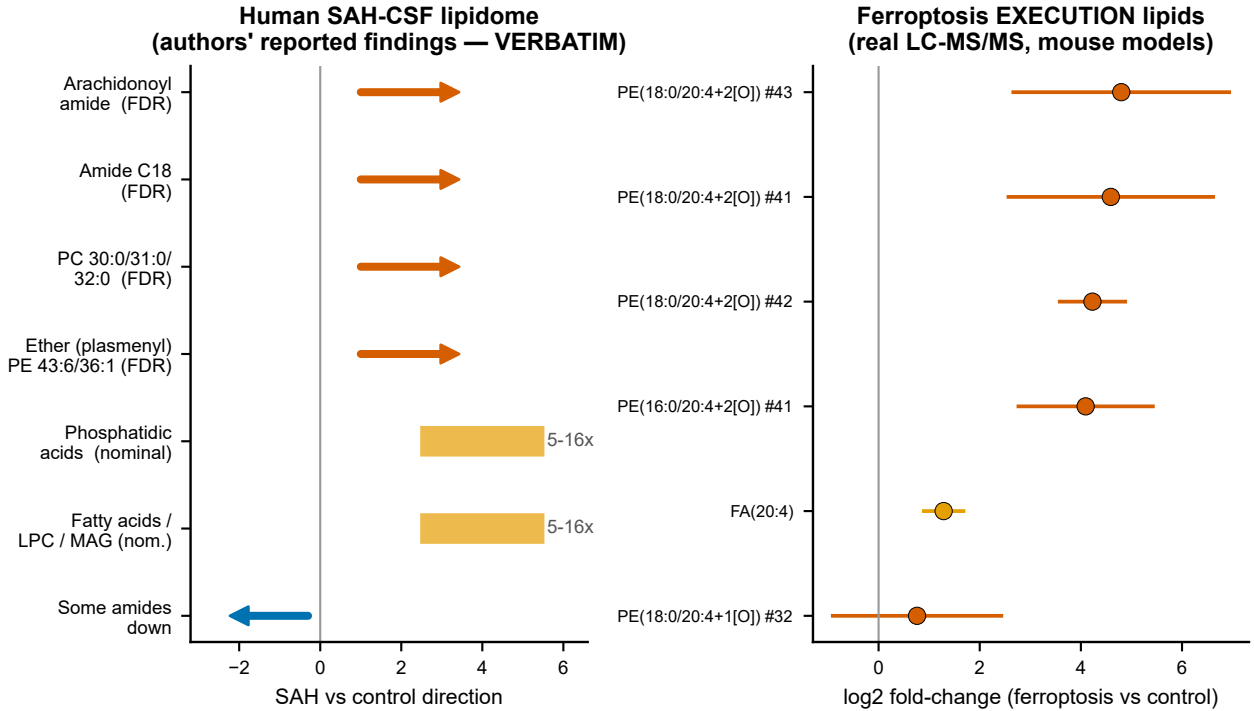

Integration & limits

Ferroptosis-lipid evidence chain

RNA layer : PUFA-PL machinery (ACSL4) + ferritin/ferritin-loss program in HDFI axis (Fig 18/24/36)

Execution lipids : ox-PE 17-28x, free AA 2.44x, **PE-20:4 substrates consumed** (mouse ferroptosis models)

Human CSF direction : ether/plasmenyl-PE + arachidonoyl + PUFA-containing species UP in SAH (verbatim)

NOT computable:

a single per-patient human ferroptosis-lipid index, because the human CSF per-sample matrix is not openly deposited

Human CSF per-sample abundance is NOT openly downloadable (MacAulayLab GitHub = code only; journal supplement is figures-only), so panel A reproduces the authors' published differential-lipid findings VERBATIM (13 SAH vs 11 control) and is never re-derived.
Panel B numbers are real but from mouse cell-culture ferroptosis (valinomycin MEFs / RSL3 MDSCs), not human SAH; no paired within-patient HDFI-lipid correlation is claimed.