

**NUEN 629**  
**Numerical Methods in Reactor Analysis**  
**Homework 4 & 5 & Project**

Due on:  
Thursday, November 19, 2015  
&  
Thursday, December 3, 2015

*Dr. McClarren*

**Paul Mendoza**

## Contents

Homework 4 Problem Statement	3
Homework 4 Problem Background	4
Homework 4 Problem Solution	7
Homework 4 Code	15
Homework 5 Problem Statement	32
Homework 5 Background	33
Homework 5 Solution	35
Homework 5 Code	40
Project	62
Project Results	63
Project Code	65

## Homework 4 Problem Statement

Solve the following problem and submit a detailed report, including a justification of why a reader should believe your results and a description of your methods and iteration strategies.

1. (150 points + 50 points extra credit) In class we discussed the diamond-difference spatial discretization. Another discretization is the step discretization (this has several other names from other disciplines). It writes the discrete ordinates equations with isotropic scattering as, for  $\mu_n > 0$  to

$$\mu_n \frac{\psi_{i,n} - \psi_{i-1,n}}{h_x} + \Sigma_t \psi_{i,n} = \frac{\Sigma_s}{2} \phi_i + \frac{Q}{2} \quad (1)$$

and for  $\mu_n < 0$

$$\mu_n \frac{\psi_{i+1,n} - \psi_{i,n}}{h_x} + \Sigma_t \psi_{i,n} = \frac{\Sigma_s}{2} \phi_i + \frac{Q}{2} \quad (2)$$

The codes provided in class should be modified to implement this discretization.

- (a) (50 Points) Your task (should you choose to accept it) is to solve a problem with uniform source of  $Q = 0.01$ ,  $\Sigma_t = \Sigma_s = 100$  for a slab in vacuum of width 10 using step and diamond difference discretizations. Use, 10, 50, and 100 zones ( $h_x = 1, 0.02, 0.01$ ) and your expert choice of angular quadratures. Discuss your results and how the two methods compare at each number of zones.
- (b) (10 points) Discuss why there is a different form of the discretization for the different signs of  $\mu$ .
- (c) (40 points) Plot the error after each iteration using a 0 initial guess for the step discretization with source iteration and GMRES.
- (d) (50 points) Solve Reed's problem (see finite difference diffusion codes). Present convergence plots for the solution in space and angle to a "refined" solution in space and angle.
- (e) (50 points extra credit) Solve a time dependant problem for a slab surrounded by vacuum with  $\Sigma_t = \Sigma_s = 1$  and initial condition given by  $\psi(\mathbf{0}) = \mathbf{1}/h_x$  (original problem statement said  $\phi(0) = 1/h_x$  and I'm not sure how to solve that). Plot the solution at  $t = 1$  s, using step and diamond difference. The particles have a speed of 1 cm/s. Which discretization is better with a small time step? What do you see with a small number of ordinates compared to a really large number (100s)?

## Homework 4 Problem Background

Due to the complicated nature of this course, I provided this background for the lay person (me), so that they might have some grounding for the solution and hopefully believe the results. It should be noted that most of this background information is copied from various points in Dr. McClarren's notes, and is in no way original. Anything intelligent in the following is due to this fact and for any errors, I blame myself.

Beginning with the weighty neutron transport equation.

$$\left( \frac{1}{v} \frac{\delta}{\delta t} + \hat{\Omega} \cdot \nabla + \Sigma_t \right) \psi = \int_0^\infty dE' \int_{4\pi} d\hat{\Omega}' K(\hat{\Omega}' \cdot \hat{\Omega}, v' \rightarrow v) \Sigma_s \psi + \frac{1}{4\pi} \chi \int_0^\infty dE' \bar{v} \Sigma_f \phi + q$$

Where  $K(\hat{\Omega}' \cdot \hat{\Omega}, v' \rightarrow v)$  represents the probability of scattering from one angle and energy to another given a scattering event occurred and  $\Sigma_s$  is the macroscopic scattering cross section. The dependencies for the variables are shown below.

$$\begin{aligned} &\Sigma_t(\vec{x}, v, t) \\ &\psi(\vec{x}, \hat{\Omega}, v, t) \\ &\Sigma_s(\vec{x}, v, t) \\ &\chi(\vec{x}, v) \\ &\Sigma_f(\vec{x}, v, t) \\ &\phi(\vec{x}, v, t) \\ &q(\vec{x}, \hat{\Omega}, v, t) \end{aligned}$$

There are 7 free variables (three spatial  $[\vec{x}]$ , two angular  $[\hat{\Omega}]$ , one energy  $[v]$  and one time  $[t]$ ) in this equation. In the steady state  $\left( \frac{\delta \psi}{\delta t} = 0, \text{ i.e. no time dependence} \right)$ , non fissioning ( $\Sigma_f = 0$ ) case the transport equation reduces to,

$$\left( \hat{\Omega} \cdot \nabla + \Sigma_t \right) \psi = \int_0^\infty dE' \int_{4\pi} d\hat{\Omega}' K(\hat{\Omega}' \cdot \hat{\Omega}, v' \rightarrow v) \Sigma_s \psi + q.$$

In order to reduce this to a single energy the following definitions are helpful (remembering all time dependence is gone).

$$\begin{aligned} \psi(\vec{x}, \hat{\Omega}) &= \int_0^\infty dE \psi(\vec{x}, \hat{\Omega}, v(E)) \\ \Sigma_t(\vec{x}) &= \frac{\int_0^\infty dE \Sigma_t(\vec{x}, v(E)) \psi(\vec{x}, \hat{\Omega}, v(E))}{\psi(\vec{x}, \hat{\Omega})} \\ K(\hat{\Omega}' \cdot \hat{\Omega}, v' \rightarrow v) &= K(\hat{\Omega}' \cdot \hat{\Omega}) K(v' \rightarrow v) \\ \Sigma_s(\vec{x}) &= \frac{\int_0^\infty dE \int_0^\infty dE' \Sigma_s(\vec{x}, v(E)) K(v' \rightarrow v) \psi(\vec{x}, \hat{\Omega}, v(E))}{\psi(\vec{x}, \hat{\Omega})} \\ q(\vec{x}, \hat{\Omega}) &= \int_0^\infty dE q(\vec{x}, \hat{\Omega}, v(E)) \end{aligned}$$

Using these definitions, integrating the transport equation over all energy, and assuming cross sections and sources do not vary in space or angle, our transport equation reduces again to,

$$\left( \hat{\Omega} \cdot \nabla + \Sigma_t \right) \psi(\vec{x}, \hat{\Omega}) = \int_{4\pi} d\hat{\Omega}' K(\hat{\Omega}' \cdot \hat{\Omega}) \Sigma_s \psi(\vec{x}, \hat{\Omega}') + q.$$

Where the double differential was assumed to be separable in angle and energy. The final simplification for our problem will be in space. If we assume that our geometry is infinite in  $y$  ( $\frac{\delta}{\delta y} = 0$ ) and  $x$  ( $\frac{\delta}{\delta x} = 0$ ). This also means that  $\psi$  depends only on  $z$  and  $mu$ , and if we recall that

$$\hat{\Omega} = (\sqrt{1 - \mu^2} \cos(\rho), \sqrt{1 - \mu^2} \sin(\rho), \mu),$$

and

$$\nabla = \left( \frac{\delta}{\delta x}, \frac{\delta}{\delta y}, \frac{\delta}{\delta x} \right)$$

also assuming that

$$K(\hat{\Omega}' \cdot \hat{\Omega}) = \frac{1}{4\pi} \text{ Isotropic Scattering}$$

then our transport equation, and the equation I think we are trying to solve for this homework is.

$$\left( \mu \frac{\delta}{\delta z} + \Sigma_t \right) \psi(z, \mu) = \Sigma_s \frac{2\pi}{4\pi} \int_{-1}^1 d\mu' \psi(z, \mu') + q.$$

Checking units,

$$\left( \mu \frac{\delta}{\delta z} + \Sigma_t \right) \left[ \frac{1}{cm} \right] \psi(z, \mu) \left[ \frac{n \cdot cm}{str \cdot cm^3 \cdot s} \right] = \Sigma_s \frac{1}{2} \left[ \frac{1}{cm \cdot rad} \right] \int_{-1}^1 d\mu' \psi(z, \mu') \left[ \frac{n \cdot cm}{rad \cdot cm^3 \cdot s} \right] + q \left[ \frac{n}{str \cdot cm^3 \cdot s} \right].$$

$\Sigma_s$  was moved outside the integral because it has no angular dependence integration over the azimuthal angle occurred because  $\psi(z, \hat{\Omega})$  is assumed to be uniform and not depend on that angle.

Using Gauss-Legendre Quadrature for the integration term

$$\phi = \int_{-1}^1 d\mu' \psi(z, \mu') = \sum_{i=1}^n w_i \psi(z, \mu'_i)$$

where

$$w_i = \frac{2}{(1 - \mu_i^2)[P'_n(\mu_i)]^2}$$

$P'_n$  is the differential of the legendre polynomial  $n$ , and  $\mu'_i$  are the roots of  $P_n$ . The weights of even  $n$ 's of the legendre polynomials should sum to 2, the value of  $\int_{-1}^1 d\mu$ , which they do.

Putting this all together with time dependence:

$$\left( \frac{1}{v} \frac{\delta}{\delta t} + \mu \frac{\delta}{\delta z} + \Sigma_t \right) \psi_n(z) = \Sigma_s \frac{1}{2} \sum_{n'=1}^N w_{n'} \psi_{n'}(z) + q$$

Where  $n$  and  $n'$  denote the direction being solved for and  $N$  is the total number of angles being solved for. Also units of  $w$  are rad.

### Diamond difference discretization

$$\frac{1}{v} \frac{\psi_{n,i}^{\ell+1,j+1} - \psi_{n,i}^{L,j}}{\Delta t} + \mu_n \frac{\psi_{n,i+1/2}^{\ell+1,j+1} - \psi_{n,i-1/2}^{\ell+1,j+1}}{hz} + \Sigma_t \psi_{n,i}^{\ell+1,j+1} = \Sigma_s \frac{1}{2} \sum_{n'=1}^N w_{n'} \psi_{n',i}^{\ell,j+1} + q.$$

Where  $n$  is for angle,  $i$  is the midplane of a spacial discretization,  $\ell$  is the iteration index for spacial convergence,  $j$  is for a time step and

$$\psi_{n,i}^{\ell+1,j+1} = \frac{1}{2} (\psi_{n,i+1/2}^{\ell+1,j+1} + \psi_{n,i-1/2}^{\ell+1,j+1})$$

Writing this in terms of a steady state

$$\mu_n \frac{\psi_{n,i+1/2}^{\ell+1,j+1} - \psi_{n,i-1/2}^{\ell+1,j+1}}{hz} + \Sigma_t^* \psi_{n,i}^{\ell+1,j+1} = \Sigma_s \frac{1}{2} \sum_{n'=1}^N w_i \psi_{n',i}^{\ell,j+1} + q^*.$$

where

$$\Sigma_t^* = \Sigma_t + \frac{1}{v\Delta t}$$

$$q^* = q + \frac{\psi_{n,i}^{L,j}}{v\Delta t}$$

The above equation has L for the iteration index to indicate that its value was iteratively determined in the previous time step.

### Step discretization

Writing this in terms of a steady state for  $\mu > 0$

$$\mu_n \frac{\psi_{n,i}^{\ell+1,j+1} - \psi_{n,i-1}^{\ell+1,j+1}}{hz} + \Sigma_t^* \psi_{n,i}^{\ell+1,j+1} = \Sigma_s \frac{1}{2} \sum_{n'=1}^N w_i \psi_{n',i}^{\ell,j+1} + q^*.$$

and for  $\mu < 0$

$$\mu_n \frac{\psi_{n,i+1}^{\ell+1,j+1} - \psi_{n,i}^{\ell+1,j+1}}{hz} + \Sigma_t^* \psi_{n,i}^{\ell+1,j+1} = \Sigma_s \frac{1}{2} \sum_{n'=1}^N w_i \psi_{n',i}^{\ell,j+1} + q^*.$$

where

$$\Sigma_t^* = \Sigma_t + \frac{1}{v\Delta t}$$

$$q^* = q + \frac{\psi_{n,i}^{L,j}}{v\Delta t}$$

### GMRES

The generalized minimum residual (GMRES) method is an iterative method for solving linear systems of equations. The method approximates the solution by the vector in a Krylov subspace with a minimum residual (see wikipedia or Dr. McClarren's notes, I'm not really sure how this method works, but python has a solver for it).

The system  $A\vec{\phi} = b$  is solved with GMRES, where for our situation,

$$A = \left( I - \sum_{n'=1}^N L^{-1} \Sigma_s \frac{1}{2} \right)$$

where  $L^{-1}$  is a sweep solve for our system and acts as an operator (I think), and

$$b = \sum_{n'=1}^N L^{-1} q^*$$

### Reeds Problem


Reeds problem is a similiar system as above, except the source and scattering and total cross sections are variable in  $z$ , and the width of  $z$  is 16.

## Homework 4 Problem Solution

The code for this problem will be at the end of this section. The answers are below.

- (a) (50 Points) Your task is to solve a problem with uniform source of  $Q = 0.01$ ,  $\Sigma_t = \Sigma_s = 100$  for a slab in vacuum of width 10 using step and diamond difference discretizations. Use, 10, 50, and 100 zones ( $h_x = 1, 0.02, 0.01$ ) and your expert choice of angular quadratures. Discuss your results and how the two methods compare at each number of zones.

The angular quadrature used was the Gauss-Legendre Quadrature because of the integration range. Its form was shown in the background section. The plot below was produced with the GMRES method, but the source iteration scheme produced the same results.

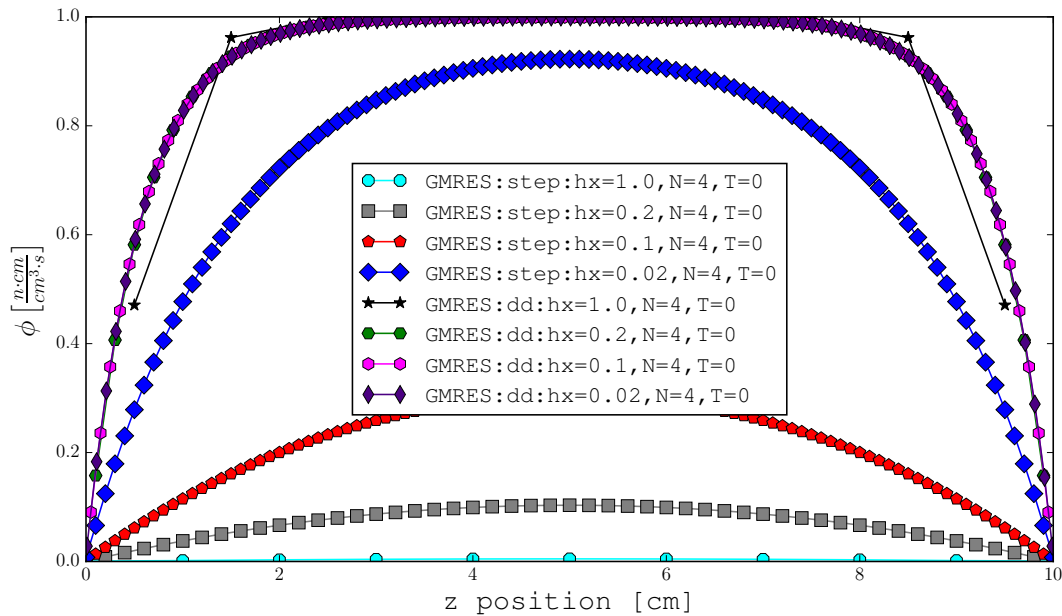

Both of the iterative solutions converged with max iterations of 100,000 and a slight modification on cross section ( $\Sigma_t = \Sigma_t \cdot 1.0001$ ) to help the system converge. As the number of zones increased for the step solution, the flux magnitude kept increasing to match with the diamond difference and maintained a cosine(ish) shape. As the number of zones increased with the diamond difference, the shape started to converge towards the cosine, but maintained the proper magnitude.

Something else I would like to point out in the solution is that the step solution always had one more point plotted than the diamond difference. The reason for this is due to how each solution was solved. This is easier highlighted (for me) with an example, which is shown in the case where the number of zones is 10.

For the Diamond difference, the average locations (remember they were averaged),  $\psi_{n,i}^{L,j+1}$ , being solved for were,

$$z = [0.5, 1.5, 2.5, 3.5, 4.5, 5.5, 6.5, 7.5, 8.5, 9.5]$$

The points for  $\psi_{n,i+1/2}^{L,j+1}$  and  $\psi_{n,i-1/2}^{L,j+1}$  were at the points,

$$z = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10]$$

When sweeping to the right,  $\psi_n(z = 0)$  was set to zero, because the incoming flux is zero, and all points were solved for up to where  $z = 10$ , and  $\psi_{n,i}$  values were determined with averaging. This same thing occurred when sweeping to the left (except here  $\psi_n(z = 10)$  was set to zero). This would yield 10 values at the points  $[0.5, 1.5, \dots, 9.5]$ .

For the step discretization scheme, the locations (non averaged),  $\psi_{n,i}^{L,j+1}$ , being solved for were,

$$x = \begin{cases} [1, 2, 3, 4, 5, 6, 7, 8, 9, 10] & \mu > 0 \\ [0, 1, 2, 3, 4, 5, 6, 7, 8, 9] & \mu < 0 \end{cases}$$

When combining these two lists for  $\phi$ , this was considered, and hence the step discretization scheme had one extra point (both lists have 10 points, but the location 10 is unique in the first list, and 0 in the second).

- (b) (10 points) Discuss why there is a different form of the discretization for the different signs of  $\mu$ .


**The different forms are needed in the step discretization because in both the diamond and step approaches to the solution a value is needed from a previous zone. Our vacuum boundary condition states that the incoming neutrons are zero, which at the left side of the boundary, determines the angular flux moving to the right, and at the right side of the boundary, the angular flux moving to the left (these values are 0).**

- (c) (40 points) Plot the error after each iteration using a 0 initial guess for the step discretization with source iteration and GMRES.

**Error will be determined with the following:**


$$\text{Error} = \frac{||\phi^{\ell+1} - \phi^{\ell}||}{||\phi^{\ell+1}||}$$





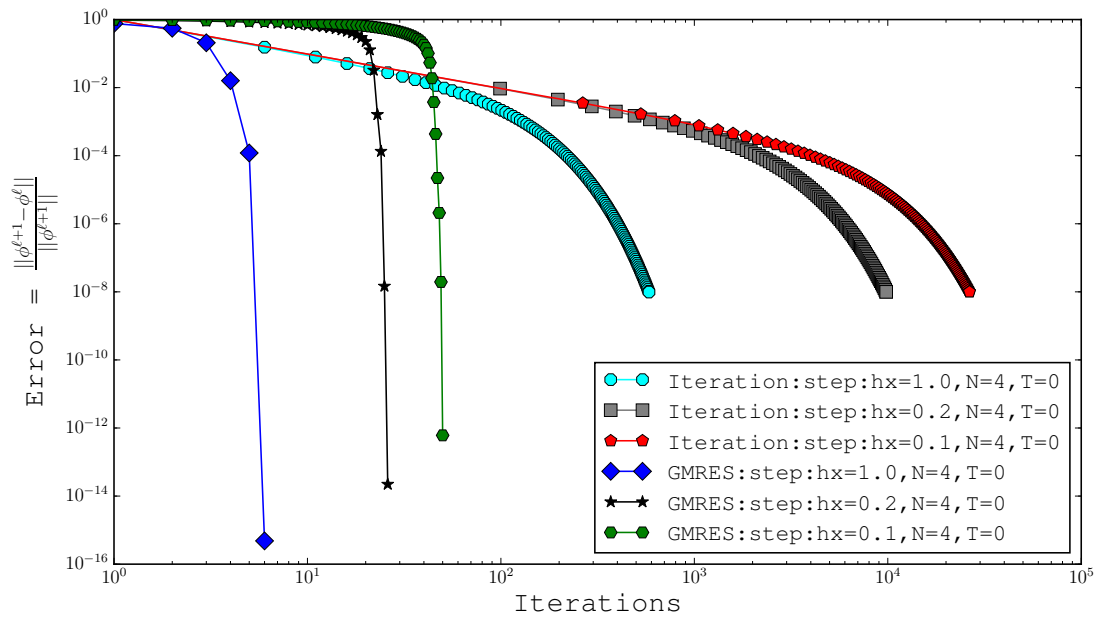


- (d) (50 points) Solve Reed's problem (see finite difference diffusion codes). Present convergence plots for the solution in space and angle to a "refined" solution in space and angle.

Plots are below, reduced the number of points so that figures wouldn't take so long to load.


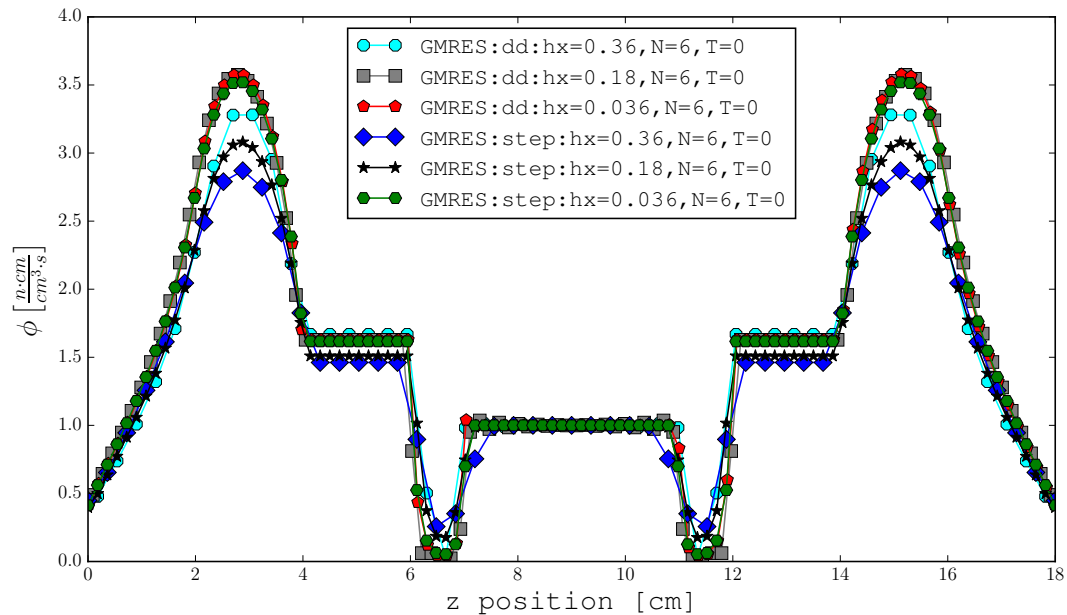


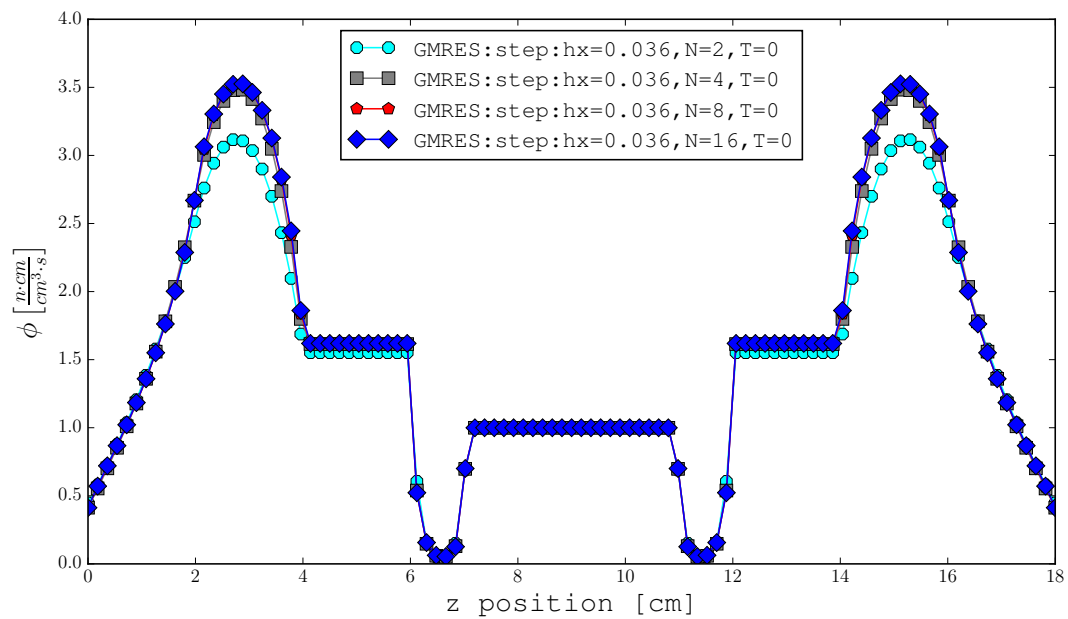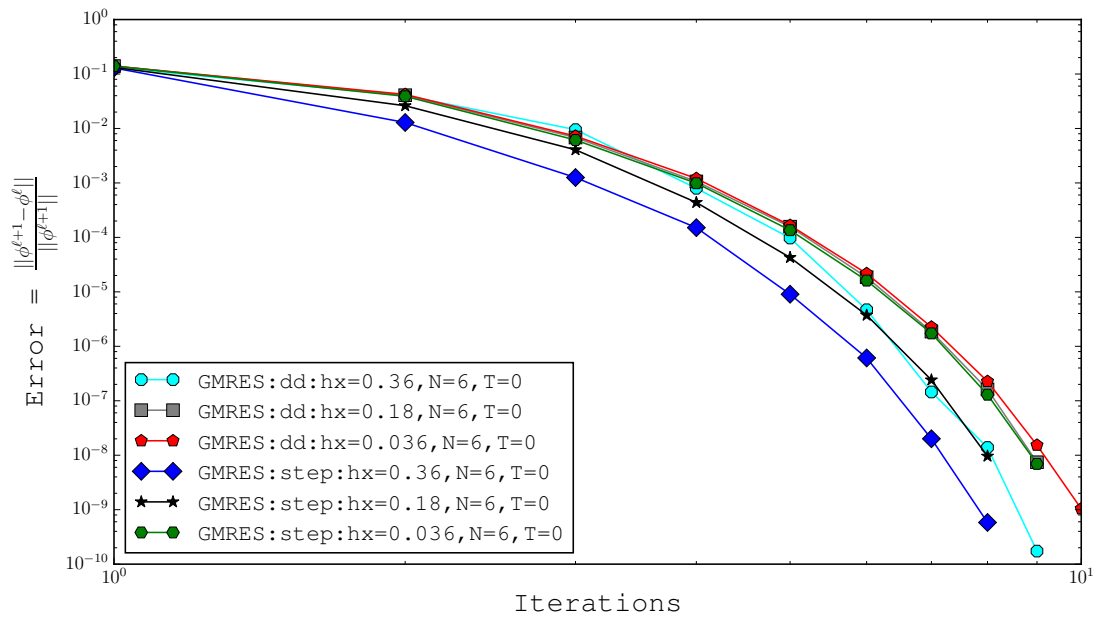

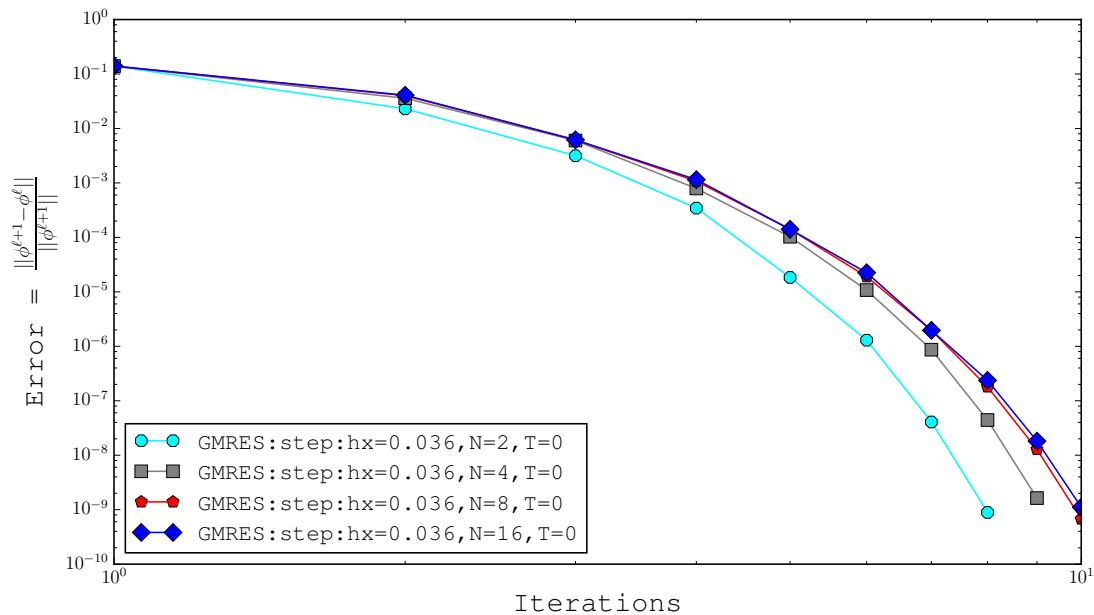



The solution converges with more spatial slices. Increasing the number of angular slices helps upto when  $N=4$ , but beyond that it doesn't do much.

- (e) (50 points extra credit) Solve a time dependant problem for a slab surrounded by vacuum with  $\Sigma_t = \Sigma_s = 1$  and initial condition given by  $\psi(\mathbf{0}) = \mathbf{1}/h_x$  (original problem statement said  $\phi(0) = 1/h_x$  and I'm not sure how to solve that). Plot the solution at  $t = 1$  s, using step and diamond difference. The particles have a speed of 1 cm/s. Which discretization is better with a small time step? What do you see with a small number of ordinates compared to a really large number (100s)?

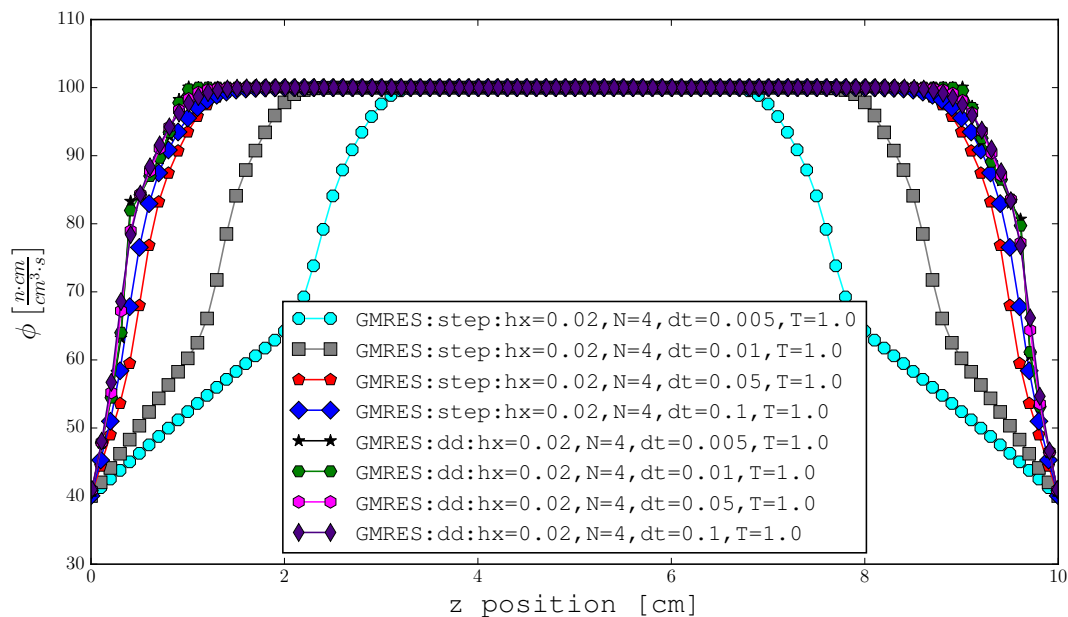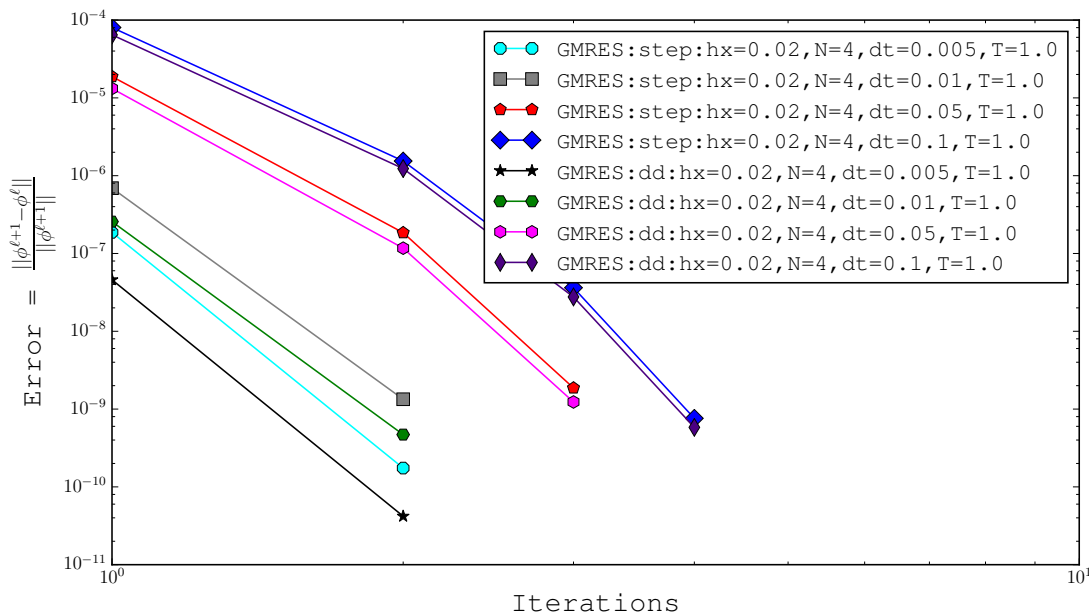Figure 1:  $Q=0.01$ Figure 2:  $Q=0.01$ 

Based on the above graphs, I am not sure which solution does better with a smaller step size. It depends on what the answer should be. I think the step solution, as the step size increases, look like

they have some nonphysical bends in the solution. This could be due to lots of things, but maybe its because of the smaller step size, which makes me think the diamond difference method is better with smaller step sizes.

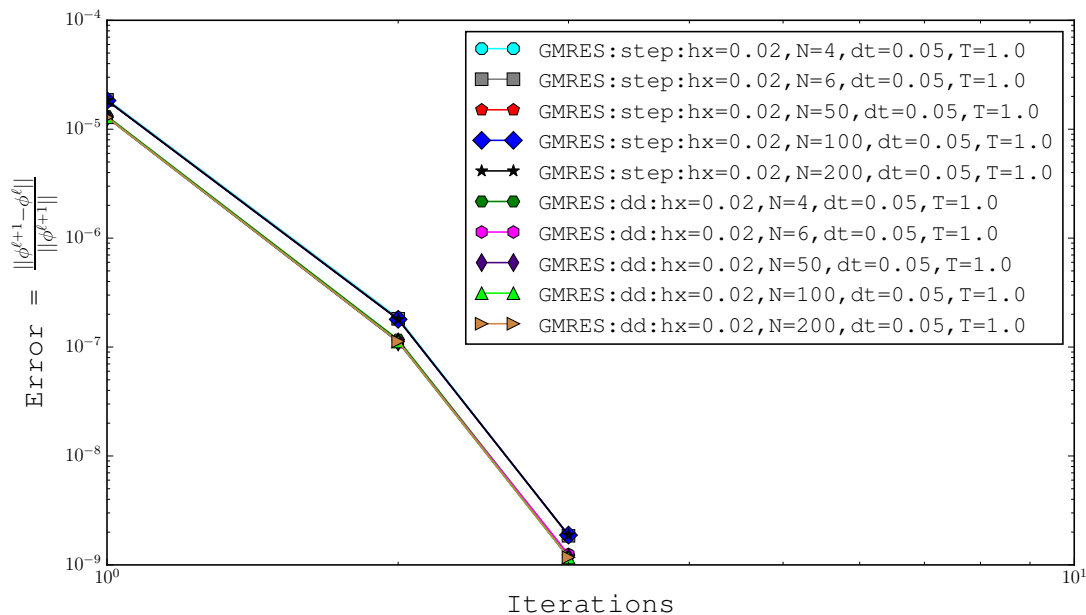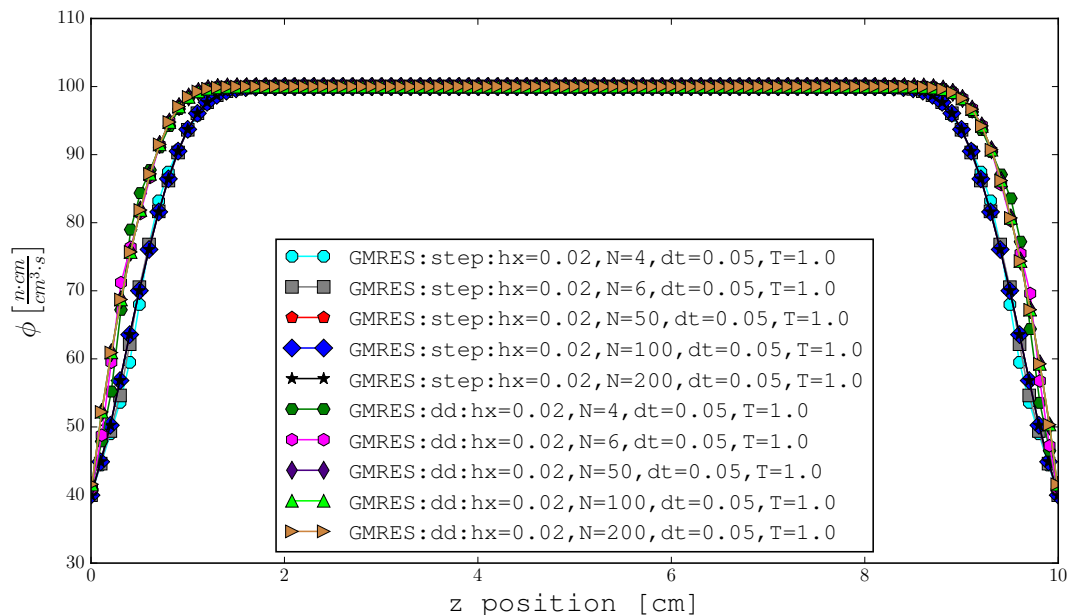

As the number of ordinances increase in the problem there isn't much change in the solution, which is expected because with the Quadrature rule we used, the integral can usually be expressed within

around 6 terms. There was an increase in computational time though.

## Homework 4 Code

Listing 1: Main Code For Parts a,b and c

```

#!/usr/bin/env python3

#####
##### Import packages #####
#####

5
import time
start_time = time.time()
import Functions as f

10
#####
##### Inputs #####
#####

15
# Constants
Q = 0.01
Sigma_t = 100;Sigma_s=100
# Add adsorption to help converge
if Sigma_t==Sigma_s:
20
    Sigma_t=Sigma_t*1.0001

# Geometry
L = 10.                # Width of slab
slices=[10,50,100,500] # Number of cuts in slab (looped)
25
N = 4                  # Number of angle slices
BCs = f.np.zeros(N)   # Zero incoming flux

#Time
T=0                    # total Time (A plot made at T)
30
dt=1                   # Time steps width
v=1                    # Velocity

MAXITS=100000          # Max iterations for source iter
loud=False             # Echo every Iteration?

35
#Method
Methods=['GMRES:step',    # 'Iteration' or 'GMRES'
          'GMRES:dd']     # Methods to solve with?
                          # 'step' or 'dd'

40
tol=1e-8

PlotError=False        # Do we plot the error?

45
NumOfPoints=100        # Max Number of points for plots

#####
##### Initialize Figures #####
#####

50

```

```

Check=0
fig=f=plt.figure(figsize=f.FigureSize)    # Plot all Methods
ax=fig.add_subplot(111)
if PlotError:
55     erfig=f=plt.figure(figsize=f.FigureSize) # Err Plot
        erax=erfig.add_subplot(111)          # at T=0

#####
60 ##### Calculations #####
#####

for Scheme in Methods:

65     Method=Scheme.split(':')[1]
        #####
        ##### Set Up #####
        #####

70     for II in slices:
        if Method == 'step': #Step Dude needs one extra
            I=II+1
        elif Method == 'dd':
            I=II

75     #Width, ang lists for materials
        hx = L/II
        q = f.np.ones(I)*Q
        Sig_t_discr = f.np.ones(I)*Sigma_t
80     Sig_s_discr = f.np.ones(I)*Sigma_s

        #Initialize psi (for time steps)
        if T==0:
            psi=f.np.zeros((N,I))
85     Time=[0]
        else:
            psi=f.np.ones((N,I))*(1/hx)
            Time=f.Timevector(T,dt)

90     label_tmp=Scheme+":hx="+str(hx)+" ,N="+str(N)+" ,T="
        #####
        ##### Determine phi #####
        #####

95     for t in Time: #Loop over time

        label=label_tmp+str(t)

        #Determine phi (new psi is determined for time steps)
100    x,phi,it,er,psi=f.solver(I,hx,q,Sig_t_discr,
        Sig_s_discr,N,psi,v,dt,Time,BCs,Scheme,tol,MAXITS,loud)

        #####

```



```

##### Plot Information #####
#####
105 fig
    ax,fig=f.plot(x,phi,ax,label,fig,Check,NumOfPoints)
    if t==0 and PlotError:
        erfig
110         erax,erfig=f.plotE(it,er,erax,label,erfig,
                                Check,NumOfPoints)
        Check=Check+1

#####
##### Legend/Save #####
#####

fig
f.Legend(ax)
120 #f.plt.savefig('Plots/FluxPlot.pdf')
    if PlotError:
        erfig
        f.Legend(erax)
        #f.plt.savefig('Plots/ErrorPlot.pdf')
125 f.plt.savefig('Plots/ErrorPlotTime.pdf')
        #f.plt.clf()
        f.plt.close()
fig
f.plt.savefig('Plots/FluxPlotTime.pdf')
130 #f.plt.show()

#Why is tmp_psi in the GMRES going negative?

##### Time To execute #####
135 print("--- %s seconds ---" % (time.time() - start_time))

```

Listing 2: Main Code For Part d

```

#!/usr/bin/env python3

#####
##### Import packages #####
5 #####

import time
start_time = time.time()
import Functions as f

10 #####
##### Inputs #####
#####

15 # Geometry
L = 18. # Width of slab
slices=[500] # Number of cuts in slab (looped)
NN = [2,4,8,16] # Number of angle slices

```

```

20 #Time
T=0          # total Time (A plot made at T)
dt=1         # Time steps width
v=1          # Velocity

25 MAXITS=1000000      # Max iterations for source iter
loud=False         # Echo every Iteration?

#Method
Methods=['GMRES:step']#,          # 'Iteration' or 'GMRES'
30      # 'GMRES:step']          # Methods to solve with?
                                # 'step' or 'dd'

tol=1e-8

35 PlotError=True      # Do we plot the error?

NumOfPoints=100        # Max Number of points for plots

#####
40 ##### Initialize Figures #####
#####

Check=0
fig=f.plt.figure(figsize=f.FigureSize) # Plot all Methods
45 ax=fig.add_subplot(111)
if PlotError:
    erfig=f.plt.figure(figsize=f.FigureSize) # Err Plot
    erax=erfig.add_subplot(111)             # at T=0

50 #####
##### Calculations #####
#####

55 for Scheme in Methods:

    Method=Scheme.split(':')[1]
    #####
    ##### Set Up #####
60    #####

    for II in slices:
        if Method == 'step': #Step Dude needs one extra
            I=II+1
65        elif Method == 'dd':
            I=II

        #Width, ang lists for materials
        hx = L/II
70        q = f.np.zeros(I)
        Sig_t_discr = f.np.zeros(I)

```

```

Sig_s_discr = f.np.zeros(I)

75  if Method == 'step':
    x = f.np.linspace(0, (I-1)*hx, I)
elif Method == 'dd':
    x = f.np.linspace(hx/2, I*hx-hx/2, I)

80  for i in range(0, len(x)):
    q[i]=f.QReed(x[i])
    Sig_t_discr[i]=f.Sigma_tReed(x[i])
    Sig_s_discr[i]=Sig_t_discr[i]-f.Sigma_aReed(x[i])

85  for N in NN:
    BCs = f.np.zeros(N)          # Zero incoming flux
    #Initialize psi (for time steps)
    if T==0:
        psi=f.np.zeros( (N,I) )
        Time=[0]
90    else:
        psi=f.np.ones( (N,I) ) * (1/hx)
        Time=f.Timevector(T,dt)

95  label_tmp=Scheme+":hx="+str(hx)+" ,N="+str(N)+" ,T="
    #####
    ##### Determine phi #####
    #####

100  for t in Time: #Loop over time

    label=label_tmp+str(t)

    #Determine phi (new psi is determined for time steps)
105  x,phi,it,er,psi=f.solver(I,hx,q,Sig_t_discr,
    Sig_s_discr,N,psi,v,dt,Time,BCs,Scheme,tol,MAXITS,loud)

    #####
    ##### Plot Information #####
    #####
110  fig
    ax,fig=f.plot(x,phi,ax,label,fig,Check,NumOfPoints)
    if t==0 and PlotError:
        erfig
115        erax,erfig=f.plotE(it,er,erax,label,erfig,
        Check,NumOfPoints)

    Check=Check+1

    #####
120  ##### Legend/Save #####
    #####

fig
f.Legend(ax)

```

```

125 #f=plt.savefig('Plots/FluxPlot.pdf')
    if PlotError:
        erfig
        f.legend(erax)
        #f=plt.savefig('Plots/ErrorPlot.pdf')
130 f=plt.savefig('Plots/ErrorPlotReedVaryN.pdf')
        #f=plt.clf()
        f=plt.close()
    fig
    f=plt.savefig('Plots/FluxPlotReedVaryN.pdf')
135 #f=plt.show()

##### Time To execute #####

print("--- %s seconds ---" % (time.time() - start_time))

```

Listing 3: Main Code For Part e

```

#!/usr/bin/env python3

#####
##### Import packages #####
5 #####

import time
start_time = time.time()
import Functions as f

10 #####
##### Inputs #####
#####

15 # Geometry
L = 10                # Width of slab
# Constants
Q = 0.01
Sigma_t = 1;Sigma_s=1
20 # Add adsorption to help converge
if Sigma_t==Sigma_s:
    Sigma_t=Sigma_t*1.0001

slices=[500]          # Number of cuts in slab (looped)
25 NN = [4,6,50,100,200]    # Number of angle slices

#Time
T=1                    # total Time (A plot made at T)
dtt=[0.05]             # Time steps width
30 v=1                  # Velocity

MAXITS=1000000         # Max iterations for source iter
loud=False             # Echo every Iteration?

35 #Method
Methods=['GMRES:step',    # 'Iteration' or 'GMRES'

```

```

        'GMRES:dd']          # Methods to solve with?
                             # 'step' or 'dd'

40  tol=1e-8
    Ttol=1e-3

    PlotError=True          # Do we plot the error?

45  NumOfPoints=100         # Max Number of points for plots

    #####
    ##### Initialize Figures #####
    #####

50  Check=0
    fig=f.plt.figure(figsize=f.FigureSize)    # Plot all Methods
    ax=fig.add_subplot(111)
    if PlotError:
55      erfig=f.plt.figure(figsize=f.FigureSize) # Err Plot
        erax=erfig.add_subplot(111)           # at T=0

    #####
    ##### Calculations #####
    #####

    for Scheme in Methods:

65      Method=Scheme.split(':')[1]
        #####
        ##### Set Up #####
        #####

70      for II in slices:
          if Method == 'step': #Step Dude needs one extra
              I=II+1
          elif Method == 'dd':
              I=II

75      #Width, ang lists for materials
          hx = L/II
          q = f.np.ones(I)*Q
          Sig_t_discr = f.np.ones(I)*Sigma_t
80      Sig_s_discr = f.np.ones(I)*Sigma_s

          for N in NN:
              BCs = f.np.zeros(N)          # Zero incoming flux
85              for dt in dtt:
                  #Initialize psi (for time steps)
                  if T==0:
                      psi=f.np.zeros((N,I))
                      Time=[0]

```

```

90         else:
            psi=f.np.ones((N,I))*(1/hx)
            Time=f.Timevector(T,dt)

            label_tmp=Scheme+":hx="+str(hx)+" ,N="+str(N)+" ,dt="+\
95                 str(dt)+" ,T="
            #####
            ##### Determine phi #####
            #####

100         for t in Time: #Loop over time

            label=label_tmp+str(round(t,3))

            #Determine phi (new psi is determined for time steps)
105         x,phi,it,er,psi=f.solver(I,hx,q,Sig_t_discr,
            Sig_s_discr,N,psi,v,dt,Time,BCs,Scheme,tol,MAXITS,loud)

            #####
            ##### Plot Information #####
            #####
110         PlotQuestion=abs(t-dt)<Ttol\
            or abs(t-0.5)<Ttol or abs(t-1)<Ttol
            PlotQuestion=abs(t-1)<Ttol
            if PlotQuestion:
115                 fig
                 ax,fig=f.plot(x,phi,ax,label,fig,Check,NumOfPoints)
                 if PlotError:
                     erfig
                     erax,erfig=f.plotE(it,er,erax,label,erfig,
120                                     Check,NumOfPoints)

                 Check=Check+1

            #####
            ##### Legend/Save #####
125         #####

fig
f.Legend(ax)
#f.plt.savefig('Plots/FluxPlot.pdf')
130 if PlotError:
    erfig
    f.Legend(erax)
    #f.plt.savefig('Plots/ErrorPlot.pdf')
    f.plt.savefig('Plots/ErrorPlotTimeVaryN.pdf')
135    #f.plt.clf()
    f.plt.close()

fig
f.plt.savefig('Plots/FluxPlotTimeVaryN.pdf')
#f.plt.show()
140

##### Time To execute #####

```

```
print("--- %s seconds ---" % (time.time() - start_time))
```

Listing 4: **Functions holder**

```
#!/usr/bin/env python3

#####
##### Import packages #####
5 #####

import sys
import numpy as np
import scipy.sparse.linalg as spla

10
import scipy.special as sps
import matplotlib.pyplot as plt
plt.rcParams["font.family"] = "monospace"
import matplotlib
15 matplotlib.rc('text',usetex=True)
matplotlib.rcParams['text.latex.preamble']=[r"\usepackage{amsmath}"]
import random as rn
import matplotlib.mlab as mlab
import copy
20 import os

#####
##### Variables #####
#####

25
# Basic information
FigureSize = (11, 6)          # Dimensions of the figure
TypeOfFamily='monospace'     # This sets the type of font for text
font = {'family' : TypeOfFamily} # This sets the type of font for text
30 LegendFontSize = 12
Lfont = {'family' : TypeOfFamily} # This sets up legend font
Lfont['size']=LegendFontSize

Title = ''
35 TitleFontSize = 22
TitleFontWeight = "bold" # "bold" or "normal"

#Xlabel='E (eV)' # X label
XFontSize=18 # X label font size
40 XFontWeight="normal" # "bold" or "normal"
XScale="linear" # 'linear' or 'log'
XScaleE='log' # Same but for error plot

YFontSize=18 # Y label font size
45 YFontWeight="normal" # "bold" or "normal"
YScale="linear" # 'linear' or 'log'
YScaleE='log'

Check=0

50
```

```

Colors=["aqua","gray","red","blue","black",
        "green","magenta","indigo","lime","peru","steelblue",
        "darkorange","salmon","yellow","lime","black"]
55
# If you want to highlight a specific item
# set its alpha value =1 and all others to 0.4
# You can also change the MarkSize (or just use the highlight option below)
Alpha_Value=[1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1]
60 MarkSize= [8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8 ,8]

Linewidth=[1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1 ,1]

# Can change all these to "." or "" for nothing "x" isn't that good
65 MarkerType=["8","s","p","D","*", "H", "h", "d", "^", ">"]

# LineStyles=["solid","dashed","dash_dot","dotted","."]
LineStyles=["solid"]

70 SquishGraph = 0.75
BBOX = 1.24
BBOXY = 0.5 # Set legend on right side of graph

NumberOfLegendColumns=1

75 Xlabel='z position [cm]'
Ylabel="$\phi\left[\frac{n\cdot cm}{cm^3\cdot s}\right]$"

XlabelE='Iterations'
80 YlabelE="Error = $\frac{|\phi^{\ell+1}-\phi^{\ell}|}{|\phi^{\ell+1}|}$"

#####
##### Functions #####
#####

85
def Sigma_tReed(r):
    value = 0 + ((1.0*(r>=14) + 1.0*(r<=4)) +
                 5.0 * ((np.abs(r-11.5)<0.5) or (np.abs(r-6.5)<0.5)) +
                 50.0 * (np.abs(r-9)<=2) )
90     return value;
def Sigma_aReed(r):
    value = 0 + (0.1*(r>=14) + 0.1*(r<=4) +
                 5.0 * ((np.abs(r-11.5)<0.5) or (np.abs(r-6.5)<0.5)) +
                 50.0 * (np.abs(r-9)<=2) )
95     return value;
def QReed(r):
    value = 0 + 1.0*((r<16) * (r>14)) + 1.0*((r>2) * (r<4)) + 50.0*(np.abs(r-9)<=2)
    return value;

100 def Timevector(T,dt):
    Time=[dt]
    while Time[-1]<T:
        Time.append(Time[-1]+dt)

```



```

    return (Time)

105 def diamond_sweep1D(I,hx,q,sigma_t,mu,boundary):
    """Compute a transport diamond difference sweep for a given
    Inputs:
        I:            number of zones
110     hx:            size of each zone
        q:            source array
        sigma_t:      array of total cross-sections
        mu:            direction to sweep
        boundary:     value of angular flux on the boundary
115     Outputs:
        psi:          value of angular flux in each zone
    """
    assert(np.abs(mu) > 1e-10)
    psi = np.zeros(I)
120     ihx = 1./hx
    if (mu > 0):
        psi_left = boundary
        for i in range(I):
            psi_right = (q[i] + (mu*ihx-0.5*sigma_t[i])*psi_left)\
125                /(0.5*sigma_t[i] + mu*ihx)
            psi[i] = 0.5*(psi_right + psi_left)
            psi_left = psi_right
    else:
        psi_right = boundary
130     for i in reversed(range(I)):
        psi_left = (q[i] + (-mu*ihx-0.5*sigma_t[i])*psi_right)\
            /(0.5*sigma_t[i] - mu*ihx)
        psi[i] = 0.5*(psi_right + psi_left)
        psi_right = psi_left
135     return psi

def step_sweep1D(I,hx,q,sigma_t,mu,boundary):
    """Compute a transport step sweep for a given
    Inputs:
140     I:            number of zones
        hx:            size of each zone
        q:            source array
        sigma_t:      array of total cross-sections
        mu:            direction to sweep
145     boundary:     value of angular flux on the boundary
    Outputs:
        psi:          value of angular flux in each zone
    """
    assert(np.abs(mu) > 1e-10)
150     psi = np.zeros(I)
    ihx = 1./hx
    if (mu > 0):
        psi_left = boundary
        psi[0] = 0
155     for i in range(1,I):
        psi_right = (q[i] + mu*ihx*psi_left)/(mu*ihx + sigma_t[i])

```

```

    psi[i] = 0.5*(psi_right + psi_left)
    psi_left = psi_right
else:
160     psi_right = boundary
    psi[-1] = 0
    for i in reversed(range(0,I-1)):
        psi_left = (q[i] - mu*ihx*psi_right)/(sigma_t[i] - mu*ihx)
        psi[i] = 0.5*(psi_right + psi_left)
165     psi_right = psi_left
    return psi

def source_iteration(I,hx,q,sigma_t,sigma_s,N,psiprevious_time,
170     v,dt,Time,BCs,sweep_type,
    tolerance = 1.0e-8,maxits = 100, LOUD=False ):
    """Perform source iteration for single-group steady state problem
    Inputs:
        I:            number of zones
175     hx:            size of each zone
        q:            source array
        sigma_t:       array of total cross-sections
        sigma_s:       array of scattering cross-sections
        N:            number of angles
180     BCs:          Boundary conditions for each angle
        sweep_type:    type of 1D sweep to perform solution
        tolerance:     the relative convergence tolerance for the iterations
        maxits:        the maximum number of iterations
        LOUD:          boolean to print out iteration stats
185     Outputs:
        x:            value of center of each zone
        phi:          value of scalar flux in each zone
    """
    iterations = []
190     Errors = []
    phi = np.zeros(I)
    phi_old = phi.copy()
    converged = False
    MU, W = np.polynomial.legendre.leggauss(N)
195     iteration = 1
    tmp_psi=psiprevious_time.copy()
    if len(Time)==1:
        sigma_ts=sigma_t
    else:
200         sigma_ts=sigma_t+1/(v*dt)

    while not(converged):
        phi = np.zeros(I)
        #sweep over each direction
205         for n in range(N):
            #qs=(q*W[n])/2+(phi_old*sigma_s)/2+psiprevious_time[n,:]/(v*dt)
            qs=(q)/2+(phi_old*sigma_s)/2+psiprevious_time[n,:]/(v*dt)
            if sweep_type == 'dd':
                tmp_psi[n,:] = diamond_sweep1D(I,hx,qs,sigma_ts,MU[n],BCs[n])

```

```

210     elif sweep_type == 'step':
        tmp_psi[n,:] = step_sweep1D(I,hx,qs,sigma_ts,MU[n],BCs[n])
    else:
        sys.exit("Sweep method specified not defined in SnMethods")
    phi = phi+tmp_psi[n,:]*W[n]
215    #check convergence
    change = np.linalg.norm(phi-phi_old)/np.linalg.norm(phi)
    iterations.append(iteration)
    Errors.append(change)
    #iterations.append(iteration)
220    #Errors.append(change)
    converged = (change < tolerance) or (iteration > maxits)
    if (LOUD>0) or (converged and LOUD<0):
        print("Iteration",iteration," : Relative Change =",change)
    if (iteration > maxits):
225        print("Warning: Source Iteration did not converge : "+\
                sweep_type+", I : "+str(I)+", Diff : %.2e" % change)
    #Prepare for next iteration
    iteration += 1
    phi_old = phi.copy()
230    if sweep_type == 'step':
        x = np.linspace(0, (I-1)*hx,I)
    elif sweep_type == 'dd':
        x = np.linspace(hx/2,I*hx-hx/2,I)
    return x, phi, iterations, Errors, tmp_psi
235

def gmres_solve(I,hx,q,sigma_t,sigma_s,N,psiprevious_time,
                v,dt,Time,BCs, sweep_type,
                tolerance = 1.0e-8,maxits = 100, LOUD=False,
240                restart = 20 ):
    """Solve, via GMRES, a single-group steady state problem
    Inputs:
        I:                number of zones
        hx:               size of each zone
245        q:              source array
        sigma_t:          array of total cross-sections
        sigma_s:          array of scattering cross-sections
        N:                number of angles
        BCs:              Boundary conditions for each angle
250        sweep_type:     type of 1D sweep to perform solution
        tolerance:        the relative convergence tolerance for the iterations
        maxits:           the maximum number of iterations
        LOUD:             boolean to print out iteration stats
    Outputs:
255        x:              value of center of each zone
        phi:              value of scalar flux in each zone
    """
    iterations = []
    Errors = []
260
    #compute RHS side
    RHS = np.zeros(I)

```

```

265 MU, W = np.polynomial.legendre.leggauss(N)
tmp_psi=psiprevious.time.copy()
if len(Time)==1:
    sigma_ts=sigma_t
else:
    sigma_ts=sigma_t+1/(v*dt)
270
for n in range(N):
    qs=q/2+psiprevious.time[n,:]/(v*dt)
    if sweep_type == 'dd':
        tmp_psi[n,:] = diamond_sweep1D(I,hx,qs,sigma_ts,MU[n],BCs[n])
275 elif sweep_type == 'step':
        tmp_psi[n,:] = step_sweep1D(I,hx,qs,sigma_ts,MU[n],BCs[n])
        #tmp_psi = sweep1D(I,hx,q,sigma_t,MU[n],BCs[n])
        RHS += tmp_psi[n,:]*W[n]

280 #define linear operator for gmres
def linop(phi):
    tmp = phi*0
    #sweep over each direction
    for n in range(N):
285         if sweep_type == 'dd':
            tmp_psi[n,:] = diamond_sweep1D(I,hx,(phi*sigma_s)/2,
                                            sigma_ts,MU[n],BCs[n])

            elif sweep_type == 'step':
                tmp_psi[n,:] = step_sweep1D(I,hx,(phi*sigma_s)/2,
290                                         sigma_ts,MU[n],BCs[n])

            tmp += tmp_psi[n,:]*W[n]
    return phi-tmp
A = spla.LinearOperator((I,I), matvec = linop, dtype='d')

295
#define a little function to call when the iteration is called
iteration = np.zeros(1)
def callback(rk, iteration=iteration):
    iteration += 1
300     if (LOUD>0):
        print("Iteration",iteration[0],"norm of residual",np.linalg.norm(rk))
        iterations.append(iteration[0])
        Errors.append(np.linalg.norm(rk))

305 #Do the GMRES Solve
phi,info = spla.gmres(A,RHS,x0=RHS,tol=tolerance,
                    restart=int(restart),callback=callback)

#Print important information
310 if (LOUD):
    print("Finished in",iteration[0],"iterations.")
    if (info > 0):
        print("Warning, convergence not achieved :"+str(sweep_type)+" "+str(hx))
    if sweep_type == 'step':
315         x = np.linspace(0,(I-1)*hx,I)

```

```

elif sweep_type == 'dd':
    x = np.linspace(hx/2,I*hx-hx/2,I)

    #Calculate Psi for time iterations
320 phi2 = np.zeros(I)
    #sweep over each direction
    for n in range(N):
        #qs=(q*W[n])/2+(phi_old*sigma_s)/2+psipreviousime[n,:]/(v*dt)
        qs=(q)/2+(phi*sigma_s)/2+psipreviousime[n,:]/(v*dt)
325     if sweep_type == 'dd':
        tmp_psi[n,:] = diamond_sweep1D(I,hx,qs,sigma_ts,MU[n],BCs[n])
        elif sweep_type == 'step':
        tmp_psi[n,:] = step_sweep1D(I,hx,qs,sigma_ts,MU[n],BCs[n])
        else:
330     sys.exit("Sweep method specified not defined in SnMethods")
    phi2 = phi2+tmp_psi[n,:]*W[n]

    return x, phi, iterations, Errors,tmp_psi

335 def solver(I,hx,q,Sig_t,Sig_s,N,psi,v,dt,Time,BCs,Scheme,tol,MAXITS,loud):
    Method=Scheme.split(':')[1]
    if "Iteration" in Scheme:
        x, phi, iterations, errors, psi =source_iteration(I,
            hx,q,Sig_t,Sig_s,N,psi,v,dt,Time,BCs,
340         Method,tolerance=tol,maxits=MAXITS,LOUD=loud)
    elif "GMRES" in Scheme:
        x, phi, iterations, errors, psi =gmres_solve(I,
            hx,q,Sig_t,Sig_s,N,psi,v,dt,Time,BCs,
            Method,tolerance=tol,maxits=MAXITS,LOUD=loud,restart=MAXITS)
345     else:
        print("Improper sweep selected")
        quit()
    return x, phi, iterations, errors,psi

350 #####
##### Plotting Function #####
#####

def reduceList(List,N):
355     List2=[List[0]]
    Div=int(len(List)/N)
    for i in range(1,len(List)-1):
        if i % Div == 0:
            List2.append(List[i])
360     List2.append(List[-1])
    return(List2)

def loop_values(list1,index):
    """
365     This function will loop through values in list even if
    outside range (in the positive sense not negative)
    """
    while True:

```

```

    try:
370         list1[index]
        break
    except IndexError:
        index=index-len(list1)
    return(list1[index])
375
def plot(x,y,ax,label,fig,Check,NumOfPoints):
    if len(x)>300:
        x=reduceList(x,NumOfPoints)
        y=reduceList(y,NumOfPoints)
380    #Plot X and Y
    ax.plot(x,y,
            linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
385            markersize=loop_values(MarkSize,Check),
            alpha=loop_values(Alpha_Value,Check),
            label=label)

    #Log or linear scale?
390    ax.set_xscale(XScale)
    ax.set_yscale(YScale)
    #Set Title
    fig.suptitle(Title,fontsize=TitleFontSize,
                 fontweight=TitleFontWeight,fontdict=font,
395                                     ha='center')

    #Set X and y labels
    ax.set_xlabel(Xlabel,
                 fontsize=XFontSize,fontweight=XFontWeight,
                 fontdict=font)
400    ax.set_ylabel(Ylabel,
                 fontsize=YFontSize,
                 fontweight=YFontWeight,
                 fontdict=font)

    return(ax,fig)
405

def plotE(x,y,erax,label,erfig,Check,NumOfPoints):
    if len(x)>300:
        x=reduceList(x,NumOfPoints)
410        y=reduceList(y,NumOfPoints)
    #Plot X and Y
    erax.plot(x,y,
            linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
415            color=loop_values(Colors,Check),
            markersize=loop_values(MarkSize,Check),
            alpha=loop_values(Alpha_Value,Check),
            label=label)

    #Log or linear scale?
420    erax.set_xscale(XScaleE)

```

```
erax.set_yscale(YScaleE)
#Set Title
erfig.suptitle(Title, fontsize=TitleFontSize,
425         fontweight=TitleFontWeight, fontdict=font,
                                                ha='center')

#Set X and y labels
erax.set_xlabel(XlabelE,
430         fontsize=XFontSize, fontweight=XFontWeight,
        fontdict=font)
erax.set_ylabel(YlabelE,
435         fontsize=YFontSize,
        fontweight=YFontWeight,
        fontdict=font)

return(erax, erfig)

def Legend(ax):
    handles, labels=ax.get_legend_handles_labels()
    ax.legend(handles, labels, loc='best',
440         fontsize=LegendFontSize, prop=font)

    return(ax)

# def Legend(ax):
#     handles, labels=ax.get_legend_handles_labels()
#     box=ax.get_position()
445 #     ax.set_position([box.x0, box.y0, box.width*SquishGraph,
#     box.height])
#     ax.legend(handles, labels, loc='center',
#     bbox_to_anchor=(BBOXX, BBOXY),
#     450     fontsize=LegendFontSize, prop=font,
#     ncol=NumberOfLegendColumns)
#     return(ax)
```

## Homework 5 Problem Statement

Solve the following problem and submit a detailed report, including a justification of why a reader should believe your results.

### Clean Fusion Energy

(100 points) Consider a thermonuclear fusion reactor producing neutrons of energy 14.1 and 2.45 MeV. The reactor is surrounded by FLiBe (a 2:1 mixture of LiF and BeF<sub>2</sub>) to convert the neutron energy into heat. All the constituents in the FLiBe have their natural abundances. Using data from JANIS, and assuming the total neutron flux is  $10^{14}$  n/cm<sup>2</sup>·s. Perform the following analyses.

- (a) (25 points) Write out the depletion (or in this case activation) chains that will occur in the system.
- (b) (50 points) Over a two-year cycle compute the inventory of nuclides in the system using two methods discussed in class. What is the maximum concentration of tritium?
- (c) (25 points) After discharging the FLiBe blanket, how long will it take until the material is less radioactive than Brazil Nuts ? (444 Bq/kg)



## Homework 5 Background

Please note, that most of this background is copied directly from Dr. McClarren's notes, but are reproduced here.

The production of an isotope is dictated by production and loss

$$\frac{dn_i}{dt} = -\lambda_i^{eff} n_i + \sum_{j=1}^N b_{j \rightarrow i}^{eff} \lambda_j^{eff} n_j$$

Where,

$$\lambda_i^{eff} = \lambda_i + \phi \sum_{j=1}^N \sigma_{i \rightarrow j}$$

and

$$b_{j \rightarrow i}^{eff} = \frac{b_{j \rightarrow i} \lambda_j + \sigma_{j \rightarrow i} \phi}{\lambda_j^{eff}}$$

For a system of isotopes, this can be reduced to:

$$\frac{d\vec{n}}{dt} = \mathbf{A}\vec{n}(t)$$

Where  $\mathbf{A}$  is a matrix whose diagonal elements are  $[-\lambda_1^{eff}, -\lambda_2^{eff}, \dots, -\lambda_N^{eff}]$ , all off diagonal elements are  $b_{j \rightarrow i}^{eff} \lambda_j^{eff}$  (i for the diagonal, and j is for the off diagonal position) and  $\vec{n}(t) = [n_1, n_2, \dots, n_N]$ .

The solution to this system is obvious (it wasn't to me at first - but that's because I'm a newb)

$$\vec{n} = e^{\mathbf{A}t} \vec{n}_0$$

Determining  $e^{\mathbf{A}t} \vec{n}_0$  will be done 3 different ways,

### Matrix Exponential

Analytic Solution, unstable with large N.

$$\vec{n}(t) = e^{\mathbf{A}t} \vec{n}_0 \approx \left[ \sum_{m=0}^{\infty} \frac{1}{m!} \mathbf{A}^m t^m \right] \vec{n}_0$$

### Backward Euler

Unstable for large  $\Delta t$ , but can take time steps.

$$\begin{aligned} \frac{d\vec{n}}{dt} &\approx \frac{\vec{n}(\Delta t) - \vec{n}_0}{\Delta t} \approx \mathbf{A}\vec{n}(\Delta t) \\ \vec{n}(\Delta t) &\approx (\mathbf{I} - \mathbf{A}\Delta t)^{-1} \vec{n}_0 \end{aligned}$$

### Rational Approximation

$$\vec{n}(t) = e^{\mathbf{A}t} \vec{n}_0 \approx -2\Re \sum_{k=1}^{N/2} c_k (z_k \mathbf{I} - \mathbf{A}t)^{-1} \vec{n}_0$$

The  $\Re$  symbol means taking the real part of the solution. Further,

$$c_k = \frac{i}{N} e^{z_k} w_k$$

where  $z_k$  and  $w_k$  are both scalars defined as

$$\begin{aligned} z_k &= \phi(\theta_k) \\ w_k &= \phi'(\theta_k) \end{aligned}$$

with

$$\begin{aligned} \phi(\theta) &= N[0.1309 - 0.1194\theta^2 + 0.2500i\theta] \\ \text{or} \\ \phi(\theta) &= 2.246N [1 - \sin(1.1721 - 0.3443i\theta)] \\ \text{or} \\ \phi(\theta) &= N[0.5071\theta \cot(0.6407\theta) - 0.6122 + 0.2645i\theta] \\ \text{or} \\ \phi(\theta) &= \text{Best Possible} \end{aligned}$$

and

$$\theta_k = \pm \frac{\pi}{N} (1 + 2k) \quad k \text{ from } 0 \text{ to } N-1$$

Where  $N$  doesn't have to go much higher than 10 to have low errors (for the best Rational Approximation). Also both plus and minus terms were written here, but the first equation in this solution method only uses the positive terms. This is because using the negative  $\beta$ 's yields the same real part as the positive  $\beta$ 's, with opposite complex parts (the complex cancels). That's why the  $\sum$  only goes to  $N/2$  and the solution is multiplied by 2.

The solution utilized the assumption that half the neutron flux was 14 MeV and the other half was 2.45 MeV. The  $A$  matrix was built in terms of days and atoms per kg of initial fuel.

$$1 \text{ Kg FLiBe} \cdot \frac{6.022E23}{98.9 \text{ g}} = 6.09E24 \text{ atoms of FLiBe}$$

This number was the starting condition for  $^9\text{Be}$ . Twice this number (with natural abundance considerations) for  $^6\text{Li}$  and  $^7\text{Li}$ , and 4 times this number for  $^{19}\text{F}$ .

## Homework 5 Solution

- (a) (25 points) Write out the depletion (or in this case activation) chains that will occur in the system.

The chains were written out in a form so that the diagram would be uncluttered, and not all possible reactions are displayed.

				<div><div><div><div><div><div></div><div><math>(n, \alpha) {}^7_3\text{Li}</math></div><div>Stable - 19.9%</div></div></div><div><div><div><math>{}^{10}_5\text{B}</math></div><div></div></div></div><div><div>2.45 MeV: 0.281</div><div>14.1 MeV: 0.0445</div></div></div></div></div>	
		<div><div><div><div><div><div></div><div><math>\alpha \rightarrow {}^4_2\text{He}</math></div><div></div></div></div><div><div><div><math>{}^8_4\text{Be}</math></div><div>6E-17 s</div></div></div></div></div></div>		<div><div><div><div><div><div><math>(n, 2n) {}^8_4\text{Be}</math></div><div><math>(n, t) {}^7_3\text{Li}</math></div><div><math>(n, \alpha) {}^6_3\text{He}</math></div><div><math>(n, \gamma) {}^{10}_5\text{Be}</math></div><div><math>(n, p) {}^9_4\text{Li}</math></div></div></div><div><div><div><math>{}^9_4\text{Be}</math></div><div></div></div></div><div><div>2.45 MeV: 0.021, 0, 0.083</div><div>14.1 MeV: 0.48, 0.021, 0.01</div></div></div></div></div> <div><div><div><div><div><div></div><div><math>\beta^{-1} \rightarrow {}^{10}_5\text{B}</math></div><div></div></div></div><div><div><div><math>{}^{10}_4\text{Be}</math></div><div>1.4E6 y</div></div></div></div></div></div>	
		<div><div><div><div><div><div><math>(n, t) {}^4_2\text{He}</math></div><div><math>(n, 2n \alpha) {}^1_1\text{H}</math></div><div><math>(n, p) {}^6_3\text{He}</math></div><div><math>(n, \gamma) {}^6_3\text{Li}</math></div></div></div><div><div><div><math>{}^6_3\text{Li}</math></div><div></div></div></div><div><div>2.45 MeV: 0.21,0,0</div><div>14.1 MeV: 0.03,0.08,0.01</div></div></div></div></div> <div>Stable - 7.59%</div>		<div><div><div><div><div><div><math>(n, 2n) {}^6_3\text{Li}</math></div><div><math>(n, 2n \alpha) {}^2_1\text{H}</math></div><div><math>(n, d) {}^6_3\text{He}</math></div><div><math>(n, 3n \alpha) {}^1_1\text{H}</math></div><div><math>(n, \gamma) {}^7_3\text{Li}</math></div></div></div><div><div><div><math>{}^7_3\text{Li}</math></div><div></div></div></div><div><div>2.45 MeV: 0,0,0</div><div>14.1 MeV: 0.03,0.02,0.01</div></div></div></div></div> <div>Stable - 92.41%</div>	
		<div><div><div><div><div><div></div><div><math>\beta^{-1} \rightarrow {}^8_4\text{Be}</math></div><div></div></div></div><div><div><div><math>{}^8_3\text{Li}</math></div><div>0.8399 s</div></div></div></div></div></div>		<div><div><div><div><div><div></div><div><math>\beta^{-1} \rightarrow {}^9_4\text{Be}</math> (49.2)</div><div><math>\beta^{-1} n \rightarrow {}^9_4\text{Be}</math> (50.8)</div></div></div><div><div><div><math>{}^9_3\text{Li}</math></div><div>0.178 s</div></div></div></div></div></div>	
<div><div><div><div><div><div><math>(n, p) {}^3_2\text{He}</math></div><div><math>(n, d) {}^3_1\text{H}</math></div><div><math>(n, \gamma) {}^3_2\text{He}</math></div></div></div><div><div><div><math>{}^3_2\text{He}</math></div><div></div></div></div><div><div>2.45 MeV: 0.71,0.9E-5</div><div>14.1 MeV: 0.12,0.08,3E-5</div></div></div></div></div> <div>Stable - 0.0001%</div>	<div><div><div><div><div><div></div><div>Stable - 99.9999%</div><div></div></div></div><div><div><div><math>{}^4_2\text{He}</math></div><div></div></div></div></div></div></div>			<div><div><div><div><div><div></div><div><math>\beta^{-1} \rightarrow {}^6_3\text{Li}</math></div><div></div></div></div><div><div><div><math>{}^6_2\text{He}</math></div><div>0.8 s</div></div></div></div></div></div>	
<div><div><div><div><div><div><math>(n, 2n) {}^1_1\text{H}</math></div><div><math>(n, \gamma) {}^1_1\text{H}</math></div></div></div><div><div><div><math>{}^2_1\text{H}</math></div><div></div></div></div><div><div>2.45 MeV: 0,8E-6</div><div>14.1 MeV: 0.17,9E-6</div></div></div></div></div> <div>Stable - 0.0115%</div>	<div><div><div><div><div><div><math>(n, 2n) {}^2_1\text{H}</math></div><div><math>\beta^{-1} \rightarrow {}^3_2\text{He}</math></div></div></div><div><div><div><math>{}^3_1\text{H}</math></div><div>12.32 y</div></div></div></div></div></div>				


<div>Stable - 90.48%</div> <div><math>{}^{20}_{10}\text{Ne}</math></div>			
<div><math>EC \rightarrow {}^{18}_8\text{O}</math></div> <div><math>{}^{18}_9\text{F}</math></div> <div>110 min</div>	<div> <math>(n, n \alpha) {}^{15}_7\text{N}</math>  <math>(n, n p) {}^{18}_8\text{O}</math>  <math>(n, 2n) {}^{18}_9\text{F}</math>  <math>(n, \alpha) {}^{16}_7\text{N}</math>  <math>(n, d) {}^{18}_8\text{O}</math>  <math>(n, p) {}^{19}_9\text{F}</math>  <math>(n, t) {}^{17}_8\text{O}</math>  <math>(n, \gamma) {}^{20}_9\text{F}</math> </div> <div>Stable - 100%</div> <div><math>{}^{19}_9\text{F}</math></div> <div>2.45 MeV: 0,0,0 14.1 MeV: 0.4,0.06,0.04</div>	<div><math>\beta^{-1} \rightarrow {}^{20}_{10}\text{Ne}</math></div> <div><math>{}^{20}_9\text{F}</math></div> <div>11.1 s</div>	
<div> <math>(n, \alpha) {}^{13}_6\text{C}</math>  <math>(n, p) {}^{16}_7\text{N}</math>  <math>(n, d) {}^{15}_7\text{N}</math>  <math>(n, \gamma) {}^{17}_8\text{O}</math> </div> <div>Stable - 99.757%</div> <div><math>{}^{16}_8\text{O}</math></div> <div>2.45 MeV: 0,0,0 14.1 MeV: 0.14,0.04,0.02</div>	<div> <math>(n, \alpha) {}^{14}_6\text{C}</math>  <math>(n, 2n) {}^{16}_8\text{O}</math>  <math>(n, n \alpha) {}^{13}_6\text{C}</math>  <math>(n, p) {}^{17}_7\text{N}</math>  <math>(n, d) {}^{16}_7\text{N}</math>  <math>(n, \gamma) {}^{18}_8\text{O}</math> </div> <div>Stable - 0.038%</div> <div><math>{}^{17}_8\text{O}</math></div> <div>2.45 MeV: 0.12,0,0 14.1 MeV: 0.3,0.1,0.04</div>	<div>Stable - 0.21%</div> <div><math>{}^{18}_8\text{O}</math></div>	<div><math>\beta^{-1} \rightarrow {}^{19}_9\text{F}</math></div> <div><math>{}^{19}_8\text{O}</math></div> <div>26.9 s</div>
<div> <math>(n, 2n) {}^{14}_7\text{N}</math>  <math>(n, \alpha) {}^{12}_6\text{B}</math>  <math>(n, n p) {}^{14}_6\text{C}</math>  <math>(n, t) {}^{13}_6\text{C}</math>  <math>(n, p) {}^{15}_6\text{C}</math>  <math>(n, d) {}^{14}_6\text{C}</math> </div> <div>Stable - 0.364%</div> <div><math>{}^{15}_7\text{N}</math></div> <div>2.45 MeV: 0,0,0 14.1 MeV: 0.11,0.07,0.04</div>	<div><math>EC \rightarrow {}^{16}_8\text{O}</math></div> <div><math>{}^{16}_7\text{N}</math></div> <div>7.13 s</div>		

- (b) (50 points) Over a two-year cycle compute the inventory of nuclides in the system using two methods discussed in class. What is the maximum concentration of tritium?


The matrix exponential method did not converge. The Backwards Euler and the Rational approximation solutions did converge. Their answers are basically the same (all plots will have both solutions, but their answers are on top of one another). It should be noted that I changed the solver from in the notes from a GMRES solver to a normal matrix inverter for the rational approach to speed up the algorithm and give better results.

Plots were split up into two groups, with initial nuclides, and product nuclides which would have appreciable activity after a couple of days. Below plots are shown in grams.

The rational approximation used the “Best” method with 10 quadrature points,

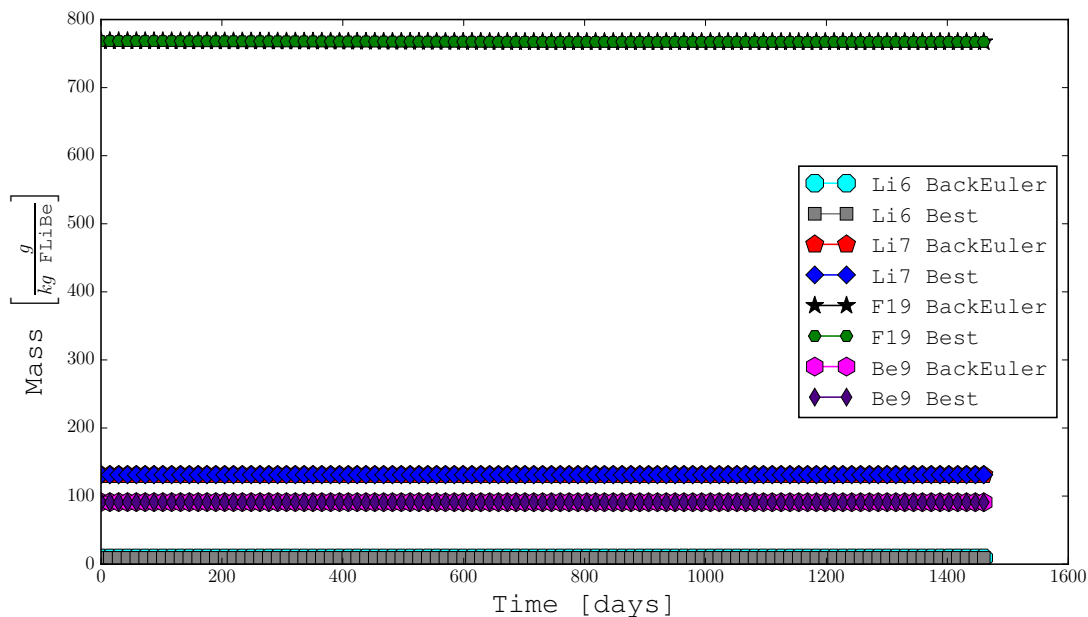


This figure shows that there wasn't sizeable amount of depletion in the coolant. Which is expected because the cross sections are less than a barn.

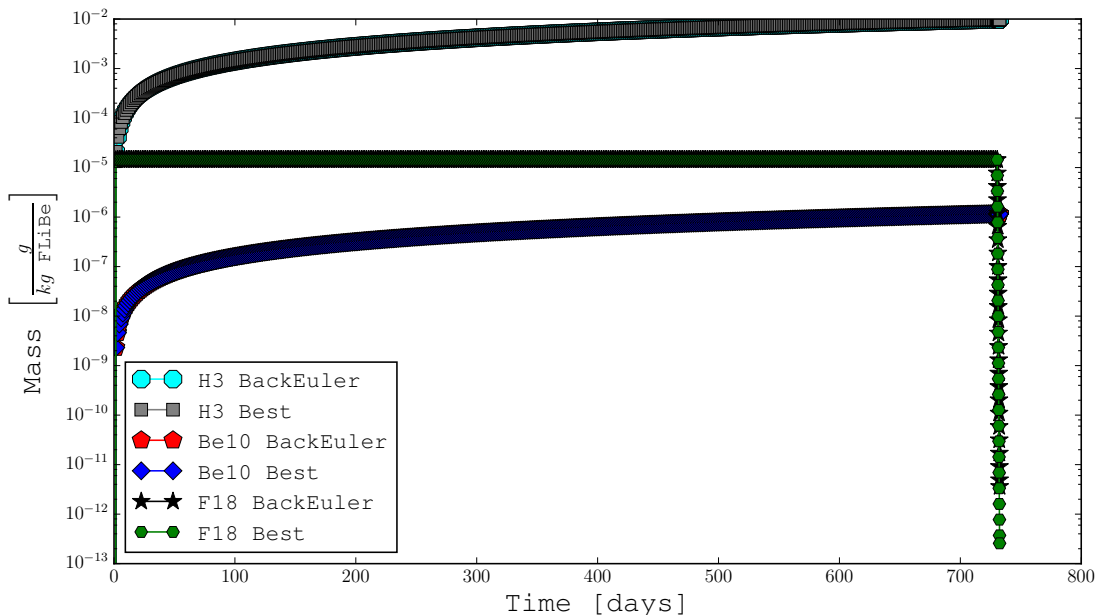


The above figure shows that the high activity elements with large half lives (all other radioactive elements have half lives less than a minute and would decay away and less than 7 minutes) are not produced in a sizeable quantity except for  $^3\text{H}$ , which has a 12 year half life. The sharp decrease in  $^{18}\text{F}$

is because the plot has about a day of decay included to show that activity is primarily from  $^3\text{H}$  (Beta emitter) and  $^{10}\text{Be}$  (alpha emitter).

Below it is shown that the hydrogen is fairly enriched in  $^3\text{H} \approx 40\%$ . If the hydrogen were removed, the dose due to the coolant would decrease dramatically but would still have a small amount of activity due to  $^{10}\text{Be}$ .

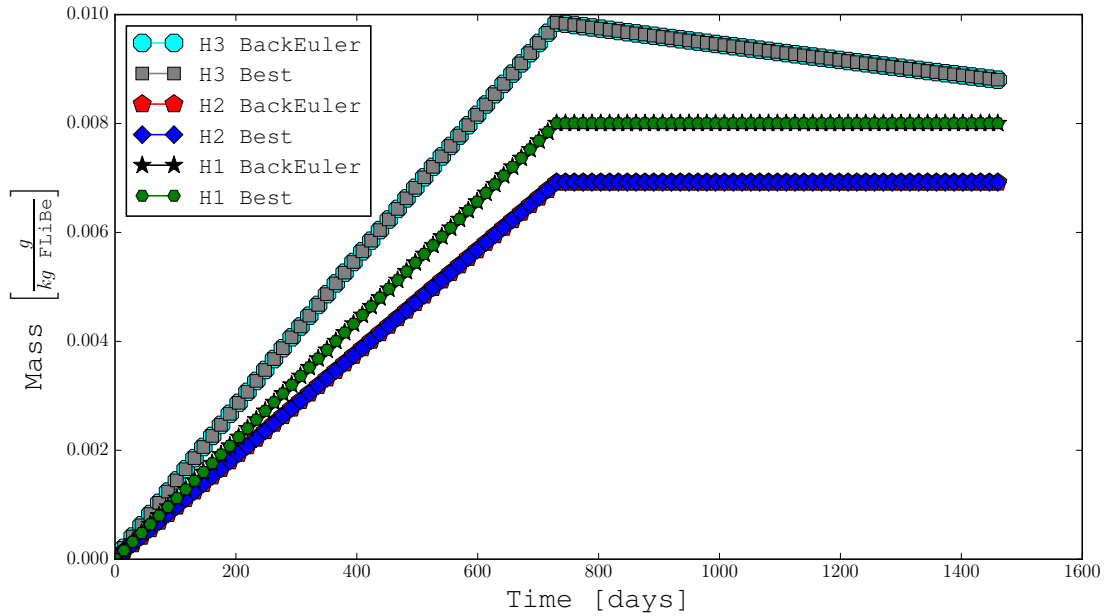


Below we look at the enrichment of  $^3\text{He}$ . Which is mostly  $^4\text{He}$ .

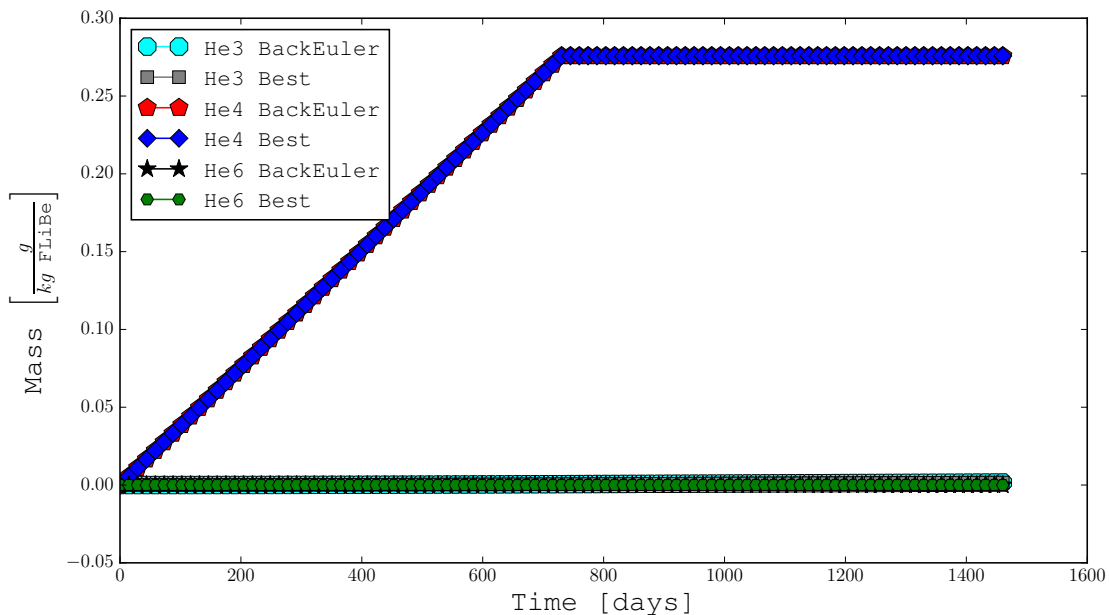

- (c) (25 points) After discharging the FLiBe blanket, how long will it take until the material is less radioactive than Brazil Nuts? (444 Bq/kg)

In order to use the code to do decay, the  $A$  matrix was remade with  $\phi = 0$ . Looking into this problem without  $^{18}\text{F}$ . Also the reason why this plot looks linear is because the y axis has a log scale.

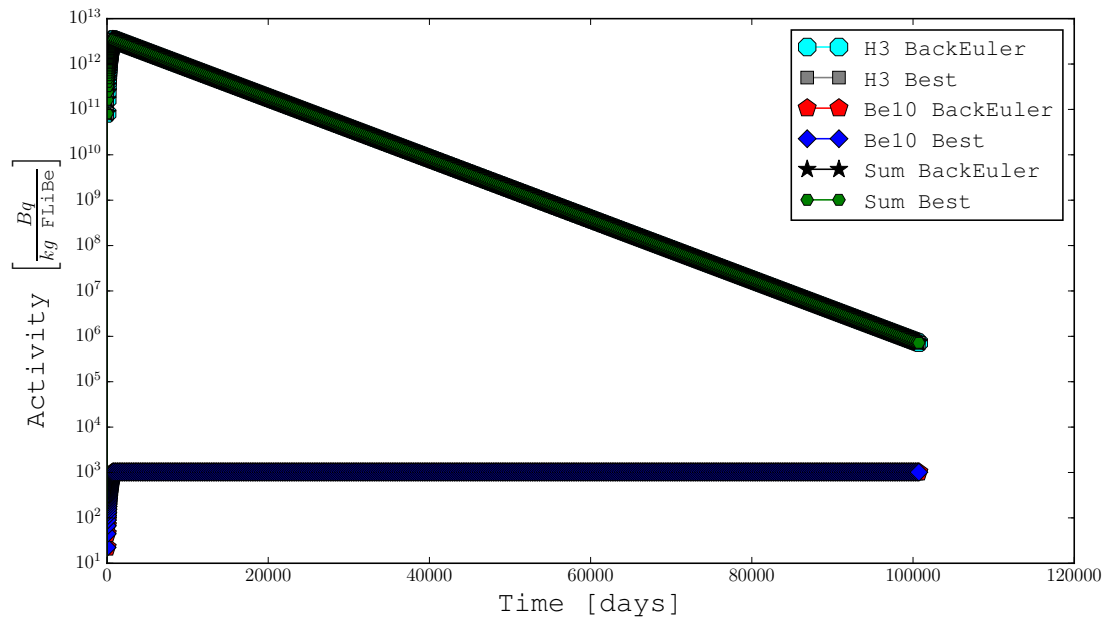

It will take a long time for the  $^{10}\text{Be}$  to decay to a point where its less radioactive than nuts.

I decided to do this analytically with

$$t = \frac{-1}{\lambda_Y} \ln \left( \frac{444}{N_0 \lambda_s} \right)$$

For the  $^3\text{H}$  to decay to 444 Bq, it will take about 400 years, and the  $^{10}\text{Be}$  it will take 1.8E6 years, which is a long time, and slightly over one half life for the  $^{10}\text{Be}$ .

## Homework 5 Code

In order to build the  $A$  matrix I utilized code from James Tompkins that he let me see a while back. I wanted to give him credit because building the  $A$  matrix is probably one of the harder parts of this homework. I had my own experience in building a much larger  $A$  matrix for the next problem.

Listing 5: Main Code

```
#!/usr/bin/env python3

#####
##### Import packages #####
5 #####

import time
start_time = time.time()
import Functions as f
10

#####
##### Initialize System #####
#####

15 NumOfPoints=200          # Max Number of points for plots
PlottingG1=["Li6","Li7","F19","Be9"] #List elements you want to Plot
CompareG1=["Li6","Li7","F19","Be9"]
PlottingG2=["H3","Be10"] #List elements you want to Plot
CompareG2=["H3","Be10"]
20 #List elements you want to compare between methods

#####
##### Initialize Matrix #####
#####

25 high_flux_fraction=0.5
phi=1.0e14
A,n0=f.MakeAb(high_flux_fraction,phi)

30 if not A.shape[0] == A.shape[1] or not A.shape[0] == len(n0):
    print("A is not a square matrix")
    quit()

#####
35 ##### Initialize Time #####
#####

t=730.5; #Two years in days
Nt=1000; #Number of Time Steps
40 dt=t/Nt;
Time=f.np.linspace(dt,t,Nt) #Time steps

tDecay=100000; #No time of decay
NtDecay=10000; #Number of Decay Time Steps
45 dtDecay=tDecay/NtDecay
TimeDecay=f.np.linspace(t+dtDecay,t+tDecay,NtDecay)
```



```

#####
##### Solve System #####
50 ##### And Time How long it takes #####
##### For Each Method #####
##### And Plot at Each Time Step #####
#####

55 #Matrix Exp - Unstable
#Current_Time=time.time()
#maxits=20
# nt_Mat=f.MatExp(A,n0,t,maxits)
# Mat_Time=time.time()-Current_Time
60 #nt_Mat=n0.copy();TIMEOLD=0
#for TIME in Time[1:len(Time)]: #Unstable
    #nt_Mat=f.MatExp(A,n0,TIME,maxits) No Converge
    #Step through
    #nt_Mat=f.MatExp(A,nt_Mat,TIME-TIMEOLD,maxits)
65 #TIMEOLD=TIME.copy()
#nt_Mat=f.RationalApprox(A,n0,t,maxits) #one Step
#Mat_Time=time.time()-Current_Time

#####
70 ##### Backward Euler #####
#####

Current_Time=time.time()
File=f.PrepareFile('BackEuler.csv',n0) #Prep File
75 nt_Back=n0.copy();
#Irradiation Time
for TIME in Time:
    nt_Back=f.BackEuler(A,nt_Back,dt)
    File.write(str(TIME)+", "+f.ListToStr(nt_Back))
80 #Decay Time
phi=0
A,n0=f.MakeAb(high_flux_fraction,phi)
for TIME in TimeDecay:
    nt_Back=f.BackEuler(A,nt_Back,dtDecay)
85 File.write(str(TIME)+", "+f.ListToStr(nt_Back))

File.close()
Back_Time=time.time()-Current_Time

90 #####
##### Rational Approx #####
#####

#Reset A and n0
95 high_flux_fraction=0.5
phi=1.0e14
A,n0=f.MakeAb(high_flux_fraction,phi)

#Irradiation Time

```

```

100 Current_Time=time.time()
    N=10;
    Method="Best" #Parabola, Cotangent, Hyperbola, Best
    File=f.PrepareFile(Method+".csv",n0)
    ck,zk=f.RationalPrep(N,Method);nt_Rational=n0.copy();TIMEOLD=0
105 for TIME in Time:
        nt_Rational=f.RationalApprox(A,n0,TIME,N,ck,zk)
        File.write(str(TIME)+","+f.ListToStr(nt_Rational))
        #Step through
        #nt_Rational=f.RationalApprox(A,nt_Rational,TIME-TIMEOLD,N,ck,zk)
110        #TIMEOLD=TIME.copy()
        #nt_Rational=f.RationalApprox(A,n0,t,N,ck,zk) #one Step

        #Non Irradiation Time
        phi=0
115 A,n0=f.MakeAb(high_flux_fraction,phi)
        n0=nt_Rational
        for TIME in TimeDecay:
            nt_Rational=f.RationalApprox(A,n0,TIME-t,N,ck,zk)
            File.write(str(TIME)+","+f.ListToStr(nt_Rational))

120 File.close()
    Rational_Time=time.time()-Current_Time

#####
125 ##### Plot Solution #####
##### In Grams #####
##### and activity #####
#####

130 dfBack = f.pd.read_csv('BackEuler.csv',index_col=False)
    dfRational = f.pd.read_csv(Method+".csv",index_col=False)

    # #Plot group 1 dudes Back Euler method
    #f.plot(dfBack,PlottingG1,'BackEulerG1',NumOfPoints)
135 # f.plot(dfRational,PlottingG1,Method+'G1',NumOfPoints)

    # #Plot group 2 dudes Rational method
    #f.plot(dfBack,PlottingG2,'BackEulerG2',NumOfPoints)
    f.plot(dfRational,PlottingG2,Method+'G2_Check',NumOfPoints)

140

    # #Plot group 1 dudes, compare both methods
    # Name='BackEuler_'+Method+"_G1"
    # f.plots2(dfBack,dfRational,CompareG1,Name,
    #         NumOfPoints,'BackEuler',Method)
145

    #Plot group 2 dudes, compare both methods
    # Name='BackEuler_'+Method+"_G2_NoF"
    # f.plots2(dfBack,dfRational,CompareG2,Name,
    #         NumOfPoints,'BackEuler',Method)
150

#####
##### Print Solution #####

```

```

#####

155 #f.Print("Matrix Exp", "H3", nt_Mat, Mat_Time)
    f.Print("Backward Euler", "H3", nt_Back, Back_Time)
    f.Print("Rational Approx ", "H3", nt_Rational, Rational_Time)

    f.Print("Backward Euler", "Be10", nt_Back, Back_Time)
160 f.Print("Rational Approx ", "Be10", nt_Rational, Rational_Time)

    ## Time in years to be below 444 bq
    f.Years("Backward Euler", "H3", nt_Back)
    f.Years("Rational Approx ", "H3", nt_Rational)
165 f.Years("Backward Euler", "Be10", nt_Back)
    f.Years("Rational Approx ", "Be10", nt_Rational)

170 ##### Time To execute #####

print("--- %s seconds ---" % (time.time() - start_time))

```

Listing 6: Functions holder

```

#!/usr/bin/env python3

#####
##### Import packages #####
5 #####

import sys
import numpy as np
import scipy.sparse as sparse
10 import scipy.sparse.linalg as spla
import scipy.linalg as scil
import scipy.special as sps
import matplotlib.pyplot as plt
plt.rcParams["font.family"] = "monospace"
15 import matplotlib
matplotlib.rc('text', usetex=True)
matplotlib.rcParams['text.latex.preamble']=[r"\usepackage{amsmath}"]
import random as rn
import matplotlib.mlab as mlab
20 import copy
import os
import pandas as pd

#####
25 ##### Variables #####
#####

# Basic information
FigureSize = (11, 6) # Dimensions of the figure
30 TypeOfFamily='monospace' # This sets the type of font for text

```

```

font = {'family' : TypeOfFamily} # This sets the type of font for text
LegendFontSize = 12
Lfont = {'family' : TypeOfFamily} # This sets up legend font
Lfont['size']=LegendFontSize
35
Title = ''
TitleFontSize = 22
TitleFontWeight = "bold" # "bold" or "normal"

40 #Xlabel='E (eV)' # X label
XFontSize=18 # X label font size
XFontWeight="normal" # "bold" or "normal"
XScale="linear" # 'linear' or 'log'

45 YFontSize=18 # Y label font size
YFontWeight="normal" # "bold" or "normal"
YScale="linear" # 'linear' or 'log'

Check=0
50

Colors=["aqua","gray","red","blue","black",
        "green","magenta","indigo","lime","peru","steelblue",
        "darkorange","salmon","yellow","lime","black"]
55

# If you want to highlight a specific item
# set its alpha value =1 and all others to 0.4
# You can also change the MarkSize (or just use the highlight option below)
Alpha_Value=[1 ,1 ,1 ,1 ,1 ,1, 1, 1, 1, 1, 1, 1, 1, 1, 1]
60 MarkSize= [8 ,8 ,8 ,8 ,8 ,8, 8, 8, 8, 8, 8, 8, 8, 8, 8]

Linewidth=[1 ,1 ,1 ,1 ,1 ,1, 1, 1, 1, 1, 1, 1, 1, 1, 1]

# Can change all these to "." or "" for nothing "x" isn't that good
65 MarkerType=["8","s","p","D","*", "H", "h", "d", "^", ">"]

# LineStyles=["solid","dashed","dash_dot","dotted","."]
LineStyles=["solid"]

70 SquishGraph = 0.75
BBOX = 1.24
BBOXY = 0.5 # Set legend on right side of graph

NumberOfLegendColumns=1
75

Xlabel='Time [days]'
Ylabel="Mass  $\left[\frac{\text{g}}{\text{kg}} \text{FLiBe}\right]$ "

80 nuclides = { 'H1':0, 'H2':1, 'H3':2, 'He3':3, 'He4':4,
               'He6':5, 'Li6':6, 'Li7':7, 'Li8':8, 'Be8':9,
               'Be9':10, 'Be10':11, 'Be11':12, 'B10':13, 'B11':14,
               'B12':15, 'C12':16, 'C13':17, 'C14':18, 'C15':19,

```

```

85         'N13':20, 'N14':21, 'N15':22, 'N16':23, 'N17':24,
        'O16':25, 'O17':26, 'O18':27, 'O19':28, 'F18':29,
        'F19':30, 'F20':31, 'Ne20':32}

atom_mass = np.array([1.007825032,2.014101778,3.0160492779, #2
                      3.016029320,4.002603254,6.151228874, #5
90                      6.015122887,7.0160034366,8.022486246, #8
                      8.005305102,9.012183065,10.013534695, #11
                      11.02166108,10.01293695,11.00930536, #14
                      12.0269221, 12, 13.003354835, #17
                      14.003241988, 15.01059926,13.00573861, #20
95                      14.003074004, 15.000108898, 16.0061019, #23
                      17.008449, 15.994914619, 16.999131756, #26
                      17.999159612, 19.0035780,17.99915961286, #29
                      18.998403162, 19.999981252, 19.992440176])

100 nuclide_names = ('H1', 'H2', 'H3', 'He3', 'He4', 'He6', 'Li6',
                    'Li7', 'Li8', 'Be8', 'Be9', 'Be10',
                    'Be11', 'B10', 'B11', 'B12', 'C12', 'C13',
                    'C14', 'C15', 'N13', 'N14', 'N15', 'N16',
105                    'N17', 'O16', 'O17', 'O18', 'O19', 'F18',
                    'F19', 'F20', 'Ne20')

decay_consts = np.array([0., 0., np.log(2)/3.887896E8, #H1 H2 H3
                          0., 0., np.log(2)/0.807, #He3 He4 He6
                          0.,0., np.log(2)/0.840, #Li6 #Li7 #Li8
110                          np.log(2)/6E-17,0., #Be8 #Be9
                          np.log(2)/4.73364E13,np.log(2)/13.8, # Be10,11
                          0., 0., np.log(2)/0.0202, #B10 B11 B12
                          0., 0.,np.log(2)/1.803517E11, #C12 C13 C14
                          np.log(2)/2.45,np.log(2)/598.2, #C15 N13
115                          0., 0., np.log(2)/7.13, # N14 N15 N16
                          np.log(2)/4.174, 0., 0., 0., #N17 O16 O17 O18
                          np.log(2)/26.9, np.log(2)/6586.2, #O19 F18
                          0., np.log(2)/11.1, 0.]) #F19 F20 Ne20

Na=6.0221409E23

120 #####
##### Functions #####
#####

125 def MatExp(A,n0,t,maxits,tolerance=1e-12,LOUD=False):

    converged = False
    m=0
    sum_old=n0.copy()*0

130     while not(converged):

        if m==0:
            APowerm=np.identity(A.shape[0])
            Factorial=1
135         else:
```

```

    APowerm=np.dot (APowerm,A)
    Factorial=Factorial*m
    Sum=sum_old+(1/Factorial)*np.dot ((APowerm)*(t**m),n0)
140
    #Avoid dividing by zero
    if sum(Sum)==0: m+=1;sum_old=Sum.copy();continue

    change = np.linalg.norm(Sum-sum_old)/np.linalg.norm(Sum)
145
    converged = (change < tolerance) or (m > maxits)

    if (LOUD>0) or (converged and LOUD<0):
        print ("Iteration",m,": Relative Change =",change)
    if (m > maxits):
150
        print ("Warning: Source Iteration did not converge : "+\
                " m : "+str(m)+", Diff : %.2e" % change)
    #Prepare for next iteration
    m += 1
    sum_old = Sum.copy()
155

return (Sum)

def BackEuler(A,no,dt):
    I=np.identity(A.shape[0])
160
    return (np.dot (np.linalg.inv (I-A*dt),no))

def DeterminePolesNResidues(n):
    """
    This program takes the algorithm from the reference
    and converts to a python script...I know its janky
165
    but it works
    """
    def Append(List1,List2):
        for item in List2:
170
            for item2 in item:
                List1=np.append(List1,item2)
        return (List1)
    def absG(List):
        List2=[]
175
        for item in List:
            if abs(item)>1:
                List2.append(item)
        return (List2)
    #function [zk,ck] = cf(n);
180
    K = 75; # no of Cheb coeffs
    nf = 1024; # no of pts for FFT
    #Roots correct?
    roots=np.arange(0,nf,1)/nf
    #w = np.exp(2i*pi*(0:nf-1)/nf); # roots of unity
185
    w=np.exp(2j*np.pi*roots)
    t = np.real(w); # Cheb pts (twice over)
    scl = 9; # scale factor for stability
    #F = np.exp(scl*(t-1)./(t+1+1e-16)); # exp(x) transpl. to [-1,1]

```

```

190 F = np.exp(scl*(t-1)/(t+1+1e-16)); # exp(x) transpl. to [-1,1]
    c = np.real(np.fft.fft(F))/nf;      # Cheb coeffs of F
    index=reversed(np.arange(1,K+2,1))
    partofc=[]
    for i in index:
195     partofc.append(c[i-1])
    #f = np.polyval(c(K+1:-1:1),w);      # analytic part f of F
    f = np.polyval(partofc,w);          # analytic part f of F

    #[U,S,V] = svd(hankel(c(2:K+1)));    # SVD of Hankel matrix
200 hankie=scil.hankel(c[1:K+1])
    U,S,V=np.linalg.svd(hankie,full_matrices=False)

    #s = S(n+1,n+1);                    # singular value
    s=S[n]
205 #u = U(K:-1:1,n+1); v = V(:,n+1);    # singular vector
    u=[]
    index=reversed(np.arange(0,K,1))
    for i in index:
        u.append(U[i,n])
210 #v=np.array(V[:,n].copy())
    v=np.array(V[n,:].copy())
    #zz = zeros(1,nf-K);                # zeros for padding
    zz=np.zeros([1,nf-K])
    #b = fft([u zz])./fft([v zz]);      # finite Blaschke product
215 b=np.fft.fft(Append(u,zz))/np.fft.fft(Append(v,zz))
    #rt = f-s*w.^K.*b;                  # extended function r-tilde
    rt=f-s*(w**K)*b;
    #rtc = real(fft(rt))/nf;            # its Laurent coeffs
    rtc=np.real(np.fft.fft(rt))/nf;
220 #zr = roots(v); qk = zr(abs(zr)>1);    # poles
    zr=np.roots(v);qk=np.array(absG(zr));
    #qc = poly(qk);                    # coeffs of denominator
    qc=np.poly(qk);
    #pt = rt.*polyval(qc,w);            # numerator
225 pt=rt*np.polyval(qc,w);
    #ptc = real(fft(pt))/nf;            # coeffs of numerator
    ptc=np.real(np.fft.fft(pt))/nf;
    #ptc = ptc(n+1:-1:1); ck = 0*qk;
    index=reversed(np.arange(0,n+1,1))
230 ptc2=[]
    for i in index: #Can I just reversed ptc?
        ptc2.append(ptc[i])
    ptc=ptc2.copy()
    ck=0*qk
235 #N+1?
    #for k = 1:n                        # calculate residues
    #    q = qk(k); q2 = poly(qk(qk~=q));
    #    ck(k) = polyval(ptc,q)/polyval(q2,q);
    for k in range(0,n):
240     if len(qk)==k:
        print("we are short a qk")
        continue

```

```

    q=qk[k];
    q2=[];
245     for item in qk:
        if not q==item:
            q2.append(item)
    q2=np.poly(q2);
    ck[k]=np.polyval(ptc,q)/np.polyval(q2,q)
250     #zk = scl*(qk-1).^2./(qk+1).^2;      # poles in z-plane
    zk=scl*((qk-1)**2)/((qk+1)**2)
    #ck = 4*ck.*zk./(qk.^2-1);           # residues in z-plane
    ck=4*ck*zk/(qk**2-1)
    #Cut down ck and zk to half the original points
255     ck2=[];zk2=[]
    for i in range(0,len(ck)):
        if i % 2 == 0:
            ck2=np.append(ck2,ck[i])
            zk2=np.append(zk2,zk[i])
260
    return (ck2,zk2)

def RationalPrep(N,Phi):
    """Calculate constants for a rational approximation
265     Inputs:
    N:                Number of Quadrature points
    Phi:              'Parabola',
                    'Cotangent', or
                    'Hyperbola' (shape of Phi)
270
    Outputs:
    ck:               First set of constants for approximation
    zk:               Second set of constants for approximation
    """
275     theta=np.pi*np.arange(1,N,2)/N
    if Phi=='Parabola':
        zk=N*(0.1309-0.1194*theta**2+0.2500j*theta)
        w=N*(-2*0.1194*theta+0.2500j)
    elif Phi=='Cotangent':
280         cot=1/np.tan(0.6407*theta)
        ncsc=-0.6407/(np.sin(0.6407*theta)**2)
        zk=N*(0.5017*theta*cot-0.6122+0.2645j*theta)
        w=N*(0.2645j+0.5017*cot+0.5017*theta*ncsc)
    elif Phi=='Hyperbola':
285         zk=2.246*N*(1-np.sin(1.1721-0.3443j*theta))
        w=2.246*N*(0.3443j*np.cos(1.1721-0.3443j*theta))
    elif Phi=='Best':
        ck,zk=DeterminePolesNResidues(N)
        return (ck,zk)
290     else:
        print("Did not pick proper rational approximation dude")
        print("Quiting now")
        quit()
295     ck=1.0j/N*np.exp(zk)*w

```



```

    return (ck, zk)

def RationalApprox(A, n0, t, N, ck, zk, tol=1e-12, maxits=2000):
    """
300    Calculate the rational approximation solution for n(t)
    Inputs:
    A:          Matrix with system to be solved
    n0:         initial conditions of the system
    t:          time at which solution is determined
305    N:        Number of quadrature points (should be less than 20)
    ck:         constants for quadrature solution
    zk:         constants for quadrature solution
    tol:        Tolerance for convergence for GMRES
    maxits:     Maximum iterations for GMRES
310    Outputs:
    nt:         Solution at time t
    """
    nt = np.zeros(len(n0))
    for k in range(int(N/2)):
315        if len(n0) > 1:
            #phi, code = spla.gmres(zk[k]*sparse.identity(len(n0))-A*t, n0,
            #                      tol=tol, maxiter=maxits)
            phi = np.dot(np.linalg.inv(zk[k]*np.identity(len(n0))-A*t),
                        n0)
320            #if (code):
            #    print(code)
        else:
            phi = (zk[k]-A*t)**(-1)*n0
            nt = nt - 2*np.real(ck[k]*phi)
325    return (nt)

def MakeAb(hi_flux_frac = 0.5, phi = 1.0e14):

    """Interaction functions
330    @ In, nuclides: dictionary with isotope keywords and
                    corresponding indices
    @ In, parent:    parent nuclides undergoing a decay or interaction
    @Out, value:     new value in interaction matrix, either a half
                    life [secs] or 2.45 MeV and 14.1 MeV cross
335                    sections [barns]
    """

    def betanegdecay(nuclides, parent):
340        if parent == 'F20': return nuclides['Ne20'], 11.1 # s
        elif parent == 'O19': return nuclides['F19'], 26.9 # s
        elif parent == 'N16': return nuclides['O16'], 7.13 # s
        elif parent == 'N17': return nuclides['O17'], 4.174 # s
        elif parent == 'C14': return nuclides['N14'], 1.803517E11 # s
        elif parent == 'C15': return nuclides['N15'], 2.45 # s
345        elif parent == 'B12': return nuclides['C12'], 0.0202 # s
        elif parent == 'Be10': return nuclides['B10'], 4.73364E13 # s
        elif parent == 'Be11': return nuclides['B11'], 13.8 # s
        elif parent == 'Li8': return nuclides['Be8'], 0.840 # s

```

```

350     elif parent == 'He6': return nuclides['Li6'], 0.807 # s
    elif parent == 'H3': return nuclides['He3'], 3.887896E8 # s
    else: return -1, 0.0

def betaposdecay(nuclides, parent):
    if parent == 'F18': return nuclides['O18'], 6586.2 # s
355    elif parent == 'N13': return nuclides['C13'], 598.2 # s
    else: return -1, 0.0

def twoalphadecay(nuclides, parent):
    if parent == 'Be8': return nuclides['He4'], 7.0E-17 # s
360    else: return -1, 0.0

def n_gamma(nuclides, parent):
    if parent == 'F19':
        return nuclides['F20'], 8.649107E-5, 3.495035E-5
365    elif parent == 'O16':
        return nuclides['O17'], 1.0E-4, 1.0E-4
    elif parent == 'O17':
        return nuclides['O18'], 2.2675E-4, 2.087114E-4
    elif parent == 'N14':
        return nuclides['N15'], 2.397479E-5, 1.679535E-5
370    elif parent == 'N15':
        return nuclides['N16'], 8.121795E-6, 8.56E-6
    elif parent == 'Be9':
        return nuclides['Be10'], 1.943574E-6, 1.660517E-6
375    elif parent == 'Li6':
        return nuclides['Li7'], 1.106851E-5, 1.017047E-5
    elif parent == 'Li7':
        return nuclides['Li8'], 4.677237E-6, 4.105546E-6
    elif parent == 'He3':
        return nuclides['He4'], 9.28775E-5, 3.4695E-5
380    elif parent == 'H2':
        return nuclides['H3'], 8.413251E-6, 9.471512E-6
    else:
        return -1, 0.0, 0.0
385

def n_2n(nuclides, parent):
    if parent == 'F19':
        return nuclides['F18'], 0.0, 0.04162
390    elif parent == 'O17':
        return nuclides['O16'], 0.0, 0.066113
    elif parent == 'N14':
        return nuclides['N13'], 0.0, 0.006496
    elif parent == 'N15':
        return nuclides['N14'], 0.0, 0.112284
395    elif parent == 'B11':
        return nuclides['B10'], 0.0, 0.018805
    elif parent == 'Be9':
        return nuclides['Be8'], 0.0205, 0.484483
400    elif parent == 'Li7':
        return nuclides['Li6'], 0.0, 0.031603

```

```

elif parent == 'H3':
    return nuclides['H2'], 0.0, 0.0497
elif parent == 'H2':
405     return nuclides['H1'], 0.0, 0.166767
else:
    return -1, 0.0, 0.0

def n_alpha(nuclides, parent):
410     if parent == 'F19':
        return [nuclides['N16'], nuclides['He4']], 2.1667E-5, 0.028393
    elif parent == 'O16':
        return [nuclides['C13'], nuclides['He4']], 0.0, 0.144515
    elif parent == 'O17':
415     return [nuclides['C14'], nuclides['He4']], 0.117316, 0.260809
    elif parent == 'N14':
        return [nuclides['B11'], nuclides['He4']], 0.104365, 0.080516
    elif parent == 'N15':
        return [nuclides['B12'], nuclides['He4']], 0.0, 0.069240
420     elif parent == 'B10':
        return [nuclides['Li7'], nuclides['He4']], 0.281082, 0.044480
    elif parent == 'B11':
        return [nuclides['Li8'], nuclides['He4']], 0.0, 0.031853
    else:
425     return [-1, -1], 0.0, 0.0

def n_2alpha(nuclides, parent):
    if parent == 'N14':
        return [nuclides['Li7'], nuclides['He4']], 0.0, 0.031771
430     elif parent == 'B10':
        return [nuclides['H3'], nuclides['He4']], 0.038439, 0.095487
    else:
        return [-1, -1], 0.0, 0.0

435 def n_nalpha(nuclides, parent):
    if parent == 'F19':
        return [nuclides['N15'], nuclides['He4']], 0.0, 0.3818
    elif parent == 'O17':
        return [nuclides['C13'], nuclides['He4']], 0.0, 0.043420
440     elif parent == 'N15':
        return [nuclides['B11'], nuclides['He4']], 0.0, 0.012646
    elif parent == 'B11':
        return [nuclides['Li7'], nuclides['He4']], 0.0, 0.286932
    elif parent == 'Be9':
445     return [nuclides['He6'], nuclides['He4']], 0.0825, 0.0104
    else:
        return [-1, -1], 0.0, 0.0

def n_2nalpha(nuclides, parent):
450     if parent == 'Li6':
        return [nuclides['H1'], nuclides['He4']], 0.0, 0.0783
    elif parent == 'Li7':
        return [nuclides['H2'], nuclides['He4']], 0.0, 0.020195
    else:

```

```

455         return [-1,-1], 0.0, 0.0

def n_3nalpha(nuclides, parent):
    if parent == 'Li7':
        return [nuclides['H1'], nuclides['He4']], 0.0, 6.556330E-5
460    else:
        return [-1,-1], 0.0, 0.0

def n_p(nuclides, parent):
    if parent == 'F19':
465        return [nuclides['O19'], nuclides['H1']], 0.0, 0.018438
    elif parent == 'O16':
        return [nuclides['N16'], nuclides['H1']], 0.0, 0.042723
    elif parent == 'O17':
        return [nuclides['N17'], nuclides['H1']], 0.0, 0.041838
470    elif parent == 'N14':
        return [nuclides['C14'], nuclides['H1']], 0.014102, 0.043891
    elif parent == 'N15':
        return [nuclides['C15'], nuclides['H1']], 0.0, 0.019601
    elif parent == 'B10':
475        return [nuclides['Be10'], nuclides['H1']], 0.018860, 0.034093
    elif parent == 'B11':
        return [nuclides['Be11'], nuclides['H1']], 0.0, 0.005564
    elif parent == 'Li6':
        return [nuclides['He6'], nuclides['H1']], 0.0, 0.00604
480    elif parent == 'He3':
        return [nuclides['H3'], nuclides['H1']], 0.714941, 0.121
    else:
        return [-1,-1], 0.0, 0.0

485 def n_np(nuclides, parent):
    if parent == 'F19':
        return [nuclides['O18'], nuclides['H1']], 0.0, 0.061973
    elif parent == 'N15':
        return [nuclides['C14'], nuclides['H1']], 0.0, 0.044827
490    elif parent == 'B11':
        return [nuclides['Be10'], nuclides['H1']], 0.0, 0.001016
    else:
        return [-1,-1], 0.0, 0.0

495 def n_d(nuclides, parent):
    if parent == 'F19':
        return [nuclides['O18'], nuclides['H2']], 0.0, 0.022215
    elif parent == 'O16':
        return [nuclides['N15'], nuclides['H2']], 0.0, 0.017623
500    elif parent == 'O17':
        return [nuclides['N16'], nuclides['H2']], 0.0, 0.020579
    elif parent == 'N14':
        return [nuclides['C13'], nuclides['H2']], 0.0, 0.042027
    elif parent == 'N15':
505        return [nuclides['C14'], nuclides['H2']], 0.0, 0.014926
    elif parent == 'B10':
        return [nuclides['Be9'], nuclides['H2']], 0.0, 0.031270

```

```

elif parent == 'Li7':
    return [nuclides['He6'], nuclides['H2']], 0.0, 0.010199
510 elif parent == 'He3':
    return [nuclides['H2'], nuclides['H2']], 0.0, 0.07609
else:
    return [-1, -1], 0.0, 0.0

515 def n_t(nuclides, parent):
    if parent == 'F19':
        return [nuclides['O17'], nuclides['H3']], 0.0, 0.01303
    elif parent == 'N14':
        return [nuclides['C12'], nuclides['H3']], 0.0, 0.028573
520 elif parent == 'N15':
        return [nuclides['C13'], nuclides['H3']], 0.0, 0.020163
    elif parent == 'B11':
        return [nuclides['Be9'], nuclides['H3']], 0.0, 0.015172
    elif parent == 'Be9':
525 return [nuclides['Li7'], nuclides['H3']], 0.0, 0.020878
    elif parent == 'Li6':
        return [nuclides['He4'], nuclides['H3']], 0.206155, 0.0258
    else:
        return [-1, -1], 0.0, 0.0

530

# Create Activation and Decay Matrix and initial
# nuclide quantity vector
A = np.zeros((len(nuclides), len(nuclides)))

535

lo_flux_frac = (1.0 - hi_flux_frac)

phi = phi * 60 * 60 * 24 #10^14 1/cm^2/s in 1/cm^2 /day
phi_hi = hi_flux_frac * phi * 1.0e-24
540 phi_lo = lo_flux_frac * phi * 1.0e-24

for isotope in nuclides:
    row = nuclides[isotope]
545 row_betanegdecay = betanegdecay(nuclides, isotope)
    row_betaposdecay = betaposdecay(nuclides, isotope)
    row_2alphadecay = twoalphadecay(nuclides, isotope)
    row_n_gamma = n_gamma(nuclides, isotope)
    row_n_2n = n_2n(nuclides, isotope)
550 row_n_alpha = n_alpha(nuclides, isotope)
    row_n_2alpha = n_2alpha(nuclides, isotope)
    row_n_nalpha = n_nalpha(nuclides, isotope)
    row_n_2nalpha = n_2nalpha(nuclides, isotope)
    row_n_3nalpha = n_3nalpha(nuclides, isotope)
555 row_n_p = n_p(nuclides, isotope)
    row_n_np = n_np(nuclides, isotope)
    row_n_d = n_d(nuclides, isotope)
    row_n_t = n_t(nuclides, isotope)
    row_lo_act_sum = row_n_gamma[1] + row_n_2n[1] + \
560 row_n_alpha[1] + row_n_2alpha[1] + \

```

```

        row_n_nalpha[1] + row_n_2nalpha[1] + \
        row_n_3nalpha[1] + row_n_p[1] +\
        row_n_np[1] + row_n_d[1] +\
        row_n_t[1]
565 row_hi_act_sum = row_n_gamma[2] + row_n_2n[2] +\
        row_n_alpha[2] + row_n_2alpha[2] +\
        row_n_nalpha[2] + row_n_2nalpha[2] + \
        row_n_3nalpha[2] + row_n_p[2] +\
        row_n_np[2] + row_n_d[2] +row_n_t[2]

570 # try:
#     if row_n_alpha[0] >= 0:
#         print(row_n_alpha)
#         donotuse=100
#     continue
575 # except TypeError:
#     print(row_n_alpha)
#     print(row_n_alpha[0][0])
#     quit()

580 if row_betanegdecay[0] >= 0:
    # [days^-1]
    row_lambda = np.log(2)*60*60*24/row_betanegdecay[1]
elif row_betaposdecay[0] >= 0:
    # [days^-1]
585 row_lambda = np.log(2)*60*60*24/row_betaposdecay[1]
elif row_2alphadecay[0] >= 0:
    # [days^-1]
    row_lambda = np.log(2)*60*60*24/row_2alphadecay[1]
else:
590 row_lambda = 0.0

# Diagonal Assignment
A[row,row] = -row_lambda - phi_lo*row_lo_act_sum -\
    phi_hi*row_hi_act_sum
595 # Off Diagonal Assignment
if row_betanegdecay[0] >= 0:
    A[row_betanegdecay[0],row] = np.log(2)*60*60*24/\
        row_betanegdecay[1]
if row_betaposdecay[0] >= 0:
600 A[row_betaposdecay[0],row] = np.log(2)*60*60*24/\
        row_betaposdecay[1]
if row_2alphadecay[0] >= 0:
    A[row_2alphadecay[0],row] = np.log(2)*60*60*24/\
        row_2alphadecay[1]
605 if row_n_gamma[0] >= 0:
    A[row_n_gamma[0],row] = phi_lo*row_n_gamma[1] +\
        phi_hi*row_n_gamma[2]
if row_n_2n[0] >= 0:
    A[row_n_2n[0],row] = phi_lo*row_n_2n[1] +\
610 phi_hi*row_n_2n[2]
if row_n_alpha[0][0] >= 0:
    for i in row_n_alpha[0]:
        A[i,row] = phi_lo*row_n_alpha[1] +\

```

```

        phi_hi*row_n_alpha[2]
615     if row_n_2alpha[0][0] >= 0:
        for i in row_n_2alpha[0]:
            A[i,row] = phi_lo*row_n_2alpha[1] +\
                phi_hi*row_n_2alpha[2]
        if row_n_nalpha[0][0] >= 0:
620     for i in row_n_nalpha[0]:
            A[i,row] = phi_lo*row_n_nalpha[1] +\
                phi_hi*row_n_nalpha[2]
        if row_n_2nalpha[0][0] >= 0:
        for i in row_n_2nalpha[0]:
625     A[i,row] = phi_lo*row_n_2nalpha[1] +\
            phi_hi*row_n_2nalpha[2]
        if row_n_3nalpha[0][0] >= 0:
        for i in row_n_3nalpha[0]:
            A[i,row] = phi_lo*row_n_3nalpha[1] +\
630     phi_hi*row_n_3nalpha[2]
        if row_n_p[0][0] >= 0:
        for i in row_n_p[0]:
            A[i,row] = phi_lo*row_n_p[1] + phi_hi*row_n_p[2]
        if row_n_np[0][0] >= 0:
635     for i in row_n_np[0]:
            A[i,row] = phi_lo*row_n_np[1] + phi_hi*row_n_np[2]
        if row_n_d[0][0] >= 0:
        for i in row_n_d[0]:
            A[i,row] = phi_lo*row_n_d[1] + phi_hi*row_n_d[2]
640     if row_n_t[0][0] >= 0:
        for i in row_n_t[0]:
            A[i,row] = phi_lo*row_n_t[1] + phi_hi*row_n_t[2]

645     b = np.zeros(len(nuclides))

    # N_0 expressed as kg nuclide per kg FLiBe
    #b[nuclides['F19']] = 0.7685
    #b[nuclides['Be9']] = 0.0911
650    #b[nuclides['Li6']] = 0.01065636
    #b[nuclides['Li7']] = 0.12974364
    AtomsofFLiBe=6.0899894727155e24
    b[nuclides['F19']] = AtomsofFLiBe*4
    b[nuclides['Be9']] = AtomsofFLiBe*1
655    b[nuclides['Li6']] = AtomsofFLiBe*2*0.0759
    b[nuclides['Li7']] = AtomsofFLiBe*2*0.9241

    return (A,b)

660    #####
    ##### Plotting Function #####
    #####

def reduceList(List,N):
665    List2=[List[0]]
    Div=int(len(List)/N)

```

```

        for i in range(1, len(List)-1):
            if i % Div == 0:
                List2.append(List[i])
670 List2.append(List[-1])
        return(List2)

def PlotPoints(Ntot, Nplot):
    t=1
675 def loop_values(list1, index):
    """
    This function will loop through values in list even if
    outside range (in the positive sense not negative)
    """
    while True:
        try:
            list1[index]
            break
        except IndexError:
685 index=index-len(list1)
    return(list1[index])

def Legend(ax):
    handles, labels=ax.get_legend_handles_labels()
690 ax.legend(handles, labels, loc='best',
            fontsize=LegendFontSize, prop=font)
    return(ax)

# def Legend(ax):
695 #     handles, labels=ax.get_legend_handles_labels()
#     box=ax.get_position()
#     ax.set_position([box.x0, box.y0, box.width*SquishGraph,
#                     box.height])
#     ax.legend(handles, labels, loc='center',
700 #             bbox_to_anchor=(BBOXX, BBOXY),
#             fontsize=LegendFontSize, prop=font,
#             ncol=NumberOfLegendColumns)
#     return(ax)

705 def InList(item2, List):
    TF=False
    for item1 in List:
        if item1 == item2:
            TF=True
710 if not TF:
    print("Invalid selection for plotting")
    print("Shuting down")
    quit()

715 def plot(df, Plotting, Name, NumOfPoints):
    #Plot In grams
    fig=plt.figure(figsize=FigureSize)
    ax=fig.add_subplot(111)

```



```

720 List=list(df.columns.values)
    x=df[List[0]].values[2:-1]

    Check=0
    for Item in Plotting:
725 InList(Item,List) #Check if we have the isotope
        y=((df[Item].values[2:-1])/Na)*df[Item].values[0]
        if len(x)>NumOfPoints:
            x=reduceList(x,NumOfPoints)
            y=reduceList(y,NumOfPoints)
730 ax.plot(x,y,
            linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
            markersize=loop_values(MarkSize,Check),
735 alpha=loop_values(Alpha_Value,Check),
            label=Item)
        Check=Check+1

740 #Log or linear scale?
    ax.set_xscale(XScale)
    ax.set_yscale(YScale)
    #Set Title
    fig.suptitle(Title,fontsize=TitleFontSize,
745 fontweight=TitleFontWeight,fontdict=font,ha='center')
    #Set X and y labels
    ax.set_xlabel(Xlabel,
        fontsize=XFontSize,fontweight=XFontWeight,
        fontdict=font)
750 ax.set_ylabel(Ylabel,
        fontsize=YFontSize,
        fontweight=YFontWeight,
        fontdict=font)

755 Legend(ax)
    plt.savefig("Plots/"+Name+'_grams.pdf')

    #Plot in Bq #####

760 fig=plt.figure(figsize=FigureSize)
    ax=fig.add_subplot(111)

    List=list(df.columns.values)
    x=df[List[0]].values[2:-1]

765 Check=0;Sum=np.zeros(len(x))
    for Item in Plotting:
        InList(Item,List) #Check if we have the isotope
        y=((df[Item].values[2:-1]))*df[Item].values[1]
770 Sum=Sum+y
        if len(x)>NumOfPoints:
            xP=reduceList(x,NumOfPoints)

```

```

        y=reduceList(y,NumOfPoints)
    ax.plot(xP,y,
775         linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
            markersize=loop_values(MarkSize,Check),
            alpha=loop_values(Alpha_Value,Check),
780         label=Item)
    Check=Check+1
    if len(x)>NumOfPoints:
        Sum=reduceList(Sum,NumOfPoints)
    ax.plot(xP,Sum,
785         linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
            markersize=loop_values(MarkSize,Check),
            alpha=loop_values(Alpha_Value,Check),
790         label="Sum")

    #Log or linear scale?
    ax.set_xscale(XScale)
    if sum(Sum)==0:
795         ax.set_yscale('linear')
    else:
        ax.set_yscale(YScale)
    #Set Title
    fig.suptitle(Title,fontsize=TitleFontSize,
800                 fontweight=TitleFontWeight,fontdict=font,ha='center')
    #Set X and y labels
    ax.set_xlabel(Xlabel,
                  fontsize=XFontSize,fontweight=XFontWeight,
                  fontdict=font)
805 YlabelBq="Activity  $\left[\frac{\text{Bq}}{\text{kg FLiBe}}\right]$ "
    ax.set_ylabel(YlabelBq,
                  fontsize=YFontSize,
                  fontweight=YFontWeight,
                  fontdict=font)
810
    Legend(ax)
    plt.savefig("Plots/"+Name+'_Bq.pdf')

def plots2(df,df2,Plotting,Name,NumOfPoints,Method1,Method2):
815     #Plot in grams
    fig=plt.figure(figsize=FigureSize)
    ax=fig.add_subplot(111)

    List=list(df.columns.values)
820     x=df[List[0]].values[2:-1]

    Check=0
    for Item in Plotting:
        InList(Item,List) #Check if we have the isotope
825         y=((df[Item].values[2:-1])/Na)*df[Item].values[0]

```

```

y2=((df2[Item].values[2:-1])/Na)*df2[Item].values[0]
if len(x)>NumOfPoints:
    x=reduceList(x,NumOfPoints)
    y=reduceList(y,NumOfPoints)
830    y2=reduceList(y2,NumOfPoints)
    ax.plot(x,y,
            linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
835            markersize=loop_values(MarkSize,Check)*1.5,
            alpha=loop_values(Alpha_Value,Check),
            label=Item+" "+Method1)
    Check=Check+1
    ax.plot(x,y2,
840            linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
            markersize=loop_values(MarkSize,Check),
            alpha=loop_values(Alpha_Value,Check),
845            label=Item+" "+Method2)
    Check=Check+1

#Log or linear scale?
850    ax.set_xscale(XScale)
    ax.set_yscale(YScale)
    #Set Title
    fig.suptitle(Title,fontsize=TitleFontSize,
                 fontweight=TitleFontWeight,fontdict=font,ha='center')
855    #Set X and y labels
    ax.set_xlabel(Xlabel,
                 fontsize=XFontSize,fontweight=XFontWeight,
                 fontdict=font)
    ax.set_ylabel(Ylabel,
860                 fontsize=YFontSize,
                 fontweight=YFontWeight,
                 fontdict=font)

    Legend(ax)
865    plt.savefig("Plots/"+Name+' _Grams.pdf')

#Plot in Bq
    fig=plt.figure(figsize=FigureSize)
870    ax=fig.add_subplot(111)

    List=list(df.columns.values)
    x=df[List[0]].values[2:-1]

875    Check=0;Sum=np.zeros(len(x));Sum2=np.zeros(len(x))
    for Item in Plotting:
        InList(Item,List) #Check if we have the isotope
        y=((df[Item].values[2:-1]))*df[Item].values[1]

```

```

y2=((df2[Item].values[2:-1]))*df2[Item].values[1]
880 Sum=Sum+y
Sum2=Sum2+y2
if len(x)>NumOfPoints:
    xP=reduceList(x,NumOfPoints)
    y=reduceList(y,NumOfPoints)
885 y2=reduceList(y2,NumOfPoints)
ax.plot(xP,y,
        linestyle=loop_values(LineStyles,Check),
        marker=loop_values(MarkerType,Check),
        color=loop_values(Colors,Check),
890 markersize=loop_values(MarkSize,Check)*1.5,
        alpha=loop_values(Alpha_Value,Check),
        label=Item+" "+Method1)
Check=Check+1
ax.plot(xP,y2,
895 linestyle=loop_values(LineStyles,Check),
        marker=loop_values(MarkerType,Check),
        color=loop_values(Colors,Check),
        markersize=loop_values(MarkSize,Check),
        alpha=loop_values(Alpha_Value,Check),
900 label=Item+" "+Method2)
Check=Check+1
if len(x)>NumOfPoints:
    Sum=reduceList(Sum,NumOfPoints)
    Sum2=reduceList(Sum2,NumOfPoints)
905 ax.plot(xP,Sum,
        linestyle=loop_values(LineStyles,Check),
        marker=loop_values(MarkerType,Check),
        color=loop_values(Colors,Check),
        markersize=loop_values(MarkSize,Check)*1.5,
910 alpha=loop_values(Alpha_Value,Check),
        label="Sum "+Method1)
Check=Check+1
ax.plot(xP,Sum2,
915 linestyle=loop_values(LineStyles,Check),
        marker=loop_values(MarkerType,Check),
        color=loop_values(Colors,Check),
        markersize=loop_values(MarkSize,Check),
        alpha=loop_values(Alpha_Value,Check),
        label="Sum "+Method2)
920
#Log or linear scale?
ax.set_xscale(XScale)
if sum(Sum)==0:
    ax.set_yscale('linear')
925 else:
    ax.set_yscale(YScale)

#Set Title
fig.suptitle(Title,fontsize=TitleFontSize,
930 fontweight=TitleFontWeight,fontdict=font,ha='center')
#Set X and y labels

```

```

    ax.set_xlabel(Xlabel,
                  fontsize=XFontSize, fontweight=XFontWeight,
                  fontdict=font)
935 YlabelBq="Activity  $\left[\frac{\text{Bq}}{\text{kg FLiBe}}\right]$ "
    ax.set_ylabel(YlabelBq,
                  fontsize=YFontSize,
                  fontweight=YFontWeight,
                  fontdict=font)
940
    Legend(ax)
    plt.savefig("Plots/"+Name+'_Bq.pdf')

def ListToStr(List):
945 Str=''
    for i in range(0, len(List)):
        if not i==len(List)-1:
            Str=Str+str(List[i])+", "
        else:
950 Str=Str+str(List[i])+"\n"
    return (Str)

def PrepFile(Name, n0):
    File=open(Name, 'w')
955 File.write("Mass then Time (d),"+','.join(nuclide_names)+'\n')
    File.write("Masses,"+ListToStr(atom_mass)) #New line already included
    File.write("DecayConts,"+ListToStr(decay_consts))
    File.write("0,"+ListToStr(n0))
    return (File)
960

def Print(Method, nuclide, Results, Time):
    Index=nuclides[nuclide]
    MassConversion=atom_mass[Index]/Na
    string="Isotope "+nuclide_names[Index]+", Mass (g) = "
965 Mass=Results[Index]*MassConversion
    Mass="%.4e" % Mass
    print(Method+" :", string, Mass, "Time=%.2f" % Time)

def Years(Method, nuclide, Results):
970 Index=nuclides[nuclide]
    LambdaY=decay_consts[Index]*60*60*24*365.25
    Lambdas=decay_consts[Index]
    string="Isotope "+nuclide_names[Index]+", Years to 444 Bq = "
    Years=(-1/LambdaY)*np.log(444/(Results[Index]*Lambdas))
975 print(Method+" :", string, "%.3e" % Years)

```

## Project

For the project I wanted to solve a depletion problem using the algorithms developed in the previous homework. The bateman equations will be written in a different form to align more with how the system was built in homework 5, and for the project.

The production of an isotope is dictated by production and loss

$$\frac{dn_i}{dt} = -\lambda_i^{eff} n_i + \sum_{j=1}^N b_{j \rightarrow i}^{eff} n_j$$

Where  $N$  is the number of nuclides and,

$$\lambda_i^{eff} = \lambda_i + \phi \sum_{j=1}^N \sigma_{i \rightarrow j}$$

and

$$b_{j \rightarrow i}^{eff} = b_{j \rightarrow i} \lambda_j + \sigma_{j \rightarrow i} \phi + \gamma_{j \rightarrow i} \sigma_{j,f} \phi$$

where  $\gamma_{j \rightarrow i}$  is the fission yield for isotope  $i$  from fission of isotope  $j$ .  $b_{j \rightarrow i}$  is the fraction of radioactive disintegration by nuclide  $j$ , which leads to nuclide  $i$ . In the case of spontaneous fission  $b_{j \rightarrow i}$  is the product of spontaneous fission fraction for nuclide  $j$  and the yield for fission from nuclide  $j$  producing nuclide  $i$ .

For a system of isotopes, the system can be reduced to:

$$\frac{d\vec{n}}{dt} = \mathbf{A}\vec{n}(t)$$

Where  $\mathbf{A}$  is a matrix whose diagonal elements are  $[-\lambda_1^{eff}, -\lambda_2^{eff}, \dots, -\lambda_N^{eff}]$ , all off diagonal elements are  $b_{j \rightarrow i}^{eff}$  ( $i$  for the row, and  $j$  is for the column) and  $\vec{n}(t) = [n_1, n_2, \dots, n_N]$ .

The solution to this system is so obvious, I won't even write it down.

For the current problem 1 metric ton of PWR fuel will be irradiated for 400 days at a constant flux of  $2.9896 \cdot 10^{14}$  n/cm<sup>2</sup>·s (37.5 W/g initially) and some of the fission product masses will be determined as a function of time. If we ignore the oxygen, the initial amount of atoms for each of the heavy isotopes is

$$\begin{aligned} N_{234U} &= 270 \text{ g} \frac{6.022E23 \text{ atoms}}{234.0409523 \text{ g}} = 6.94741E23 \frac{\text{atoms of } ^{234}\text{U}}{\text{tHM}} \\ N_{235U} &= 30000 \text{ g} \frac{6.022E23 \text{ atoms}}{235.0439301 \text{ g}} = 7.6864E25 \frac{\text{atoms of } ^{235}\text{U}}{\text{tHM}} \\ N_{238U} &= 969730 \text{ g} \frac{6.022E23 \text{ atoms}}{238.0507884 \text{ g}} = 2.4532E27 \frac{\text{atoms of } ^{238}\text{U}}{\text{tHM}} \end{aligned}$$

The results will be compared with ORIGEN2 results for a similar problem that will irradiate the same fuel with a constant power of 37.5 W/g (compare with my results from UQ).

## Project Results


The results for the code are shown below. The hardest part of this problem was building the A matrix. In order to determine if the system was solved correctly the information fed into ORIGEN2 from its TAPE9.inp file was used so that results from the two codes could be compared. I wanted to be able to recreate what ORIGEN2 does with my own code so I could complete the project for UQ in the future after I graduate. The only part I am not sure about on how to do is how to sample the cross section spectrum.

Comparison of results from the two codes are shown in the table below, and it can be seen that they are fairly close. The main difference is from the constant power (ORIGEN2) constant flux (MINE) different assumption.

Table 1: Comparison between ORIGEN2 and my code results in grams

Nuclide	ORIGEN2	My Code
$^{137}\text{Cs}$	553	544
$^{137}\text{Ba}$	7.10	7.13
$^{136}\text{Xe}$	1.04E3	1.02E3
$^{134}\text{Ba}$	3.70	3.60
$^{133}\text{Cs}$	549	538
$^{106}\text{Ru}$	74.3	73.2
$^{105}\text{Pd}$	136	134
$^{99}\text{Tc}$	374	371
$^{95}\text{Zr}$	83.1	79.9
$^{235}\text{U}$	1.629E4	1.65E4
$^{238}\text{U}$	9.597E5	9.6E5
$^{239}\text{Pu}$	3.994E3	3.85E3
$^{241}\text{Pu}$	5.279E2	5.838E2

Below are some graphs of the production and loss of nuclides to show nuclide production trends.

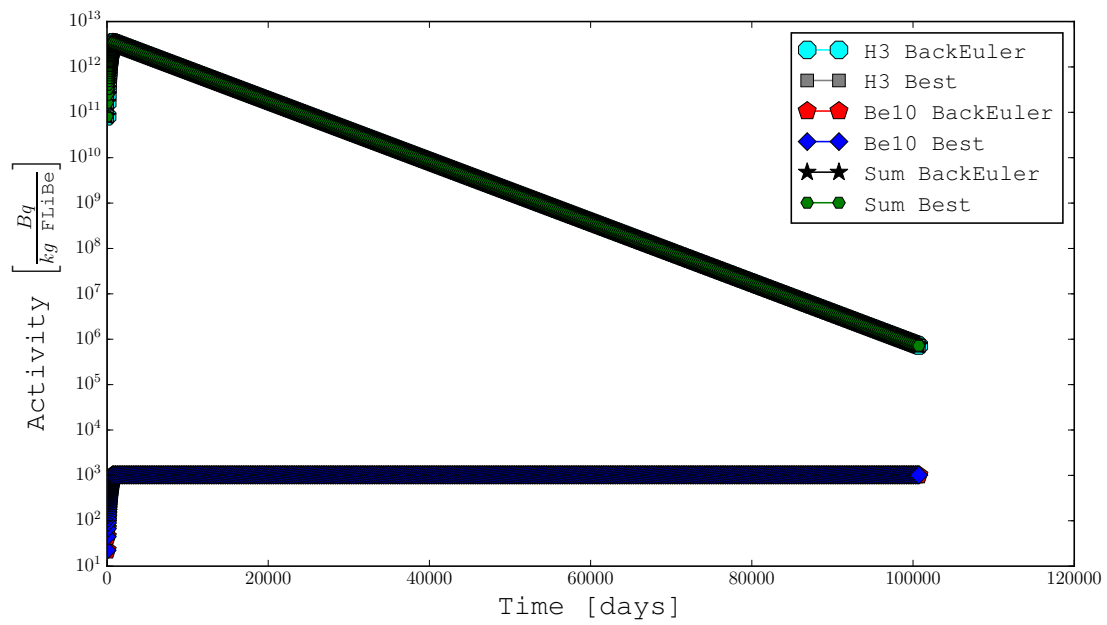



## Project Code

Listing 7: Main Code

```

#!/usr/bin/env python3
#Means for improving speed. Make dir and save all variables
#made for making a, so that no parsing is needed,
#Just multiplying by phi
5
#####
##### Import packages #####
#####

10 import time
start_time = time.time()
import Functions as f

#####
15 ##### Initialize System #####
#####

NumOfPoints=30          # Max Number of points for plots
PlottingG1=["922350"]   #List elements you want to Plot
20 #CompareG1=["922350", "922380", "942390"]
CompareG1=["942390"]
PlottingG2=["922350"]   #List elements you want to Plot
#CompareG2=["551370", "631540", "601480"]
CompareG2=["551370"]
25 #List elements you want to compare between methods

#####
##### Initialize Matrix #####
#####

30
phi=1.0e14;Power = 37.5 # MW (bc 1 ton HM power den is W/g)

Fissile_Isotopes=["922350", "922380", "942390", "942410"]
FissionXSections=f.FindFissionXSection(Fissile_Isotopes)
35 MeVperFission=f.CalMevPerFiss(Fissile_Isotopes)
ToAdd=[]
Nuclides,Nuclide_Names=f.Isotopes(ToAdd)
n0=f.Makeb(Nuclides)
phi=f.Calculatephi(FissionXSections,MeVperFission,n0,Power,Fissile_Isotopes,Nuclides)
40

#This variable takes a while to make, so if its already made
#Just load it
#f.os.system("rm Saved_Variables/Masses.npy") #To start over and remake
if not f.os.path.isfile('Saved_Variables/Masses.npy'):
45     #Grab atomic weight information
    df=f.pd.read_csv('Data/AtomicWeights.csv')
    Atom_Mass=f.GatherMasses(df,Nuclides)
    f.np.save('Saved_Variables/Masses',Atom_Mass)
else:
50     Atom_Mass=f.np.load('Saved_Variables/Masses.npy')

```

```

#Load up all the decay constants
#f.os.system("rm Saved_Variables/Decay_Consts.npy") #To start over and remake
if not f.os.path.isfile('Saved_Variables/Decay_Consts.npy'):
55     Decay_Consts=f.GatherDecay(Nuclide_Names)
    f.np.save('Saved_Variables/Decay_Consts',Decay_Consts)
else:
    Decay_Consts=f.np.load('Saved_Variables/Decay_Consts.npy')

60 #load up A and b with phi
#f.os.system("rm Saved_Variables/Amatrix.npy") #To start over
#f.os.system("rm Saved_Variables/n0vector.npy") #to start over
if not f.os.path.isfile('Saved_Variables/Amatrix.npy'):
    #A is in terms of years
65     A,n0=f.MakeAb(phi,Nuclides,Nuclide_Names,Decay_Consts)
    f.np.save('Saved_Variables/Amatrix',A)
    f.np.save('Saved_Variables/n0vector',n0)
else:
    A=f.np.load('Saved_Variables/Amatrix.npy')
70     n0=f.np.load('Saved_Variables/n0vector.npy')

phi=0
#load up A and b without phi (decay)
#f.os.system("rm Saved_Variables/Amatrixdecay.npy") #To start over
75 #f.os.system("rm Saved_Variables/n0vectordecay.npy") #to start over
if not f.os.path.isfile('Saved_Variables/Amatrixdecay.npy'):
    #A is in terms of years
    Adeca,n0=f.MakeAb(phi,Nuclides,Nuclide_Names,Decay_Consts)
    f.np.save('Saved_Variables/Amatrixdecay',A)
80     f.np.save('Saved_Variables/n0vectordecay',n0)
else:
    Adeca=f.np.load('Saved_Variables/Amatrixdecay.npy')
    n0decay=f.np.load('Saved_Variables/n0vectordecay.npy')

85 if not A.shape[0] == A.shape[1] or not A.shape[0] == len(n0):
    print("A is not a square matrix")
    quit()

print("A is complete")
90 #####
##### Initialize Time #####
#####

t=1.09514; #years
95 Nt=100; #Number of Time Steps
dt=t/Nt;
Time=f.np.linspace(dt,t,Nt) #Time steps

tDecay=0; #No time of decay
100 NtDecay=1; #Number of Decay Time Steps
dtDecay=tDecay/NtDecay
TimeDecay=f.np.linspace(t+dtDecay,t+tDecay,NtDecay)

```

```

#####
105 ##### Solve System #####
##### And Time How long it takes #####
##### For Each Method #####
##### And Plot at Each Time Step #####
#####

110 #Matrix Exp - Unstable
#Current_Time=time.time()
#maxits=20
# nt_Mat=f.MatExp(A,n0,t,maxits)
115 # Mat_Time=time.time()-Current_Time
#nt_Mat=n0.copy();TIMEOLD=0
#for TIME in Time[1:len(Time)]: #Unstable
    #nt_Mat=f.MatExp(A,n0,TIME,maxits) No Converge
    #Step through
120    #nt_Mat=f.MatExp(A,nt_Mat,TIME-TIMEOLD,maxits)
    #TIMEOLD=TIME.copy()
#nt_Mat=f.RationalApprox(A,n0,t,maxits) #one Step
#Mat_Time=time.time()-Current_Time

125 #####
##### Backward Euler #####
#####

Current_Time=time.time()
130 File=f.PrepareFile('Data/BackEuler.csv',n0,Nuclide_Names,Atom_Mass,Decay_Conts) #Prep File
nt_Back=n0.copy();
#Irradiation Time
for TIME in Time:
    nt_Back=f.BackEuler(A,nt_Back,dt)
135    File.write(str(TIME)+", "+f.ListToStr(nt_Back))
#Decay Time
#for TIME in TimeDecay:
#    nt_Back=f.BackEuler(Adecay,nt_Back,dtDecay)
#    File.write(str(TIME)+", "+f.ListToStr(nt_Back))

140 File.close()
Back_Time=time.time()-Current_Time

#####
145 ##### Rational Approx #####
#####

#Irradiation Time
150 Current_Time=time.time()
N=10;
Method="Best" #Parabola, Cotangent, Hyperbola, Best
File=f.PrepareFile("Data/"+Method+".csv",n0,Nuclide_Names,Atom_Mass,Decay_Conts)
ck,zk=f.RationalPrep(N,Method);nt_Rational=n0.copy();TIMEOLD=0
155 #for TIME in Time:
#    nt_Rational=f.RationalApprox(A,n0,TIME,N,ck,zk)

```

```

#    File.write(str(TIME)+", "+f.ListToStr(nt_Rational))
#Step through
#nt_Rational=f.RationalApprox(A,nt_Rational,TIME-TIMEOLD,N,ck,zk)
160 #TIMEOLD=TIME.copy()
nt_Rational=f.RationalApprox(A,n0,t,N,ck,zk) #one Step
File.write(str(TIME)+", "+f.ListToStr(nt_Rational))

#Non Irradiation Time
165 n0decay=nt_Rational

#for TIME in TimeDecay:
#    nt_Rational=f.RationalApprox(Adecay,n0decay,TIME-t,N,ck,zk)
#    File.write(str(TIME)+", "+f.ListToStr(nt_Rational))
170
File.close()
Rational_Time=time.time()-Current_Time

#####
175 ##### Plot Solution #####
##### In Grams #####
##### and activity #####
#####

180
dfBack = f.pd.read_csv('Data/BackEuler.csv',index_col=False)
dfRational = f.pd.read_csv("Data/"+Method+".csv",index_col=False)

# #Plot group 1 dudes Back Euler method
185 # f.plot(dfBack,PlottingG1,'BackEulerG1',NumOfPoints)
# f.plot(dfRational,PlottingG1,Method+'G1',NumOfPoints)

# #Plot group 2 dudes Rational method
# f.plot(dfBack,PlottingG2,'BackEulerG2',NumOfPoints)
190 # f.plot(dfRational,PlottingG2,Method+'G2',NumOfPoints)

#Plot group 1 dudes, compare both methods
#Name='BackEuler_'+Method+"_G1"
#f.plots2(dfBack,dfRational,CompareG1,Name,
195 #    NumOfPoints,'BackEuler',Method)

#Plot group 2 dudes, compare both methods
#Name='BackEuler_'+Method+"_G2"
#f.plots2(dfBack,dfRational,CompareG2,Name,
200 #    NumOfPoints,'BackEuler',Method)

#####
##### Print Solution #####
#####

205
#f.Print("Matrix Exp","H3",nt_Mat,Mat_Time)
f.Print("Backward Euler","541360",nt_Back,Back_Time,Nuclides,Atom_Mass,Nuclide_Names)
f.Print("Rational Approx ","541360",nt_Rational,Rational_Time,Nuclides,Atom_Mass,Nuclide_Names)

```

```

210 ##### Time To execute #####

print("--- %s seconds ---" % (time.time() - start_time))

```

Listing 8: **Functions holder**

```

#!/usr/bin/env python3

#####
##### Import packages #####
5 #####

import sys
import numpy as np
import scipy.sparse as sparse
10 import scipy.sparse.linalg as spla
import scipy.linalg as scil
import scipy.special as sps
import matplotlib.pyplot as plt
plt.rcParams["font.family"] = "monospace"
15 import matplotlib
matplotlib.rc('text',usetex=True)
matplotlib.rcParams['text.latex.preamble']=[r"\usepackage{amsmath}"]
import random as rn
import matplotlib.mlab as mlab
20 import copy
import os
import pandas as pd
import os.path

25 #####
##### Variables #####
#####

# Basic information
30 FigureSize = (11, 6) # Dimensions of the figure
TypeOfFamily='monospace' # This sets the type of font for text
font = {'family' : TypeOfFamily} # This sets the type of font for text
LegendFontSize = 12
Lfont = {'family' : TypeOfFamily} # This sets up legend font
35 Lfont['size']=LegendFontSize

Title = ''
TitleFontSize = 22
TitleFontWeight = "bold" # "bold" or "normal"

40 #Xlabel='E (eV)' # X label
XFontSize=18 # X label font size
XFontWeight="normal" # "bold" or "normal"
XScale="linear" # 'linear' or 'log'

45 YFontSize=18 # Y label font size
YFontWeight="normal" # "bold" or "normal"

```

```

YScale="linear"                # 'linear' or 'log'

50 Check=0

Colors=["aqua","gray","red","blue","black",
        "green","magenta","indigo","lime","peru","steelblue",
55     "darkorange","salmon","yellow","lime","black"]

# If you want to highlight a specific item
# set its alpha value =1 and all others to 0.4
# You can also change the MarkSize (or just use the highlight option below)
60 Alpha_Value=[1 ,1 ,1 ,1 ,1 ,1, 1, 1, 1, 1, 1, 1, 1, 1, 1]
MarkSize= [8 ,8 ,8 ,8 ,8 ,8, 8, 8, 8, 8, 8, 8, 8, 8, 8]

Linewidth=[1 ,1 ,1 ,1 ,1 ,1, 1, 1, 1, 1, 1, 1, 1, 1, 1]

65 # Can change all these to "." or "" for nothing "x" isn't that good
MarkerType=["8","s","p","D","*", "H", "h", "d", "^", ">"]

# LineStyles=["solid","dashed","dash_dot","dotted","."]
LineStyles=["solid"]

70 SquishGraph = 0.75
BBOX = 1.24
BBOXY = 0.5          # Set legend on right side of graph

75 NumberOfLegendColumns=1

#Xlabel='Time [days]'
Xlabel='Time [years]'
Ylabel="Mass  $\left[\frac{g}{\text{tHM}}\right]$ "

80

Na=6.0221409E23

85 #####
##### Functions for building #####
##### Lists #####
#####

90 def Returnfloat(string):
    """
    string has format    238.023249814(23)
                        or format    [15.99903-15.99977]
                        or format    235.04+/-0.0000019

95
    Returns just the number, no uncertainties
    """
    if "(" in string:
        Number=str(string.split('(')[0])
100        LastErrorNumber=str(string.split("(")[1].replace(",",""))

```

```

        NumberOfZeros=len(Number.split("."))-len(LastErrorNumber)
        Error="0."
        for i in range(0,NumberOfZeros):
            Error=Error+"0"
105     Error=Error+LastErrorNumber
    elif "[" in string:
        FirstNum=float(string.split('-')[0].replace("[", ''))
        SecondNum=float(string.split('-')[1].replace(']', ''))
        Number=str((FirstNum+SecondNum)/2)
110     Error=str(float(Number)-FirstNum)
    elif "+/-" in string:
        Number=string.split("+/-")[0]
        Error=string.split("+/-")[1]

115     return(float(Number))

def Isotopes(ToAdd):
    """
    This function will create a dictionary 'Nuclides'
120    with nuclides found in tape9.inp, excluding activation isotopes
    """
    Nuclides={}
    Nuclide_Names=()

125    with open('Data/tape9.inp') as f:
        TAPE9Content=f.readlines()

    count=0
    for line in TAPE9Content:
130        hold=line.split()

        #No activation products or the -1 between libraries
        if not '1' in hold[0] and not '601' in hold[0] and "-" not in hold[0]:

135            #No repeats                #No decimals                #No text
            if hold[1] not in Nuclides and "." not in hold[1] and hold[1].isdigit():
                #Filter out lower mass isotopes
                if len(hold[1])==6:
                    Nuclides[hold[1]]=count
140                    Nuclide_Names=Nuclide_Names+(hold[1],)
                    count=count+1

    for isotope in ToAdd:
        Nuclides[isotope]=count
145        Nuclide_Names=Nuclide_Names+(isotope,)
        count=count+1

    return(Nuclides,Nuclide_Names)

150 def GatherDecay(Nuclide_Names):
    """
    This function will create an array 'Decay_Consts'
    that has all the half-life information for our system.

```

```

155     """
    Decay_Consts = np.zeros(len(Nuclide_Names))

    with open('Data/tape9.inp') as f:
160         TAPE9Content=f.readlines()

    for i in range(0,len(Nuclide_Names)):
        Nuclide=Nuclide_Names[i]
        for line in TAPE9Content:
165             hold=line.split()

            #Look for half life information, and decay type information
            #No activation products or the -1 between libraries
            if hold[0]=='2' or hold[0]=='3':
170                 if hold[1] == Nuclide:
                    Thalf=float(hold[3])
                    if hold[2]=='1': #seconds
                        const=np.log(2)/Thalf
                    elif hold[2]=='2': #minutes
175                         const=np.log(2)/(Thalf*60)
                    elif hold[2]=='3': #hours
                        const=np.log(2)/(Thalf*60*60)
                    elif hold[2]=='4': #days
                        const=np.log(2)/(Thalf*60*60*24)
180                     elif hold[2]=='5': #years
                        const=np.log(2)/(Thalf*60*60*24*365.25)
                    elif hold[2]=='6': #Stable
                        const=-1
                    elif hold[2]=='7':
185                         const=np.log(2)/(Thalf*60*60*24*365.25*10**3)
                    elif hold[2]=='8':
                        const=np.log(2)/(Thalf*60*60*24*365.25*10**6)
                    elif hold[2]=='9':
                        const=np.log(2)/(Thalf*60*60*24*365.25*10**9)
190                 else:
                    print("could not find a proper halflife")
                    print(line)
                    quit()
                Decay_Consts[i]=const
195
    return (Decay_Consts)

200 def FindAtomicMass(df,proton,Isotope):
    """
    This function will take in a dataset 'df' look through the
    'df.Protons' column and find the column that matches with
    'proton'. If the row that contains 'proton' also contains
205    'Isotope' in the 'df.Isotope' column, then the value stored
    in 'df.Relative_Atomic_Mass' is reported for that row.

```



```

210     Because the proton numbering scheme can have a format
        '10' for hydrogen and '10' for neon (following MCNP ZAID
        naming conventions) if we don't find a value with the whole
        string of 'proton' then the program looks through the first
        element of string and tries to match that 'proton[0]'
        If no matches are found, and error is thrown out.

215     df = dataset with columns 'Protons' 'Isotopes' and
        'Relative_Atomic_Mass'. Dataset created with pandas

        proton = string with proton number (follow MCNP zaid format)

        Isotope = string with isotope number (just put the atomic mass
220     do not follow MCNP format - different for few cases)
        """
        #print(df)
        for i in range(0, len(df.Protons)):
            dfPro=str(df.Protons[i])
225             if proton==dfPro:
                dfIso=str(df.Isotope[i])
                if Isotope==dfIso:
                    Mass=df.Relative_Atomic_Mass[i]
                    break

230         try:
            Mass
        except NameError:
            for i in range(0, len(df.Protons)):
                dfPro=str(df.Protons[i])
235                 if proton[0]==dfPro:
                    dfIso=str(df.Isotope[i])
                    if Isotope==dfIso:
                        Mass=df.Relative_Atomic_Mass[i]
                        break

240         try:
            Mass
        except NameError:
            print("Could not find atomic mass for proton = "\
                +proton+" and for Isotope = "+Isotope)
245             Mass='10000.09(23)'
            Mass=Returnfloat(Mass)
            return(Mass)

def GatherMasses(df, Nuclides):
250     """
        Make numpy array of masses which correspond to isotopes in Nuclides
        Nuclides is a dictionary. Where each key is a zaid number
        """

255     Atom_Mass=np.zeros(len(Nuclides))
    for key,value in Nuclides.items():
        if not len(key)==6:
            print("Did not filter out the lower mass isotopes, quitting")
            quit()

```

```

260     proton=key[0:2]
        if key[2]=="0":
            Isotope=key[3:5]
        elif key[4]=="0" and float(proton)*3<100:
            Isotope=key[2:4]
265     elif key[2]!="0":
            Isotope=key[2:5]

    Mass=FindAtomicMass(df,proton,Isotope)
    if Mass>9000:
270         print("Mass is over 9,000!!!")
        print(key)
        quit()
    Atom_Mass[value]=Mass
    return (Atom_Mass)

275     #####
    ##### Functions for solving the system Ax=b (kind of) #####
    #####

280 def MatExp(A,n0,t,maxits,tolerance=1e-12,LOUD=False):

    converged = False
    m=0
    sum_old=n0.copy()*0

285     while not (converged):

        if m==0:
            APowerm=np.identity(A.shape[0])
290             Factorial=1
        else:
            APowerm=np.dot(APowerm,A)
            Factorial=Factorial*m
            Sum=sum_old+(1/Factorial)*np.dot((APowerm)*(t**m),n0)

295             #Avoid dividing by zero
            if sum(Sum)==0: m+=1;sum_old=Sum.copy();continue

        change = np.linalg.norm(Sum-sum_old)/np.linalg.norm(Sum)
300         converged = (change < tolerance) or (m > maxits)

        if (LOUD>0) or (converged and LOUD<0):
            print("Iteration",m," : Relative Change =",change)
        if (m > maxits):
305             print("Warning: Source Iteration did not converge : "+\
                    " m : "+str(m)+" , Diff : %.2e" % change)
            #Prepare for next iteration
            m += 1
            sum_old = Sum.copy()

310     return (Sum)

```

```

def BackEuler(A,no,dt):
    I=np.identity(A.shape[0])
315     return (np.dot(np.linalg.inv(I-A*dt),no))

def DeterminePolesNResidues(n):
    """
    This program takes the algorithm from the reference
320     and converts to a python script...I know its janky
    but it works
    """
    def Append(List1,List2):
        for item in List2:
325             for item2 in item:
                List1=np.append(List1,item2)
        return (List1)
    def absG(List):
        List2=[]
330         for item in List:
            if abs(item)>1:
                List2.append(item)
        return (List2)
    #function [zk,ck] = cf(n);
335     K = 75;                                # no of Cheb coeffs
    nf = 1024;                                # no of pts for FFT
    #Roots correct?
    roots=np.arange(0,nf,1)/nf
    #w = np.exp(2i*pi*(0:nf-1)/nf);           # roots of unity
340
    w=np.exp(2j*np.pi*roots)
    t = np.real(w);                           # Cheb pts (twice over)
    scl = 9;                                  # scale factor for stability
    #F = np.exp(scl*(t-1)./(t+1+1e-16)); # exp(x) transpl. to [-1,1]
345     F = np.exp(scl*(t-1)/(t+1+1e-16)); # exp(x) transpl. to [-1,1]
    c = np.real(np.fft.fft(F))/nf;             # Cheb coeffs of F
    index=reversed(np.arange(1,K+2,1))
    partofc=[]
    for i in index:
350         partofc.append(c[i-1])
    #f = np.polyval(c(K+1:-1:1),w);           # analytic part f of F
    f = np.polyval(partofc,w);               # analytic part f of F

    #[U,S,V] = svd(hankel(c(2:K+1)));         # SVD of Hankel matrix
355     hankie=scil.hankel(c[1:K+1])
    U,S,V=np.linalg.svd(hankie,full_matrices=False)

    #s = S(n+1,n+1);                         # singular value
    s=S[n]
360     #u = U(K:-1:1,n+1); v = V(:,n+1);     # singular vector
    u=[]
    index=reversed(np.arange(0,K,1))
    for i in index:
        u.append(U[i,n])
365     #v=np.array(V[:,n].copy())

```

```

v=np.array(V[n,:].copy())
#zz = zeros(1,nf-K);          # zeros for padding
zz=np.zeros([1,nf-K])
#b = fft([u zz])./fft([v zz]);    # finite Blaschke product
370 b=np.fft.fft(Append(u,zz))/np.fft.fft(Append(v,zz))
#rt = f-s*w.^K.*b;          # extended function r-tilde
rt=f-s*(w**K)*b;
#rtc = real(fft(rt))/nf;        # its Laurent coeffs
rtc=np.real(np.fft.fft(rt))/nf;
375 #zr = roots(v); qk = zr(abs(zr)>1); # poles
zr=np.roots(v);qk=np.array(absG(zr));
#qc = poly(qk);                # coeffs of denominator
qc=np.poly(qk);
#pt = rt.*polyval(qc,w);        # numerator
380 pt=rt*np.polyval(qc,w);
#ptc = real(fft(pt))/nf;        # coeffs of numerator
ptc=np.real(np.fft.fft(pt))/nf;
#ptc = ptc(n+1:-1:1); ck = 0*qk;
index=reversed(np.arange(0,n+1,1))
385 ptc2=[]
for i in index: #Can I just reversed ptc?
    ptc2.append(ptc[i])
ptc=ptc2.copy()
ck=0*qk
390 #N+1?
#for k = 1:n          # calculate residues
#    q = qk(k); q2 = poly(qk(qk~=q));
#    ck(k) = polyval(ptc,q)/polyval(q2,q);
for k in range(0,n):
395     if len(qk)==k:
         print("we are short a qk")
         continue
     q=qk[k];
     q2=[];
400     for item in qk:
         if not q==item:
             q2.append(item)
     q2=np.poly(q2);
     ck[k]=np.polyval(ptc,q)/np.polyval(q2,q)
405 #zk = scl*(qk-1).^2./(qk+1).^2;    # poles in z-plane
zk=scl*((qk-1)**2)/((qk+1)**2)
#ck = 4*ck.*zk./(qk.^2-1);          # residues in z-plane
ck=4*ck*zk/(qk**2-1)
#Cut down ck and zk to half the original points
410 ck2=[];zk2=[]
for i in range(0,len(ck)):
    if i % 2 == 0:
        ck2=np.append(ck2,ck[i])
        zk2=np.append(zk2,zk[i])
415
return (ck2,zk2)

def RationalPrep(N,Phi):

```

```

420     """Calculate constants for a rational approximation
Inputs:
N:          Number of Quadrature points
Phi:        'Parabola',
             'Cotangent', or
             'Hyperbola' (shape of Phi)

425     Outputs:
ck:          First set of constants for approximation
zk:          Second set of constants for approximation
"""

430     theta=np.pi*np.arange(1,N,2)/N
    if Phi=='Parabola':
        zk=N*(0.1309-0.1194*theta**2+0.2500j*theta)
        w=N*(-2*0.1194*theta+0.2500j)
    elif Phi=='Cotangent':
435         cot=1/np.tan(0.6407*theta)
        ncsc=-0.6407/(np.sin(0.6407*theta)**2)
        zk=N*(0.5017*theta*cot-0.6122+0.2645j*theta)
        w=N*(0.2645j+0.5017*cot+0.5017*theta*ncsc)
    elif Phi=='Hyperbola':
440         zk=2.246*N*(1-np.sin(1.1721-0.3443j*theta))
        w=2.246*N*(0.3443j*np.cos(1.1721-0.3443j*theta))
    elif Phi=='Best':
        ck,zk=DeterminePolesNResidues(N)
        return(ck,zk)
445     else:
        print("Did not pick proper rational approximation dude")
        print("Quitting now")
        quit()

450     ck=1.0j/N*np.exp(zk)*w
    return(ck,zk)

def RationalApprox(A,n0,t,N,ck,zk,tol=1e-12,maxits=2000):
    """
455     Calculate the rational approximation solution for n(t)
Inputs:
A:          Matrix with system to be solved
n0:         initial conditions of the system
t:          time at which solution is determined
460     N:          Number of quadrature points (should be less than 20)
ck:         constants for quadrature solution
zk:         constants for quadrature solution
tol:        Tolerance for convergence for GMRES
maxits:     Maximum iterations for GMRES
465     Outputs:
nt:         Solution at time t
"""
    nt=np.zeros(len(n0))
    for k in range(int(N/2)):
470         if len(n0)>1:
            #phi,code=spla.gmres(zk[k]*sparse.identity(len(n0))-A*t,n0,

```

```

#                                     tol=tol,maxiter=maxits)
phi=np.dot(np.linalg.inv(zk[k]*np.identity(len(n0))-A*t),
            n0)
475     #if (code):
#         print(code)
    else:
        phi=(zk[k]-A*t)**(-1)*n0
        nt=nt-2*np.real(ck[k]*phi)
480     return (nt)

#####
##### Plotting Functions #####
#####

485
def reduceList(List,N):
    List2=[List[0]]
    Div=int(len(List)/N)
    for i in range(1,len(List)-1):
490         if i % Div == 0:
            List2.append(List[i])
    List2.append(List[-1])
    return (List2)

495 def PlotPoints(Ntot,Nplot):
    t=1
def loop_values(list1,index):
    """
    This function will loop through values in list even if
500    outside range (in the positive sense not negative)
    """
    while True:
        try:
            list1[index]
505            break
        except IndexError:
            index=index-len(list1)
    return (list1[index])

510 def Legend(ax):
    handles,labels=ax.get_legend_handles_labels()
    ax.legend(handles,labels,loc='best',
              fontsize=LegendFontSize,prop=font)
    return (ax)

515
# def Legend(ax):
#     handles,labels=ax.get_legend_handles_labels()
#     box=ax.get_position()
#     ax.set_position([box.x0, box.y0, box.width*SquishGraph,
520 #                     box.height])
#     ax.legend(handles,labels,loc='center',
#               bbox_to_anchor=(BBOXX,BBOXY),
#               fontsize=LegendFontSize,prop=font,
#               ncol=NumberOfLegendColumns)

```

```

525 #         return(ax)

def InList(item2,List):
    TF=False
    for item1 in List:
530         if item1 == item2:
            TF=True
    if not TF:
        print("Invalid selection for plotting")
        print("Shuting down")
535     quit()

def plot(df,Plotting,Name,NumOfPoints):
    #Plot In grams
    fig=plt.figure(figsize=FigureSize)
540     ax=fig.add_subplot(111)

    List=list(df.columns.values)
    x=df[List[0]].values[2:]

    Check=0
545     for Item in Plotting:
        InList(Item,List) #Check if we have the isotope
        y=((df[Item].values[2:])/Na)*df[Item].values[0]
        if len(x)>NumOfPoints:
550             x=reduceList(x,NumOfPoints)
            y=reduceList(y,NumOfPoints)
            ax.plot(x,y,
                    linestyle=loop_values(LineStyles,Check),
                    marker=loop_values(MarkerType,Check),
555             color=loop_values(Colors,Check),
                    markersize=loop_values(MarkSize,Check),
                    alpha=loop_values(Alpha_Value,Check),
                    label=Item)
            Check=Check+1
560

    #Log or linear scale?
    ax.set_xscale(XScale)
    ax.set_yscale(YScale)
565     #Set Title
    fig.suptitle(Title,fontsize=TitleFontSize,
                 fontweight=TitleFontWeight,fontdict=font,ha='center')
    #Set X and y labels
    ax.set_xlabel(Xlabel,
570                 fontsize=XFontSize,fontweight=XFontWeight,
                 fontdict=font)
    ax.set_ylabel(Ylabel,
                 fontsize=YFontSize,
                 fontweight=YFontWeight,
575                 fontdict=font)

    Legend(ax)

```

```

plt.savefig("Plots/"+Name+'_grams.pdf')

580  #Plot in Bq #####

fig=plt.figure(figsize=FigureSize)
ax=fig.add_subplot(111)

585  List=list(df.columns.values)
x=df[List[0]].values[2:]

Check=0;Sum=np.zeros(len(x))
for Item in Plotting:
590  InList(Item,List) #Check if we have the isotope
y=((df[Item].values[2:]))*df[Item].values[1]
Sum=Sum+y
if len(x)>NumOfPoints:
    xP=reduceList(x,NumOfPoints)
595    y=reduceList(y,NumOfPoints)
    ax.plot(xP,y,
            linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
600            markersize=loop_values(MarkSize,Check),
            alpha=loop_values(Alpha_Value,Check),
            label=Item)
    Check=Check+1
if len(x)>NumOfPoints:
605    Sum=reduceList(Sum,NumOfPoints)
ax.plot(xP,Sum,
        linestyle=loop_values(LineStyles,Check),
        marker=loop_values(MarkerType,Check),
        color=loop_values(Colors,Check),
610        markersize=loop_values(MarkSize,Check),
        alpha=loop_values(Alpha_Value,Check),
        label="Sum")

#Log or linear scale?
615 ax.set_xscale(XScale)
if sum(Sum)==0:
    ax.set_yscale('linear')
else:
    ax.set_yscale(YScale)
620 #Set Title
fig.suptitle(Title,fontsize=TitleFontSize,
            fontweight=TitleFontWeight,fontdict=font,ha='center')
#Set X and y labels
ax.set_xlabel(Xlabel,
625             fontsize=XFontSize,fontweight=XFontWeight,
             fontdict=font)
YlabelBq="Activity  $\left[\frac{Bq}{t_{HM}}\right]$ "
ax.set_ylabel(YlabelBq,
630             fontsize=YFontSize,
             fontweight=YFontWeight,

```



```

        fontdict=font)

    Legend(ax)
    plt.savefig("Plots/"+Name+'_Bq.pdf')
635
def plots2(df,df2,Plotting,Name,NumOfPoints,Method1,Method2):
    #Plot in grams
    fig=plt.figure(figsize=FigureSize)
    ax=fig.add_subplot(111)
640

    List=list(df.columns.values)
    x=df[List[0]].values[2:]
    x2=df2[List[0]].values[2:]

645
    Check=0
    for Item in Plotting:
        InList(Item,List) #Check if we have the isotope
        y=((df[Item].values[2:])/Na)*df[Item].values[0]
        y2=((df2[Item].values[2:])/Na)*df2[Item].values[0]
650
        if len(x)>NumOfPoints:
            x=reduceList(x,NumOfPoints)
            y=reduceList(y,NumOfPoints)
        if len(x2)>NumOfPoints:
            x2=reduceList(x2,NumOfPoints)
655
            y2=reduceList(y2,NumOfPoints)
        ax.plot(x,y,
                linestyle=loop_values(LineStyles,Check),
                marker=loop_values(MarkerType,Check),
                color=loop_values(Colors,Check),
660
                markersize=loop_values(MarkSize,Check)*1.5,
                alpha=loop_values(Alpha_Value,Check),
                label=Item+" "+Method1)

        Check=Check+1
        ax.plot(x2,y2,
665
                linestyle=loop_values(LineStyles,Check),
                marker=loop_values(MarkerType,Check),
                color=loop_values(Colors,Check),
                markersize=loop_values(MarkSize,Check),
                alpha=loop_values(Alpha_Value,Check),
670
                label=Item+" "+Method2)

        Check=Check+1

    #Log or linear scale?
675
    ax.set_xscale(XScale)
    ax.set_yscale(YScale)
    #Set Title
    fig.suptitle(Title,fontsize=TitleFontSize,
                 fontweight=TitleFontWeight,fontdict=font,ha='center')
680
    #Set X and y labels
    ax.set_xlabel(Xlabel,
                 fontsize=XFontSize,fontweight=XFontWeight,
                 fontdict=font)

```

```

ax.set_ylabel(Ylabel,
685         fontsize=YFontSize,
         fontweight=YFontWeight,
         fontdict=font)

Legend(ax)
690 plt.savefig("Plots/"+Name+' _Grams.pdf')

#Plot in Bq
fig=plt.figure(figsize=FigureSize)
695 ax=fig.add_subplot(111)

List=list(df.columns.values)
x=df[List[0]].values[2:]
x2=df2[List[0]].values[2:]

700 Check=0;Sum=np.zeros(len(x));Sum2=np.zeros(len(x2))
for Item in Plotting:
    InList(Item,List) #Check if we have the isotope
    y=((df[Item].values[2:]))*df[Item].values[1]
705 y2=((df2[Item].values[2:]))*df2[Item].values[1]
    Sum=Sum+y
    Sum2=Sum2+y2
    if len(x)>NumOfPoints:
        xP=reduceList(x,NumOfPoints)
710 y=reduceList(y,NumOfPoints)
    else:
        xP=x.copy()
    if len(x2)>NumOfPoints:
        xP2=redcueList(x2,NumOfPoints)
715 y2=reduceList(y2,NumOfPoints)
    else:
        xP2=x2.copy()
    ax.plot(xP,y,
            linestyle=loop_values(LineStyles,Check),
720 marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
            markersize=loop_values(MarkSize,Check)*1.5,
            alpha=loop_values(Alpha_Value,Check),
            label=Item+" "+Method1)
725 Check=Check+1
    ax.plot(xP2,y2,
            linestyle=loop_values(LineStyles,Check),
            marker=loop_values(MarkerType,Check),
            color=loop_values(Colors,Check),
730 markersize=loop_values(MarkSize,Check),
            alpha=loop_values(Alpha_Value,Check),
            label=Item+" "+Method2)
    Check=Check+1
    if len(x)>NumOfPoints:
735 Sum=reduceList(Sum,NumOfPoints)
    if len(x2)>NumOfPoints:

```

```

    Sum2=reduceList (Sum2,NumOfPoints)
    ax.plot (xP, Sum,
        linestyle=loop_values (LineStyle,Check),
740         marker=loop_values (MarkerType,Check),
        color=loop_values (Colors,Check),
        markersize=loop_values (MarkSize,Check) *1.5,
        alpha=loop_values (Alpha_Value,Check),
        label="Sum "+Method1)
745    Check=Check+1
    ax.plot (xP2, Sum2,
        linestyle=loop_values (LineStyle,Check),
        marker=loop_values (MarkerType,Check),
        color=loop_values (Colors,Check),
750         markersize=loop_values (MarkSize,Check),
        alpha=loop_values (Alpha_Value,Check),
        label="Sum "+Method2)

    #Log or linear scale?
755    ax.set_xscale (XScale)
    if sum (Sum)==0:
        ax.set_yscale ('linear')
    else:
        ax.set_yscale (YScale)
760

    #Set Title
    fig.suptitle (Title, fontsize=TitleFontSize,
        fontweight=TitleFontWeight, fontdict=font, ha='center')
    #Set X and y labels
765    ax.set_xlabel (Xlabel,
        fontsize=XFontSize, fontweight=XFontWeight,
        fontdict=font)
    YlabelBq="Activity  $\left[\frac{Bq}{t_{HM}}\right]$ "
    ax.set_ylabel (YlabelBq,
770         fontsize=YFontSize,
        fontweight=YFontWeight,
        fontdict=font)

    Legend (ax)
775    plt.savefig ("Plots/"+Name+'_Bq.pdf')

def ListToStr (List):
    Str=''
    for i in range (0, len (List)):
780         if not i==len (List)-1:
            Str=Str+str (List[i])+", "
        else:
            Str=Str+str (List[i])+"\n"
    return (Str)
785

def PrepFile (Name, n0, nuclide_names, atom_mass, decay_consts):
    File=open (Name, 'w')
    File.write ("Mass then Time (d), "+','.join (nuclide_names)+'\n')
    File.write ("Masses, "+ListToStr (atom_mass)) #New line already included

```

```

790     File.write("DecayConfs,"+ListToStr(decay_consts))
    File.write("0,"+ListToStr(n0))
    return (File)

def Print (Method,nuclide,Results,Time,nuclides,atom_mass,nuclide_names):
795     Index=nuclides[nuclide]
    MassConversion=atom_mass[Index]/Na
    string="Isotope "+nuclide_names[Index]+" , Mass (g) = "
    Mass=Results[Index]*MassConversion
    Mass="%.4e" % Mass
800     print (Method+" :",string,Mass,"Time=%.2f" % Time)

#####
##### for calculatin phi #####
805 #####

def FindFissionXSection(Fissile_Isotopes):

    FissionXSections=np.zeros(len(Fissile_Isotopes))

810     with open('Data/tape9.inp') as f:  #Save all X-section data to variable
        TAPE9Content=f.readlines()

    for i in range(0,len(Fissile_Isotopes)): #Loop through fissile isos
815         parent=Fissile_Isotopes[i]

        for line in TAPE9Content: #Loop through x-section data
            hold=line.split()

820             if '602' == hold[0] and hold[1]==parent:  #Find x-section
                FissionXSections[i]=hold[5]
                break
    return (FissionXSections)

825 def CalMevPerFiss (Fissile_Isotopes):
    """
    Given a list of fissile isotopes
    return a list of MeV/fission numbers
    calculated from an equation
830    """
    MeVperFission=np.zeros(len(Fissile_Isotopes))
    for i in range(0,len(Fissile_Isotopes)):
        isotope=Fissile_Isotopes[i]
        proton=isotope[0:2]
835         if isotope[2]=="0":
            Anum=isotope[3:5]
            elif isotope[4]=="0" and float (proton)*3<100:
                Anum=isotope[2:4]
            elif isotope[2]!="0":
840                 Anum=isotope[2:5]
            else:
                print ("Missed logic in finding A number")

```

```

quit()
if int(Anum)<int(proton):
    print("Something is wrong, more protons than neutrons")
    print("Proton: ",proton,"A: ",Anum,"ZAID :",isotope)
    quit()
MeVperFission[i]=1.29927*(10**-3)*(float(proton)**2)*(float(Anum)**0.5)+33.12
return (MeVperFission)

def Calculatephi(FissionXSections,MeVperFission,n0,Power,Fissile_Isotopes,Nuclides):
    Sum=0
    for i in range(0,len(FissionXSections)):
        sigma=FissionXSections[i]*10**-24
        E=MeVperFission[i]
        N=n0[Nuclides[Fissile_Isotopes[i]]]
        Sum=Sum+sigma*E*N
    phi=(6.2414959617521E18*Power)/Sum
    return (phi)

def Makeb(Nuclides):

    b = np.zeros(len(Nuclides))
    b[Nuclides['922340']] = 6.94741E23
    b[Nuclides['922350']] = 7.6864E25
    b[Nuclides['922380']] = 2.4532E27
    return (b)

#####
##### For Building A and b #####
#####

class DecayClass:
    def __init__(self):
        self.FBX = 0. # 'The fraction of negatron beta decay transitions that results in
                        # in the daughter nuclide being in a relatively long-lived state'
                        # I think this should read the fraction of all decay events which are.

        self.IDFBX = '' # ZAID for daughter for FBX
        self.FPEC = 0. # Fraction of all decay events which are positron or EC
        self.IDFPEC = '' # ZAID for daughter for FPEC
        self.FPECX = 0. # Fraction of all EC or positron decays which result in excited state
        self.IDFPECX= '' # ZAID for daughter for FPECX
        self.FA = 0. # Fraction of all decay events which are alpha
        self.IDFA = '' # ZAID for daughter for alpha
        self.FIT = 0. # 'fraction of all the decay events of an excited nuclear state
                        # which result in the production of the ground state of the same nuclide

        self.IDFIT = '' # ZAID for daughter of FIT
        self.FSF = 0. # Fraction that decay events that are spontaneous fission
                        # No daughter listed, will loop through all elements for yields
        self.FN = 0. # Fraction of all decay events that are beta + neutron decays
        self.IDFN = '' # ZAID for daughter for FN
        #Note: Negatron beta decay = 1 - FBX - FPEC - FA - FIT - FSF - FN

```

```

        self.FB      = 0. # Fraction of all decay events which are beta
        self.IDFB    = ''

900 def FindPotentialMatch(List,protons,A,Fraction,Excited,LOUD=False):
    if(Fraction<0 or Fraction>1):
        print("Fraction of decays is too low or high : ",Fraction)
        print("Inquire further")
        quit()
905     if Fraction>0:
        for item in List:
            if protons in item[0:2] and A in item[: -1] and item[-1]==Excited:
                Toretturn=item

        else:
910             Toretturn=''
        try: #To make sure its defined
            Toretturn
        except NameError:
            if LOUD:
915                 print("Could not find daughter in list of isotopes when expecting one")
                 print("Looking for Protons : ",protons," Total Nucleons : ",A," Fraction",Fraction)
                 #print("Close items are")
                 #for item in List:
                 #    if protons in item[: -1] and A in item[: -1]:
920                     #        print(item)
            if (Fraction<2):
                if LOUD:
                    print("Assuming it doesn't matter, will let slide")
                    Toretturn=''
925             else:
                quit()

        return(Toretturn)

930 def DecayInfo(Nuclide_Names,parent,Lambda,proton,A):
    """
    This function will store and return decay information from
    the tape9.inp file
935    """

    Info=DecayClass()

    with open('Data/tape9.inp') as f:
940         TAPE9Content=f.readlines()

    Found=False
    for line in TAPE9Content:
        hold=line.split()

945         #Looking at second line in each library (put this if statement above below)
        if Found:
            #Spontaneous fission

```

```

Info.FSF=float(hold[1])
950  #Beta plus neutron
Info.FN=float(hold[2])
Info.IDFN=FindPotentialMatch(Nuclide_Names,str(int(proton)+1),str(int(A)-1),Info.FN,
break

955  #Looking for fission product and actinide decay information
#The libraries we are looking through for this information are '2' and '3'
if ('2' == hold[0] or '3' == hold[0]) and hold[1]==parent:
    Found=True

960  #Beta minus to excited
Info.FBX=float(hold[4])
Info.IDFBX=FindPotentialMatch(Nuclide_Names,str(int(proton)+1),A,Info.FBX,'1')
#positron or EC
Info.FPEC=float(hold[5]) #Total positron or EC
965 Info.FPECX=float(hold[6]) #percent of above to excited
if Info.FPECX < 1:
    Info.IDFPEC=FindPotentialMatch(Nuclide_Names,str(int(proton)-1),A,Info.FPEC,'0')
    Info.IDFPECX=FindPotentialMatch(Nuclide_Names,str(int(proton)-1),A,Info.FPECX,'1')
    Info.FA=float(hold[7]) #Fraction of events that are alpha
970 Info.IDFA=FindPotentialMatch(Nuclide_Names,str(int(proton)-2),str(int(A)-4),Info.FA,
#Excited state to ground state
Info.FIT=float(hold[8])
Info.IDFIT=FindPotentialMatch(Nuclide_Names,proton,A,Info.FIT,'0')

975 #Calculate the beta
Info.FB=1-Info.FBX-Info.FPEC-Info.FA-Info.FIT-Info.FSF-Info.FN

if(Info.FB<0 or Info.FB>1):
    #print("Fraction of beta decays is too low or high : ",Info.FB)
980 if abs(Info.FB)<7e-4 or abs(Info.FB-1)<7e-4:
    #print("But I'll let it slide and set to zero")
    Info.FB=0
else:
    print("I can't let this slide, not small enough")
985 print("Beta excited",Info.FBX)
print("EC",Info.FPEC)
print("Alpha decay ground",Info.FA)
print("Excited to ground",Info.FIT)
print("Spontaneous fission",Info.FSF)
990 print("Beta Plus neutron",Info.FN)
quit()

if Lambda>0:
    Info.IDFB=FindPotentialMatch(Nuclide_Names,str(int(proton)+1),A,Info.FB,'0')
995

#Make sure all decay fractions add to one (for some reason the EC to excited is
# probability given a EC
FPEC=(1-Info.FPECX)*Info.FPEC
FPECX=Info.FPECX*Info.FPEC
1000 Info.FPEC=FPEC
Info.FPECX=FPECX

```

```

    return (Info)

1005
def FindPotentialMatchX(List,protons,A,XSection,Excited,Lambda,LOUD=False):
    if (XSection<0):
        print ("Fraction of decays is too low",XSection)
        print ("Inquire further")
1010
        quit()
    if XSection>0:
        for item in List:
            if protons in item[0:2] and A in item[:-1] and item[-1]==Excited:
                Toretturn=item

1015
    else:
        Toretturn=''
    try: #To make sure its defined
        Toretturn
    except NameError:
1020
        if LOUD:
            print ("Could not find daughter in list of isotopes when expecting one")
            print ("Looking for Protons : ",protons," Total Nucleons : ",A," XSection ",XSection)
            print ("Lambda = ",Lambda)
            #print("Close items are")
            #for item in List:
            #     if protons in item[:-1] and A in item[:-1]:
            #         print(item)
            if (XSection<100000 or Lambda>0.1):
                if LOUD:
1030
                    print ("Assuming it doesn't matter, will let slide")
                    Toretturn=''
                    XSection=0
                else:
                    quit()

1035
    return (Toretturn,XSection)

class XSectionClass:
    def __init__(self):
1040
        self.SNG = 0      # the effective, one group (n,y) x-section leadin to ground state
        self.IDSNG = ''   # ZAID ID for the above
        self.SN2N = 0.    # the effective, one group (n,2n) x-section leading to ground state
        self.IDSN2N = ''  # ZAID ID for the above
        self.SN3N = 0     # effective to ground
1045
        self.IDSN3N = ''  # ZAID for daughter for above
        self.SNA = 0.     # effective to ground n,alpha
        self.IDSNA = ''   # ZAID for daughter for above
        self.SNF = 0.
        self.SNP = 0.    #
1050
        self.IDSNP = ''  # ZAID for daughter for above
        self.SNGX = 0.   #
        self.IDSNGX = '' # ZAID for daughter of above
        self.SN2NX = 0.  #
        self.IDSN2NX = '' # ZAID for daughter for above

```



```

1055 def XSectionInfo(Nuclide_Names,parent,L,proton,A):
    """
    This function will store and return decay information from
1060 the tape9.inp file
    """

    Info=XSectionClass()

1065 with open('Data/tape9.inp') as f:
    TAPE9Content=f.readlines()

    Found=False
    for line in TAPE9Content:
1070         hold=line.split()

        #Looking for fission product and actinide cross section information
        #The libraries we are looking through for this information are '602' and '603'
        #set a cross section to zero if daughter is not found (second return of FindPotentialMat
1075         if ('602' == hold[0] or '603' == hold[0]) and hold[1]==parent:

            # (n, gamma)
            Info.SNG=float(hold[2])
            Info.IDSNG,Info.SNG=FindPotentialMatchX(Nuclide_Names,proton,str(int(A)+1),Info.SNG,
1080             #n, 2n
            Info.SN2N=float(hold[3])
            Info.IDSN2N,Info.SN2N=FindPotentialMatchX(Nuclide_Names,
                                                         proton,str(int(A)-1),Info.SN2N,'0',L)

            if '602' == hold[0]: #Actinides
1085                 #n, 3n
                Info.SN3N=float(hold[4])
                Info.IDSN3N,Info.SN3N=FindPotentialMatchX(Nuclide_Names,
                                                             proton,str(int(A)-2),Info.SN3N,'0',L)

                #n, f
1090                 Info.SNF=float(hold[5])
            if '603' == hold[0]: #Fission products
                #n, alpha
                Info.SNA=float(hold[4])
                Info.IDSNA,Info.SNA=FindPotentialMatchX(Nuclide_Names,str(int(proton)-2),str(int
1095                 Info.SNA,'0',L)

                #n, p
                Info.SNP=float(hold[5])
                Info.IDSNP,Info.SNP=FindPotentialMatchX(Nuclide_Names,
                                                         str(int(proton)-1),A,Info.SNP,'0',L)

1100             # (n, gamma) excited
            Info.SNGX=float(hold[6])
            Info.IDSNGX,Info.SNGX=FindPotentialMatchX(Nuclide_Names,proton,
                                                         str(int(A)+1),Info.SNGX,'1',L)

            # (n, 2n) excited
1105             Info.SN2NX=float(hold[7])
            Info.IDSN2NX,Info.SN2NX=FindPotentialMatchX(Nuclide_Names,proton,
                                                         str(int(A)-1),Info.SN2NX,'1',L)

```

```

1110     return (Info)

def YieldInfo(yieldiso,holdIndex,LOUD=False):
    with open('Data/tape9.inp') as f:
        TAPE9Content=f.readlines()

1115    Found=False;Yield=False
    for line in TAPE9Content:
        hold=line.split()

        if Found:
1120            if Yield:
                returnyield=float(hold[holdIndex])
            else:
                returnyield=0
            break
1125    if '603' == hold[0] and hold[1]==yieldiso:
        Found=True
        if float(hold[8])>0:
            Yield=True
        else:
1130            Yield=False

    if not Found:
        if LOUD:
            print("Did not find a yield for ",yieldiso)
1135    returnyield=0
    return (returnyield)

def AddFission(A,Nuclides,isotope,c1,c2,row,LOUD=False):
1140    if isotope=="922320": #Th232
        #print("Th232")
        holdIndex=1
        element="Th232"
    elif isotope=="922330": #U233
1145        #print("U233")
        holdIndex=2
        element="U233"
    elif isotope=="922350": #U235
        #print("U235")
        holdIndex=3
1150        element="U235"
    elif isotope=="922380": #U238
        #print("U238")
        holdIndex=4
        element="U238"
1155    elif isotope=="942390": #Pu239
        #print("Pu239")
        holdIndex=5
        element="Pu239"
    elif isotope=="942410": #Pu241
1160        #print("Pu241")

```

```

        holdIndex=6
        element="Pu241"
    elif isotope=="962450": #Cm245
        #print("Cm245")
1165     holdIndex=7
        element="Cm245"
    elif isotope=="982490": #Cf249
        #print("Cf249")
1170     holdIndex=8
        element="Cf249"
    else:
        if LOUD:
            print("Did not find yields for ",isotope," because not provided")
            holdIndex=100
1175
    if holdIndex<40:
        YieldSum=0 #Check what the yields sum up to
        for yieldiso in Nuclides:
            actualrow=Nuclides[yieldiso]
1180             Yield=YieldInfo(yieldiso,holdIndex,LOUD=False)
            A[actualrow,row]=A[actualrow,row]+c1*c2*Yield/100
            YieldSum=YieldSum+Yield
            if LOUD:
                print("Yield Sum for ",element," = ",YieldSum)
1185     return (A)

def MakeAb(phi,Nuclides,Nuclide_Names,Decay_Conts):

    # Create Activation and Decay Matrix and initial
1190     # nuclide quantity vector
    A = np.zeros((len(Nuclides),len(Nuclides)))

    #10^14 1/cm^2/s in 1/cm^2 /year #Bars included
    phi = phi * 60 * 60 * 24 * 365.25 *(10**(-24))
1195

    for isotope in Nuclides:
        row = Nuclides[isotope]
        proton=isotope[0:2]
1200         if isotope[2]=="0":
            Anum=isotope[3:5]
            elif isotope[4]=="0" and float(proton)*3<100:
                Anum=isotope[2:4]
            elif isotope[2]!="0":
1205                 Anum=isotope[2:5]
            else:
                print("Missed logic in finding A number")
                quit()
            if int(Anum)<int(proton):
1210                 print("Something is wrong, more protons than neutrons")
                print("Proton: ",proton,"A: ",Anum,"ZAID :",isotope)
                quit()

```

```

1215     #print(row,isotope,Decay_Conts[row])
    Lambda=Decay_Conts[row]
    #Store all decay and x section information for row (I think I mean column)
    row_decay = DecayInfo(Nuclide_Names,isotope,Lambda,proton,Anum)
    row_XSection=XSectionInfo(Nuclide_Names,isotope,Lambda,proton,Anum)

1220     #Convert Lambda to years^-1 (If radioactive)
    if Lambda>0:
        Lambday=Lambda*60*60*24*365.25
    else:
        Lambday=0

1225     XList=["SN2N","SN2NX","SN3N","SNA","SNG","SNGX","SNP","SNF"]
    DList=["FA","FB","FBX","FIT","FN","FPEC","FPECX","FSF"]

    #Useful to see things
1230     #for a in dir(row_XSection):
    #     if not a.startswith('__'):
    #         print(a)
    #         print(getattr(row_XSection,a))
    #quit()
1235     #for a in dir(row_decay):
    #     if not a.startswith('__'):
    #         print(a)
    #         print(getattr(row_decay,a))
    #quit()

1240     #Sum up all the sigma abs
    sigma_sum=0
    for xsec in XList:
        sigma_sum=sigma_sum+getattr(row_XSection,xsec)

1245     # Diagonal Assignment
    A[row,row] = -Lambday - phi*sigma_sum

    ##does a single isotope produce another isotope through more than one path
1250     ##like EC and NP
    #for xsec in XList:
    #     for decay in DList:
    #         if not decay[-1]!='F' and not "F" in xsec and len(getattr(row_decay,"ID"+decay))>1:
    #             if getattr(row_XSection,"ID"+xsec) == getattr(row_decay,"ID"+decay):
1255     #                 print("Isotope ",getattr(row_XSection,"ID"+xsec),"Produced from ",
    #                     isotope," with RNS ",decay,xsec)
    #                 print("Both will be used")

    #Off diagonal assignment adding x-sec productions except from fission
1260     for xsec in XList:
        if not "F" in xsec: #Don't do fission yet
            Product=getattr(row_XSection,"ID"+xsec)
            if len(Product)>1:
                actualrow=Nuclides[Product]
1265                A[actualrow,row]=A[actualrow,row]+phi*getattr(row_XSection,xsec)

    #Off diagonal assignment adding all decay except from spontaneous fission

```

```
1270     for decay in DList:
1275         if not decay[-1]=='F':
            Product=getattr(row_decay,"ID"+decay)
            if len(Product)>1:
                actualrow=Nuclides[Product]
                A[actualrow,row]=A[actualrow,row]+Lambday*getattr(row_decay,decay)

            #Now for xfission (these next two if statements take the longest)
            if row_XSection.SNF>0:
                A=AddFission(A,Nuclides,isotope,row_XSection.SNF,phi,row,LOUD=False)
            #Now for spontaneous fission
            if row_decay.FSF>0:
                A=AddFission(A,Nuclides,isotope,row_decay.FSF,Lambday,row,LOUD=False)

1280
1285     b = np.zeros(len(Nuclides))
        b[Nuclides['922340']] = 6.94741E23
        b[Nuclides['922350']] = 7.6864E25
        b[Nuclides['922380']] = 2.4532E27

    return (A,b)
```