
INSIS

User Documentation

Policy Rules v10.5.4.0

October 25, 2019

fadata

Updated Information	1
Policy Rules Life Cycle	2
CFG Policy Rules	3
Using Policy Rules	3
Policy Rules Definitions	3
Policy Rules Description	5
Rule Codes Attributes	7
Rule Nomenclatures Attributes	8
CFG_POLICY_RULES Attributes	9
CFG_POLICY_RULES_ATTR Attributes	12
CFG_POLICY_RULES_VALUES Attributes	14
CFG_ATTR_CODE Attributes	15
Rule Types Description	16
Rules Definition Types Description	20
Rules Configuration in Master, Dependent and Regular Policies	22
Policy Rules Configuration in Policies	22
Master Policy	23
Dependent Policy	25
Regular Individual Policy	27
Regular Combined Policy	28
Configure Policy Rule	29
Configure Policy Rule	29
Rule Allowance Description	30
Configure a Policy Rule with Rule Allowance	31
CFG_POLICY_RULES_ALLOWANCE Table Description	33
ATTRn- Additional Attributes	35
Specific Rules Configuration	36
Defining Rule Allowance	36
Configure Allowance	36
Rule Allowance for Policy and Claim	39
Review Policy Rule Types	41
Defining Eligibility Rules	42
Eligibility Rules Overview	42
Create Eligibility Rules	43
Eligibility Rules Attributes	45
Registering Policy Rule for Indemnity Corrections	47
Create Policy Rule for Indemnity Corrections	48
Policy Rules Attributes	50

Create Financial Rules	52
INSIS Product Configurator	54
Rule Configuration	54
INSIS Operational Modules	56
Policy Rules Administration	56
Policy Rules Results	58


Updated Information

The following changes were introduced to this document after its initial release.

Date	Change Description
17 JUL 2019	Initial release

Policy Rules Life Cycle

The main purpose of this document is to present step by step the process of creation, modification and the usage of policy rules.

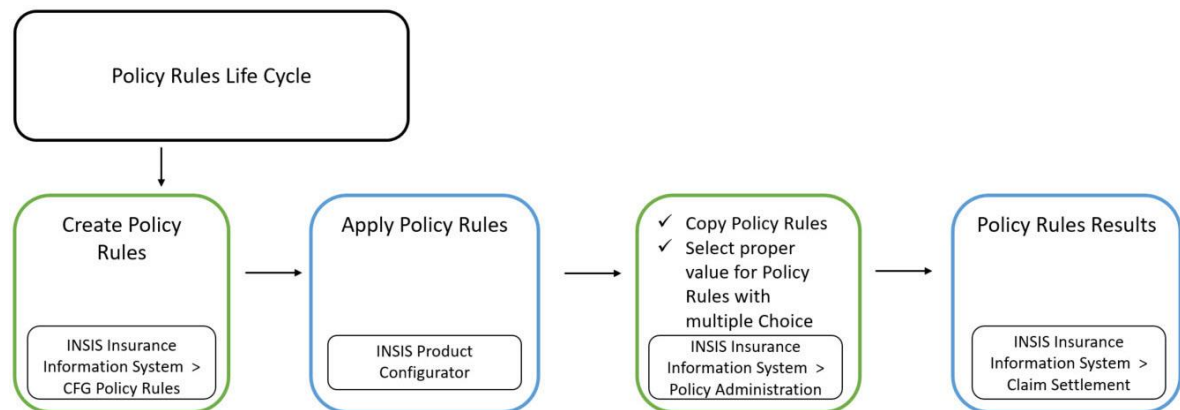

CFG Policy Rules

Using Policy Rules

Policy Rules Definitions

For better understanding of the following definitions, you must be familiar with Master policy and Dependent policy and the way they are related. Conditions created in Master policies are inherited by dependent policies.

There are two types of Regular policies:

- Regular Individual policies with only individual objects registered.
- Regular Combined policy that may contains plans, objects connected with plans, individual objects, and rules, which are defined in one and the same policy.

The first section explains the main objects used in above policy types.

Policy Objects

Policy Rule Plan is a virtual object that is not related to premium collection and claim registration. This object is created in Master and Regular Combined policies.

The plan is a type of object that assigns a group or a subgroup. The plan defines one or more rules and policy conditions for the policy. These rules and conditions are inherited by real insurance objects that are connected to the plan.

Object type of the plan is a part of nomenclature table of the types `HST_Object_Type`, as `main_object_type` is always in group 8 and Name is 'Insured Group', and a `GRP_USAGE` is GRP or SUBGRP.

In the policy, policy rules are defined in the following tables: `policy_rules`, `Policy_rules_attr`, `policy_rules_values`.

If a policy rule is defined on plan level, it will appear on object level in case the objects are connected to the plan.

Insured Objects inherit policy rules from the plan.

Interaction between Policy Rules and Policy Objects

In contrast to the plan, you can configure policy rules on a certain level:

- **Policy** - Policy rule is applicable to the policy without any difference if a certain rule is configured in a policy plan or in a policy object.
- **Group** - Rule that defines group level in the policy.
- **Dependent** - Rule configured on a real insured object. This rule is inherited by already created plan and inherits all plan conditions.

Note: All the rules above can restrict plan conditions but never allow other conditions than inherited by the plan.

-
-
- **Individual** - Rule configured on individual or regular insured object has the restrictions only defined in the configuration, if applicable.

Policy Rules Description

To define a rule, you should use four tables in CFG Policy Rules screen. Two of these tables are mandatory: CFG_POLICY_RULES, CFG_POLICY_RULES_ATTR, and the other two are optional: CFG_POLICY_RULES_VALUES, CFG_ATTR_CODE.

- CFG_POLICY_RULES is the main table, in which rules must be defined.

CFG_POLICY_RULES

View

Create

Delete

Copy Row

Excel

Detach

* RuleCfgId	* InsrType	* RuleOr	* RuleKeyCondition	* RuleDef	RuleUsage	TimeFrame	TotPaid	TotDed	* RuleCalcType	RuleOn	* ReRuleType	RuleText
66700000000031	900	1	LIMIT	Cover	Financial	Policy	☒	☐	Limit that cannot be exceeded	Service amount	HIC_LHMBPO	Policy limit per Member for IP
66700000000032	900	1	LIMIT	Cover	Financial	Policy	☒	☐	Limit that cannot be exceeded	Service amount	HIC_LHMBPO	Policy Limit per Member for OP
66700000000033	900	2	LIMIT	Cover	Financial	Policy	☒	☐	Limit that cannot be exceeded	Service amount	HIC_LMHFPO	Policy Limit per Family for OP
66700000000034	900	2	LIMIT	Cover	Financial	Policy	☒	☐	Limit that cannot be exceeded	Service amount	HIC_LMHFPO	Policy Limit per Family for IP-DNTL
66700000000035	900	2	LIMIT	Cover	Financial	Policy	☒	☐	Limit that cannot be exceeded	Service amount	HIC_LMHFPO	Policy Limit per Family for IP-CONGE
66700000000036	900	10	LIMIT	Cover	Financial	Policy	☒	☐	Limit that cannot be exceeded	Service amount	HIC_LMHFPO	Policy Limit per Family for IP-PC

- Parameters can be specified for each rule, if necessary. This should be done in CFG_POLICY_RULES_ATTR table.
Parameters can determine some specific result, restrictions or rule allowance.

CFG_POLICY_RULES_ATTR				
View Create Delete Excel Detach				
RuleCfgId	* DefinitionType	Mandatory	Optional	
66700000000104	Case Type	☒	☐	
66700000000104	Numeric	☒	☐	
66700000000104	Rule Allowan	☒	☐	

- If in the CFG_POLICY_RULES_ATTR table, a **Numeric** Definition Type is specified, then the actual values should be defined in CFG_POLICY_RULES_VALUES table.
This table is used when particular value or a list of values should be set for the rule parameter, defined in the upper form. If more than one record is defined here, then in Policy Rules CFG (when the user sets this rule) the user will choose one of the configured values.

CFG_POLICY_RULES_VALUES					
View Create Delete Copy Row Excel Detach					
RuleCfgId	DefinitionType	* RuleValue	* ValueType	ValueDim	Currency
66700000000097	NUMERIC	30	A Amount	V Value	EUR

This form is only used for **Numeric** Definition Type.

- CFG_ATTR_CODE Table is used for all the cases of **Definition Type** different than Numeric. For every **Definition Type** defined in the form above, one or more records can be set.

RuleCfgId	DefinitionType	* AttrCode
66700000000104	CASETYPE	CLAIM

Note: The database tables corresponding to this configuration are CFG_POLICY_RULES , CFG_POLICY_RULES_ATTR , CFG_POLICY_RULES_VALUES and CFG_ATTR_CODE. They are in the INSIS_PPX_V10 schema.

Related Information

- [CFG_POLICY_RULES Attributes](#)(see page 9)
- [CFG_POLICY_RULES_ATTR Attributes](#)(see page 12)
- [CFG_POLICY_RULES_VALUES Attributes](#)(see page 14)
- [CFG_ATTR_CODE Attributes](#)(see page 15)
- [Rule Codes Attributes](#)(see page 7)
- [Rule Nomenclatures Attributes](#)(see page 8)
- [Rules Definition Types Description](#)(see page 20)

Rule Codes Attributes

The table below contains different attributes that can be configured. General and Health Insurance share the same list of codes.

Id	Name
COINS	Coinsurance (deductible as percentage of the price)
COPAY	Deductible as amount
DEBT_LOAN	Debts - loan
DEBT_PREM	Debts - premium
DEDUCTIBLE	Deductible
DEPRECIATE	Depreciation
EXCESS	Excess
EXCLUDE	Exclude
FRANCHISE	Franchise
IV_AV_COEF	Under-Above Insurance
LIMIT	Limit
MAXNUM	Number of services
MAXOPM	Maximum out of pocket money
PREDET	Predetermination
PREVPAYM	Previous payments
PRICE	Service price
WAIT	Waiting period

CFG_POLICY_RULES_VALUES Attributes

The table below contains description of the columns of CFG_POLICY_RULES_VALUES table.

Id	Name
Rule CFG Id	Unique key, generated by the system
*Definition Type	Automatically populated with attribute from Cfg_policy_rules_attr Rules Definition Types Description (see page 20)
Rule Value	Value of the rule, could be 10 (percentage) or 1000 SEK
Value Type	Amount, Number or Time
Value Dimension	If Amount “ Value or Percent If Number “ not used for now If Time “ days, months, years

CFG_ATTR_CODE Attributes

The table below contains description of the columns of CFG_ATTR_CODE table.

Id	Name
Rule CFG Id	Unique key, generated by the system
*Definition Type	Automatically populated with attribute from Cfg_policy_rules_attr
*Attribute Code	Depend on attribute different data are required, could be Rule code or object type etc.

Master Policy

Use the example procedure below to configure policy rules for **Master policy** with two policy plans.

Prerequisites

- There are policy rules for the created plans that must allow more than one value. You must have defined all values in `policy_rules_values` table.
- You have familiarized with the procedure for creating financial rules. See [Create Financial Rules](#)(see page 52).

Procedure

1. From the **INSIS Menu**, select **Insurance Operations >Policies**
Create plans- **P1** and **P2**.
2. Connect plan **P1** to cover **C1** and **P2** to cover **C2**.
There will be four records in **Policy Rules** table.
3. From the **INSIS Menu**, select **CFG > CFG Policy Rules**.
By default, the **Policy Rules CFG** tab opens.
Use the following example rules in two policy plans- **P1** and **P2**.
4. For **Id#1 Rule#1- P1** and **C1** with initial values: 10, 20, 30, 40, 50, 60 that are copied from the configuration: Unmark values 20 and 40 and continue with 10, 30, 50 and 60.
If there is a plan rule with more than one value, there will be no records in **CFG_POLICY_RULES_VALUES** table.
5. For **Id#2 Rule#2**: Set the claim max number to 5 in **RuleValue** column, **CFG_POLICY_RULES_VALUES** table.
6. For **Id#3 Rule#3- P1 with C1** and initial values: 10000, 20000, 30000, 40000, 50000 that are copied from the configuration: Unmark value 5000 and continue with 10000, 20000, 30000 and 40000.
If there is a plan rule with more than one value, there will be no records in **CFG_POLICY_RULES_VALUES** table.
7. For **Id#4 Rule#4- P2 with C2** and initial values: 50000, 60000, 70000, 80000, 90000 that are copied from the configuration: Unmark values 50000 and 60000, and continue with 70000, 80000 and 90000.
If there is a plan rule with more than one value, there will be no records in **CFG_POLICY_RULES_VALUES** table.
8. Click **Confirm** to activate policy rules.
The system starts validation process and checks on which level the Rule is configured.

-
-
- If the rule is configured on plan level, the system checks whether there are values in **CFG_POLICY_RULES_VALUES** table.
 - If there are values defined in **CFG_POLICY_RULES_VALUES** table, the system checks for selected values in **RuleValue** column.
 - If there are no values selected, the system stops with an error message.

Related Information

[Policy Rules Configuration in Policies](#)(see page 22)

[Create Financial Rules](#)(see page 52)

Dependent Policy

Use the example procedure below to configure a **Dependent policy** that is connected to previously created Master policy. In the Dependent policy, define only real insurance objects that are connected to Master policy plans.

Prerequisites

- There are policy rules for the created plans that must allow more than one value. You must have defined all values in `policy_rules_values` table.
- You have familiarized with the procedure for creating financial rules. See [Create Financial Rules](#)(see page 52).

Procedure

1. From the **INSIS Menu**, select **Insurance Operations >Policies**
2. Create two insurance objects **IO#1** and **IO#2**.
3. Connect **IO#1** to **P1** and **IO#2** to **P2**.
There will be four records in **Policy Rules** table.
4. From the **INSIS Menu**, select **>Insurance Operations >Policies> Application> Policy Rules**.
By default, the **Policy Rules** tab opens.
5. **Id#1, Rule#1, IO#1, P1 and C1** with initially missing values and copied records in **Policy Rules Values** table.

Note: The system will not consider any input by the user in **Policy Rules Values** table.

- a. Select a value from a list of values in the field **RuleValue** in **Policy Rules Values** table.
The list of values is limited. It contains only the values that are already in the plan, that rule is attached to. In this example the list contains the following values: 10, 30, 50, 60.
 - a. Select value 30 for this example.
If you try to validate the rule without selected value, validation process will stop with error message.
6. **Id#2 Rule#2, IO#1, P1 and C1**. Set the claim max number to 5 in **RuleValue** column, **CFG_POLICY_RULES_VALUES** table.
 7. **Id#3 Rule#3, IO#2, P2 and C2** with initially missing value in **RuleValue** column and copied records in **CFG_POLICY_RULES_VALUES** table.
 - a. Select a value from a list of values in **RuleValue** column .
The list of values is limited. It contains only the values that are already in the plan, that rule is attached to. In this example the list contains the following values: 10000, 20000, 30000, 40000.

-
-
- a. Selected value 20000 for this example.
If you try to validate rule without selected value, validation process will stop with error message.
 8. **Id#4 Rule#4, IO#2, P2 and C2** with initially missing value in **RuleValue** column and copied records in **CFG_POLICY_RULES_VALUES** table.
 - a. If the user need to activate the rule, should choose a value from a list of values in **RuleValue** column.
The list of values is limited. It contains only the values that are already in the plan, that rule is attached to. In this example the list contains the following values:70000, 80000, 90000.
 - a. Select value 90000 for this example.
If you try to validate the rule without selected value, validation process will stop with error message.
 9. Use **Rule#5** from the configuration and create manually new individual rule, connected to **IO#2**.
 - a. Create manually records in **CFG_POLICY_RULES**, **CFG_POLICY_RULES_ATTR** table and **CFG_POLICY_RULES_VALUES** table for this Rule.
You should not expect to find records in **CFG_POLICY_RULES_VALUES** .
 - a. Select value between 15, 25 and 30 and activate the rule.

Related Information

[Policy Rules Configuration in Policies](#)(see page 22)

[Create Financial Rules](#)(see page 52)

Regular Individual Policy

Individual (Regular) Policies with only individual objects registered in them.

Prerequisites

- You have familiarized with the procedure for creating financial rules. See [Create Financial Rules](#)(see page 52).

Procedure

1. From the **INSIS Menu**, select **Insurance Operations >Policies**
2. Create one insurance objects **IO**.
3. You should never expect to find record in **CFG_Policy_Rules_Values** table and therefore, select a value from **RuleValue** column.
4. Create consecutively records in the tables: **CFG_POLICY_RULES**, **CFG_POLICY_RULES_ATTR**, **CFG_POLICY_RULES_VALUES** for all the policy rules from the example configuration that you need to configure.

Related Information

[Policy Rules Configuration in Policies](#)(see page 22)

Policy Rules Overview

Regular Combined Policy

Combined Policy- when plans, objects connected with plans, individual objects, and rules are all defined in one and the same policy.

Prerequisites

- There are policy rules for the created plans that must allow more than one value. You must have defined all values in `policy_rules_values` table.
- You have familiarized with the procedure for creating financial rules. See [Create Financial Rules](#)(see page 52).

Procedure

1. From the **INSIS Menu**, select **Insurance Operations >Policies**
2. Create a plan **P** and connect it to insurance objects **IO** or create individual Insurance object **IIO**.
 - a. If the rule is connected to a plan and there is more than one value, select a value in `CFG_POLICY_RULES_VALUES` table.
 - b. If the IO is connected to the plan, then the rule will be inherited by the plan, select a values in LOV (list of values) in **RuleValue** column.
LOV contains only the values selected for the plan.
 - a. If you create individual rule for the insurance object **IO** that is connected to a plan and this rule is not inherited by the plan, and you must select more than one value, select between values in LOV (list of values) in **RuleValue** column.
LOV contains only the values contained in the configuration.
 - a. If you create a rule for individual insurance object **IIO** and select between values in LOV (list of values) in **RuleValue** column.
LOV contains only the values contained in the configuration.

Note: When configuring Rules for Annexes the main principle of choice and change the values from LOV is the same as above explained.

Related Information

[Policy Rules Configuration in Policies](#)(see page 22)

Policy Rules Overview

Configure Policy Rule

Configure Policy Rule

Configure Policy Rule

Create policy rule in INSIS Application > CFG Policy Rules screen.
(Use preliminary created product in INSIS Configurator)



Insert Rule (RULE_CFG_ID) in CFG_POLICY_RULES_ALLOWANCE DB table
from INSIS_PPX_V10 scheme.
Set the rule to be applicable for Object, Cover or Risk and rule level.



Attach the policy rule type in INSIS Product Configurator on the
corresponding level – Product, Object, Cover.

Rule Allowance Description

CFG_POLICY_RULES_ALLOWANCE is a database table in INSIS_PPX_V10 schema that is a part of the rule configuration process. In this table, you must insert RULE_CFG_ID and associate it with one object, cover, risk, additional attributes, and rule level or combination of them (depending on the provided requirements).

Related Information

[Configure a Policy Rule with Rule Allowance](#)(see page 31)

Configure a Policy Rule with Rule Allowance

Policy rules configuration affects tables: `cfg_policy_rules`, `cfg_policy_rules_attr`, `cfg_policy_rules_values`, `cfg_attr_code`, `cfg_rule_allowance`.

If you need to configure a policy rule, follow the procedure below.

Prerequisites

- You have logged in INSIS Configurator.
- You have logged in `<insis_server>:<port>/<app_root>`, where `<insis_server>` is the IP address or FQDN of the server on which INSIS Application is hosted, and `<port>` is the connection port of INSIS Application in your environment.
- You have logged in SQL Navigator.

Procedure

- Go to **CFG Policy Rules** screen and define a rule on product level. Use a Product code for a product already created in INSIS Configurator.
- After you define the needed rule for the product you configure, go to `CFG_POLICY_RULES_ALLOWANCE` and set the level:
 - Choose between Object, Cover or Risk level.

Row #	RULE_CFG_ID	OBJECT_TYPE	COVER_TYPE	PACKAGE_ID	RISK_TYPE
197	66700000000126		PA		
198	66700000000126		PA		TEMPDISAB
199	66700000000127	993 OWNDAMAGE			
200	66700000000113		MTPL		LIABPD
201	66700000000114		MTPL		LIABBI
202	66700000000115	14 MTPL			LIABPD
203	66700000000128		VANDALISM		

- Attach **RULE_CFG_ID** to particular Object, Cover or Risk. (Select it preliminary from INSIS Configurator.)

Example:

Condition:

Cover 1

Risk 1 with Limit 1

Risk 2 with Limit 2

Action:

Create Rule 1, define Limit 1 and attach it to Risk 1.

Create Rule 2, define Limit 2 and attach it to Risk 2.

Result:

You have one cover with two risks and different limits for them, so that you can spend these limits separately.

If you leave `OBJECT_TYPE` empty or with NULL, rules will be applicable for all object types.

Note: If the rule is attached to a product but not attached to a Cover, when you begin a policy creation process and get to Policy Rules step by clicking **Copy CFG Policy Rules** button, it will load this rule for all the Covers attached to this product.

- a. Set the rule to work on Policy and Claim level. Define the Rule_Level in `CFG_POLICY_RULES_ALLOWANCE` table in the DB.

VALID_FROM	VALID_TO	RULE_LEVEL	COUNTRY_ID
01-Jan-2000		POLICY	
01-Jan-2000		POLICY	
01-Jan-2000		CLAIM	
01-Jan-2000		POLICY	
01-Jan-2000		CLAIM	
01-Jan-2000		POLICY	

3. Open INSIS Product Configurator, attach the policy rule type on the corresponding level “Product, Object, Cover.

Related Information

[ATTRn- Additional Attributes](#)(see page 35)

[CFG_POLICY_RULES_ALLOWANCE Table Description](#)(see page 33)

[Specific Rules Configuration](#)(see page 36)

CFG_POLICY_RULES_ALLOWANCE Table Description

Name	Field	Description
RULE_CFG_ID	Unique code	NUMBER
OBJECT_TYPE	Object type	NUMBER
COVER_TYPE	Cover type	VARCHAR2
PACKAGE_ID	Package	VARCHAR2
RISK_TYPE	Claim stage	VARCHAR2
CLAIM_STAGE	Claim stage	VARCHAR2
CLAIM_TYPE	Claim type- In health insurance (Example: PAR)	VARCHAR2
RQ_TYPE	Request type	VARCHAR2
IN_NETWORK	Network providers	In health insurance. (VARCHAR2)
ATTRn	Additional attributes- ATTRn- Additional Attributes (see page 35)	VARCHAR2
VALID_FROM	Date when validity of the rule starts.	DATE
VALID_TO	Date when validity of the rule ends.	DATE
RULE_LEVEL	Whether the rules will apply on policy or on cover level.	VARCHAR2
COUNTRY_ID	ID of a particular country.	VARCHAR2
CURRENCY	Currency	VARCHAR2

Related Information

[ATTRn- Additional Attributes](#)(see page 35)

ATTRn- Additional Attributes

There are 20 ATTR columns. They may be used for a different purposes. It is very important to insert one and the same type of data in each column you use.

Example:

Condition:

Configure a sublimit that should be a part of a general limit. This sublimit may be spent as a part of the general limit and separately.

Action:

rule_cfg_id = 101

Configuration in CFG_POLICY_RULES_ALLOWANCE:

- Row 1
Rule_cfg_id = 66700000000033
Object_type = 8
Cover_type = 'OP'
ATTR3 = 'OP'
Rule_level = 'POLICY'
- Row 2
Rule_cfg_id = 66700000000033
Object_type = 8
Cover_type = 'OP-DNTL'
ATTR3 = 'OP'
Rule_level = 'POLICY'
- Row 3
Rule_cfg_id = 66700000000033
Object_type = 8
Cover_type = 'OP-MER'
ATTR3 = 'OP'
Rule_level = 'POLICY'

Row #	RULE_CFG_ID	OBJECT_TYPE	COVER_TYPE	PACKAGE_ID	RISK_TYPE	CLAIM_STAGE	CLAIM_TYPE	RQ_TYPE	IN_NETWORK	ATTR1	ATTR2	ATTR3	ATTR4
5	66700000000033		OP									OP	
6	66700000000033		OP-DNTL									OP	
7	66700000000033		OP-MER									OP	

Related Information

[CFG_POLICY_RULES_ALLOWANCE Table Description](#)(see page 33)

Specific Rules Configuration

Defining Rule Allowance

Configure Allowance

Set rule allowance when you need to define when and in what conditions the rule must be executed or not.

Prerequisites

You have logged in <insis_server>:<port>/<app_root>, where <insis_server> is the IP address or FQDN of the server on which INSIS Application is hosted, and <port> is the connection port of INSIS Application in your environment.

Procedure

1. Go to **CFG Policy Rules** screen and select a rule that is already configured in **CFG_POLICY_RULES** table.

CFG_POLICY_RULES							
View ▾	✚ Create	✗ Delete	📄 Copy Row	📊 Excel	📁 Detach		
* RuleCfgId	* InsrType	* RuleOr	* RuleKeyCondition	* RuleDeff	RuleUsage	TimeFrame	TotPaid
66700000000096	900	84	WAIT	Cover ▾	Eligibility ▾	Policy ▾	✓
66700000000097	900	84	WAIT	Cover ▾	Eligibility ▾	Policy ▾	✓
66700000000104	900	85	EXCLUDE	Cover ▾	Eligibility ▾	Policy ▾	✓
66700000000115	1000	1	LIMIT	Cover ▾	Financial ▾	Policy ▾	✓

TotDed	* RuleCalcType	RuleOn	* ReRuleType	RuleText
☐	Restriction (service not allowed ▾)	Service amount ▾	HIC_WAPOPO	9 months waiting period applied for cover IP-MAT
☐	Restriction (service not allowed ▾)	Service amount ▾	HIC_WAPOPO	30 days waiting period in case of Illness applied on cover IP
☐	Restriction (service not allowed ▾)	Service number ▾	HIC_EXCLPO	Exclude second death claim
☐	Limit that cannot be exceeded ▾	Service amount ▾	CS_LMEVPO	MTPL Property Damage limit EUR250K (when hazardous goods)

2. Go to **CFG_POLICY_RULES_ATTR** table and click **Create** button.

- New row appears with automatically populated **RuleCfgId**.
- From drop down list select **Rule Allowance Definition Type**.

CFG_POLICY_RULES_ATTR			
View ▾	 Create	 Delete	 Excel
RuleCfgId	* DefinitionType	Mandatory	Optional
66700000000104	Case Type ▾	☒	☐
66700000000104	Numeric ▾	☒	☐
66700000000104	Rule Allowan ▾	☒	☐

3. Go to **CFG_ATTR_CODE** table and click **Create** button.

CFG_ATTR_CODE		
View ▾	 Create	 Delete
RuleCfgId	DefinitionType	* AttrCode
66700000000115	RULEA	MTPL_LIMIT_HAZARDOUS

- New row appears with automatically populated **RuleCfgId**.
- Definition Type** is **RULEA**.
- Write the needed **AttrCode**. You may find the needed AttrCode in **INSIS Configurator** > **Rule** menu > **Rule Code** column.

Note: Behind every Rule Code there is a SQL script that is a different rule. So the rule that you configure starts the execution of another rule. The result of the execution of this rule determines the eligibility of a policy rule. Possible values as a result are: 0 -the rule will not be activated, 1 - the rule will be activated and will not permit claim payment.

- a. Click **Save**.

Related Information

[Rule Allowance for Policy and Claim](#)(see page 39)

[Review Policy Rule Types](#)(see page 41)

Rule Allowance for Policy and Claim

Defining Rule Allowance for Policies

With these two example rows you define that for object 114 and IP cover, policy rule is acceptable and for all other cases it is unacceptable.

Example:

rule_cfg_id = 101

Configuration in CFG_POLICY_RULES_ALLOWANCE:

Row 1:

Rule_cfg_id = 101

Object_type = 114

Cover_type = 'IP'

Rule_level = 'POLICY'

Row 2:

Rule_cfg_id = 101

Object_type = NULL

Cover_type = 'N/A'

Rule_level = 'POLICY'

Note: There is one configured rule for policy and claim, in dependence of where it is used the rule must do the correct check.

Defining Rule Allowance for Claims

If RULEA is defined for a policy rule in **CFG POLICY RULES**, and for claim no restrictions are needed, RULEA must be written so as to check properly conditions in case of policy and to allow unconditionally in a case of claim.

Example:

rule_cfg_id = 101

Configuration in CFG_POLICY_RULES_ALLOWANCE:

Row 1:

Rule_cfg_id = 101

Object_type = 112

Cover_type = NULL

Claim_Stage = 'PAR'

Rule_level = 'CLAIM'

Related Information

[Configure Allowance](#)(see page 36)

Review Policy Rule Types

If you need to review policy rules types, execute the following select statement:

```
Select t.* from INSIS_GEN_CFG_V10.SYSCFG_RULE_TYPES t
```

Related Information

[Configure Allowance](#)(see page 36)

[CFG_POLICY_RULES_ALLOWANCE Table Description](#)(see page 33)

Defining Eligibility Rules

Eligibility Rules Overview

The system allows to run predefined and configurable set of checks during the process of claim registration and claim handling. These checks are part of the Policy Rules functionality and are also referred as **eligibility rules**.

The eligibility rules can be applied as eligibility checks for claim objects. They are restrictive by nature and if set as stopping rules, the system behavior is to stop with an error message.

Below is a short overview of how the standard processing of eligibility rules works in INSIS for non-life insurance products.

Eligibility Rules Processing

- The eligibility rules are created through the **CFG > CFG Policy Rules** menu in the **INSIS Application**. See [Create Eligibility Rules](#) (see page 43).
- By design, each eligibility rule should return **0** or **1** as a result of the execution:
 - Result **0** means that the rule is executed (the claim object has passed the eligibility check successfully).
 - Result **1** means that the eligibility rule is not executed and the claim object can be approved only in case the system message type is not ERROR (can be WARNING or MESSAGE), or if the system message is flagged as EX_GRATIA in the **claim_objects_eligibility** table.
Note that the system message is the `message_code` from the **srv_messages** table and it is expected to be provided as a value of the RuleText attribute (See [Eligibility Rules Attributes](#) (see page 45)).
- For each eligibility rule, you can define a **rule allowance** to start applying an eligibility rule. The result of the rule allowance determines whether the eligibility rule should be applied or not. This option works with the same standard approach as with financial rules.
- The eligibility rules check starts upon confirmation of a claim object (event **CLM_CS_SET_OBJSTATE_OPEN**) or claim request (event **CLM_CS_CLAIM_REQUEST_CONVERT**). This check calls the confirmation of each object of the current claim request.
- The result of the eligibility rules execution will be stored in table **claim_objects_eligibility**.

Related Information

[Create Eligibility Rules](#) (see page 43)

[Eligibility Rules Attributes](#) (see page 45)

Create Eligibility Rules

You can create eligibility rules by using the **CFG** menu in the **INSIS Application**.

Prerequisites

- You have logged in `<insis_server>:<port>/<app_root>`, where `<insis_server>` is the IP address or FQDN of the server on which INSIS Application is hosted, and `<port>` is the connection port of INSIS Application in your environment.

Procedure

- From the **INSIS Menu**, select **CFG > CFG Policy Rules**.
By default, the **Policy Rules CFG** tab opens.
- In the **CFG_POLICY_RULES** panel, click **Create** and configure all the mandatory attributes of the rule.
For more information about the settings, see *Eligibility Rules Attributes*.

* Rule CFG Id	* Insr Type	* Rule Order	* Rule Key Condition	* Rule Definition	Rule Usage	Time Frame	Total Paid	Total Deduct	* Rule Calc Type	Rule On	* Re Rule Type	Rule Text
66700000000688	900	45	EXCLUDE	Cover	Eligibility	Policy	✓	✓	Restriction (service not allowed)	Service number	HIC_EXCLPO	XOL is not allowed due to not exhausted IP Limit per Family

- In the **CFG_POLICY_RULES_ATTR** panel, click **Create** and specify the type of the rule that you already created.
 - From the **Definition Type** drop-down menu, select the applicable option(s).

Example:

RuleCfgId	* DefinitionType	Mandatory	Optional
66700000000033	Particular Rule	☐	☐

If you select the **Particular Rule** option for Definition Type, that particular (`RE_CODE`) rule should be associated with a rule configured in the Product Configurator, which checks the eligibility conditions. If the check is successful, the returned result will be `0` (otherwise, it will return `1`). With Particular Rules, some special conditions should be met and processing is different from the standard processing.

- In the **CFG_ATTR_CODE** panel, click **Create** and associate the rule with the rule type.

- In the **Attr Code** field, enter the applicable value(s). A value entry for every Definition Type that is configured in **CFG_POLICY_RULES_ATTR** panel is required here.

Example:

Rule CFG Id	Definition Type	* Attribute Code
66700000000180	RULEA	POLICY_RULES_ALLOW

For each eligibility rule, you can define a **Rule Allowance** Definition Type. According to the configured Definition Type, different data can be defined in the **Attribute Code** field (Rule Code, object type, or else). The result of the rule allowance determines whether the eligibility rule should be executed or not. This option works with the same standard approach as with financial rules.

5. On the top toolbar, click **Save**.

What to Do Next

To enable the system to execute the defined eligibility rule, the rule should be configured through the **Rules** tab in INSIS Configurator. See Policy Rules Configuration.

Related Information

[Eligibility Rules Attributes](#) (see page 45)

Policy Rules Configuration

Eligibility Rules Attributes

The eligibility rules have the following attributes, which should be configured in the **CFG_POLICY_RULES** panel.

Table - Eligibility Rules Attributes

Option	Definition
RuleCfgId*	A unique identification number of the rule. It is generated automatically by the system.
Insr Type*	Product code for which the rule is applied
Rule Order*	When there is more than one rule defined, the rule order determines the sequence of the rule execution
Rule Key Condition*	EXCLUDE - this is a restriction rule that excludes services. All available types are defined in the Rule Codes tab of CFG Policy Rules.
Rule Definition*	Determines the level of usage, on which the rule should be applied
Rule Usage*	Eligibility - different checks for eligibility of claim objects
Time Frame	Specifies the time range of the rule to be applied
Total Paid	To be flagged when the system has to check the sum of all payments across all claims
Total Deduct	To be flagged when the system has to check the sum of all applied deductibles in claim
Rule Calc Type*	Restriction (service not allowed) - defines how the rule will be processed.
Rule On	Attribute of the service that is restricted by the rule.
Re Rule Type*	Standard code corresponding to the rule type that will be executed (see more details below)

Rule Text	Short description of the rule and its usage. For eligibility rules: the <code>message_code</code> from the <code>srv_messages</code> table is expected here
-----------	--

* Mandatory attributes

Re Rule Type Definition

Depending on the relevant line of business (General or Health Insurance), the following rule types apply for the `Re Rule Type` attribute.

- Claim eligibility rule:
 - `HIC_EXCLPO` (Health insurance)
 - `CS_EXCLPO` (General insurance)
- Policy eligibility rule
 - `HIC_EXPOPO` (Health insurance)
 - `CS_EXPOPO` (General insurance)
- Policy lifetime eligibility rule
 - `HIC_EXPOPF` (Health insurance)
 - `CS_EXPOPF` (General insurance)

For information about the specific format of the `Re Rule Type` attribute, see `Re Rule Type`.

Registering Policy Rule for Indemnity Corrections

In certain cases, the System Operators might need to reduce the calculated claim indemnity with the obligations of the policy holder to the insurance company, for example, some costs, external expenses, unpaid premiums, and so on.

You can configure the calculation of claim indemnity by applying corrections for unpaid premium. The correction for the unpaid premium is applied before the limit correction.

Create Policy Rule for Indemnity Corrections

To allow the System Operators to reduce the claim indemnity amount with the unpaid premium amount, you have to configure a particular rule, by using the **CFG** menu from the **INSIS Application**.

Prerequisites

- You have logged in `<insis_server>:<port>/<app_root>` where 'insis_server' is the IP address or FQDN of the server where INSIS Application is hosted, and <port> is the connection port of INSIS Application in your environment.

Procedure

- From the **INSIS Menu**, select **CFG > CFG Policy Rules**.
By default, the **Policy Rules CFG** tab is opened.
- In the **CFG_POLICY_RULES** panel, click **Create** and enter the attributes of the rule.

*RuleCfgId	*InsType	*RuleOrder	*RuleKeyCondition	*RuleDef	RuleUsage	TimeFrame	TotPaid	TotDeduct	*RuleCalcType	RuleOn	*ReRuleType	RuleText
66700000000033	3001	4	PREM	Policy	Financial	Policy			Decreases the indemnity	Service amount	SC_PROPO	Unpaid Premium Correction

- In the **CFG_POLICY_RULES_ATTR** panel, click **Create** and specify the type of the rule that you already created.
 - From the **Definition Type** drop-down menu, select **Particular Rule** option.

RuleCfgId	*DefinitionType	Mandatory	Optional
66700000000033	Particular Rule	☐	☐

- In the **CFG_ATTR_CODE** panel, click **Create** and associate the rule with the rule type.
 - In the **Attr Code** field, enter **UNPAID_PREMIUM**.

 CFG_ATTR_CODE

View ▾

 Create

 Delete

 Excel

 Detach

RuleCfgId	DefinitionType	* AttrCode
66700000000033	RE_CODE	UNPAID_PREMIUM

5. On the top toolbar, click **Save**.

Related Information

- [Policy Rules Attributes](#)(see page 50)
- Read more about how to configure insurance products to calculate indemnity amount by applying corrections for unpaid premium. See [Configuring Indemnity Corrections for Unpaid Premium](#) section in the **INSIS Product Configurator** guide.

Policy Rules Attributes

The policy rule has the following attributes:

Table - Policy Rules Attributes

Option	Description
RuleCfgId	A unique identification number of the rule. It is generated automatically by the system.
Insr Type	Product code for which the rule is configured.
Rule Order	The sequence number of the rule.
Rule Key Condition*	Unpaid premium, this code will go in fraction and will be sent then to the BLC module.
Rule Deff*	The whole unpaid premium for policy is deducted. In general, there is no sense to set different level than Policy.
Rule Usage*	Rule will correct indemnity amount, so it has a financial impact.
Time Frame*	The whole unpaid premium for policy is deducted. In general, there is no sense to set different level than Policy.
Total Paid*	Not used in this rule type.
Total Deduct	When set, the system will check whether there is another calculation that is for the same policy and is confirmed but still unpaid. When one calculation with correction fract PREM is paid, the system automatically generates PAID premium for the policy. When some claim makes new indemnity calculation, the rule that calculates unpaid part will take into consideration the already paid amount.

Rule Calc Type*	Rule will decrease the indemnity amount with the amount of the unpaid premium.
Rule On*	Rule will decrease the indemnity amount with the amount of the unpaid premium.
Re Rule Type*	Standard code for this type of correction.
Rule Text	Name of the rule “ will be displayed to the user in indemnity corrections.

* Mandatory attributes

Create Financial Rules

Use the procedure below to create financial rules through the CFG menu in the INSIS Application.

Prerequisites

- You have defined an insurance product to which you will apply the rule.
- You have logged in <insis_server>:<port>/<app_root>, where <insis_server> is the IP address or FQDN of the server on which INSIS Application is hosted, and <port> is the connection port of INSIS Application in your environment.

Procedure

- From the **INSIS Menu**, select **CFG > CFG Policy Rules**.
By default, the **Policy Rules CFG** tab opens.
- In the **CFG_POLICY_RULES** panel, click **Create** and configure all the mandatory attributes of the rule.
For more information about the settings, see [Policy Rules Overview](#).

* RuleCfgId	* InsrType	* RuleOr	* RuleKeyCondition	* RuleDef	RuleUsage	TimeFrame	TotPaid	TotDee	* RuleCalcType	RuleOn	* ReRuleType	RuleText
66700000000128	1000	1	DEDUCTIBLE	Cover	Financial	Claim			Decreases the indemnity	Service amount	CS_DEEVPO	Deductible

- In the **CFG_POLICY_RULES_ATTR** panel, click **Create** and specify the type of the rule that you already created.
From the **Definition Type** drop-down menu, select the applicable option.

RuleCfgId	* DefinitionType	Mandatory	Optional
66700000000127	Numeric	☐	☐

- In the **CFG_POLICY_RULES_VALUES** panel, click **Create** and associate the rule with the rule value.
 - In the **RuleValue** field, enter the applicable value.
 - From a drop-down menu select **ValueType** and **ValueDim**.
 - From the magnifying glass button find and select **Currency**.

CFG_POLICY_RULES_VALUES					
View Create Delete Copy Row Excel Detach					
RuleCfgId	DefinitionType	* RuleValue	* ValueType	ValueDim	Currency
66700000000127	NUMERIC	0	A Amount	V Value	EUR
66700000000127	NUMERIC	250	A Amount	V Value	EUR
66700000000127	NUMERIC	500	A Amount	V Value	EUR

- On the top toolbar, click **Save**.

What to do next

To enable the system to execute the defined financial rule, you must go to INSIS Product Configurator and add the proper Rule Type on Policy, Cover or Object level.

Related Information

[Policy Rules Overview](#)

[Policy Rules Configuration](#)

INSIS Product Configurator

Rule Configuration

During the process of configuration of each of the products, you should apply Policy Rules in order to be executed further in the policy. Configuration must be done according to level dependence of the rules. This dependence may be at Product, Object, Package, or Cover level. The configuration should be accomplished through the **Rules** tab in INSIS Configurator.

User should make an association between Rule Type and Rule that should be executed.

Prerequisites

- You have logged in `<insis_server>:<port>/<app_root>`, where `<insis_server>` is the IP address or FQDN of the server on which INSIS Application is hosted, and `<port>` is the connection port of INSIS Application in your environment.
- You have configured Rules in INSIS Application.
- You are logged in INSIS Product Configurator Application.
- You have defined an insurance product to which you will apply the rule.

Procedure

1. Go to menu Configuration, open panel Product.
2. Select the needed product and click next to continue.
3. Click the needed level and extend the menu.
4. Click menu Rule on the needed level.

Note: In Product Configurator, for the same product based on level should be created a record per rule type. Combination level and rule type should be unique, one rule type should be entered only once no matter how many rules with this type are created in CFG Policy Rules.

Rules could be set on four levels in Configurator in dependence on Rule Definition: Product, Object, Package or Cover.

Rules added on configuration level can be override at policy level if necessary.

5. Click Commit.

Related Information

Configuration

INSIS Operational Modules

Policy Rules Administration

If you need to list and predefine policy rules, follow the procedure below.

Prerequisites

- You have logged in `<insis_server>:<port>/<app_root>`, where `<insis_server>` is the IP address or FQDN of the server on which INSIS Application is hosted, and `<port>` is the connection port of INSIS Application in your environment.
- You have all the needed information for a policy registration.

Procedure

1. Go to Policy menu and start a process of a policy registration.
2. Complete the needed information until you get to a .Policy Rules menu.
3. Click **Copy CFG Rules** button to list the policy rules and if there is any need to predefine them.

Note: Only the rules with the multiple choice are visible.

4. Click **Confirm** and **Annul** buttons from the menu to modify rules status.

Policy rules statuses may vary:

Policy Rule Status	Usage
Draft	Rules can be modified and are not confirmed yet.
Active	Rules that are modified or a value is already chosen for them, and are confirmed.
Product	A rule that cannot be modified.

Example:

If there is a rule that is 'Copy for a policy' on configuration level, the value of this rule can be predefined at **Policy Rule** stage only for this particular policy.

1. Click **Save** and continue.

Note: The system will not allow a policy to be converted unless one of the multiply options is chosen for each of the rules.

Once active, a Policy can be modified only by the means of an Annex.

Related Information

- Policy Administration for health insurance
- Policy Administration for general insurance

Policy Rules Results

Follow the procedure below to find the policy rules results.

Prerequisites

- You have logged in <insis_server>:<port>/<app_root>, where <insis_server> is the IP address or FQDN of the server on which INSIS Application is hosted, and <port> is the connection port of INSIS Application in your environment.
- You have all the needed information for a claim registration.

Procedure

- Go to Claims menu and start a process of a claim registration.
- Complete the needed information and calculate the claim.
- Find the results in **Claim Dscr Fract** section.

Note: Rows in fractions are as many as the number of the Policy Rule results.

Claim Dscr Fract					
Fract Type	Amount Ded	Amount Left	Internal Descr	Public Descr	Apply
Limit	0	100,000	Remaining Limit for Bancmed IP cover 4900000	Remaining Limit for Bancmed IP cover 4900000	☒
Limit	50,000	50,000	Limit for Bancmed FUNERAL cover 50000	Limit for Bancmed FUNERAL cover 50000	☒
Limit	0	50,000	Remaining Limit for Bancmed FUNERAL cover 0	Remaining Limit for Bancmed FUNERAL cover 0	☒

Related Information

- Create Claim Request for health insurance
- Claim Settlement for general insurance

The content objects are Copyright Â© 2019, Fadata EOOD. All rights reserved.

You may not copy or modify this content without permission.

You may quote information only to parties who have signed Non-disclosure agreement with Fadata and if a reference to the source is provided as well.

You may not use extraction tools to extract text or graphics.

You are free to store files permanently and to print, only if you protect electronic and printed documents confidential.

HelpServer is a trademark of 4.ST Belgium NV

INSIS is a trademark of Fadata EOOD