

# PLOTWEAVER L<sup>A</sup>T<sub>E</sub>X DOCUMENT CLASS

This file serves as a tutorial and example for how to use the plotweaver document class to typeset homebrew content in the style of Plotweaver RPG and Cosmere RPG games.

## INTRODUCTION

The plotweaver document class is a free and open source resource which uses L<sup>A</sup>T<sub>E</sub>X to emulate the style of the Plotweaver RPG and Cosmere RPG rule books. This allows you to focus on writing and creating content without the hassle of formatting each document. To use this document class, you will need to have L<sup>A</sup>T<sub>E</sub>X installed, which can be downloaded at the [official L<sup>A</sup>T<sub>E</sub>X project website](#). If you're not familiar with L<sup>A</sup>T<sub>E</sub>X, a full installation is recommended. Another non-local option is to upload the class and package files to an online L<sup>A</sup>T<sub>E</sub>X editor such as Overleaf. Please note that online editors may or maynot be free. Regardless of installation choice, you will need to use LuaL<sup>A</sup>T<sub>E</sub>X as the compiler.

The philosophy of this document class and its accompanying packages is to be as simple to use as possible while remaining as modular and flexible as possible. It is also still under active development, particularly with respect to the talent tree boxes. Contributions are welcome on this project's [GitHub repository](#).

This work is licensed under the [LaTeX Project Public License \(LPPL\) version 1.3c](#). This is unofficial fan content, created and shared for non-commercial use. It has not been reviewed by Dragonsteel Entertainment, LLC or Brotherwise Games, LLC.

## EXAMPLE USAGE

For full documentation, please see `plotweaver.pdf`. For an example of how to use this document class to generate character sheets, please see `character-sheet.tex`.

## FEATURE BOXES

---

Three feature boxes are specified using `tcolorbox`. They are `featureBox`, `leftBox`, `rightBox`, `calloutBox`, and `paperBox`. You can also use the command `statBox` to nicely align a left and right box. These boxes support upper and lower content, but you don't have to specify both.

## TALENT PATHS

---

TikZ is used to make the talent paths. You can add a photo as the background, if desired. Check the `example.tex` for a sample talent path.

**TABLE 1: EXAMPLE TABLE**

| Heading 1 | Heading 2                                                | Heading 3 | Heading 4 |
|-----------|----------------------------------------------------------|-----------|-----------|
| Lipsum    | Lorem ipsum dolor sit amet, consectetur adipiscing elit. | 1234      | 5678      |
| Lipsum    | Lorem ipsum dolor sit amet, consectetur adipiscing elit. | 1234      | 5678      |
| Lipsum    | Lorem ipsum dolor sit amet, consectetur adipiscing elit. | 1234      | 5678      |
| Lipsum    | Lorem ipsum dolor sit amet, consectetur adipiscing elit. | 1234      | 5678      |

THIS IS A CAPTION THAT IS PLACED BELOW THE TABLE

## ICONS

Icons for activations and plot die are specified with `forever`, `freeAction`, `action`, `doubleAction`, `tripleAction`, `reaction`, `opportunity`, and `complication`. They look like this:



The complication commands can take a number or be left blank. Numbers look like this: 2. You can also make larger complication symbols with `complicationDice`:



## TABLES

Tables can be created using `plotable`. This uses `nicematrix` under the hood. Like usual, you can refer to Table 1 with a label.

## COLOR SCHEMES

You can switch color schemes by passing an option to the document class. The default is `stormlight`. You can also use `mistborn` or `ariandor`. You can also define your own color schemes.

## CHARACTER SHEETS

You can make a character sheet using the `MakeCharacterSheet` command if `character-sheet` is passed into the document class options. It will calculate derived attributes for you, and you can set it to use the terminology for Stormlight Archive or Mistborn instead of the generic Plotweaver terms. See `character-sheet.tex` for an example of how to use this command. In the future, I intend to make the sheet more customizable.

### FEATURE BOX

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo.

### SUB FEATURE

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.

### STAT ONE

These boxes can have different content...

### STAT TWO

...and still end up the same height! Even when one is multiple lines.

### CALLOUT BOX

This is a callout box. It will be as wide as the text (i.e., `\linewidth`) unless you pass a width to the `tcolorbox` environment.

You can also have a callout box that will float next to the text. To do this, you need to use the `wrapfig` package. Set the width in the `wrapfigure` environment and then let the `tcolorbox` fill the total width.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### CALLOUT BOX


Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

### *Torn Paper Box*

*Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.*

### *The Borders of Subsequent Boxes Match*

*Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.*

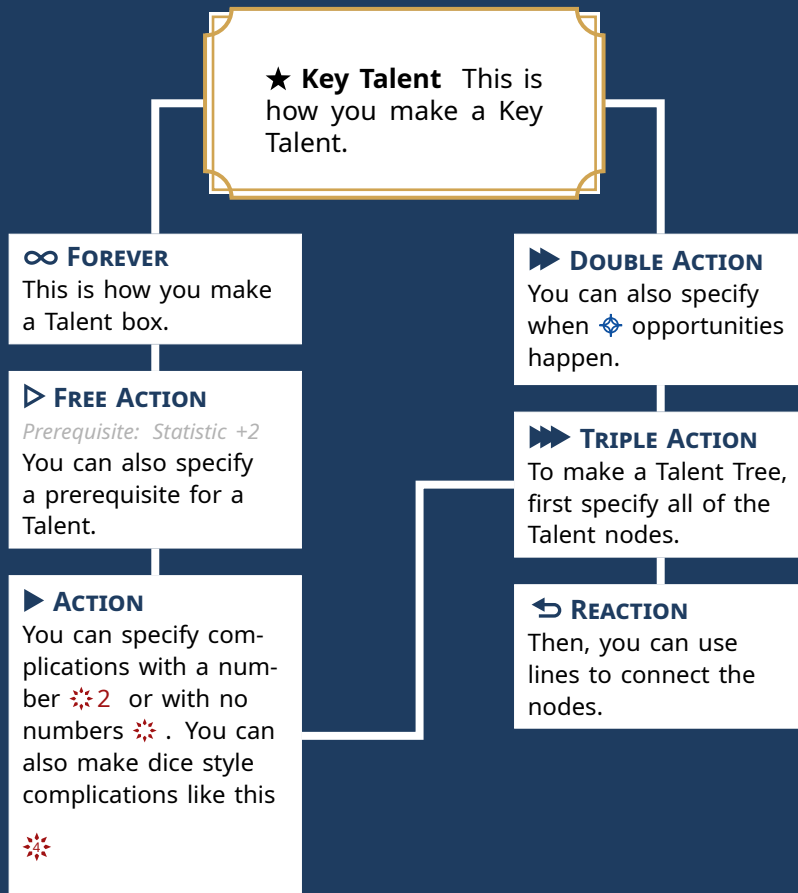



## TIMELINES

---

Timelines can be created using the timeline environment if `timeline` is passed into the document class options. You can pass in arguments to determine the spacing between major and minor ticks with `major tick pattern` and adjust the overall scale with `scale`. Within the timeline environment, the start and end years are specified with the `era` command. Specific events are added afterwards with the `event` command. This allows for multiple eras to be chained together in a single timeline.