

DI Container

→ Controller
→ ViewEngine

→ DbContext

→ Logger

→ Email Service

→ Session

→ obj



Middleware

app.Use _____

· Map

· Run()

✓ How to pass values from
action method to View
& view to action method

✓ Different return types of action
methods

✓ ViewBag, ViewData, TempData Collection

✓ ViewModel / MVVM Design Pattern

✓ Layout Pages → bind bootstrap

✓ ViewStart.cs, ViewImport.cs

✓ Partial Views

✓ ASP.NET MVC Tag Helpers

function

GetData C1 → JS

JSON URL

Browser

1

var helper = new XMLHttpRequest();

helper.onreadystatechange = () => {

1 - (helper.readyState === 4 &&

2 helper.statusCode === 200)

3 data = JSON.parse(helper.responseText)

4 helper.open("GET", URL);

5 helper.send();

2

func async fetch()

axios

await var obj = new Promise() return , r

reject , catch
then


return 05;

)

```
public Task async GetData() → MVC  
{  
    await Task tk = new Task()  
    return tk;  
}
```

```
} →  
public Task < Emp > async GetEmp()  
{  
    await Task < Emp > tk = new Task < Emp >(),  
    return tk;  
}
```

- asynchronous
- Task
- Strongly-Typed async

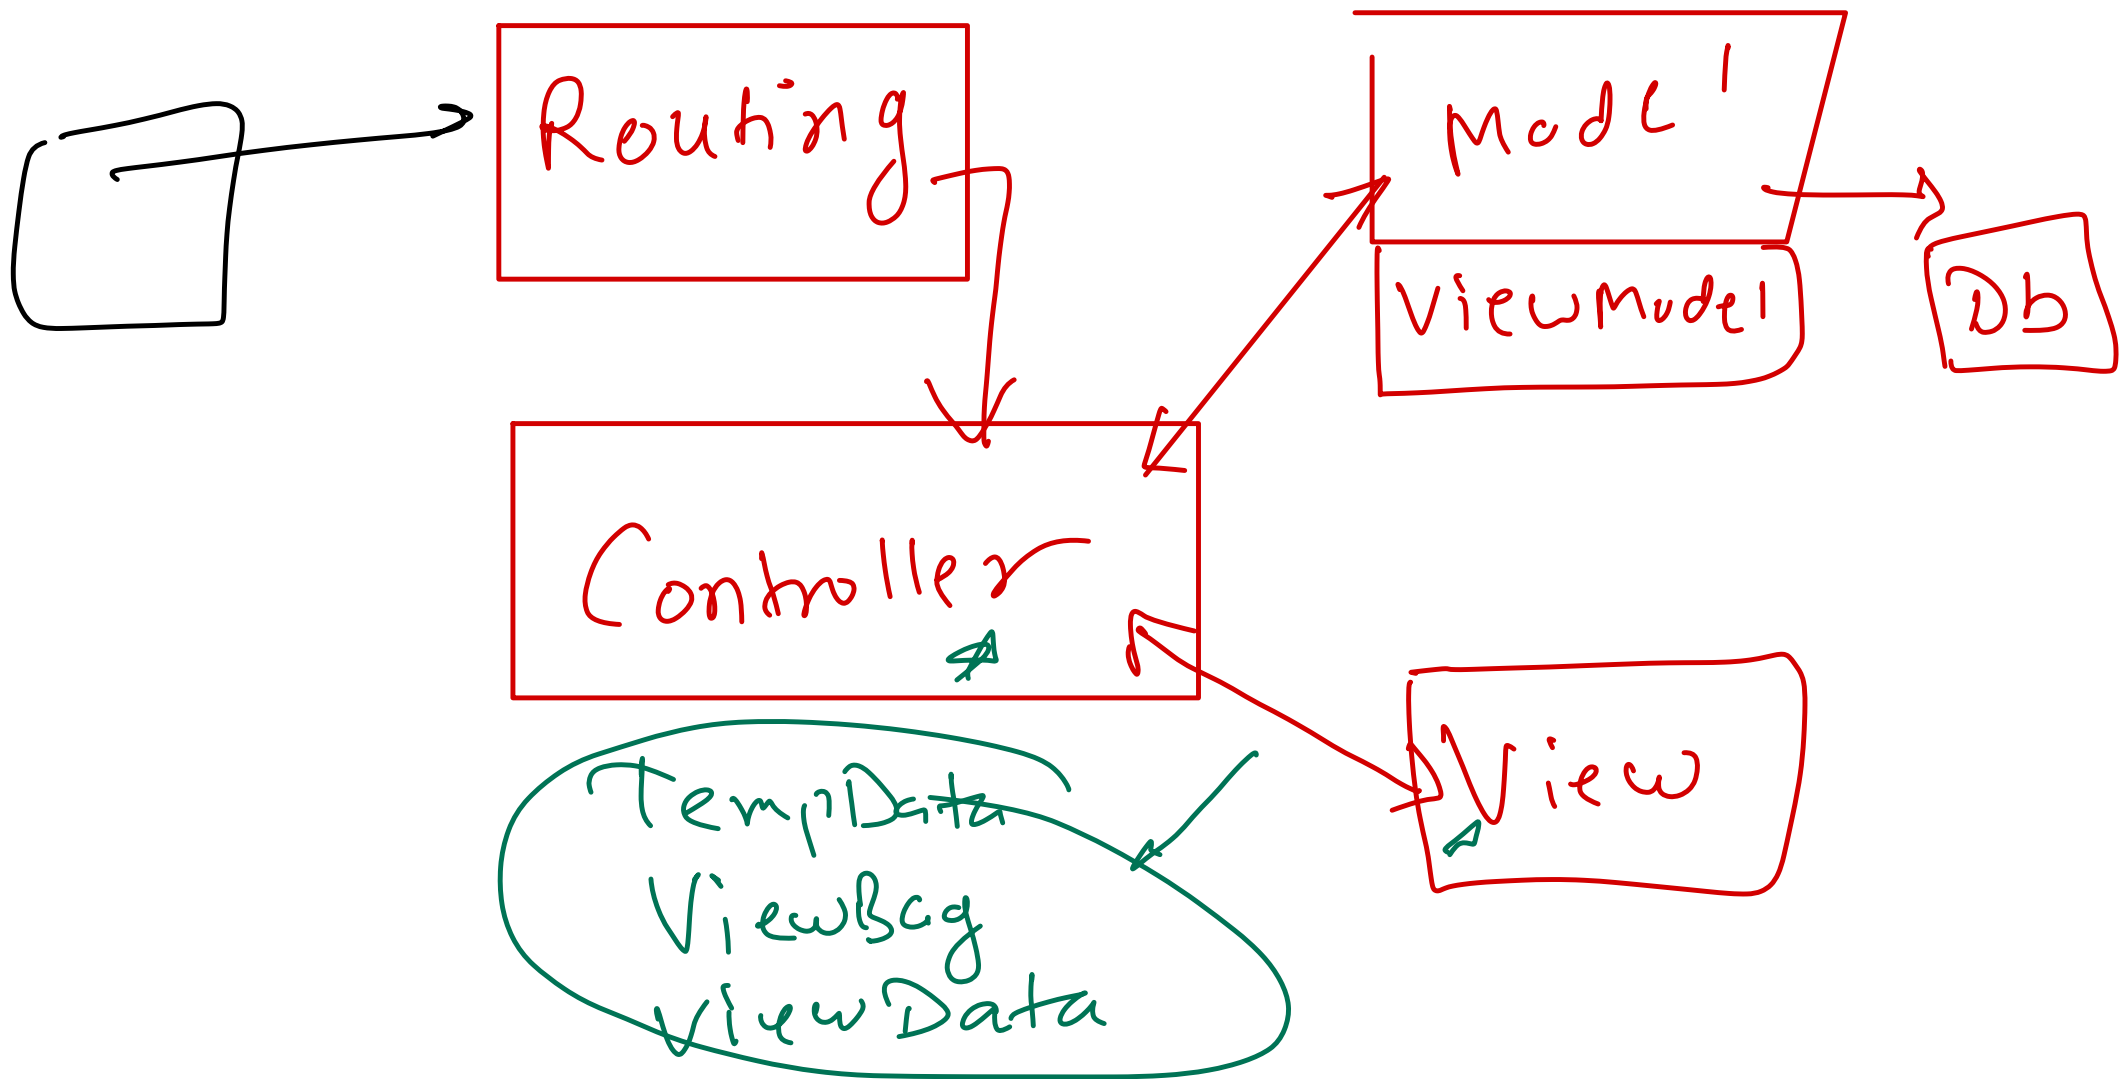

Filters

Auth, Session

EF, CRUD, partial view
Index.

→ Web API, ↔ React
↓
CRS