Bootstrap → react component → conditional rendering

display imges.

input control.

functional comp.

→ Hooks

→ Routing

→ Protected Rou~

twitter → Bootstrap a framework use for front-end appln to design HTML, CSS based design templates → typography, forms, button, carousal ←

↓

DOM → Document. get Element — id / Tag / class

↓

CSS selector + JS selector.

Bootstrap flw

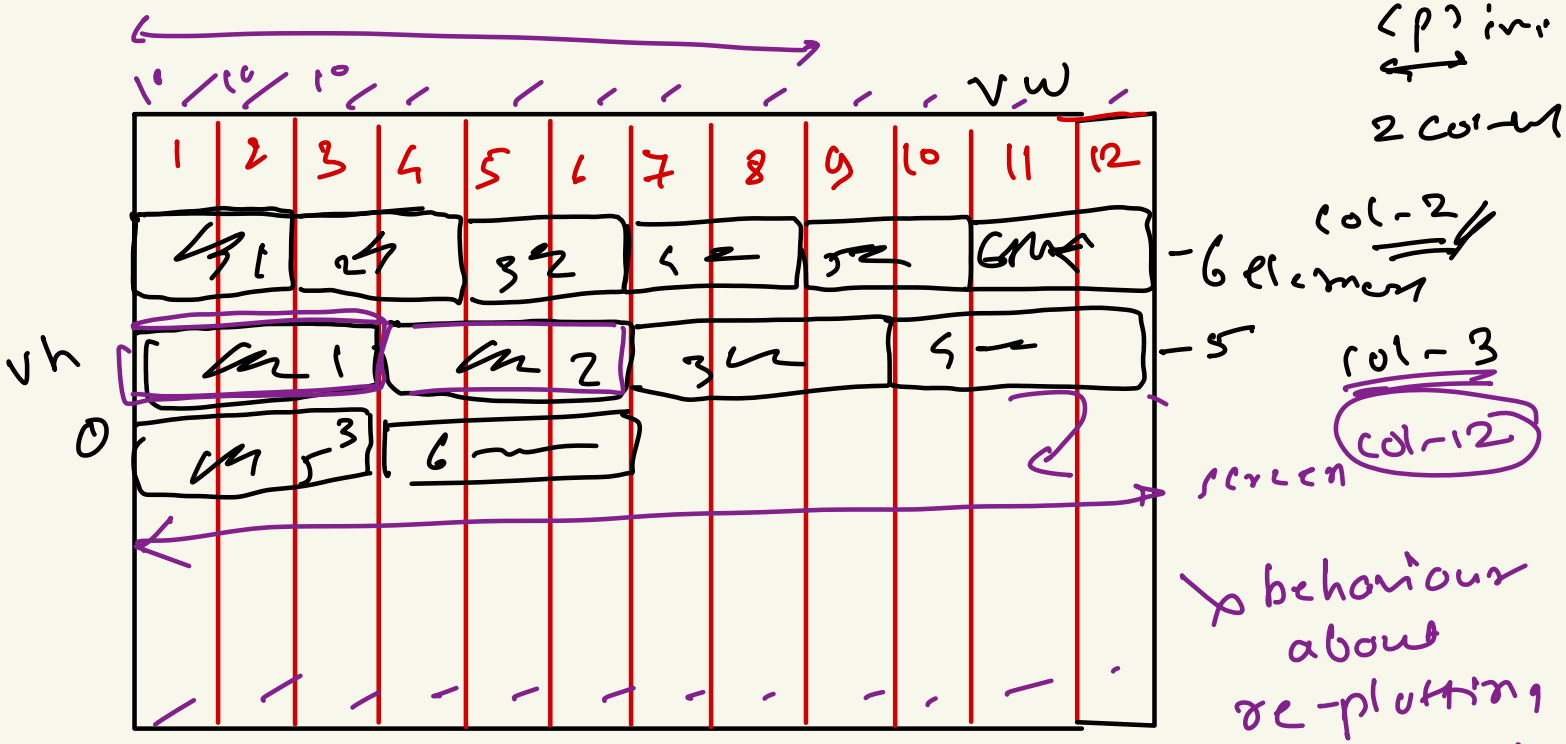

<p> in
2 col-m

↳ behaviour about re-plotting re-structuring UI components based on current available viewport width, height
↳ responsive web design.

col-3 bootstrap
↳ (CSS class)
↳ div width = 30px.

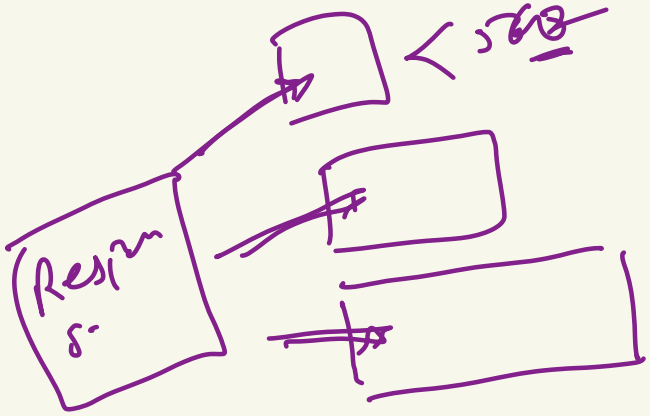

exp. def. class Demo extends Component → React

{

state = { name : "Hugh" }

data : {}

componentDidMount()

- only once & first time after render.

[] — XHR

render() ← "root" <

returns ← JSX

<hr> <hr> — JSX

 { } →

this.state.name

Pure HTML/JS

 Hugh

<tr —

export default functional Demo() {

React hooks

// hooks are functions that helps us maintain React components state during lifecycle events.

return

{

}

}

(2)

render

component did mount

(1)

data = []

setstate

render



useState

useEffect

~~useHistory~~

useNavigate

useLocation

useContext

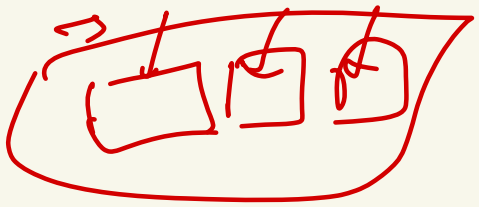

Custom hook.

function.

Browser

DOM

document obj.

- HTML Elements

<btn>

 → HTML Paragraph Element ()

obj.TagName = 'p' →

obj.class = 'gray' →

obj.id = 'p1' →

obj.style: –

obj.onclick = false true.

obj.onmouseover = false

100%

60

no

React Components → JSX

Virtual copy of Actual DOM

- HE('html')
  - HE('head')
  - HE('body')
    - obj (properties)
    - p//
    - p → '' → mugdha'

 m

<div class card>

Name

Virtual DOM of re...

render ()

↳ return (<> <>)

<card in>

Copy of VDOM

Check of UI is done in C.VDOM.

re-checking

Copy of VDOM ②

react-DOM.js VDOM ①

pass or ach DOM

mugdha → onChange → react event

→ react handler –

SPA.

index.js

decision

LoadUI(pageName)

switch:

'home' : home()

'about' : about()

'contact' : Contact()

default : NotFound()

function Home()

return <h1>Home Page</h1>

index.html

```
<a onclick="LoadUI('home')"
 Home </a>
<a onclick="LoadUI('about')">
About </a>
```

UI Page. URL: 127.0.0.1:5500 | index.html | home.html | about.html

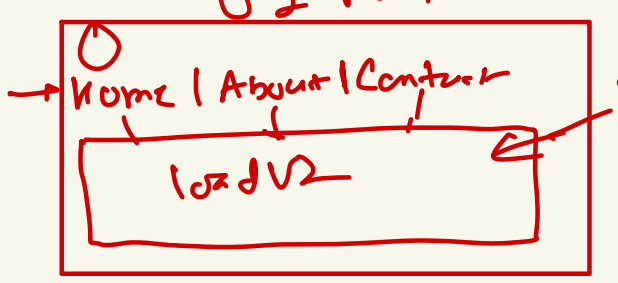

react-router-dom.js ← npmjs.org.

<a> </a> tag. html

JSX

```
<Link to="/Home">Home</Link>
<Link to="/About">About</Link>
```

HoC : ...

<a onclick='LoadUI(pagename)'.

decision → UI should return. from which component

JSX

```
<Routes>
  <Route path="/" element={<Home />}/>
  <Route path="/Home" element={<Home />}/>
  :
  <Route path="*" element={<NotFound />}
</Routes>
```

LoadUI → component / design...