HTML Elements

Semantic Elements

HTTP Request Packet : Header / Body

HTTP Response Packet : Header / Body

Client side : Browser - Chrome

Server side : live Server

Same m/c → Client ⟷ Server (web)

PORT 80 / 5500

127.0.0.1

loop-back address

127.0.0.1

Browser software → app^n → Desktop based.

↳ creating forms-collection

key-value pair

↳ name = ~~txtNm~~ :

↳ Creating HTTP Request Packet.



HTTP

<form method="post">

<input type=text name="txtNm"/>

Browser sends request to web server for very first HTTP protocol:— HTTP GET

↓

asking server some data to initially generate UI

HTTP Req. Packet



- Query string :— Syntax.

"www.bvs.com?txtnm=KJ&
txtpwd=1234"



URL : www.bvs.
Method GET
From: 127.0.0.1
chrome
en-US
To: 127.0.0.1
:

<input type="submit"/>

→ action = home.html,

Browser to generate HTTP Request Packet.

HTTP Post Method:-

Browser: using form Collection

Creates key-value pair collection

Create Request Packet ✓

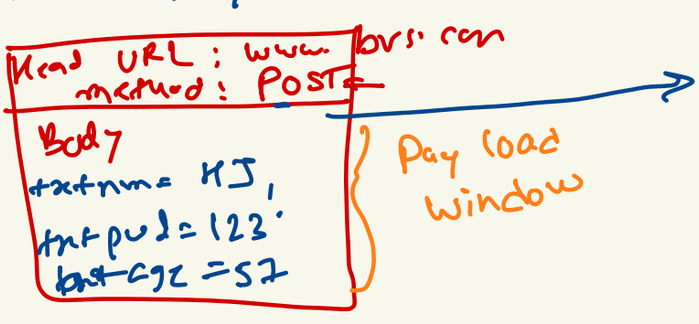

Browser - Creates HTTP Request Packet.

- Create forms collection

content-type. text/html

- loads HTML OLD parser

  doc start tag :- <html> <!html>

- load HTML5 parser

  doc start tag :- <!DOCTYPE html>

CSS :- Styles
↳ Bootstrap.

Cascading Style Sheet
↳ language.

Three ways to implement CSS

1. Inline Syntax
2. Internal CSS Syntax
3. External CSS Syntax.

2 external style.css → p{color:Red}

Internal <style>
p{color:blue}
</style>

Inline Some Text

UI
para

Some Text.

CSS Engine

p { color: Red }

p { color : blue }

p = "color : purple"

Single CSS document

CSS
com.css.