CSS Property :-

color : red ;

property-name : property-value.

} CSS rule set.

universal selector → * → reset setting.

Element Selector { html → root element. :- 16 px ↳ 1rem, 1e

body → "

. class Selector

ID Selector.

pseudo-sel

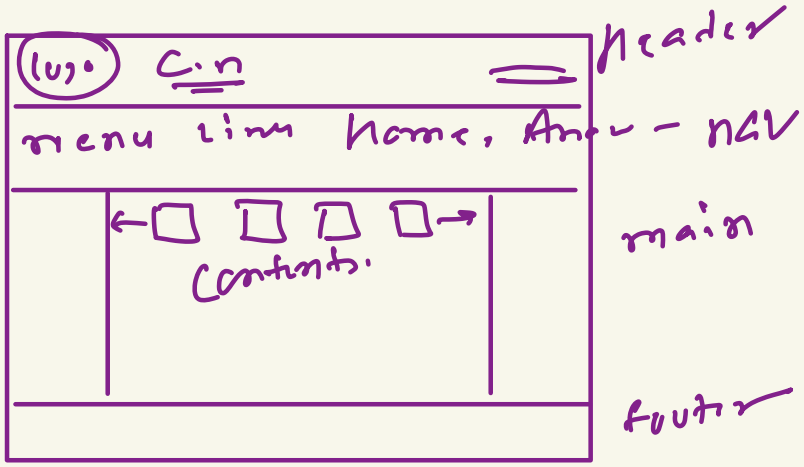

Browser → software.

↓

responsibilities

load HTML parser tag based

load CSS Engine → [it gathers all CSS files under a single location]

CSSOM → cascade style sheet

- inline style.
- internal : head.
  - <style>
  - <| style>
- External

Top to Bottom

one line at a time.

JavaScript :- scripting language.

<script> → Internal → Head / body

<sscript> - External.

JS programs as scripts.

<script> ← load JavaScript Engine.

console.log("Hello World");

console.log("Bye");

<| script>

JS statement 1

JS statement 2.

functional prog. based language

OOP based.

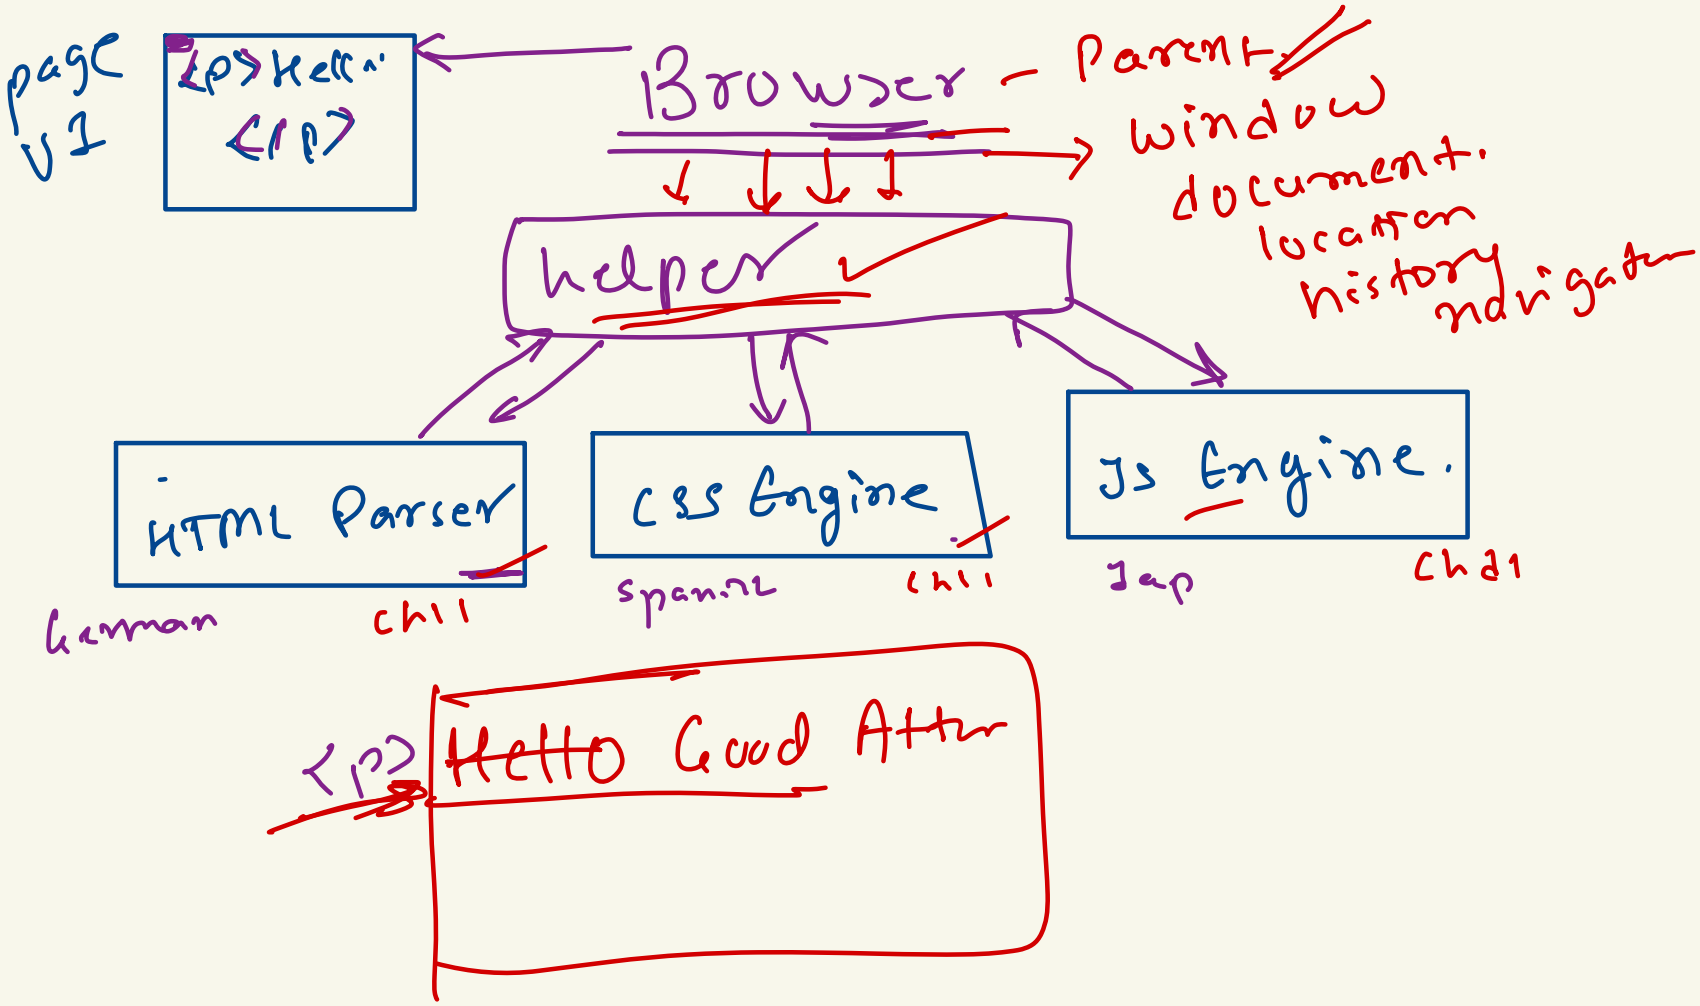
page v1
Hello

Browser - Parent
window
document
location
history
navigation
helper
HTML Parser
German
chi1
CSS Engine
spanish
chi1
JS Engine.
Jap
chd1

Hello Good After

JS Engine → script1.js → var x = 10
→ script2.js → var y = 20
→ script3.js → var name = "abc", fun. check

bundle.js →

```
var x = 10
var y = 20
var name = "abc"
f. check() → x++
f.()
f.()
x = 500
```

global level search

```
C.L(x)   500
x = 500
```

script2.js

JS Engine behaviour which moves all declarations of variables and functions on top of the file, is called

Hoisting.