react axios → http
client ⟷ server.

XHR : XMLHTTPRequest

· open("GET", "http://127.0.0.1:5500/data.json") → select

GET
X

content-Type="application/json"
body

{id:1, nm:"Hugh", role:"manager"} (3)
response. - console. (4)

XHR :-

obj = { id:4, nm='bob', role: 'HR' }

client → server → Db. insert.

xhr.open('POST',
method = POST "http://127.0.0.1:5500/data.json")
body,
obj
request Packet

XHR :

xhr.open("PUT", "http://127.0.0.1:5500/data.json/?id=2")

PUT → id=2
{nm = new name}
req Pack

→ server
↳ 2 → change nm
update query
↳ 2

update (4)

1	—	—
2	—	—
3	—	—
4	—	—

xhr.open('DELETE', "http://127.0.0.1:5500/data.json/?id=3").

DELETE id=3
X

→ server
delete 3 from Emp table.

javascript – bundling . min.js
minification / uglification

→ babel.js ←
webpack.js ←

React – ! Javascript library file.
↓
JSX :– neither Javascript Nor XML
↳ but Javascript XML Syntax.

function, class
< script >

custom tags
< Emp >
< List >

JSX :– React
↳ Components – functional Component
– Class Component.

JSX → < Hello / > component
function Hello()
{
}
class Hello {}

JSX → < Bye / >
function Bye()
{
}
class Bye {}

JSX → Javascript !
babel.js

nodejs → Server side code

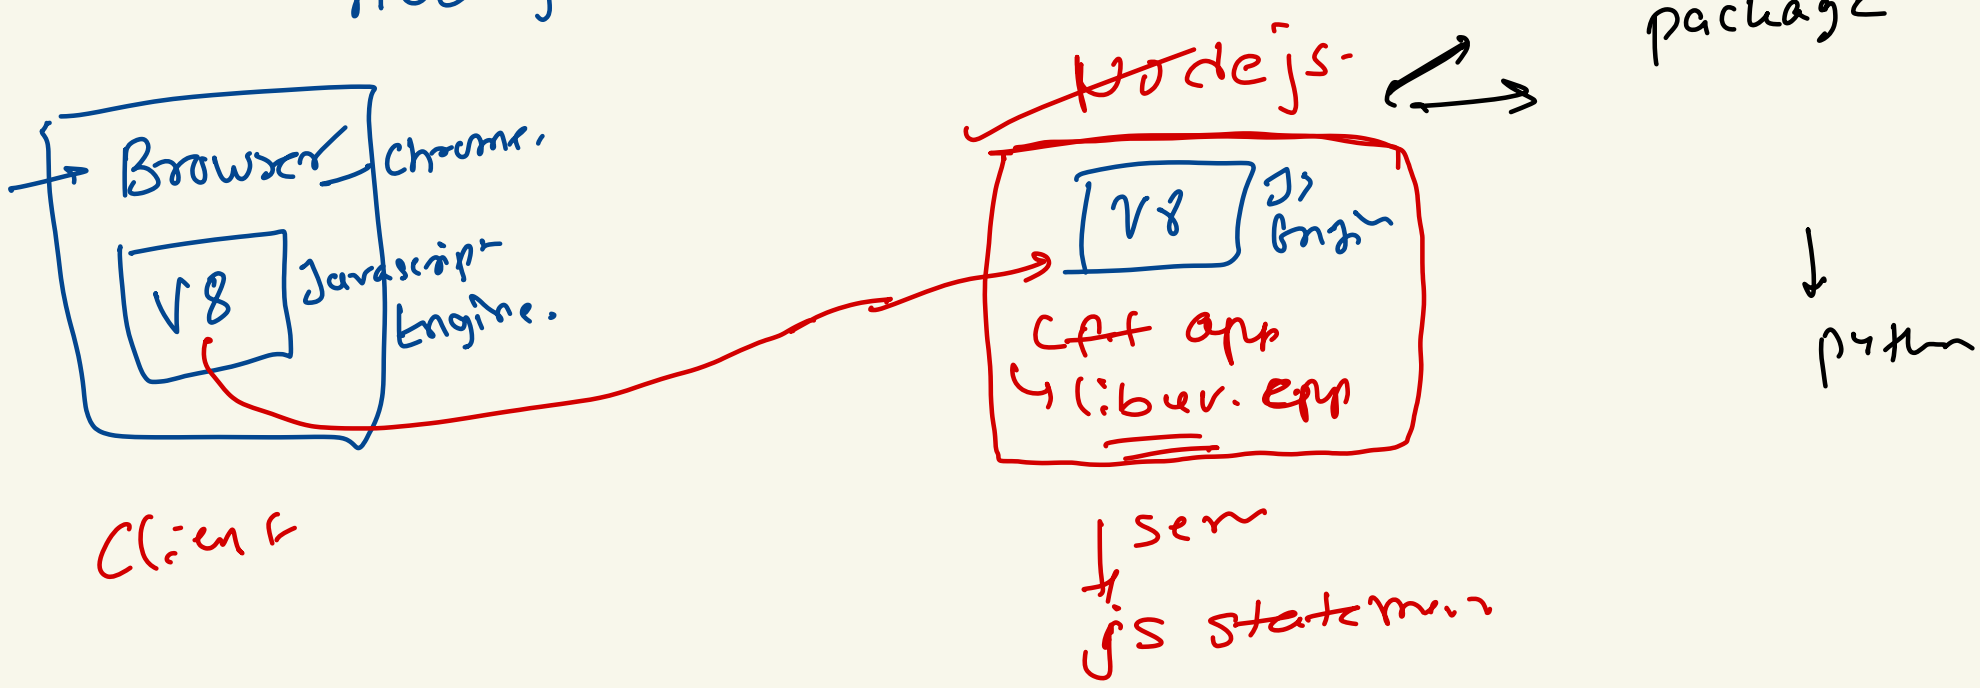

React

React.js ← lib. →
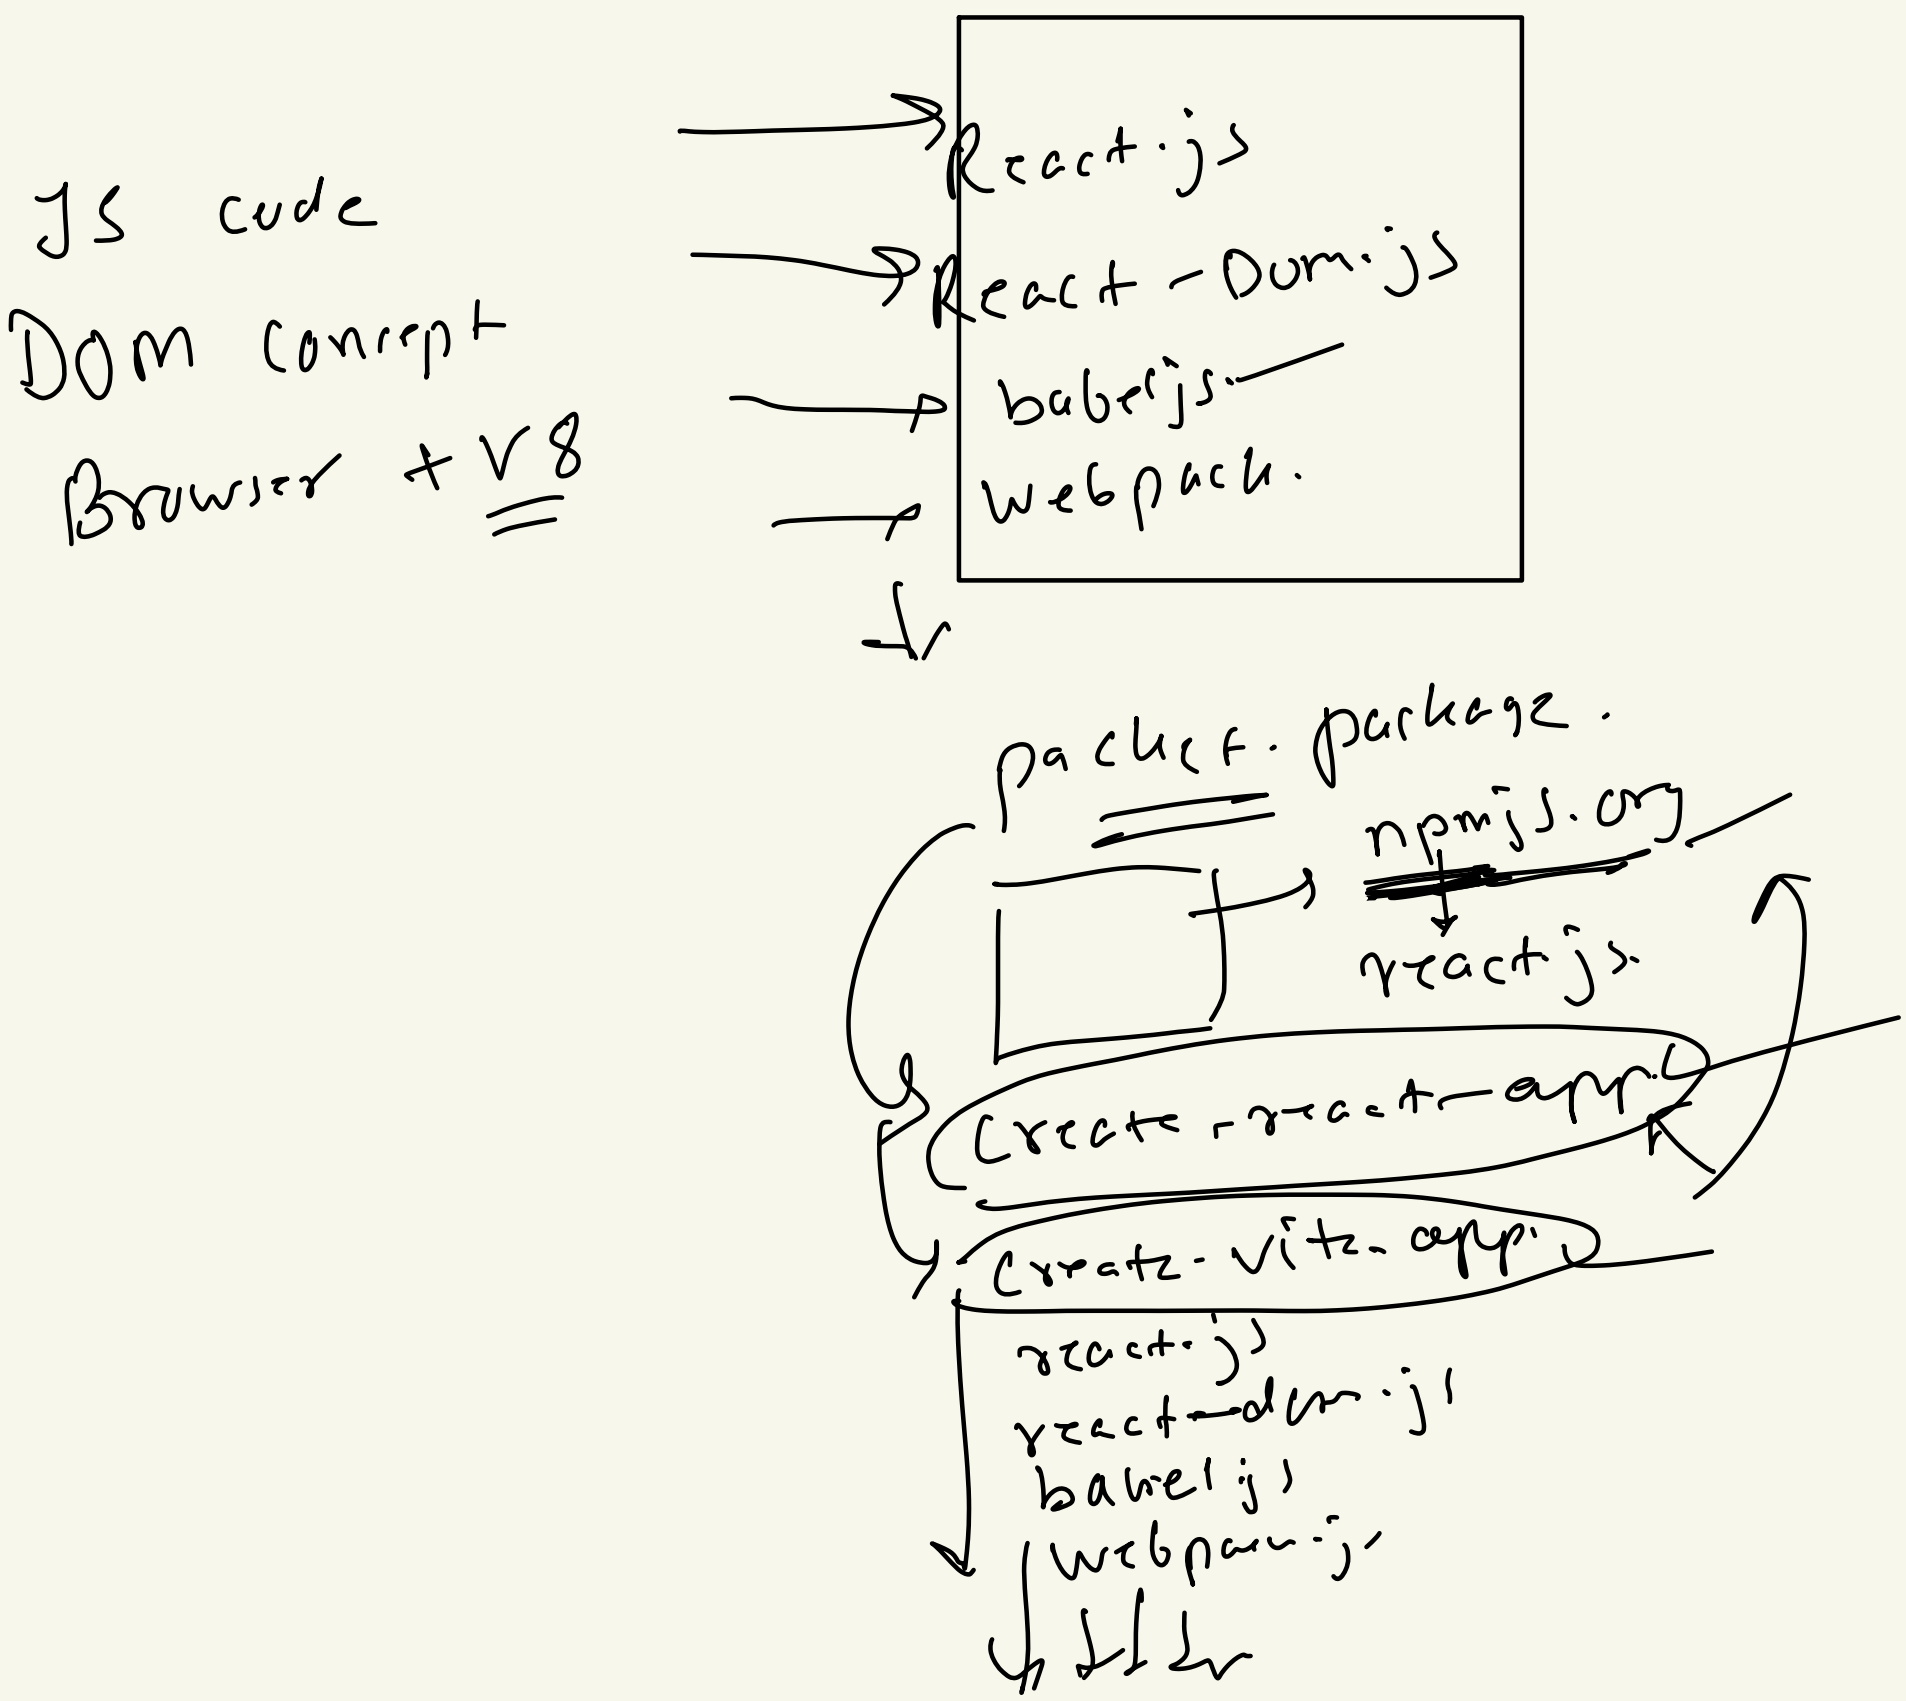
↳ JSX